

Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series —

Part 1: Medium series

ISO 6020-1:2007

**This document is now
PUBLIC**

National foreword

This British Standard is the UK implementation of ISO 6020-1:2007. It supersedes BS ISO 6020-1:1998 and BS ISO 8135:1999, which are withdrawn.

The UK participation in its preparation was entrusted by Technical Committee MCE/18, Fluid power systems and components, to Panel MCE/18/-/3, Cylinders.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2007

Amendments issued since publication

Amd. No.	Date	Comments

**This document is now
PUBLIC**

INTERNATIONAL
STANDARD

ISO
6020-1

Third edition
2007-08-15

**Hydraulic fluid power — Mounting
dimensions for single rod cylinders,
16 MPa (160 bar) series —**

**Part 1:
Medium series**

*Transmissions hydrauliques — Dimensions d'interchangeabilité des
vérins 16 MPa (160 bar) à simple tige —*

Partie 1: Série moyenne

Reference number
ISO 6020-1:2007(E)



This document is now
POOBLIC



Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Dimensions	2
5 Bore sizes	2
6 Stroke tolerances	2
7 Mounting types	2
8 Piston rod characteristics	3
9 Identification statement (reference to this part of ISO 6020)	3
Bibliography	12



Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6020-1 was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 3, *Cylinders*.

This third edition cancels and replaces the second edition (ISO 6020-1:1998) and ISO 8135:1999, which have been technically revised.

ISO 6020 consists of the following parts, under the general title *Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series*:

- *Part 1: Medium series*
- *Part 2: Compact series*
- *Part 3: Compact series with bores from 250 mm to 500 mm*

Introduction

In hydraulic fluid power systems, power is transmitted and controlled through a liquid under pressure within an enclosed circuit.

One component of such systems is the fluid power cylinder. This is a device that converts power into linear mechanical force and motion. It consists of a movable element, i.e. a piston and piston rod, operating within a cylindrical bore.





Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series —

Part 1: Medium series

1 Scope

This part of ISO 6020 establishes metric mounting dimensions for medium series cylinders, 16 MPa [160 bar¹], as required for interchangeability of commonly used hydraulic cylinders.

The medium series dimensions are applicable to round head cylinders with bores from 25 mm to 200 mm and to both round and square head cylinders with bores larger than 200 mm, thus allowing a wider range of applications.

NOTE This part of ISO 6020 allows manufacturers of hydraulic equipment flexibility in the design of 16 MPa (160 bar) cylinders and does not restrict technical development; however, it does provide basic guidelines.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1179-1, *Connections for general use and fluid power — Ports and stud ends with ISO 228-1 threads with elastomeric or metal-to-metal sealing — Part 1: Threaded ports*

ISO 3320:1987, *Fluid power systems and components — Cylinder bores and pistons rod diameters — Metric series*

ISO 4395, *Fluid power systems and components — Cylinders — Piston rod thread dimensions and types*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 6099:2001, *Fluid power systems and components — Cylinders — Identification code for mounting dimensions and mounting types*

ISO 6149-1, *Connections for hydraulic fluid power and general use — Ports and stud ends with ISO 261 metric threads and O-ring sealing — Part 1: Ports with truncated housing for O-ring seal*

ISO 6162-1, *Hydraulic fluid power — Flange connectors with split or one-piece flange clamps and metric or inch screws — Part 1: Flange connectors for use at pressures of 3,5 MPa (35 bar) to 35 MPa (350 bar), DN 13 to DN 127*

ISO 6162-2, *Hydraulic fluid power — Flange connectors with split or one-piece flange clamps and metric or inch screws — Part 2: Flange connectors for use at pressures of 35 MPa (350 bar) to 40 MPa (400 bar), DN 13 to DN 51*

1 MPa = 1 N/mm².

This document is now
POOBLIC

BS ISO 6020-1:2007

ISO 6164, *Hydraulic fluid power — Four-screw, one-piece square-flange connections for use at pressures of 25 MPa and 40 MPa (250 bar and 400 bar)*

ISO 8132, *Hydraulic fluid power — Single rod cylinders, 16 MPa (160 bar) medium and 25 MPa (250 bar) series — Mounting dimensions for accessories*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 apply.

4 Dimensions

4.1 The mounting dimensions for cylinders manufactured in accordance with this part of ISO 6020 shall be selected from Figures 1 to 6 and Tables 1 to 6 inclusive.

4.2 The dimensions for ports and flanges shall be selected from Table 7 and the relevant International Standards cited therein.

4.3 All dimensions and mounting types in this part of ISO 6020 are labelled with codes in accordance with ISO 6099.

5 Bore sizes

This part of ISO 6020 covers the following bore sizes, expressed in millimetres, in accordance with ISO 3320:1987, Table 1:

25 — 32 — 40 — 50 — 63 — 80 — 100 — 125 — 160 — 200 — 250 — 320 — 400 — 500

6 Stroke tolerances

Tolerances on stroke shall be in accordance with Table 9.

7 Mounting types

This part of ISO 6020 includes the following mounting types, identified in accordance with ISO 6099:2001, Table 2:

- a) MF 1 — Head, rectangular flange;
- b) MF 2 — Cap, rectangular flange;
- c) MF 3 — Head, circular flange;
- d) MF 4 — Cap, circular flange;
- e) MP 3 — Cap, fixed plain eye;
- f) MP 4 — Cap, detachable plain eye;
- g) MP 5 — Cap, fixed eye with spherical bearing;
- h) MP 6 — Cap, detachable eye with spherical bearing;

movable trunnion (male).

This document is now
POOBLIC

8 Piston rod characteristics

8.1 This part of ISO 6020 covers piston rods that have a shouldered male thread end; see Figure 1 and Table 1 for basic dimensions.


8.2 For rod end types, see ISO 4395.

8.3 Accessory mounting dimensions shall be selected in accordance with ISO 8132.

9 Identification statement (reference to this part of ISO 6020)

It is strongly recommended to manufacturers who have chosen to conform to this part of ISO 6020 that the following statement be used in test reports, catalogues and sales literature:

“Medium series hydraulic single rod cylinders for use at 16 MPa (160 bar) have been selected in accordance with ISO 6020-1:2007, *Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series — Part 1: Medium series.*”

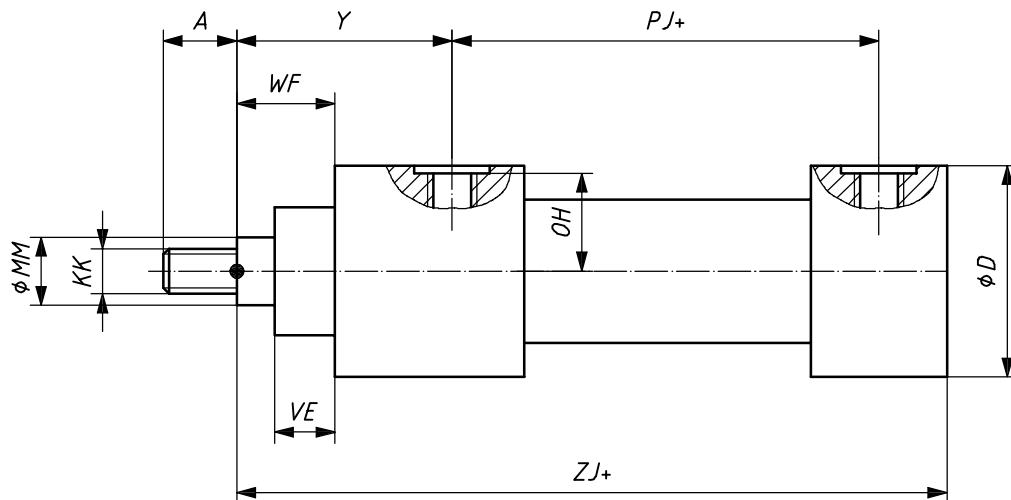

NOTE Rod end types are controlled by ISO 4395.

Figure 1 — General dimensions

Table 1 — General dimensions

Dimensions in millimetres


Bore	Rod MM	ZJ ^a	KK 6g	A max.	Y ^a	PJ ^a	D max.	OH ^b	VE max.	WF ^a
25	14	150	M12 × 1,25	16	58	77	56	25,5	15	28
	18		M12 × 1,25	16						
			M14 × 1,5	18						
32	18	170	M14 × 1,5	18	64	89	67	30	19	32
	22		M14 × 1,5	18						
			M16 × 1,5	22						
40	22	190	M16 × 1,5	22	71	97	78	35	19	32
	28		M16 × 1,5	22						
			M20 × 1,5	28						
50	28	205	M20 × 1,5	28	72	111	95	44	24	38
	36		M20 × 1,5	28						
			M27 × 2	36						
63	36	224	M27 × 2	36	82	117	116	54	29	45
	45		M27 × 2	36						
			M33 × 2	45						
80	45	250	M33 × 2	45	91	134	130	62	36	54
	56		M33 × 2	45						
			M42 × 2	56						
100	56	300	M42 × 2	56	108	162	158	75	37	57
	70		M42 × 2	56						
			M48 × 2	63						
125	70	325	M48 × 2	63	121	174	192	92	37	60
	90		M48 × 2	63						
			M64 × 3	85						
160	90	370	M64 × 3	85	143	191	238	115	41	66
	110		M64 × 3	85						
			M80 × 3	95						
200	110	450	M80 × 3	95	190	224	285	138	45	75
	140		M80 × 3	95						
			M100 × 3	112						
250	140	550	M100 × 3	112	—	—	365	—	64	96
	180		M100 × 3	112						
			M125 × 4	125						
320	180	660	M125 × 4	125	—	—	455	—	71	108
	220		M125 × 4	125						
			M160 × 4	160						
400	220	740	M160 × 4	160	—	—	565	—	90	130
	280		M160 × 4	160						
			M200 × 4	200						
500	280	890	M200 × 4	200	—	—	645	—	110	163
	360		M200 × 4	200						
			M250 × 6	250						

NOTE If other piston rod diameters or other threads are required, use those identified in ISO 3320 and ISO 4395.

and PJ are dependent on stroke; see Table 8.

tains to threaded ports.

This document is now
POUBLIC

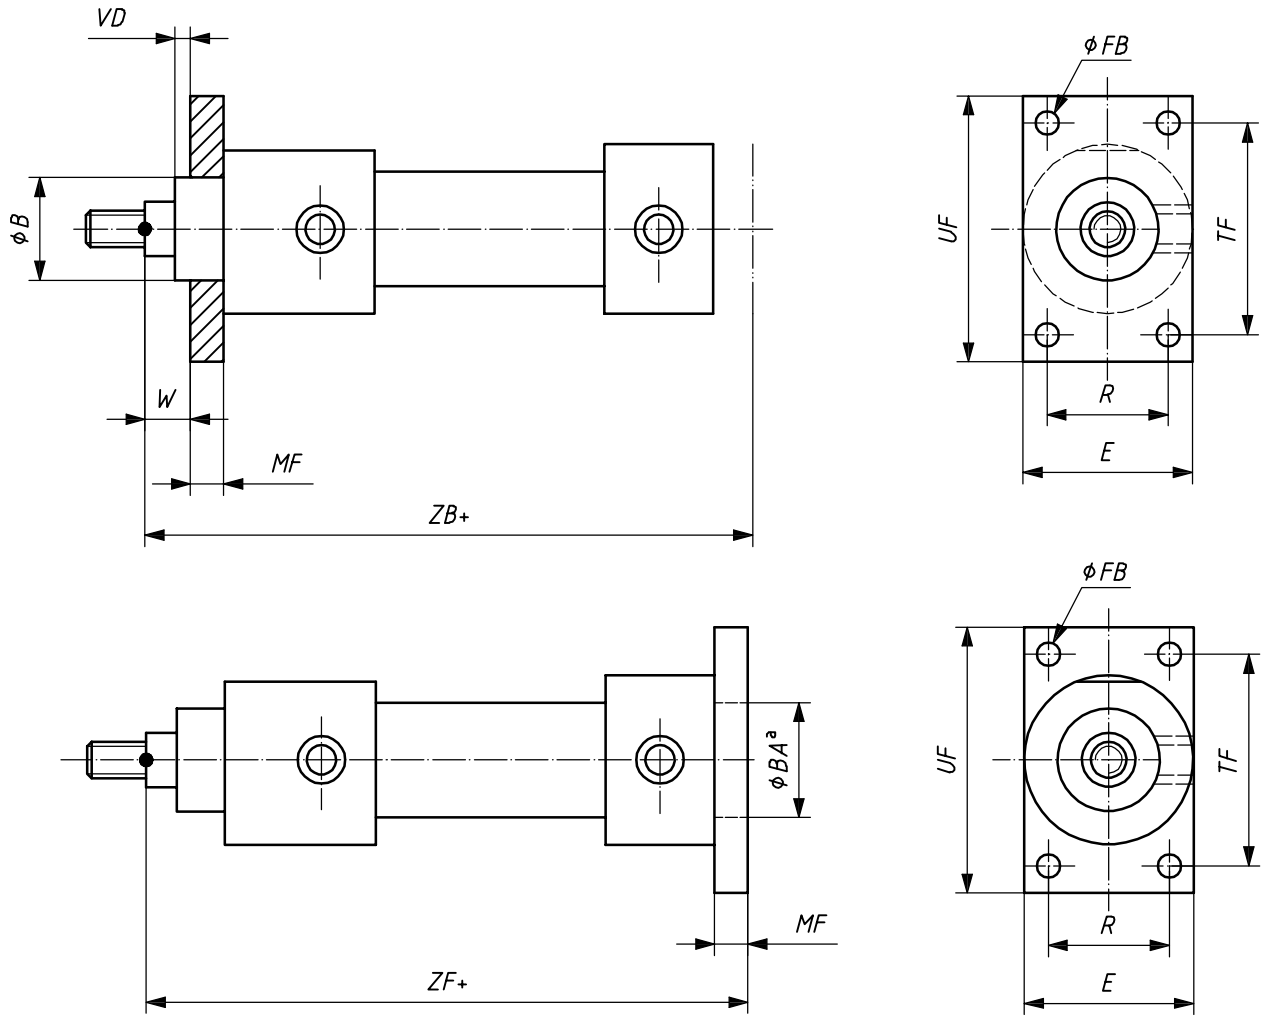

^a Optional.

Figure 2 — MF 1 — Head, rectangular flange and MF 2 — Cap, rectangular flange

Table 2 — Dimensions of rectangular flange mounting types MF 1 and MF 2


Dimensions in millimetres

Bore	FB H13	TF js13	R js13	VD min.	W ^a	ZF ^a	ZB max.	BA, B H8/f8	UF max.	E max.	MF js13
25	6,6	69,2	28,7	3	16	162	158	32	85	60	12
32	9	85	35,2	3	16	186	178	40	105	70	16
40	9	98	40,6	3	16	206	198	50	115	80	16
50	11	116,4	48,2	4	18	225	213	60	140	100	20
63	13,5	134	55,5	4	20	249	234	70	160	120	25
80	17,5	152,5	63,1	4	22	282	260	85	185	135	32
100	22	181,8	76,5	5	25	332	310	106	225	160	32
125	28	221,1	90,2	5	28	357	335	132	255	195	32

^a W and ZF are dependent on stroke; see Table 8.

London South Bank University, London South Bank University, Fri Nov 16 07:28:01 GMT+00:00 2007, Uncontrolled Copy, (c) BSI

This document is now
PUBLIC

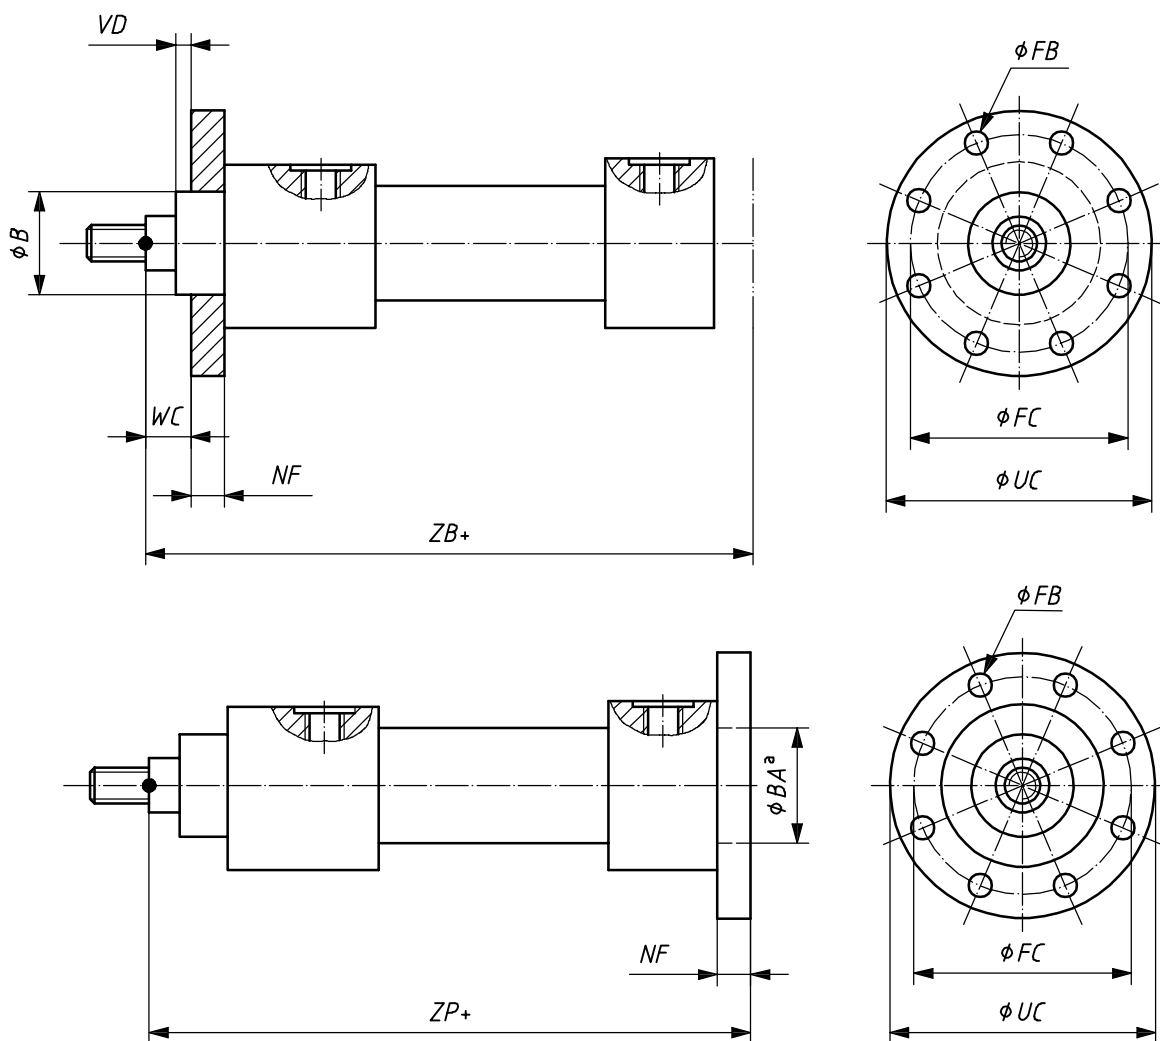

a Optional.

Figure 3 — MF 3 — Head, circular flange and MF 4 — Cap, circular flange

Table 3 — Dimensions of circular flange mounting types MF 3 and MF 4

Dimensions in millimetres

Bore	FB H13	FC js13	VD min.	WC ^a	ZP ^a	ZB max.	BA, B H8/f8	UC max.	NF js13
25	8 × Ø6,6	75	3	16	162	158	32	90	12
32	8 × Ø9	92	3	16	186	178	40	110	16
40	8 × Ø9	106	3	16	206	198	50	125	16
50	8 × Ø11	126	4	18	225	213	60	150	20
63	8 × Ø13,5	145	4	20	249	234	70	170	25
80	8 × Ø17,5	165	4	22	282	260	85	195	32
100	8 × Ø22	200	5	25	332	310	106	240	32
125	8 × Ø22	235	5	28	357	335	132	275	32
160	8 × Ø22	280	5	30	406	380	160	320	36
200	8 × Ø26	340	5	35	490	480	200	385	40
250	8 × Ø33	420	8	40	606	580	250	490	56
320	8 × Ø39	520	8	45	723	710	320	600	63
			10	50	820	790	400	730	80
			10	63	990	940	500	810	100

^a are dependent on stroke; see Table 8.



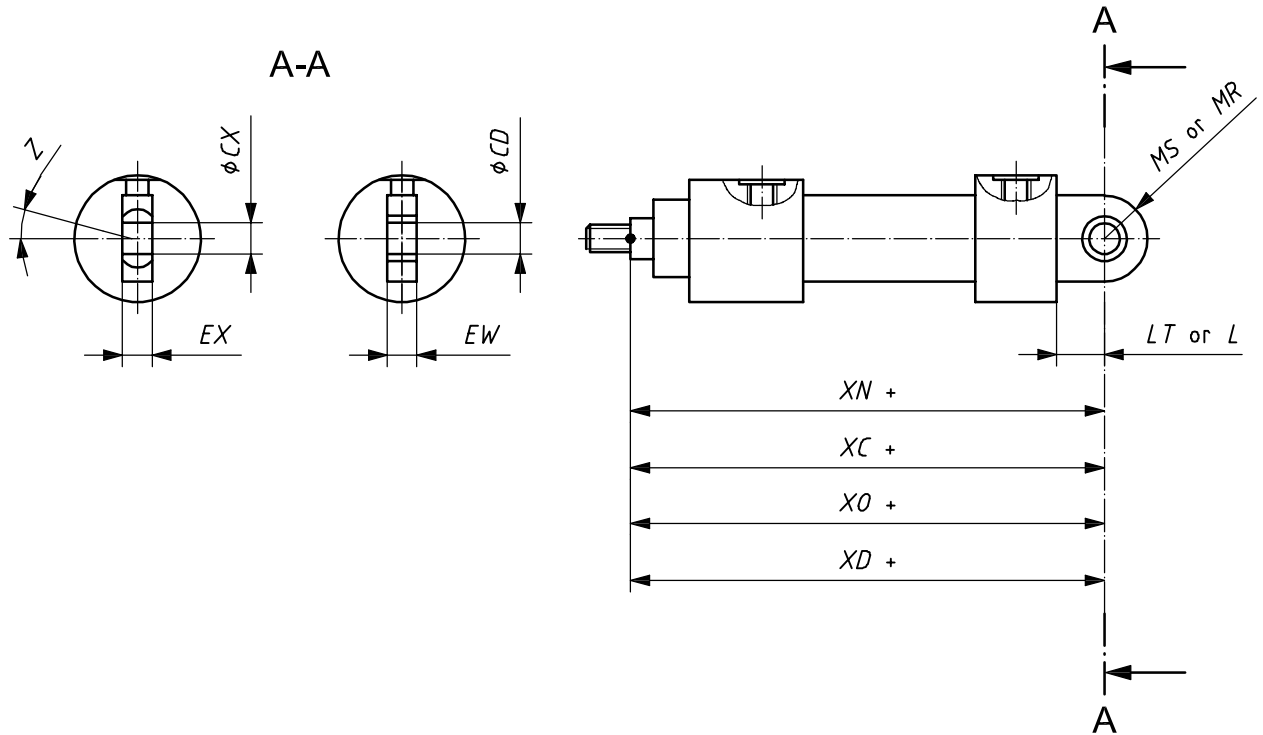


Figure 4 — MP 3 — Cap, fixed plain eye, MP 4 — Cap, detachable plain eye, MP 5 — Cap, fixed eye with spherical bearing, MP 6 — Cap, detachable eye with spherical bearing

Table 4 — Dimensions of cap eye mountings MP 3, MP 4, MP 5 and MP 6

Dimensions in millimetres

Bore	CD^b	CX^c	EW^b or EX^c	L^b or LT^c	MR^b or MS^c	XC, XD, XO or $XN^{a, d}$	Tilting angle Z min.
	H9	H7	h12	min.	max.		
25	12	12	12	16	16	178	4°
32	16	16	16	20	20	206	4°
40	20	20	20	25	25	231	4°
50	25	25	25	32	32	257	4°
63	32	32	32	40	40	289	4°
80	40	40	40	50	50	332	4°
100	50	50	50	63	63	395	4°
125	63	63	63	71	71	428	4°
160	80	80	80	90	90	505	4°
200	100	100	100	112	112	615	4°
250	125	125	125	160	160	773	4°
320	160	160	160	200	200	930	4°
400	200	200	200	250	250	990	4°
500	250	250	250	320	320	1210	4°

^a Tolerances for dimensions XC, XD, XO and XN are dependent on stroke; see Table 8.

^b The dimensions CD, EW, EX and MR are valid for mounting types MP 3 and MP 4.

and MS are valid for mounting types MP 5 and MP 6.

For mounting type MP 3, the dimension XD is valid for mounting type MP 4, the dimension XO and XC are the dimension XN is valid for mounting type MP 6.

London South Bank University, London South Bank University, Fri Nov 16 07:28:01 GMT+00:00 2007, Uncontrolled Copy, (c) BSI



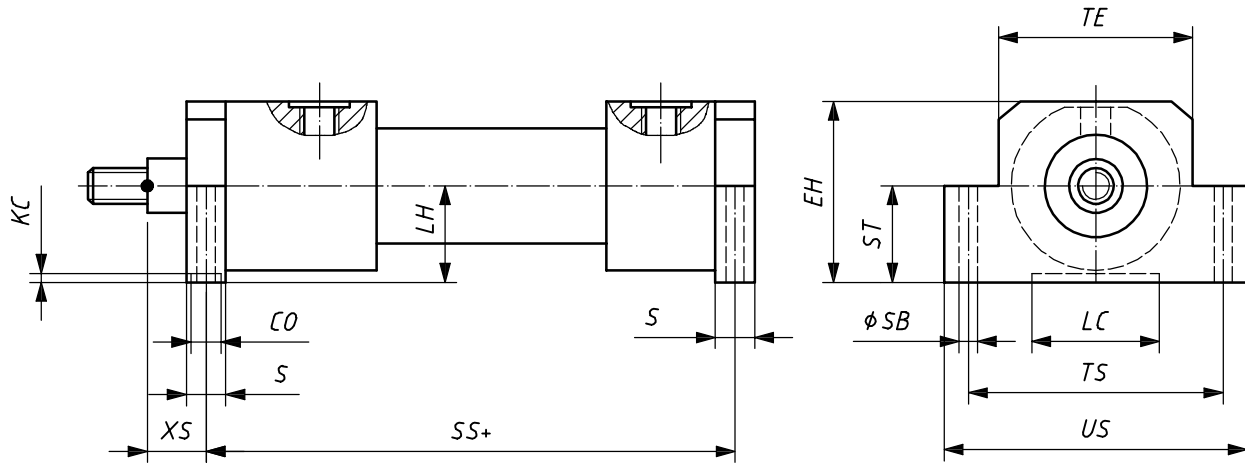


Figure 5 — MS 2 — Side lugs

Table 5 — Dimensions of side lugs mounting MS 2

Dimensions in millimetres

Bore	<i>S</i> js13	<i>XS</i> ^a	<i>SS</i> ^a	<i>TE</i> js13	<i>TS</i> js13	<i>US</i> max.	<i>SB</i> H13	<i>EH</i> max.	<i>LH</i> h10	<i>ST</i> max.	<i>KC</i> ^b min.	<i>CO</i> ^b N9	<i>LC</i> ^{b, c} min.
25	20	18	142	56	75	92	9	60	32	32	3,5	6	12
32	25	19,5	163	67	90	110	11	72	38	38	4	8	17
40	25	19,5	183	78	100	120	11	82	43	43	4	8	17
50	32	22	199	95	120	145	14	100	52	52	4,5	10	20
63	32	29	211	116	150	180	18	120	62	62	4,5	10	20
80	40	34	236	130	170	210	22	135	70	70	5	14	28
100	50	32	293	158	205	250	26	161	82	82	6	16	34
125	56	32	321	192	245	300	33	196	100	100	6	18	37
160	60	36	364	238	295	350	33	238	119	119	8	22	78
200	72	39	447	285	350	415	39	288	145	145	9	28	122

^a Tolerances for dimensions *XS* and *SS* are dependent on stroke; see Table 8.

^b Keyway is optional.

^c Minimum effective length of the keyway.



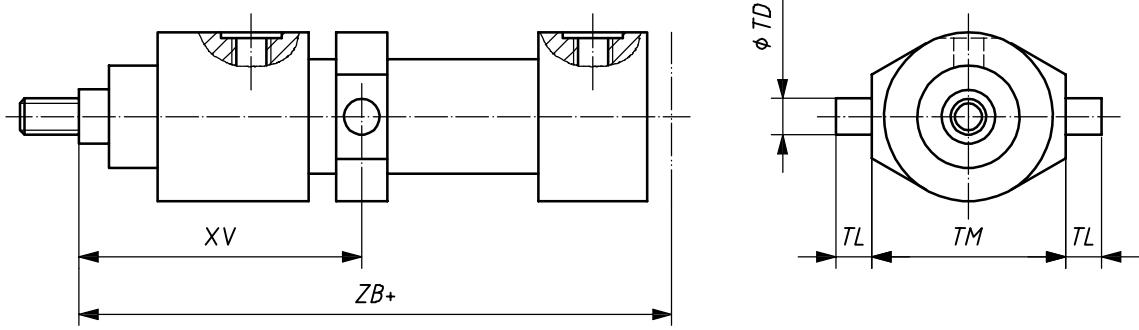


Figure 6 — MT 4 — Intermediate fixed or movable trunnion (male)

Table 6 — Dimensions of intermediate male trunnion mounting MT 4

Dimensions in millimetres


Bore	<i>TD</i> f8	<i>TL</i> js13	<i>TM</i> h12	<i>XV</i> ^a	<i>ZB</i> max.
25	12	10	63	variable; users should consult the manufacturer for minimum and maximum values	158
32	16	12	75		178
40	20	16	90		198
50	25	20	105		213
63	32	25	120		234
80	40	32	135		260
100	50	40	160		310
125	63	50	195		335
160	80	63	240		380
200	100	80	295		480
250	125	100	370		580
320	160	125	470		710
400	200	160	570		790
500	250	250	700		940

^a Tolerances for dimension *XV* are dependent on stroke; see Table 8.

/: London South Bank University, London South Bank University, Fri Nov 16 07:28:01 GMT+00:00 2007, Uncontrolled Copy, (c) BSI

This document is now
PUBLIC

Table 7 — Port and flange sizes

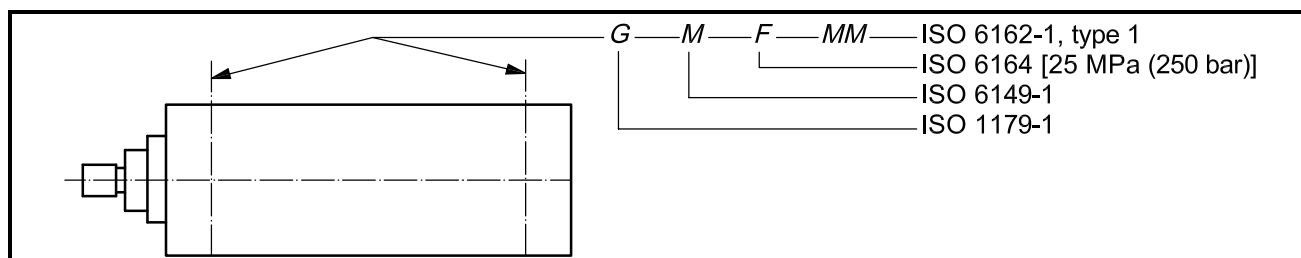

Bore	Port ISO 1179-1		Port ISO 6149-1		Square flange ISO 6164				Rectangular flange ISO 6162-1				
	G		M		F				MM				
	EE	EC	EE	EC	Nominal flange size ^b DN	FF	EA	ED	Nominal flange size ^b DN	FF	EA	EB	ED
	6g	ref. ^a	6g	ref. ^a		⁰ / _{-1,5}	± 0,25	6g		⁰ / _{-1,5}	± 0,25	± 0,25	6g
25	G 1/4	7,5	M14 × 1,5	7,5	—	—	—	—	—	—	—	—	—
32	G 3/8	9	M18 × 1,5	11	—	—	—	—	—	—	—	—	—
40 50	G 1/2	14	M22 × 1,5	14	—	—	—	—	—	—	—	—	—
63 80	G 3/4	18	M27 × 2	18	13	15	29,7	M8	13	12,7	17,5	38,1	M8
100 125	G 1	23	M33 × 2	23	19	20	35,4	M8	19	19,1	22,3	47,6	M10
160 200	G 1 1/4	30	M42 × 2	30	25	25	43,8	M10	25	25,4	26,2	52,4	M10
250 320	G 1 1/2	32	M48 × 2	36	32	32	51,6	M12	32	31,8	30,2	58,7	M10
400 500	—	—	M60 × 2	44	38	38	60,1	M16	38	38,1	35,7	69,9	M12

CAUTION — When selecting the largest diameter piston rod in a given bore size in connection with hydraulic systems where pull loads and/or pressure intensification effects can be generated, the pressure in the piston rod cavity of the cylinder can be two or more times the working pressure of the hydraulic system. In these cases, flange ports in accordance with ISO 6162-1 or ISO 6164, as shown in this table, might not have sufficient pressure ratings. When flange ports with a higher pressure rating are needed, they may be selected from the higher pressure series in ISO 6162-2 and ISO 6164.

^a For reference only. Connecting hole application can require a different size.

ype (for example, MF 4), possible interference between the mounting flange screws and the



Table 8 — Tolerances for mounting dimensions that are dependent on stroke

Dimensions in millimetres

Code for mounting dimension	<i>ZJ</i> ^a	<i>WF</i>	<i>WC</i>	<i>ZP</i> or <i>ZF</i> ^a	<i>XC, XD, XO</i> or <i>XN</i> ^a	<i>XV</i>	<i>ZB</i> ^a	<i>W</i>	<i>XS</i>	<i>SS</i> ^a	<i>Y</i>	<i>PJ</i> ^a	
Nominal stroke	Tolerances												
≤ 1 250	± 1,5	± 2	± 2	± 1,5	± 1,5	± 2	max.	± 2	± 2	± 1,5	± 2	± 1,5	
> 1 250 ≤ 3 150	± 3	± 4	± 4	± 3	± 3	± 4		± 4	± 4	± 4	± 3	± 4	± 3
> 3 150 ≤ 8 000	± 5	± 8	± 8	± 5	± 5	± 8		± 8	± 8	± 8	± 5	± 8	± 5

^a Length including stroke. Stroke tolerances from Table 9 shall not be added to the tolerances in this table.

Table 9 — Tolerances on piston strokes

Dimensions in millimetres

Nominal stroke	Tolerance
≤ 1 250	$\begin{matrix} +2 \\ 0 \end{matrix}$
> 1 250 ≤ 3 150	$\begin{matrix} +5 \\ 0 \end{matrix}$
> 3 150 ≤ 8 000	$\begin{matrix} +8 \\ 0 \end{matrix}$

Bibliography

- [1] ISO 273, *Fasteners — Clearance holes for bolts and screws*
- [2] ISO 4393, *Fluid power systems and components — Cylinders — Basic series of piston strokes*

/: London South Bank University, London South Bank University, Fri Nov 16 07:28:01 GMT+00:00 2007, Uncontrolled Copy, (c) BSI





BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001. Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior permission of BSI must be obtained.

Requests for permission to reproduce copyright material may be sent to the Copyright & Licensing Manager. Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553. Email: copyright@bsi-global.com.

This document is now
POOBLIC