

BS ISO 6987:2012



BSI Standards Publication

Indexable hard material inserts with rounded corners, with partly cylindrical fixing hole — Dimensions

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 6987:2012. It supersedes BS 4193-13:1998, which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee MTE/18, Tools tips and inserts for cutting applications.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012
Published by BSI Standards Limited 2012

ISBN 978 0 580 69445 5

ICS 25.100.01

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 29 February 2012.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL STANDARD

BS ISO 6987:2012

ISO
6987

Second edition
2012-02-01

Indexable hard material inserts with rounded corners, with partly cylindrical fixing hole — Dimensions

*Plaquettes amovibles en matériaux durs avec arrondi de pointe et trou
de fixation partiellement cylindrique — Dimensions*



Reference number
ISO 6987:2012(E)

© ISO 2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 6987 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 9, *Tools with cutting edges made of hard cutting materials*.

This second edition cancels and replaces the first edition (ISO 6987:1998), which has been technically revised.

Indexable hard material inserts with rounded corners, with partly cylindrical fixing hole — Dimensions

1 Scope

This International Standard specifies the dimensions of hard material inserts with rounded corners and with a partly cylindrical fixing hole. These inserts are primarily intended to be mounted on turning and boring tools using a countersunk head screw or any other fixing element, such as a pin lock.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 513, *Classification and application of hard cutting materials for metal removal with defined cutting edges — Designation of the main groups and groups of application*

ISO 1832, *Indexable inserts for cutting tools — Designation*

3 Types of inserts

The types of indexable hard material insert specified in this International Standard are the following:

- TC: triangular inserts, with 7° normal clearance;
- TP: triangular inserts, with 11° normal clearance;
- SC: square inserts, with 7° normal clearance;
- SP: square inserts, with 11° normal clearance;
- CC: rhombic inserts, with 7° normal clearance and 80° included angle;
- CP: rhombic inserts, with 11° normal clearance and 80° included angle;
- DC: rhombic inserts, with 7° normal clearance and 55° included angle;
- VB: rhombic inserts, with 5° normal clearance and 35° included angle;
- VC: rhombic inserts, with 7° normal clearance and 35° included angle;
- RC: round inserts, with 7° normal clearance;
- RP: round inserts, with 11° normal clearance;
- WC: hexagonal (trigon) inserts, with 7° normal clearance and 80° included angle.

Inserts dealt with in this International Standard are standardized with chip breakers on the face (designated by the letter T) and without chip breakers (designated by the letter W).

Neither the shape nor the dimensions of chip breakers are standardized. Thus, if necessary, special features shall be explained with a diagram or additional specifications.

Tables C.1 to C.4 give the range of sizes for these inserts.

4 Interchangeability

4.1 Tolerances

The indexable hard material inserts which are the subject of this International Standard are provided in tolerance class M and for VC-shape inserts also in tolerance class G in accordance with ISO 1832.

The values of tolerance class G are in accordance with ISO 1832 and the values of tolerance class M are given in Annex A.

Other tolerances are included in Table 1 for hole dimensions and in Tables 3 to 12 for insert dimensions.

4.2 Thickness, s , of inserts with chip breakers

The thickness, s , of inserts with chip breakers is defined as the distance between the cutting edge at the corner and the supporting surface of the insert; see Figure 1.

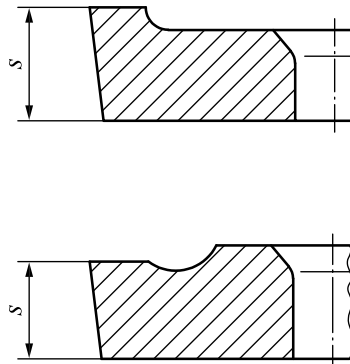


Figure 1 — Thickness of inserts with chip breakers

4.3 Fixing hole

In order to guarantee interchangeability when mounting the insert by a countersunk head screw having a head taper angle between 40° and 60°, the form of the hole is partly cylindrical and its dimensions are related to the diameter of the inscribed circle of the insert. Figure 2 and Table 1 give the elements of definition of the fixing hole.

The position of point P is given by diameter d_2 (see Table 1), the distance t , measured from the cutting edge at the corner and dimension c , measured from the upper face.

The ranges of dimensions t and c are as follows:

$$0,05 d_1 \leq t \leq 0,3 d_1$$

and

$$0,15 d_1 \leq c \leq 0,3 d_1$$

These dimensions take into account three cases: indexable inserts with upper faces below the cutting edges [see Figure 2 a)]; with upper faces on the same level as the cutting edges [see Figure 2 b)]; with upper faces above the cutting edges [see Figure 2 c)].

The dimensions of t and c shall be satisfied in all three cases.

The diameter, d_1 , of the cylindrical part of the hole is given in Table 1.

The part of the profile between d_1 and P is left to the manufacturer's discretion, but shall satisfy the following requirements:

- the use of screws with head taper angle, β , of between 40° and 60° shall be possible;
- the angle of the tangent theoretical taper at point P has the value of $\varphi \geq 65^\circ$;
- the distance between the contact line with a screw having a 40° head taper angle and the contact line with a screw having a 60° head taper angle shall be as small as possible.

The part of the profile above point P is left to the manufacturer's discretion.

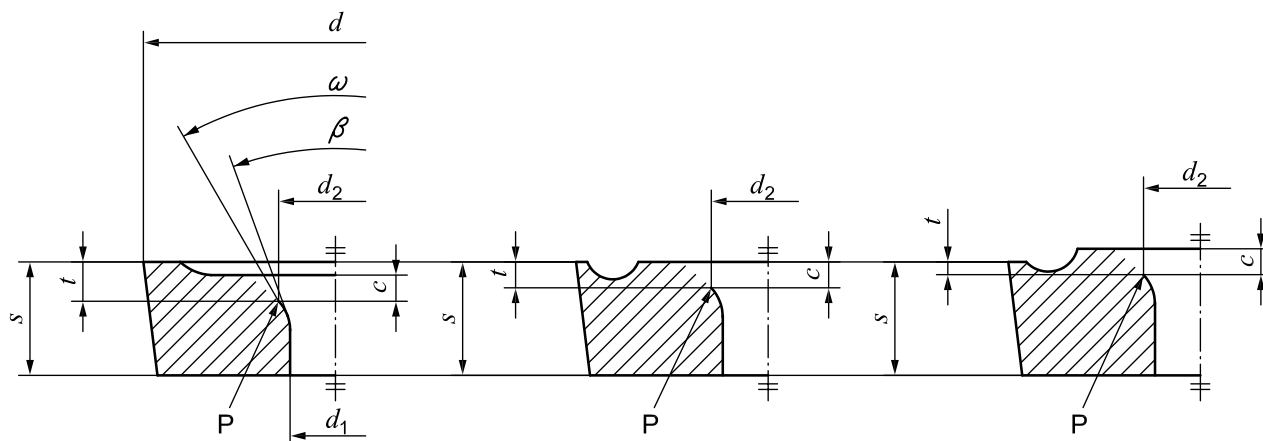


Figure 2 — Fixing hole

Table 1 — Dimensions of the hole

Dimensions in millimetres

d	For insert shape	T, S, C, D, V, W	4,76	5,56	6,35	7,94	9,525	12,7	15,875	19,05	25,4	—
		R	—	—	6	8	10/12	—	16	20	25	32
d_1	JS13		2,15	2,5	2,8	3,4	4,4	5,5	5,5	6,5	8,6	8,6
d_2	JS13		2,7	3,3	3,75	4,5	6	7,5	7,5	9	12	12

5 Designation and marking

5.1 Designation

The designation of the indexable hard material inserts which form the subject of this International Standard shall conform to ISO 1832.

In addition to this designation, one or both of the following may be indicated:

- the symbol of the group of application, in accordance with ISO 513;
- the commercial designation of the hard material grade.

5.2 Marking

The following symbol, at least, shall be marked on the insert itself (except when this is difficult to carry out on small inserts):

- symbol of the group of application, or
- commercial designation of the hard material grade, or
- both, if possible, on large inserts.

6 Measurement

Annex B indicates the methods of measuring the dimension m of the indexable inserts covered by this International Standard.

7 Recommended dimensions

The choice of the more common dimensions is restricted to the values given in Tables 3 to 12. It is strongly recommended that these standard inserts be used wherever possible (first preference). When other inserts are required, their dimensions shall be selected from the non-shaded areas of Tables C.1 to C.4 (second preference). Inserts having dimensions given in the shaded areas of this table are not recommended.

NOTE The m dimensions are calculated using the exact values of the corner radius, r_ϵ , given in Table 2, rounded to the third decimal place.

Table 2 — Exact values of r_ϵ

Designation of r_ϵ	02	04	08	12	16	20	24	32
Exact value of r_ϵ , mm	0,203 2 ^a	0,397	0,794	1,191	1,588	1,984	2,381	3,175

^a Rounded to the fourth decimal place.

7.1 Triangular inserts — TC

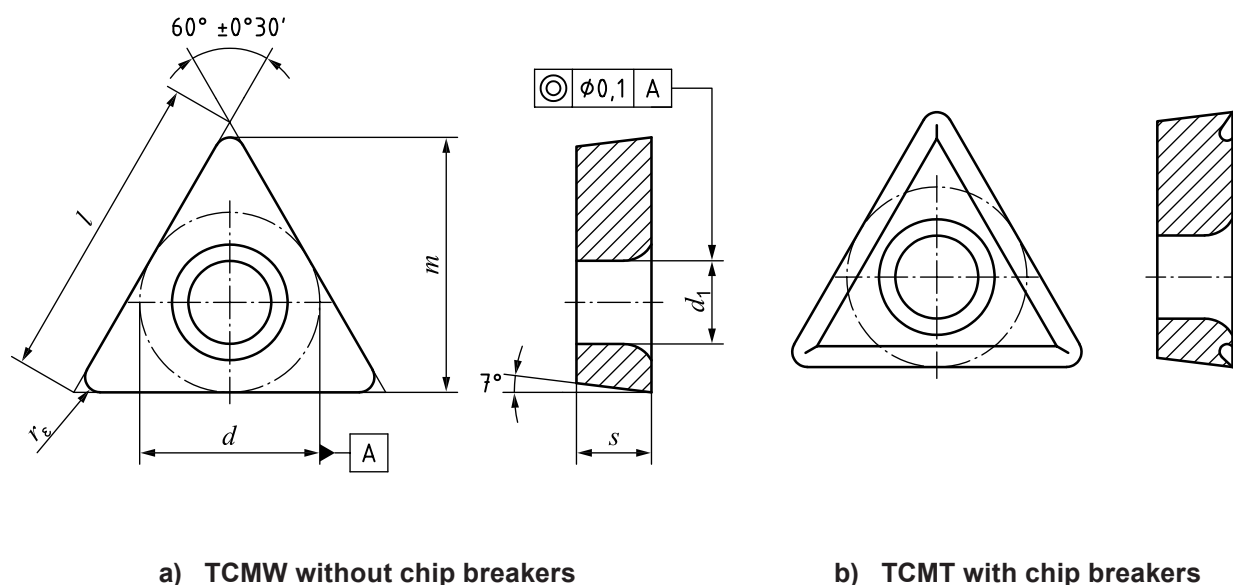


Figure 3 — Triangular inserts — TC


Table 3 — Dimensions of triangular inserts — TC

Dimensions in millimetres

Insert		l \approx	d^a	s^a	m^a	r_ϵ $\pm 0,1$	d_1 JS13
TCMW 090204	TCMT 090204	9,6	5,56	2,38	7,943	0,4	2,5
TCMW 110202	TCMT 110202	11	6,35		9,322	0,2	2,8
TCMW 110204	TCMT 110204				9,128	0,4	
TCMW 130304	TCMT 130304	13,6	7,94	3,18	11,51	0,4	3,4
TCMW 130308	TCMT 130308				11,113	0,8	
TCMW 16T304	TCMT 16T304	16,5	9,525	3,97	13,891	0,4	4,4
TCMW 16T308	TCMT 16T308				13,494	0,8	
TCMW 16T312	TCMT 16T312				13,097	1,2	
TCMW 220404	TCMT 220404	22	12,7	4,76	18,653	0,4	5,5
TCMW 220408	TCMT 220408				18,256	0,8	
TCMW 220412	TCMT 220412				17,859	1,2	
TCMW 220416	TCMT 220416				17,463	1,6	

^a Tolerances on d , s and m in accordance with ISO 1832. See Annex A.

7.2 Triangular inserts — TP

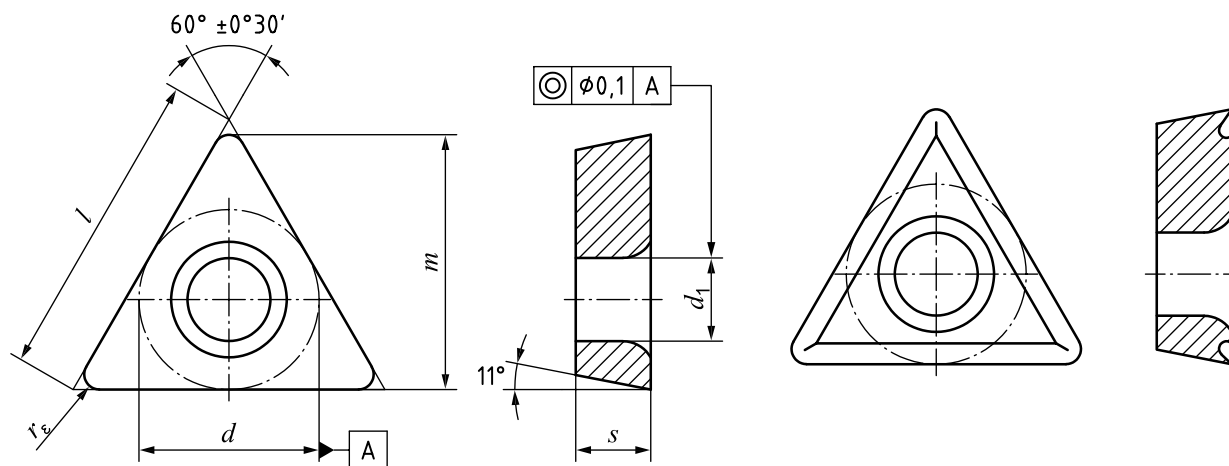

a) TPMW without chip breakers

b) TPMT with chip breakers

Figure 4 — Triangular inserts — TP


Table 4 — Dimensions of triangular inserts — TP

Dimensions in millimetres

Insert		l \approx	d^a	s^a	m^a	r_ϵ $\pm 0,1$	d_1 JS13
TPMW 090202	TPMT 090202	9,6	5,56	2,38	8,131	0,2	2,5
TPMW 090204	TPMT 090204				7,943	0,4	
TPMW 110202	TPMT 110202	11	6,35	2,38	9,322	0,2	2,8
TPMW 110204	TPMT 110204				9,128	0,4	
TPMW 130304	TPMT 130304	13,6	7,94	3,18	11,51	0,4	3,4
TPMW 130308	TPMT 130308				11,113	0,8	
TPMW 16T304	TPMT 16T304	16,5	9,525	3,97	13,891	0,4	4,4
TPMW 16T308	TPMT 16T308				13,494	0,8	

^a Tolerances on d , s and m in accordance with ISO 1832. See Annex A.

7.3 Square inserts — SC

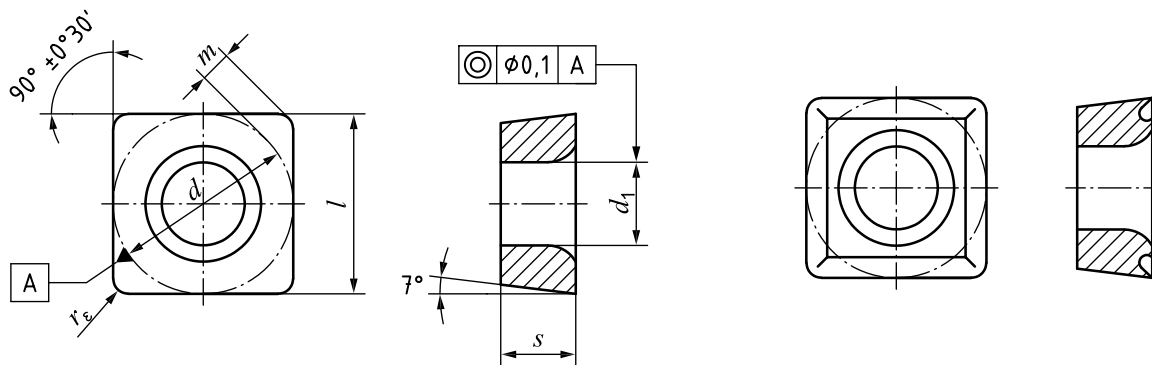

a) SCMW without chip breakers

b) SCMT with chip breakers

Figure 5 — Square inserts — SC


Table 5 — Dimensions of square inserts — SC

Dimensions in millimetres

Insert		d^a	s^a	m^a	r_ϵ $\pm 0,1$	d_1 JS13
SCMW 09T304	SCMT 09T304	9,525	3,97	1,808	0,4	4,4
SCMW 09T308	SCMT 09T308			1,644	0,8	
SCMW 120404	SCMT 120404	12,7	4,76	2,466	0,4	5,5
SCMW 120408	SCMT 120408			2,301	0,8	
SCMW 120412	SCMT 120412			2,137	1,2	
SCMW 150512	SCMT 150512	15,875	5,56	2,795	1,2	5,5
SCMW 150516	SCMT 150516			2,63	1,6	
SCMW 190612	SCMT 190612	19,05	6,35	3,452	1,2	6,5
SCMW 190616	SCMT 190616			3,288	1,6	
SCMW 190624	SCMT 190624			2,959	2,4	

^a Tolerances on d , s and m in accordance with ISO 1832. See Annex A.

7.4 Square inserts — SP

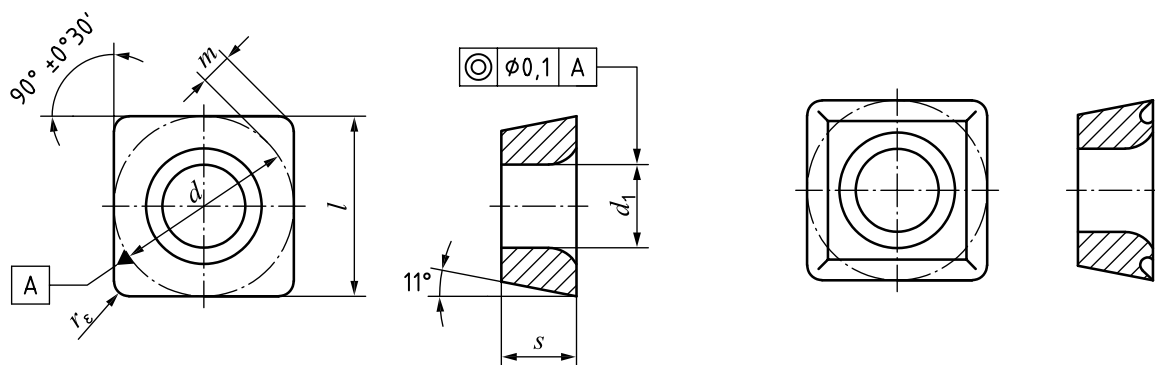

a) SPMW without chip breakers

b) SPMT with chip breakers

Figure 6 — Square inserts — SP

Table 6 — Dimensions of square inserts — SP

Dimensions in millimetres

Insert		d^a	s^a	m^a	r_ϵ $\pm 0,1$	d_1 JS13
SPMW 090304	SPMT 090304	9,525	3,18	1,808	0,4	4,4
SPMW 090308	SPMT 090308			1,644	0,8	
SPMW 09T304	SPMT 09T304	9,525	3,97	1,808	0,4	4,4
SPMW 09T308	SPMT 09T308			1,644	0,8	

^a Tolerances on d , s and m in accordance with ISO 1832. See Annex A.

7.5 Rhombic inserts with 80° included angle — CC

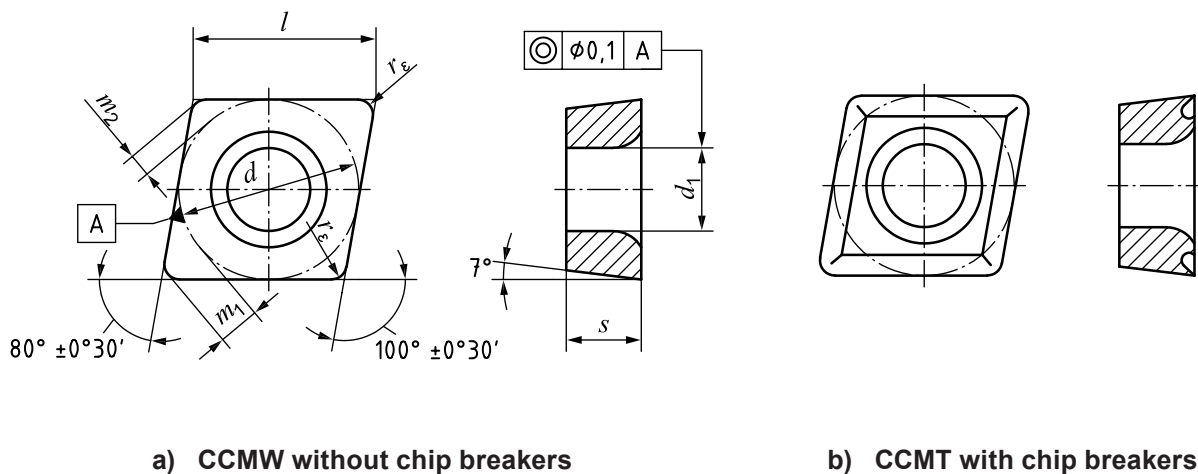


Figure 7 — Rhombic inserts with 80° included angle — CC

Table 7 — Dimensions of rhombic inserts with 80° included angle — CC

Dimensions in millimetres

Insert		l ≈	d^a	s^a	m_1^a	m_2^a	r_ϵ ± 0,1	d_1 JS13
CCMW 060202	CCMT 060202	6,4	6,35	2,38	1,652	0,908	0,2	2,8
CCMW 060204	CCMT 060204				1,544	0,848	0,4	
CCMW 080304	CCMT 080304	8,1	7,94	3,18	1,986	1,091	0,4	3,4
CCMW 080308	CCMT 080308				1,765	0,97	0,8	
CCMW 09T304	CCMT 09T304	9,7	9,525	3,97	2,426	1,333	0,4	4,4
CCMW 09T308	CCMT 09T308				2,206	1,212	0,8	
CCMW 120404	CCMT 120404	12,9	12,7	4,76	3,308	1,818	0,4	5,5
CCMW 120408	CCMT 120408				3,088	1,697	0,8	
CCMW 120412	CCMT 120412				2,867	1,576	1,2	
CCMW 160512	CCMT 160512	16,1	15,875	5,56	3,749	2,061	1,2	5,5
CCMW 160516	CCMT 160516				3,529	1,939	1,6	
CCMW 190612	CCMT 190512	19,3	19,05	6,35	4,632	2,545	1,2	6,5
CCMW 190616	CCMT 190616				4,411	2,424	1,6	
CCMW 190624	CCMT 190624				3,97	2,182	2,4	

^a Tolerances on d , s , m_1 and m_2 in accordance with ISO 1832. See Annex A.

7.6 Rhombic inserts with 80° included angle — CP

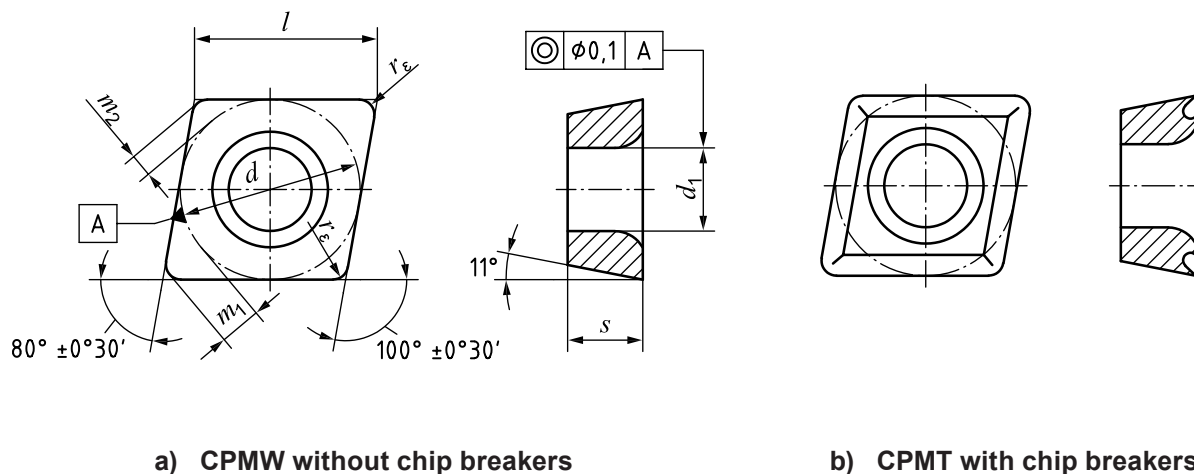


Figure 8 — Rhombic inserts with 80° included angle — CP


Table 8 — Dimensions of rhombic inserts with 80° included angle — CP

Dimensions in millimetres


Insert		l ≈	d^a	s^a	m_1^a	m_2^a	r_ϵ ± 0,1	d_1 JS13
CPMW 04T102	CPMT 04T102	4,8	4,76	1,98	1,21	0,665	0,2	2,15
CPMW 04T104	CPMT 04T104				1,102	0,606	0,4	
CPMW 050202	CPMT 050202	5,6	5,56	2,38	1,432	0,787	0,2	2,5
CPMW 050204	CPMT 050204				1,324	0,728	0,4	
CPMW 060202	CPMT 060202	6,4	6,35	2,38	1,652	0,908	0,2	2,8
CPMW 060204	CPMT 060204				1,544	0,848	0,4	
CPMW 080304	CPMT 080304	8,1	7,94	3,18	1,986	1,091	0,4	3,4
CPMW 080308	CPMT 080308				1,765	0,97	0,8	
CPMW 090304	CPMT 090304	9,7	9,525	3,18	2,426	1,333	0,4	4,4
CPMW 090308	CPMT 090308				2,206	1,212	0,8	
CPMW 09T304	CPMT 09T304	9,7	9,525	3,97	2,426	1,333	0,4	4,4
CPMW 09T308	CPMT 09T308				2,206	1,212	0,8	

^a Tolerances on d , s , m_1 and m_2 in accordance with ISO 1832. See Annex A.

7.7 Rhombic inserts with 55° included angle — DC

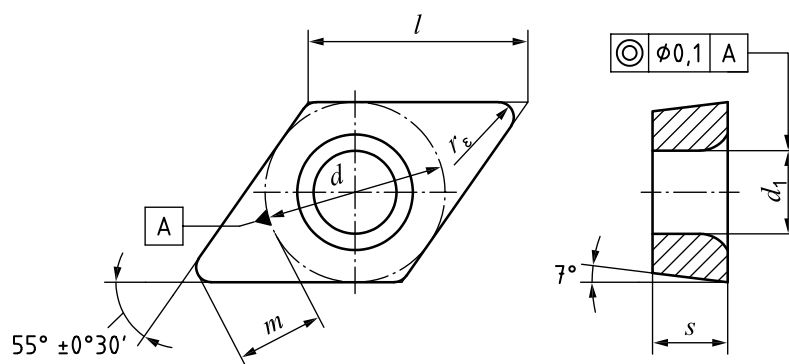

a) DCMW without chip breakers

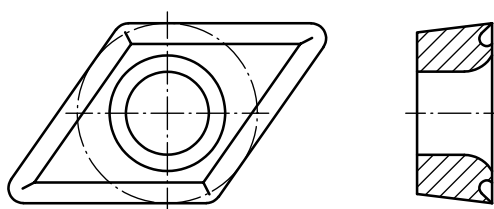

b) DCMT with chip breakers

Figure 9 — Rhombic inserts with 55° included angle — DC


Table 9 — Dimensions of rhombic inserts with 55° included angle — DC

Dimensions in millimetres


Insert		l ≈	d^a	s^a	m^a	r_ϵ ± 0,1	d_1 JS13
DCMW 070202	DCMT 070202	7,75	6,35	2,38	3,464	0,2	2,8
DCMW 070204	DCMT 070204				3,238	0,4	
DCMW 11T304	DCMT 11T304	11,6	9,525	3,97	5,089	0,4	4,4
DCMW 11T308	DCMT 11T308				4,626	0,8	
DCMW 11T312	DCMT 11T312				4,164	1,2	
DCMW 150404	DCMT 150404	15,5	12,7	4,76	6,939	0,4	5,5
DCMW 150408	DCMT 150408				6,477	0,8	
DCMW 150412	DCMT 150412				6,014	1,2	
DCMW 150416	DCMT 150416				5,552	1,6	

^a Tolerances on d , s , and m in accordance with ISO 1832. See Annex A.

7.8 Rhombic inserts with 35° included angle — VB and VC

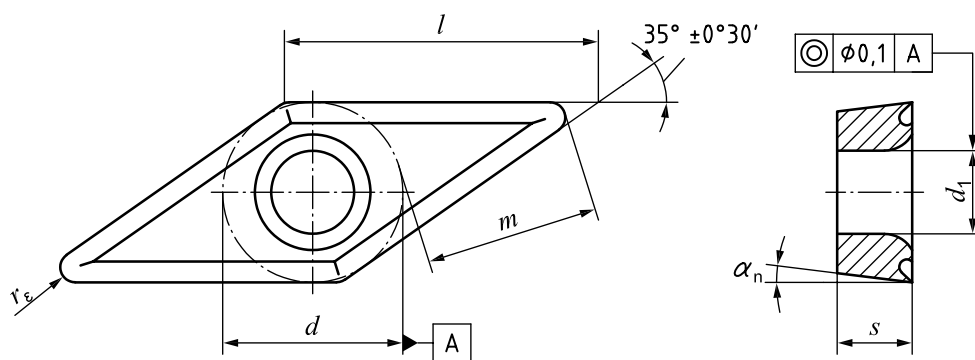

a) With chip breakers — VBMT, VCGT, VCMT

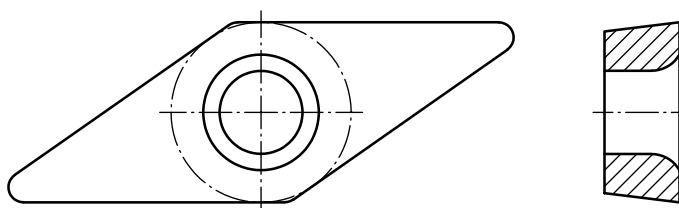

b) Without chip breakers — VBMW, VCGW, VCMW

Figure 10 — Rhombic inserts with 35° included angle — VB and VC

Table 10 — Dimensions of rhombic inserts with 35° included angle — VB and VC

Dimensions in millimetres

Insert		l ≈	d^a	s^a	m^a	r_ϵ ± 0,1	d_1 JS13	α_N ± 1°	
VBMW 110302	VBMT 110302	11,1	6,35	3,18	6,911	0,2	2,8	5°	
VBMW 110304	VBMT 110304				6,46	0,4			
VBMW 160404	VBMT 160404	16,6	9,525	4,76	10,152	0,4	4,4		
VBMW 160408	VBMT 160408				9,229	0,8			
VBMW 160412	VBMT 160412				8,306	1,2			
VCGW 110304	VCGT 110304	11,1	6,35	3,18	6,46	0,4	2,8		7°
VCMW 110304	VCMT 110304								
VCGW 160404	VCGT 160404	16,6	9,525	4,76	10,152	0,4	4,4		
VCGW 160408	VCGT 160408				9,229	0,8			
VCMW 160404	VCMT 160404				10,152	0,4			
VCMW 160408	VCMT 160408				9,229	0,8			

^a Tolerances on d , s , and m in accordance with ISO 1832. See Annex A.

7.9 Round inserts — RC

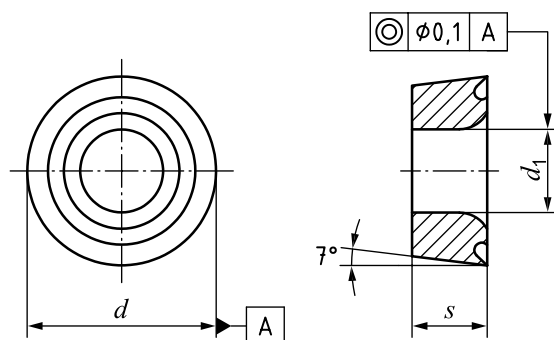


Figure 11 — RCMT with chip breakers

Table 11 — Dimensions of round inserts — RC

Dimensions in millimetres

Insert	d^a	s^a	d_1 JS13
RCMT 0602M0	6	2,38	2,8
RCMT 0803M0	8	3,18	3,4
RCMT 10T3M0	10	3,97	4,4
RCMT 1204M0	12	4,76	4,4
RCMT 1605M0	16	5,56	5,5
RCMT 2006M0	20	6,35	6,5
RCMT 2507M0	25	7,94	8,6
RCMT 3209M0	32	9,52	8,6

^a Tolerances on d and s in accordance with ISO 1832. See Annex A.

7.10 Round inserts — RP

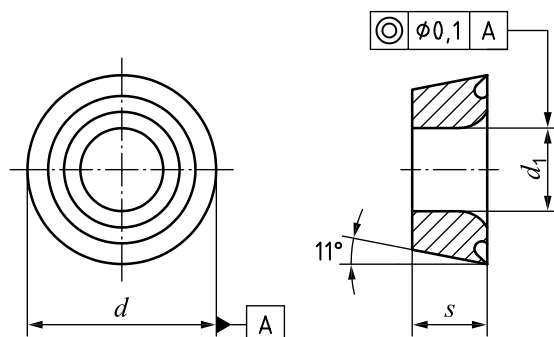


Figure 12 — RPMT with chip breakers

Table 12 — Dimensions of round inserts — RP

Dimensions in millimetres

Insert	d^a	s^a	d_1 JS13
RPMT 0803M0	8	3,18	3,4
RPMT 10T3M0	10	3,97	4,4

^a Tolerances on d and s in accordance with ISO 1832. See Annex A.

7.11 Hexagonal (trigon) inserts with 80° included angle — WC

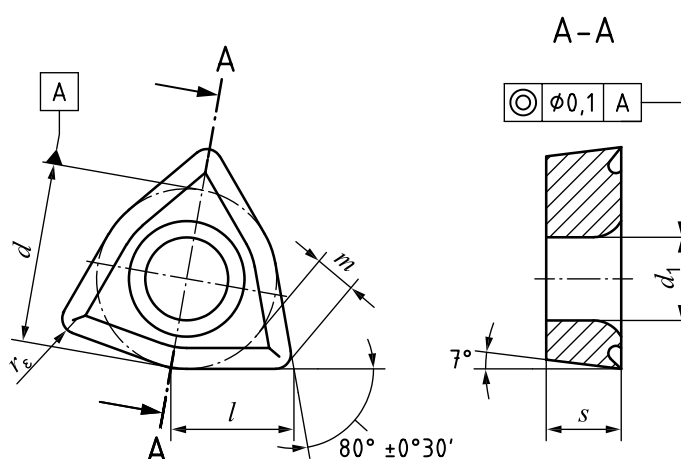


Figure 13 — WCMT with chip breakers

Table 13 — Dimensions of hexagon or trigon inserts with 80° included angle — WC

Dimensions in millimetres

Insert	l ≈	d^a	s^a	m^a	$r_ε$ ± 0,1	d_1 JS13
WCMT L3T102	3,26	4,76	1,98	1,21	0,2	2,15
WCMT L3T104				1,102	0,4	
WCMT 030202	3,8	5,56	2,38	1,432	0,2	2,5
WCMT 030204				1,324	0,4	
WCMT 040202	4,34	6,35	2,38	1,651	0,2	2,8
WCMT 040204				1,544	0,4	
WCMT 050304	5,43	7,94	3,18	1,986	0,4	3,4
WCMT 050308				1,765	0,8	
WCMT 06T304	6,52	9,525	3,97	2,426	0,4	4,4
WCMT 06T308				2,205	0,8	
WCMT 080408	8,69	12,7	4,76	3,087	0,8	5,5
WCMT 080412				2,867	1,2	

^a Tolerances in accordance with ISO 1832. See Annex A.

Annex A (normative)

Tolerances for d , m , m_1 , m_2 and s — Extract from ISO 1832

Table A.1 — Tolerances for d , m , m_1 , m_2 and s

Dimensions in millimetres

Insert		Tolerance class M for			
Designation	d	d	m , m_1 and m_2	s	
CPM. T1..	4,76	$\pm 0,05$	$\pm 0,08$	$\pm 0,05^a$	
CPM. 04..				$\pm 0,13$	
WCM. L3..					
TPM. 02..	5,56	$\pm 0,05$	$\pm 0,08$	$\pm 0,05^a$	
CPM. 02..					
RPM. 02..			—		
TPM. 09..			$\pm 0,08$	$\pm 0,13$	
TCM. 09..					
CPM. 05..					
WCM. 03..					
RCM. 06..	6	$\pm 0,05$	—		
RPM. 06..					
TPM. 11..	6,35	$\pm 0,05$	$\pm 0,08$		
TCM. 11..					
CPM. 06..					
CCM. 06..					
WCM. 04..					
DCM. 07..			$\pm 0,11$		
VBM. 11..			$\pm 0,16$		
VCM. 11..					
TPM. 13..	7,94	$\pm 0,05$	$\pm 0,08$		
TCM. 13..					
CPM. 08..					
CCM. 08..					
WCM. 05..					
RPM. 07..			—		
VCM. 13..			$\pm 0,16$		
RPM. 08..			8	$\pm 0,05$	—
RCM. 08..					

Table A.1 (continued)

Insert		Tolerance class M for			
Designation	<i>d</i>	<i>d</i>	<i>m, m₁ and m₂</i>	<i>s</i>	
TPM. 16..	9,525	± 0,05	± 0,08	± 0,13	
TCM. 16..					
SPM. 09..					
SCM. 09..					
CPM. 09..					
CCM. 09..					
WCM. 06..					
DCM. 11..			± 0,11		
RPM. 09..			—		
VBM. 16..			± 0,16		
VCM. 16..					
RPM. 10..	10	± 0,05	—		
RCM. 10..					
RPM. 12..M0	12	± 0,08	—		
RCM. 12..					
TCM. 22..	12,7	± 0,08	± 0,13		
SPM. 12..					
SCM. 12..					
CPM. 12..					
CCM. 12..					
WCM. 08..					
DCM. 15..			± 0,15		
RPM. 12..00			—		
SCM. 15..	15,875	± 0,1	± 0,15		
CCM. 16..					
RCM. 16..			—		
SCM. 19..			± 0,15		
CCM. 19..					
RCM. 20..			—		
RCM. 25..			25		± 0,13
RCM. 32..	32	—			
^a As an exception to ISO 1832.					

Annex B (normative)

Methods of measurement of dimension m

B.1 Triangular inserts

Dimension m is related to the side opposite the corner that is being measured. The insert is placed on a surface plate, as shown in Figure B.1, and checked by means of a dial gauge zeroed with the aid of a gauge block corresponding to the dimension m . The dial gauge then gives a direct reading of the error when applied to the inserts being measured.

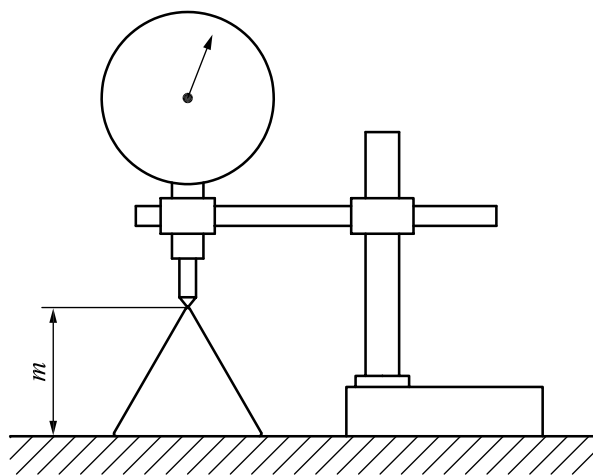


Figure B.1 — Triangular insert

B.2 Square inserts

Dimension m shall be checked with reference to the diameter, d , of a precision roller, where d corresponds to the nominal diameter of the inscribed circle of the insert. The insert shall be mounted on a 90° vee-block, as shown in Figure B.2, and checked by means of a dial gauge which shall be zeroed to dimension m by means of a roller with the aid of a gauge block. The dial gauge then gives a direct reading of the error when applied to the inserts being measured. The roller has a tolerance of $\pm 0,002$ mm.

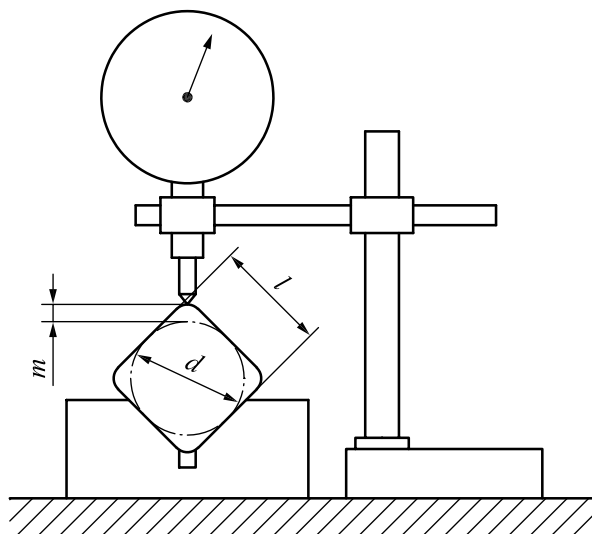


Figure B.2 — Square insert

B.3 Rhombic inserts

Dimension m , m_1 or m_2 shall be checked with reference to the diameter, d , of a precision roller, where d corresponds to the nominal size of the inscribed circle of the insert. The insert is mounted on a 35° , 55° , 80° or 100° vee-block, as shown in Figure B.3, and checked by means of a dial gauge which shall be zeroed to dimension m , m_1 or m_2 by means of a roller with the aid of a gauge block. The dial gauge then gives a direct reading of the error when applied to the inserts being measured. The roller has a tolerance of $\pm 0,002$ mm.

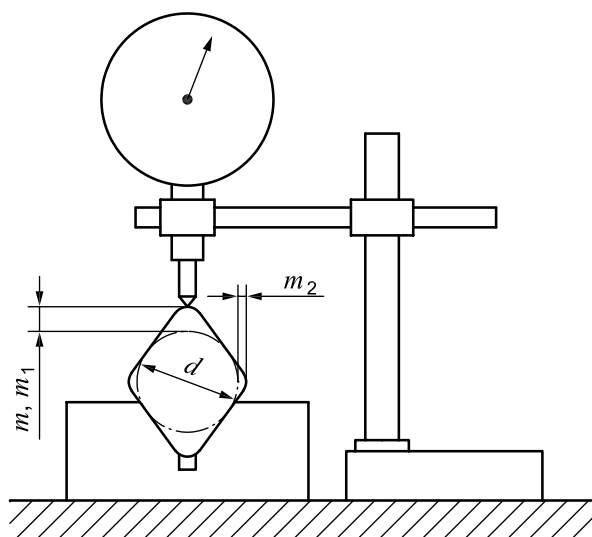


Figure B.3 — Rhombic insert

B.4 Round inserts

The diameter, d , shall be measured with a micrometer or similar device.

B.5 Hexagonal inserts

Dimension m shall be checked with reference to the diameter, d , of a precision roller, where d corresponds to the nominal diameter of the inscribed circle of the insert. The insert shall be placed on a plate, as shown in Figure B.4, and checked by means of a dial gauge which shall be zeroed to dimension m by means of a roller with the aid of a gauge block. The dial gauge then gives a direct reading of the error when applied to the inserts being measured. The roller has a tolerance of $\pm 0,002$ mm.

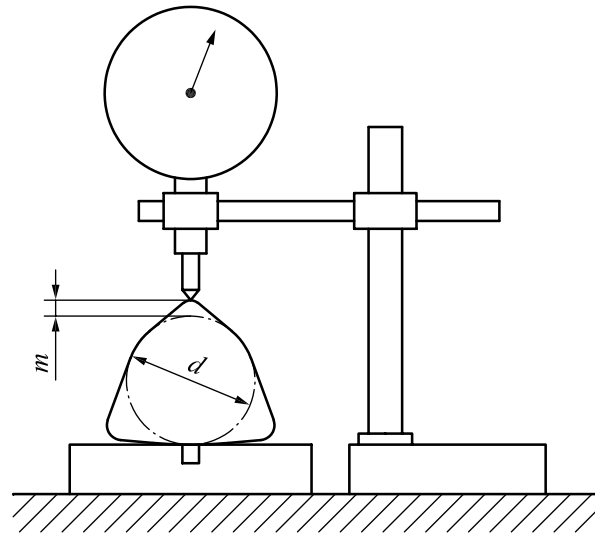


Figure B.4 — Hexagonal insert

Annex C (normative)

Size ranges

Table C.1 — Range of sizes for inserts with rounded corners with partly cylindrical fixing hole and with 11° normal clearance, with shapes TPMW., TPMT., SPMW., SPMT., CPMW., CPMT., RPMW. and RPMT. covered by this International Standard

Dimensions in millimetres

<i>d</i>	Without chip breakers (W)						With chip breakers on the face (T)							
	Designation	<i>d</i> /2	Corner radius, <i>r_ε</i>					Designation	<i>d</i> /2	Corner radius, <i>r_ε</i>				
			0,2	0,4	0,8	1,2	1,6			0,2	0,4	0,8	1,2	1,6
5,56	TPMW 0902		+	+			TPMT 0902		+	+				
6,35	TPMW 1102		+	+			TPMT 1102		+	+				
	TPMW 1103						TPMT 1103							
7,94	TPMW 1303			+	+		TPMT 1303			+	+			
9,525	TPMW 16T3			+	+		TPMT 16T3			+	+			
12,7	TPMW 2204						TPMT 2204							
9,525	SPMW 0903			+	+		SPMT 0903			+	+			
	SPMW 09T3			+	+		SPMT 09T3			+	+			
12,7	SPMW 1204						SPMT 1204							
4,76	CPMW 04T1		+	+			CPMT 04T1		+	+				
5,56	CPMW 0502		+	+			CPMT 0502		+	+				
6,35	CPMW 0602		+	+			CPMT 0602		+	+				
7,94	CPMW 0803			+	+		CPMT 0803			+	+			
9,525	CPMW 0903			+	+		CPMT 0903			+	+			
	CPMW 09T3			+	+		CPMT 09T3			+	+			
12,7	CPMW 1204						CPMT 1204							
7,94	RPMW 070300						RPMT 070300							
9,525	RPMW 09T300						RPMT 09T300							
12,7	RPMW 120400						RPMT 120400							
6	RPMW 0602M0						RPMT 0602M0							
8	RPMW 0803M0						RPMT 0803M0	+						
10	RPMW 10T3M0						RPMT 10T3M0	+						
12	RPMW 1204M0						RPMT 1204M0							

+ First preference; inserts covered by this International Standard.


Non-shaded squares: second preference; inserts not covered by this International Standard.

Shaded squares: inserts not recommended.

Table C.2 — Range of sizes for inserts with rounded corners with partly cylindrical fixing hole and with 7° normal clearance, with shapes TCMW.., TCMT.., SCMW.., SCMT.., CCMW.., CCMT.., DCMW.., DCMT.., RCMW.. and RCMT.. covered by this International Standard

Dimensions in millimetres

d	Without chip breaker (W)							With chip breaker on the face (T)								
	Designation	Corner radius, r_ϵ						Designation	Corner radius, r_ϵ							
		d/2	0,2	0,4	0,8	1,2	1,6		2,4	d/2	0,2	0,4	0,8	1,2	1,6	2,4
5,56	TCMW 0902			+					TCMT 0902			+				
6,35	TCMW 1102		+	+					TCMT 1102		+	+				
6,35	TCMW 1103								TCMT 1103							
7,94	TCMW 1303			+	+				TCMT 1303			+	+			
9,525	TCMW 16T3			+	+	+			TCMT 16T3			+	+	+		
12,7	TCMW 2204			+	+	+	+		TCMT 2204			+	+	+	+	
9,525	SCMW 09T3			+	+				SCMT 09T3			+	+			
12,7	SCMW 1204			+	+	+			SCMT 1204			+	+	+		
15,875	SCMW 1505					+	+		SCMT 1505					+	+	+
19,05	SCMW 1906					+	+	+	SCMT 1906					+	+	+
25,4	SCMW 2507								SCMT 2507							
6,35	CCMW 0602		+	+					CCMT 0602		+	+				
7,94	CCMW 0803			+	+				CCMT 0803			+	+			
9,525	CCMW 09T3			+	+				CCMT 09T3			+	+			
12,7	CCMW 1204			+	+	+			CCMT 1204			+	+	+		
15,875	CCMW 1605					+	+		CCMT 1605					+	+	
19,05	CCMW 1906					+	+	+	CCMT 1906					+	+	+
6,35	DCMW 0702		+	+					DCMT 0702		+	+				
7,94	DCMW 0903								DCMT 0903							
9,525	DCMW 11T3			+	+	+			DCMT 11T3			+	+	+		
12,7	DCMW 1504			+	+	+	+		DCMT 1504			+	+	+	+	
15,875	DCMW 1905								DCMT 1905							
6	RCMW 0602M0								RCMT 0602M0	+						
8	RCMW 0803M0								RCMT 0803M0	+						
10	RCMW 10T3M0								RCMT 10T3M0	+						
12	RCMW 1204M0								RCMT 1204M0	+						
16	RCMW 1605M0								RCMT 1605M0	+						
20	RCMW 2006M0								RCMT 2006M0	+						
25	RCMW 2507M0								RCMT 2507M0	+						
32	RCMW 3209M0								RCMT 3209M0	+						

 First preference; inserts covered by this International Standard.

 Non-shaded squares: second preference; inserts not covered by this International Standard.


 Shaded squares: inserts not recommended.

Table C.3 — Range of sizes for inserts with rounded corners with cylindrical fixing hole and with 7° normal clearance, with shape WCMT.., covered by this International Standard

Dimensions in millimetres

<i>d</i>	With chip breakers on one face only (M)				
	Designation	Corner radius, r_ϵ			
		0,2	0,4	0,8	1,2
4,76	WCMT L3T1	+	+		
5,56	WCMT 0302	+	+		
6,35	WCMT 0402	+	+		
7,94	WCMT 0503		+	+	
9,525	WCMT 06T3		+	+	
12,7	WCMT 0804			+	+

Table C.4 — Range of sizes for inserts with rounded corners with partly cylindrical fixing hole and with 5° and 7° normal clearance, with shapes VBMW.., VBMT.., VCGW.., VCGT.., VCMW.. and VCMT.., covered by this International Standard

Dimensions in millimetres

<i>d</i>	Designation	Tolerance class G				Tolerance class M			
		Corner radius, r_ϵ				Corner radius, r_ϵ			
		0,2	0,4	0,8	1,2	0,2	0,4	0,8	1,2
6,35	VBMW 1103, VBMT 1103					+	+		
9,525	VBMW 1604, VBMT 1604						+	+	+
6,35	VCGW 1103, VCGT 1103, VCMW 1103, VCMT 1103		+				+		
7,94	VCGW 13T3, VCGT 13T3, VCMW 13T3, VCMT 13T3								
9,525	VCGW 1604, VCGT 1604, VCMW 1604, VCMT 1604		+	+			+	+	



First preference; inserts covered by this International Standard.



Non-shaded squares: second preference; inserts not covered by this International Standard.



Shaded squares: inserts not recommended.

Annex D (informative)

Relationship between designations in this International Standard and the ISO 13399 series

D.1 Relationship between designations

For relationship between designations in this International Standard and preferred symbols according to the ISO 13399 series, see Table D.1.

**Table D.1 — Relationship between designations in this International Standard and
the ISO 13399-series**

Symbol in this International Standard (ISO 6987)	Reference in International Standard (ISO 6987)	Property name in the ISO 13399 series	Symbol in the ISO 13399 series	Reference in the ISO 13399 series
—	Clause 3	Insert shape code	SC	ISO/TS 13399-2 71CE7A9F0C79F
d	Tables 2, 3, 4, 5, 6, 7	Inscribed circle diameter	IC	ISO/TS 13399-2 71CE7A96D9F7D
d_1	Tables 2, 3, 4, 5, 6, 7	Fixing hole diameter	D1	ISO/TS 13399-2 71CE7A968C8FE
l	Tables 2, 3, 4, 5, 6, 7	Cutting edge length	L	ISO/TS 13399-2 71DD6C95DA49B
m	Tables 2, 3, 5, 6, 7	m-dimension	M	ISO/TS 13399-2 71CE7AA0972DB
m_1	Table 4	m-dimension	M	ISO/TS 13399-2 71CE7AA0972DB
m_2	Table 4	m2-dimension	M2	ISO/TS 13399-2 71CE7AA05C819
r_ϵ	Tables 2, 3, 4, 5, 6, 7	Corner radius	RE	ISO/TS 13399-2 71DD6C8ACA503
s	Tables 2, 3, 4, 5, 6, 7	Insert thickness	S	ISO/TS 13399-2 71CE7A9F5308C

Bibliography

- [1] ISO 883, *Indexable hardmetal (carbide) inserts with rounded corners, without fixing hole — Dimensions*
- [2] ISO 3364, *Indexable hardmetal (carbide) inserts with rounded corners, with cylindrical fixing hole — Dimensions*
- [3] ISO 3365, *Indexable hardmetal (carbide) inserts with wiper edges, without fixing hole — Dimensions*
- [4] ISO 13399 (all parts), *Cutting tool data representation and exchange*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™