



BSI Standards Publication

Earth-moving machinery — Hydraulic excavators — Terminology and commercial specifications

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

National foreword

This British Standard is the UK implementation of ISO 7135:2009. It supersedes BS 6914-8:1993 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee B/513/1, Earth moving machinery (International).

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2010

ISBN 978 0 580 60354 9

ICS 01.040.53; 53.100

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2010.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL STANDARD

BS ISO 7135:2009
ISO
7135

Second edition
2009-12-15

Earth-moving machinery — Hydraulic excavators — Terminology and commercial specifications

Engins de terrassement — Pelles hydrauliques — Terminologie et spécifications commerciales



Reference number
ISO 7135:2009(E)

© ISO 2009

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
3.1 General	2
3.2 Masses	3
3.3 Attachments	3
3.4 Equipment	4
4 Base machine	5
4.1 Classification by type	5
4.2 Component nomenclature	6
4.3 Dimensions	7
5 Equipment and attachments	9
5.1 Equipment and attachments nomenclature	9
5.2 Dimensions	16
5.3 Manoeuvring, road travelling and shipping	20
6 Performance terminology	22
6.1 ISO net power (engine)	22
6.2 Maximum travel speed	22
6.3 Maximum swing speed	22
6.4 Braking performance	22
6.5 Steering (wheeled excavators only)	22
6.6 Digging force	22
6.7 Rated lift capacity	23
7 Commercial literature specifications (SI units)	23
7.1 Engine	23
7.2 Hydraulic system	23
7.3 System fluid capacities	23
7.4 Filtration system	24
7.5 Crawler excavator	24
7.6 Wheeled excavator	24
7.7 Operating mass	25
7.8 Shipping mass	25
Annex A (normative) Base-machine dimensions	26
Annex B (normative) Dimensions of equipment and attachments	30
Bibliography	39

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7135 was prepared by Technical Committee ISO/TC 127, *Earth-moving machinery*, Subcommittee SC 4, *Terminology, commercial nomenclature, classification and ratings*.

This second edition cancels and replaces the first edition (ISO 7135:1993), which has been technically revised.

Earth-moving machinery — Hydraulic excavators — Terminology and commercial specifications

1 Scope

This International Standard establishes terminology and the content of commercial literature specifications for self-propelled crawler and wheeled hydraulic excavators and their equipment and attachments.

It is applicable to common components and does not cover terms or commercial specifications specific to walking excavators.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3450, *Earth-moving machinery — Braking systems of rubber-tyred machines — Systems and performance requirements and test procedures for braking systems*

ISO 5010, *Earth-moving machinery — Rubber-tyred machines — Steering requirements*

ISO 6014, *Earth-moving machinery — Determination of ground speed*

ISO 6015, *Earth-moving machinery — Hydraulic excavators and backhoe loaders — Methods of determining tool forces*

ISO 6165:2006, *Earth-moving machinery — Basic types — Identification and terms and definitions*

ISO 6746-1, *Earth-moving machinery — Definitions of dimensions and codes — Part 1: Base machine*

ISO 6746-2:2003, *Earth-moving machinery — Definitions of dimensions and codes — Part 2: Equipment and attachments*

ISO 9249, *Earth-moving machinery — Engine test code — Net power*

ISO 10265, *Earthmoving machinery — Crawler machines — Performance requirements and test procedures for braking systems*

ISO 10567, *Earth-moving machinery — Hydraulic excavators — Lift capacity*

ISO 14396, *Reciprocating internal combustion engines — Determination and method for the measurement of engine power — Additional requirements for exhaust emission tests in accordance with ISO 8178*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6165, ISO 6746-1 and ISO 6746-2 and the following apply.

3.1 General

3.1.1

excavator

self-propelled machine on crawlers, wheels or legs, having an upper structure capable of a 360° swing and with mounted equipment, which is primarily designed for excavating with a bucket, without movement of the undercarriage during the work cycle

NOTE 1 An excavator work cycle normally comprises excavating, elevating, swinging and discharging of material.

NOTE 2 An excavator can also be used for object or material handling/transportation.

NOTE 3 Figures 1 to 3 describe the types of excavator defined in 3.1.1.1 to 3.1.1.3.

3.1.1.1

minimal swing radius excavator

MSRX

excavator designed for operation in a confined space, having an upper structure with a short swinging radius, with its equipment and attachment swinging within 120 % of the width of the undercarriage

3.1.1.2

compact excavator

excavator with an operating mass less than or equal to 6 000 kg

3.1.1.3

walking excavator

excavator with three or more supporting legs, which can be articulated, telescopic or both, and that can be fitted with wheels

3.1.2

base machine

excavator with a cab or canopy and operator-protective structures if required, without equipment or attachments, but possessing the necessary mountings for such equipment and attachments

NOTE Figures 4 and 5 describe the base machine and its dimensions.

3.1.3

cab riser

any spacer that increases the height of the SIP greater than 250 mm relative to the normal configuration or a system that raises the cab away from the excavator in an upward direction either through a mechanical or hydraulic system

NOTE For the SIP (seat index point), see ISO 5353.

3.1.4 Equipment and attachment positions

3.1.4.1

transport position

orientation in which the equipment and its affixed attachment is placed when the excavator is positioned for shipment or transport on a flat level surface, such as a rail car or flat bed trailer, as recommended by the manufacturer

NOTE The minimal overall length and height of the excavator will result from this position.

3.1.4.2

manoeuvring position

orientation in which the equipment and its affixed attachment is placed when the excavator is positioned as recommended by the manufacturer for travel requiring numerous turns

3.1.4.3

travel position

orientation in which the equipment and its affixed attachment is placed when the excavator is positioned as recommended by the manufacturer for long-distance straight-line travel

3.2 Masses

3.2.1

operating mass

OM

mass of the base machine, with equipment and empty attachment in the most usual configuration as specified by the manufacturer, and with the operator (75 kg), full fuel tank and all fluid systems (i.e. hydraulic oil, transmission oil, engine oil, engine coolant) at the levels specified by the manufacturer and, when applicable, with sprinkler water tank(s) half full

[ISO 6016:2008, definition 3.2.1]

3.2.2

shipping mass

SM

mass of the base machine without an operator, and with fuel level at 10 % of tank capacity or with minimum fuel level needed for machine shipping purposes as specified by the manufacturer, whichever is higher, with all fluid systems at the levels specified by the manufacturer, and with empty sprinkler tank(s), if required, and with or without equipment, ballast, attachment, cab, canopy, operator-protective structures, wheels and counterweights as stated by the manufacturer

NOTE If the manufacturer intends that the machine be partially disassembled for shipping purposes, the masses of the disassembled items will also be stated.

[ISO 6016:2008, definition 3.2.6]

3.3 Attachments

3.3.1

attachment

assembly of components that can be mounted onto the base machine or equipment for specific use

[ISO 6746-2:2003, definition 3.5]

NOTE Attachments for hydraulic excavators normally are the working tool attached to the end of the arm or a telescopic boom that provides the digging, cutting, grabbing and processing function of the excavator.

3.3.2

hoe bucket

hoe-type bucket

bucket attached to the arm or telescopic boom and linkage equipment that generally cuts towards the machine

See Figure 12.

3.3.3

grab-type bucket

grab bucket

clamshell bucket

clamshell-type bucket

bucket attached to the arm and linkage equipment that digs or grabs in a generally vertical direction, discharging below and above the ground reference plane (GRP)

See Figures 16 and 17.

3.3.4
shovel bucket
shovel-type bucket

bucket attached to the arm and linkage equipment that cuts away from the machine and generally upwards, discharging above the ground reference plane (GRP)

See Figure 18.

3.3.5
quick coupler

assembly of components attached to the end of the arm and linkage that facilitates the quick mounting and removal of the attachment from the arm and linkage

NOTE A quick coupler can be considered as part of the equipment if integrated directly into the arm.

3.3.6
blade

component mounted on the undercarriage of the base machine that is generally used for backfilling trenches and for limited excavation, and which can also be used as a stabilizer

3.4 Equipment

3.4.1
equipment

set of components mounted onto the base machine to provide the primary design function of the excavator

NOTE 1 The definitions given in 3.4.2 to 3.4.6 are based on the main geometrical digging curves of most common applications of hydraulic excavators.

NOTE 2 Other equipment and derivatives are available.

NOTE 3 Figures 6 to 21 show types of equipment.

3.4.2
telescopic boom equipment

boom, with the necessary mountings for an attachment, which can be extended and retracted, and that generally cuts toward the machine through the telescoping action of the boom

See Figure 21.

NOTE It is primarily used for excavation and/or grading of slopes either above or below ground level.

3.4.3
hoe equipment

boom, arm and linkage with the mountings for a hoe-type bucket that generally cuts towards the machine

See Figure 6.

NOTE It is primarily used for below-ground level excavation.

3.4.4
shovel equipment

boom, arm and linkage that use a shovel-type bucket attached at the end of the arm that cuts away from the machine and generally upwards

See Figure 18.

NOTE It is primarily used for above-ground level excavation.

3.4.5
grab equipment
clamshell equipment

boom, arm and linkage that uses a grab-type or clamshell-type bucket that digs or grabs in a generally vertical direction, discharging below and above the GRP

See Figure 25.

3.4.6
swing-type boom

boom assembly mounted on the front of the undercarriage that can articulate, allowing the machine to excavate at various angles relative to the longitudinal centreline of the machine

NOTE A swing-type boom can allow the machine to excavate adjacent to a vertical surface.

4 Base machine

4.1 Classification by type

The excavators shall be classified by their undercarriage and by their equipment.

See also Clause 5.

a) **Undercarriage**

- Crawler excavator (see Figure 1)
- Wheeled excavator (see Figure 2)
- Walking excavator (see Figure 3)

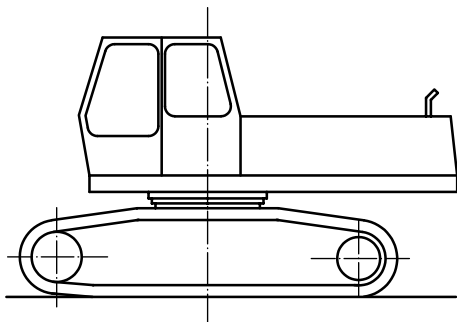


Figure 1 — Crawler excavator

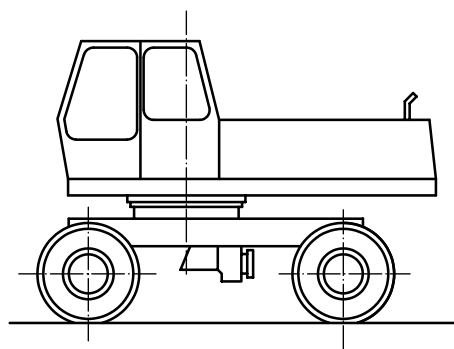


Figure 2 — Wheeled excavator

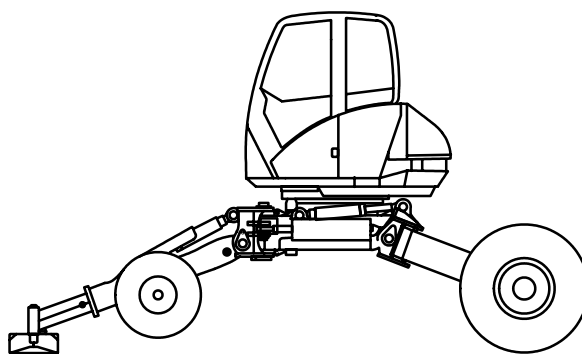



Figure 3 — Walking excavator

b) Equipment

- Backhoe (see Figure 23)
- Shovel (see Figure 24)
- Clamshell (see Figure 25)
- Telescoping boom (see Figure 26)

4.2 Component nomenclature

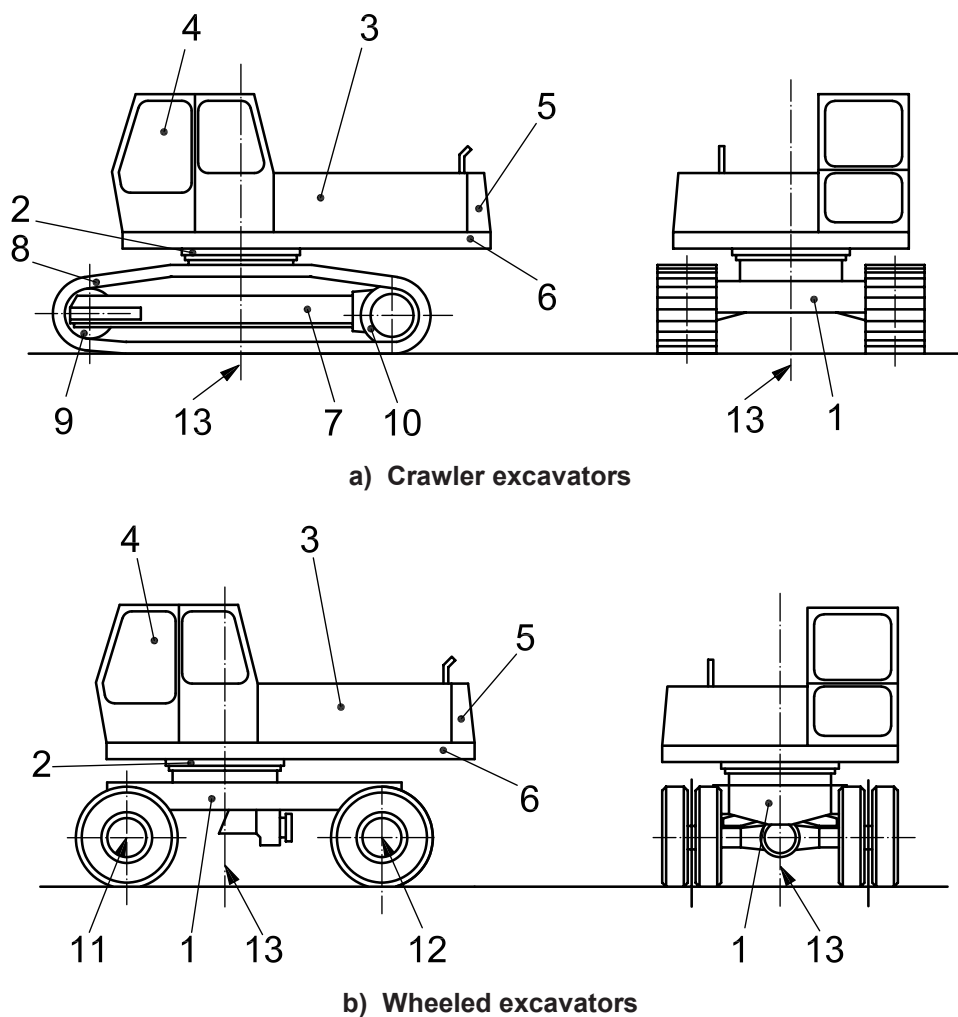Component nomenclature shall be in accordance with Figure 4 a) or b), according to whether the base machine is a crawler or wheeled excavator.



Key

- | | | | |
|---|-----------------|----|-----------------------|
| 1 | undercarriage | 8 | crawler tracks |
| 2 | swing bearing | 9 | idler |
| 3 | upper structure | 10 | sprocket |
| 4 | cab | 11 | steering axle (front) |
| 5 | counterweight | 12 | rigid axle (rear) |
| 6 | revolving frame | 13 | axis of rotation |
| 7 | track frame | | |

Figure 4 — Base machine nomenclature

4.3 Dimensions

The base-machine dimensions shall be in accordance with Figure 5.

The definitions of those base-machine dimensions common to earth-moving machinery are given in ISO 6746-1.

The base-machine dimensions shown in Figure 5 that are specific to hydraulic excavators are defined in Annex A.


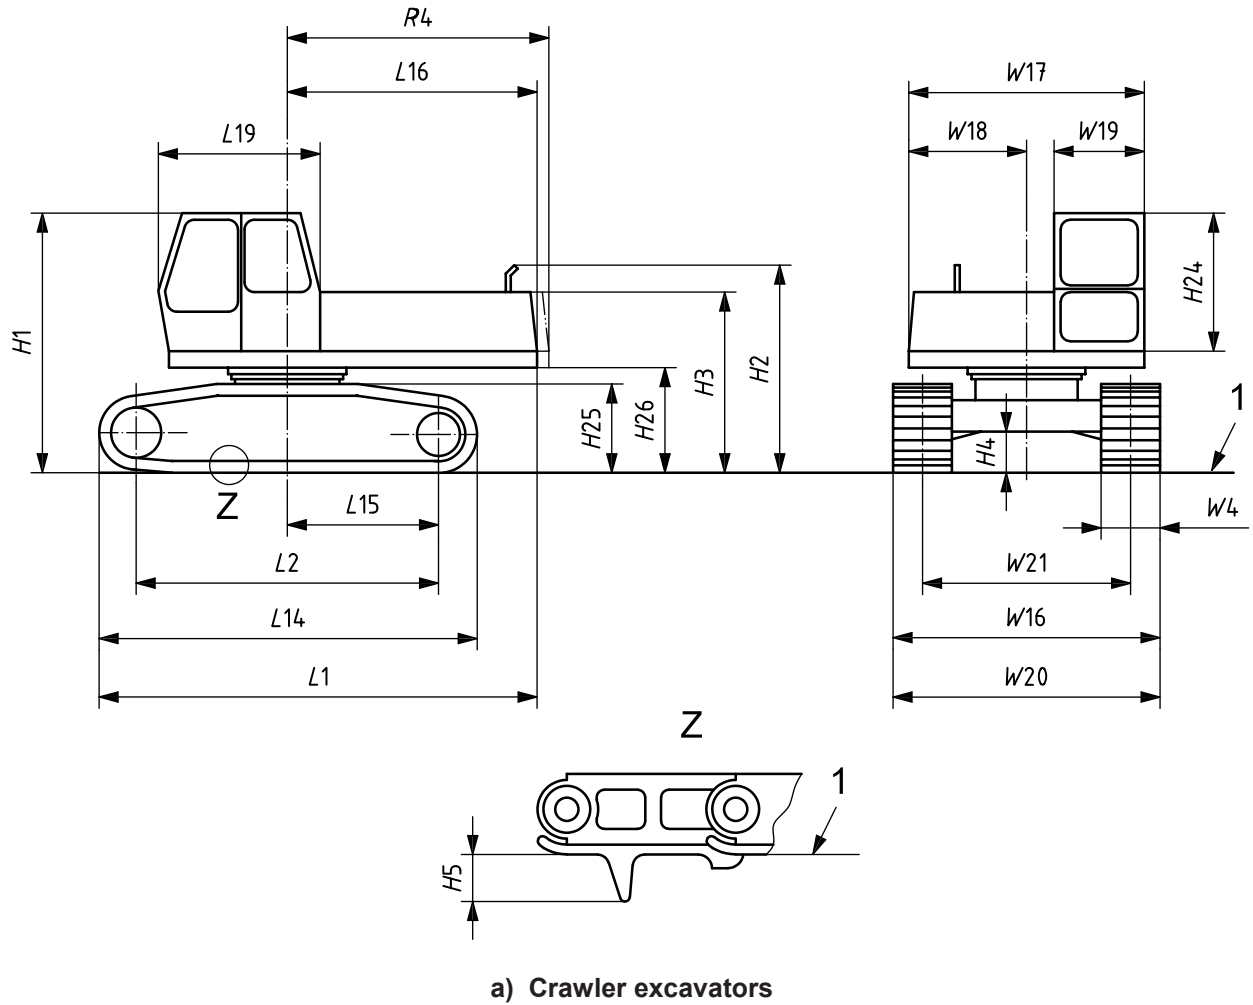


Figure 5 — Base machine dimensions

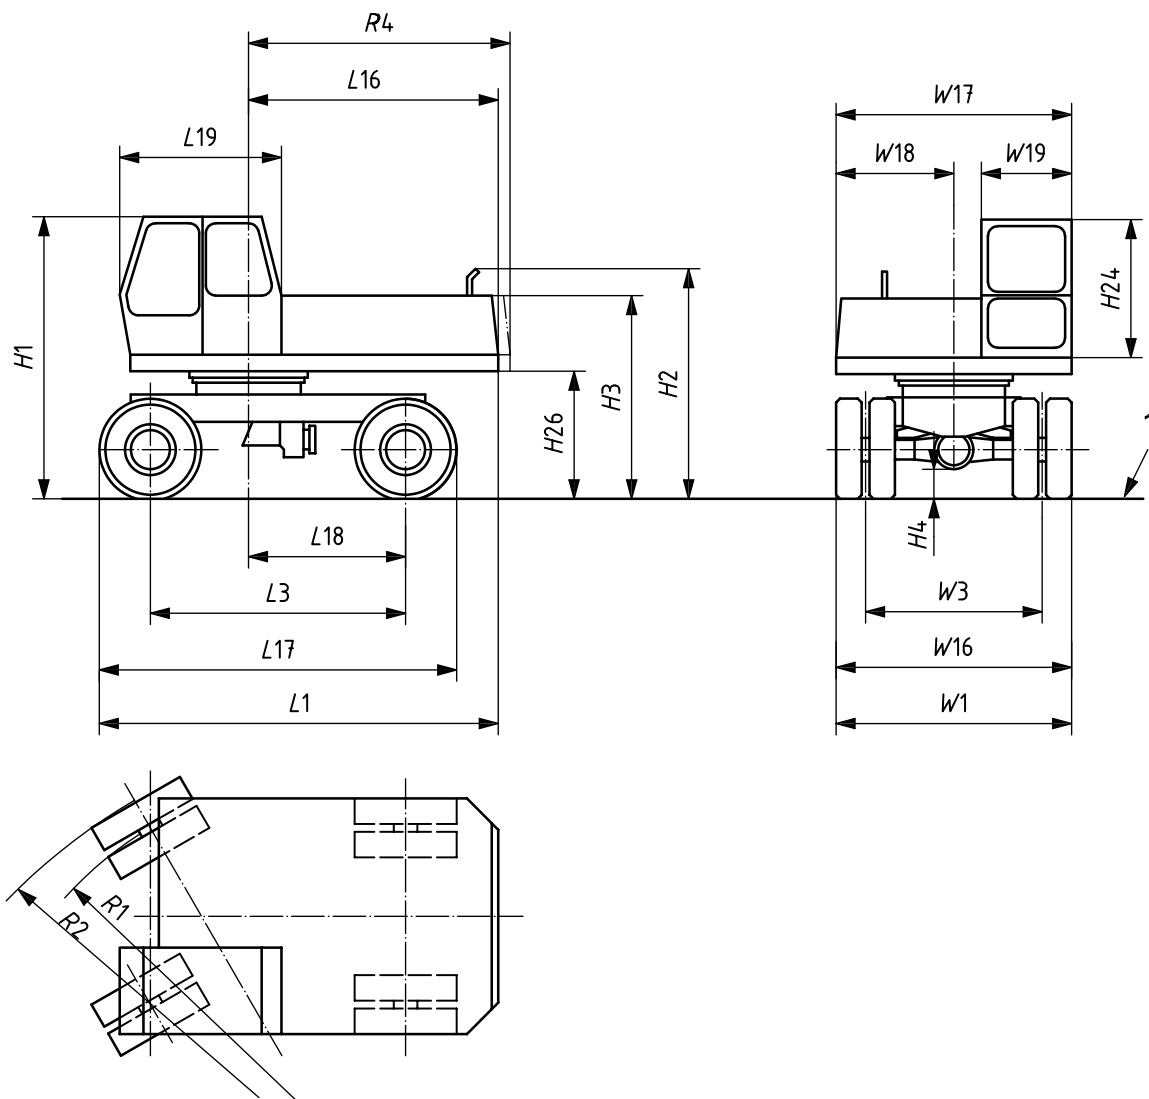

b) Wheeled excavators

Key


- 1 ground reference plane (GRP)

Figure 5 — Base machine dimensions (continued)

5 Equipment and attachments

5.1 Equipment and attachments nomenclature

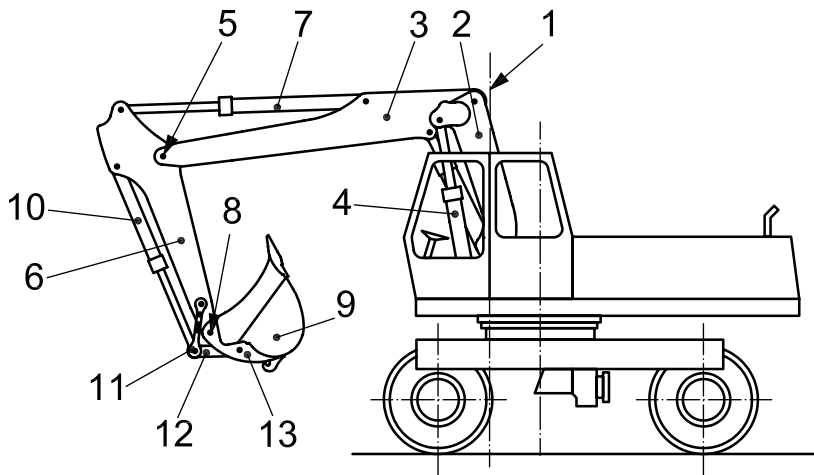
Equipment and attachments nomenclature shall be in accordance with Figures 6 to 22.



Key

- | | |
|---------------------|-----------------------|
| 1 boom pivot | 8 bucket pivot |
| 2 stub | 9 bucket |
| 3 intermediate boom | 10 bucket cylinder |
| 4 boom cylinder | 11 guide linkage |
| 5 arm pivot | 12 bucket linkage |
| 6 arm | 13 attachment bracket |
| 7 arm cylinder | |

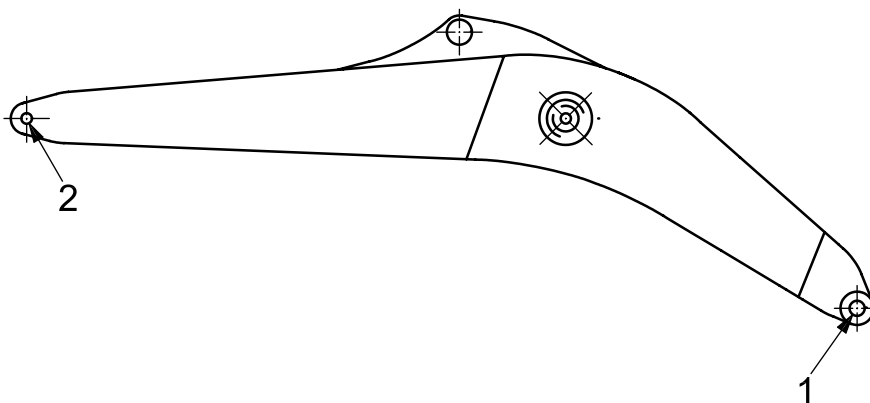
Figure 6 — Hoe



Key


- | |
|--------------|
| 1 boom pivot |
| 2 arm pivot |

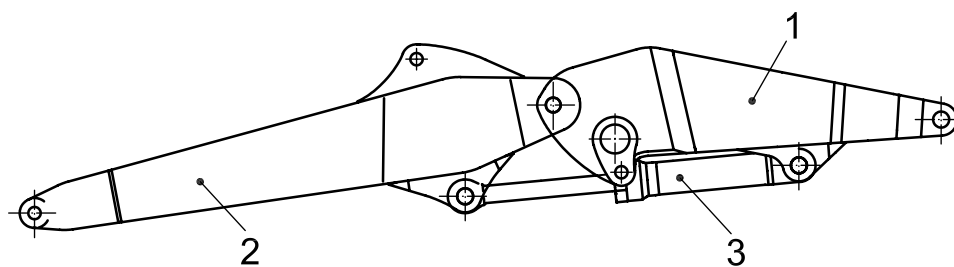Figure 7 — Front-mounted one-piece boom




- Key**
- 1 stub
 - 2 intermediate boom
 - 3 cylinder, boom adjustment

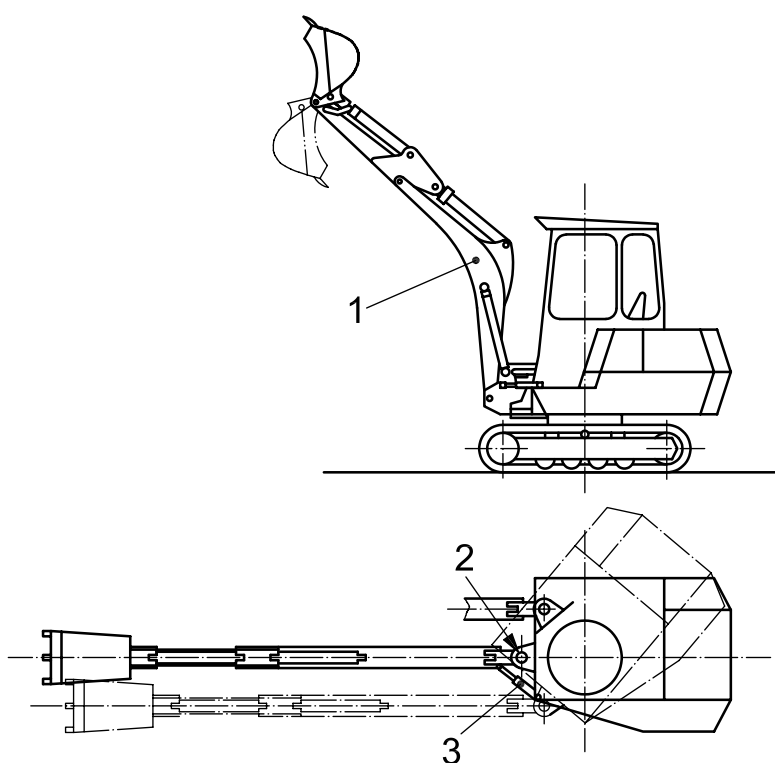Figure 8 — Hydraulic boom, adjustable height attachment



- Key**
- 1 boom
 - 2 articulation bearing
 - 3 articulation cylinder

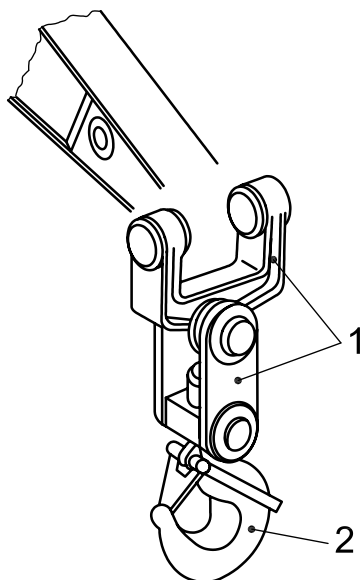
Figure 9 — Swing-type boom



Key

- 1 attachment linkage
- 2 hook with safety latch

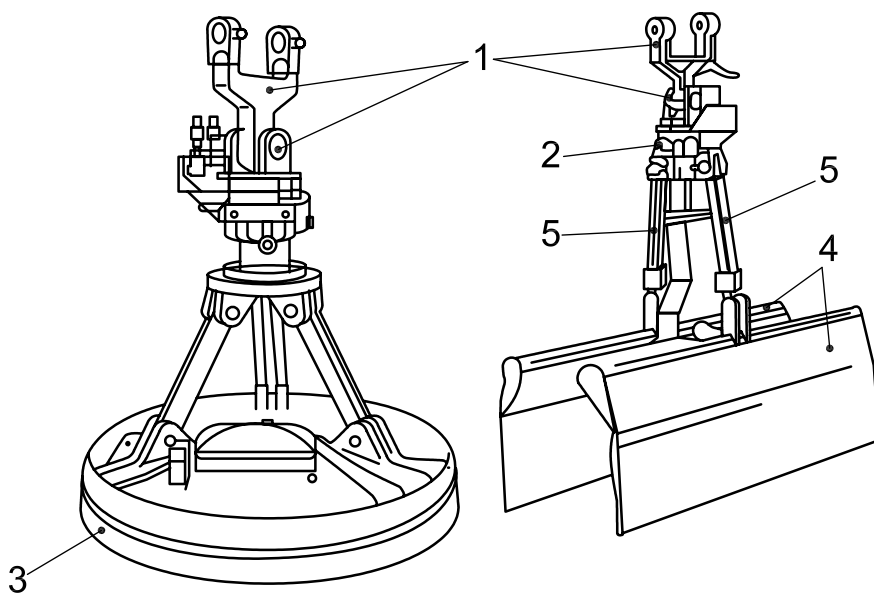
Figure 10 — Hook attachment



Key

- 1 attachment linkage
- 2 rotator
- 3 magnetic plate
- 4 special clamp plate
- 5 cylinder

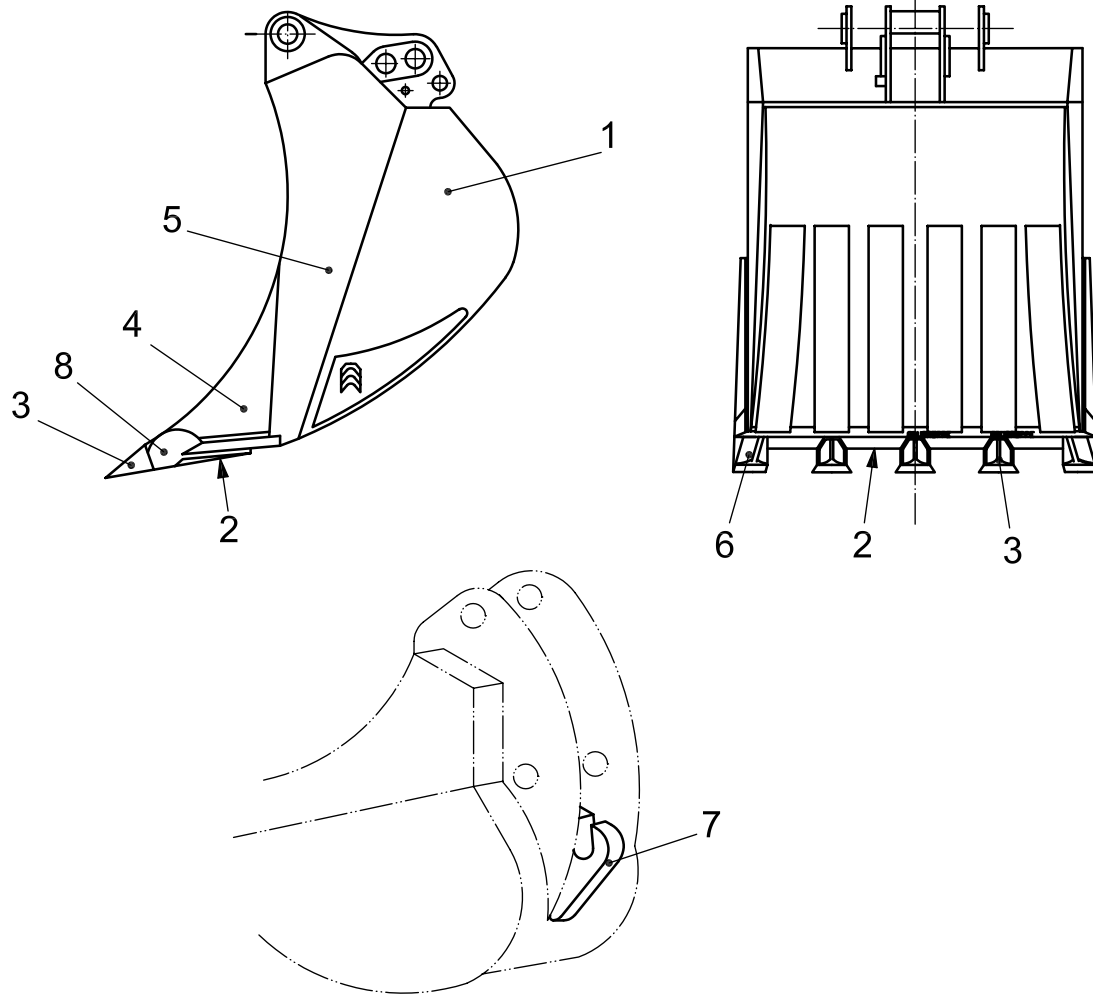Figure 11 — Magnet and clamp attachments



Key

- | | |
|----------------|---------------------|
| 1 bucket body | 5 cutting side wall |
| 2 cutting edge | 6 side tooth |
| 3 tooth | 7 hook or eye |
| 4 side cutter | 8 tooth adapter |

Figure 12 — Hoe bucket

Key

- 1 ejector


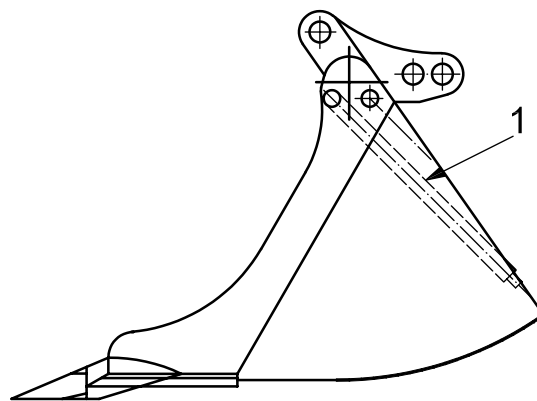



Figure 13 — Drainage [ejector] bucket

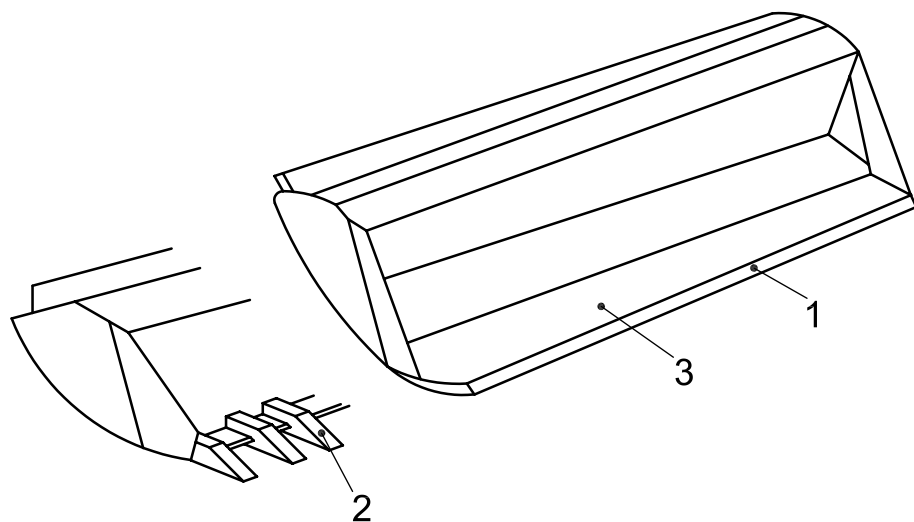

Key

- 1 cutting edge
- 2 tooth
- 3 cutting blade (replaceable)

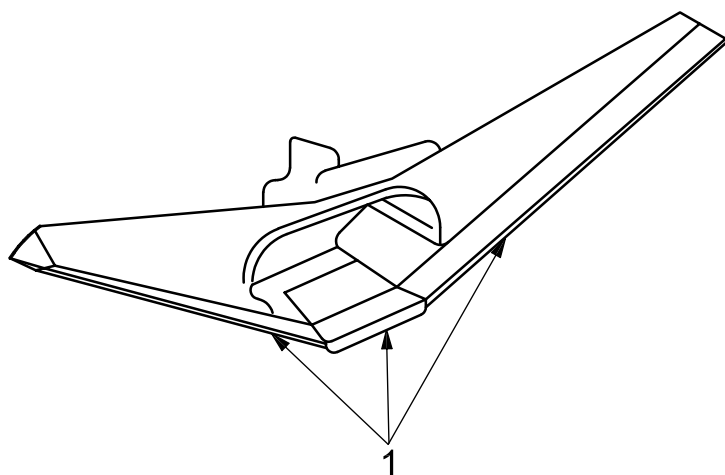
Figure 14 — Trench [ditch] cleaning bucket



Key

- 1 cutting edge

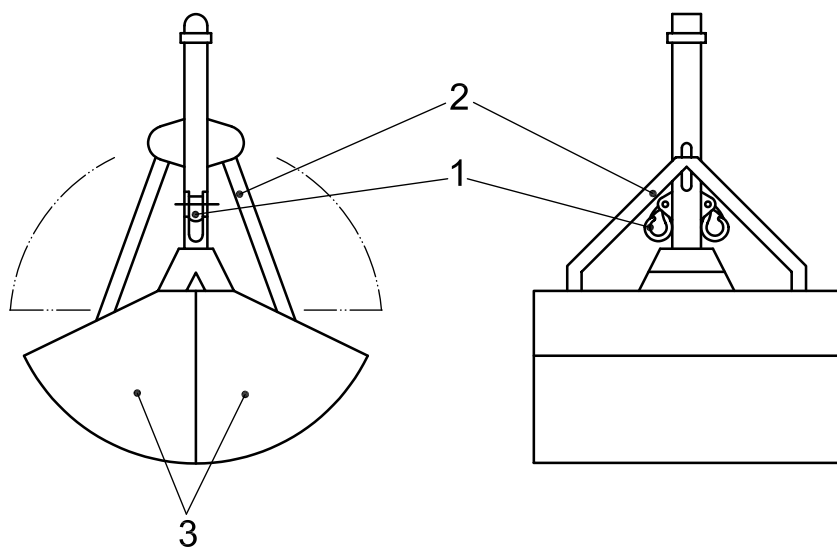
Figure 15 — Profile bucket



Key

- 1 hook
- 2 shell
- 3 linkage

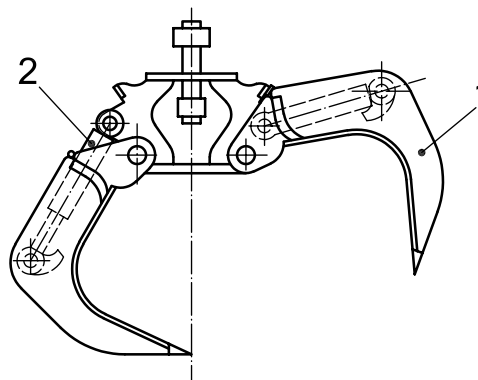
Figure 16 — Clamshell bucket



Key

- 1 arm
- 2 arm cylinder

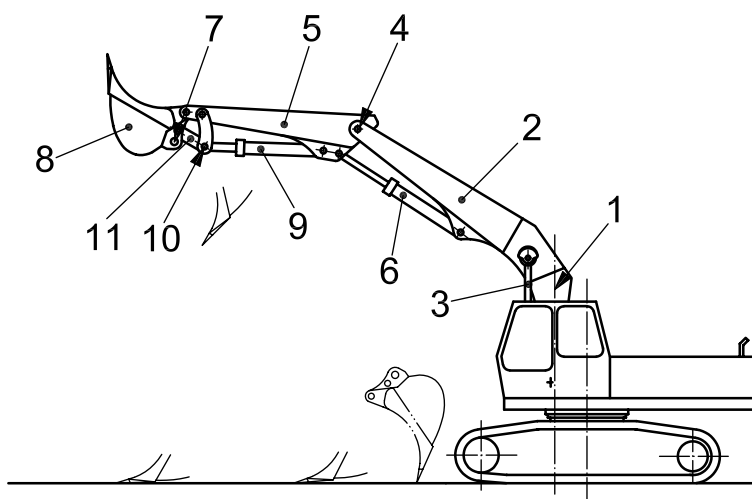
Figure 17 — Multi-claw grab



Key

- 1 boom pivot
- 2 boom
- 3 boom cylinder
- 4 arm pivot
- 5 arm
- 6 arm cylinder
- 7 bucket pivot
- 8 bucket
- 9 bucket cylinder
- 10 guide linkage
- 11 shovel linkage

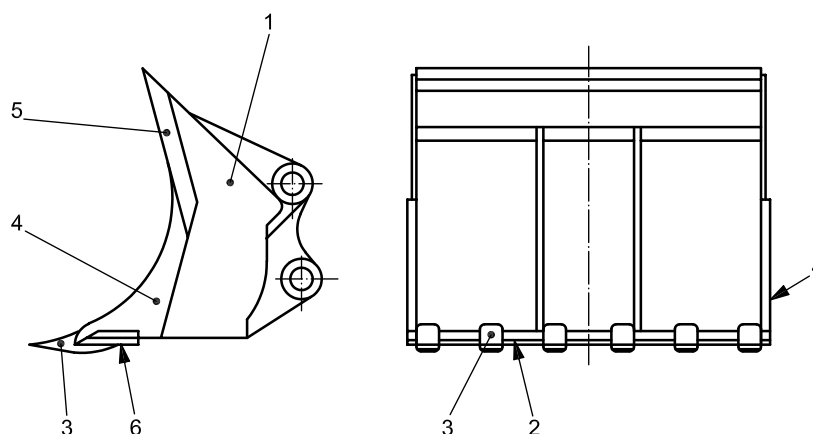
Figure 18 — Shovel



Key

- 1 bucket body
- 2 cutting edge
- 3 tooth
- 4 side cutter
- 5 cutting side wall
- 6 tooth adapter

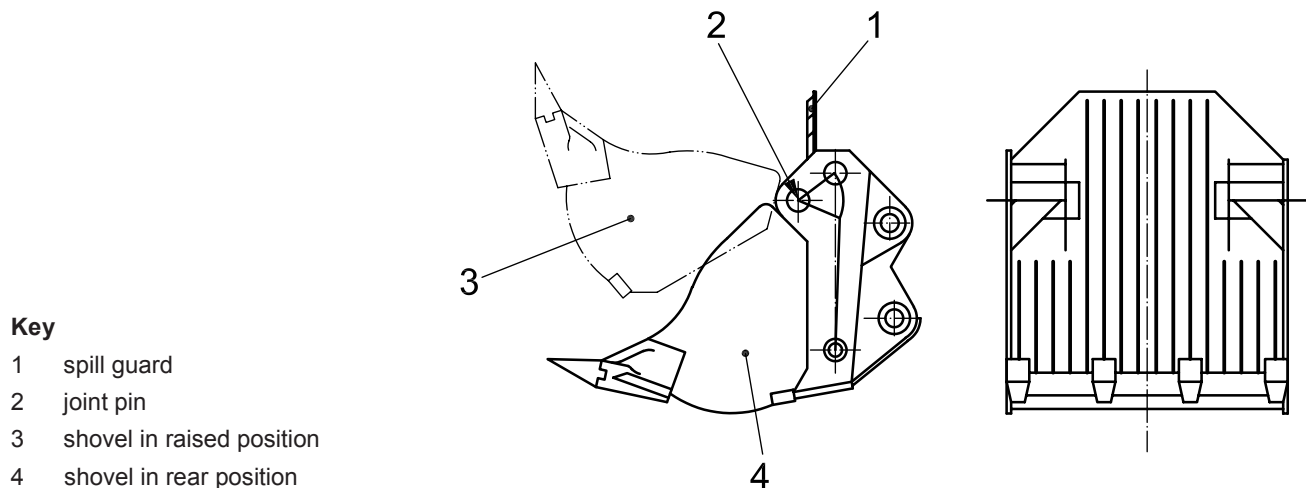
Figure 19 — Shovel bucket



Key

- 1 spill guard
- 2 joint pin
- 3 shovel in raised position
- 4 shovel in rear position

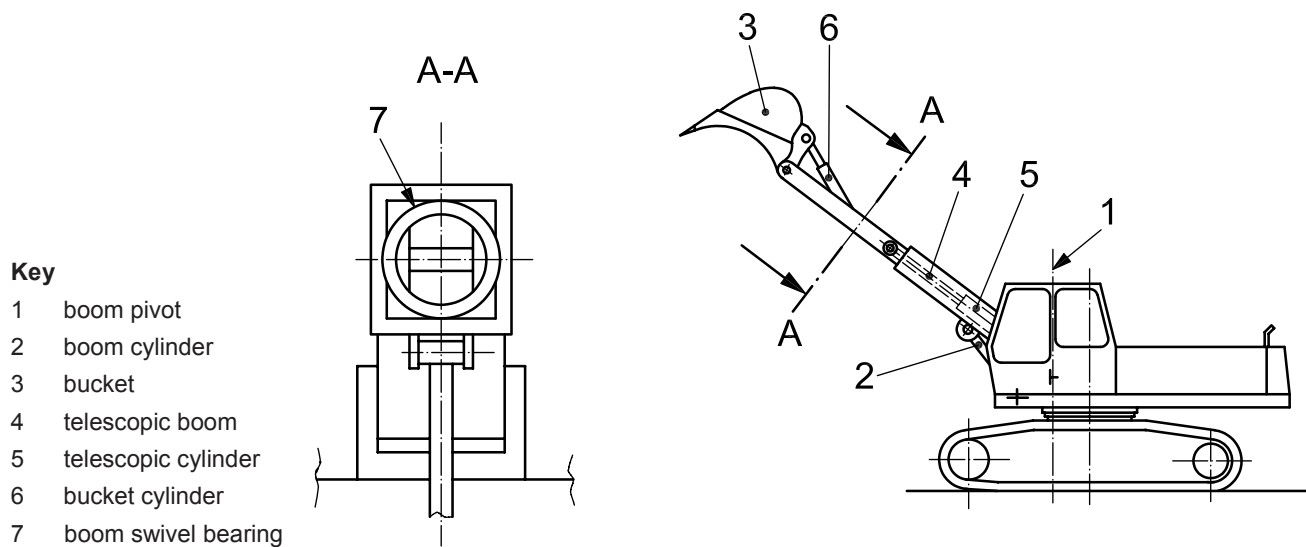
Figure 20 — Bottom-dump-type shovel bucket



Key

- 1 boom pivot
- 2 boom cylinder
- 3 bucket
- 4 telescopic boom
- 5 telescopic cylinder
- 6 bucket cylinder
- 7 boom swivel bearing

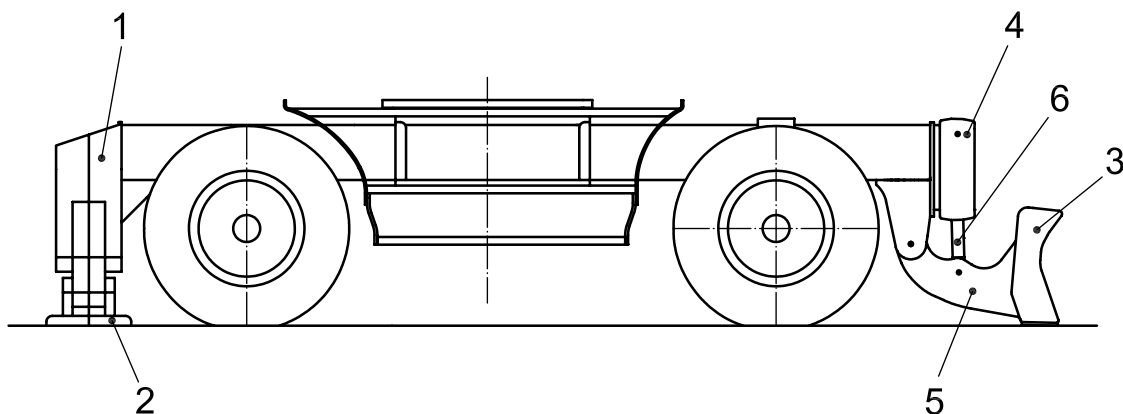Figure 21 — Telescopic boom



Key

- | | |
|-------------------|------------------|
| 1 rear outriggers | 4 cylinder, lift |
| 2 outrigger pad | 5 beam, push |
| 3 blade | 6 blade linkage |


Figure 22 — Dozer blade and outrigger

5.2 Dimensions

The dimensions of the equipment and attachments on hydraulic excavators shall be in accordance with Figures 23 to 26.

For the definitions of the dimensions, see Annex B.

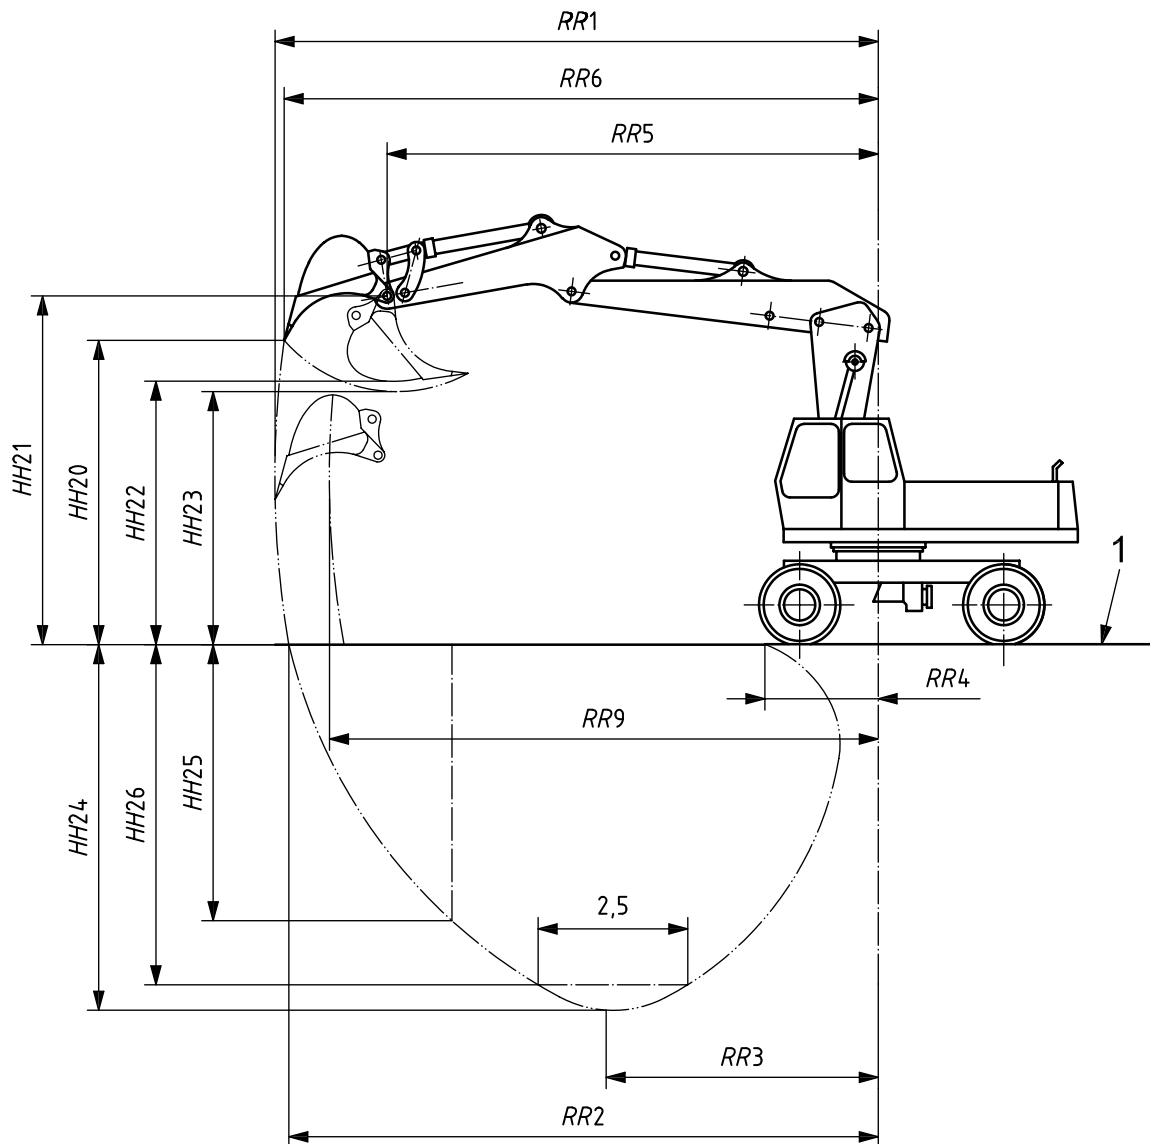
Dimensions in metres



Key

- 1 ground reference plane (GRP)

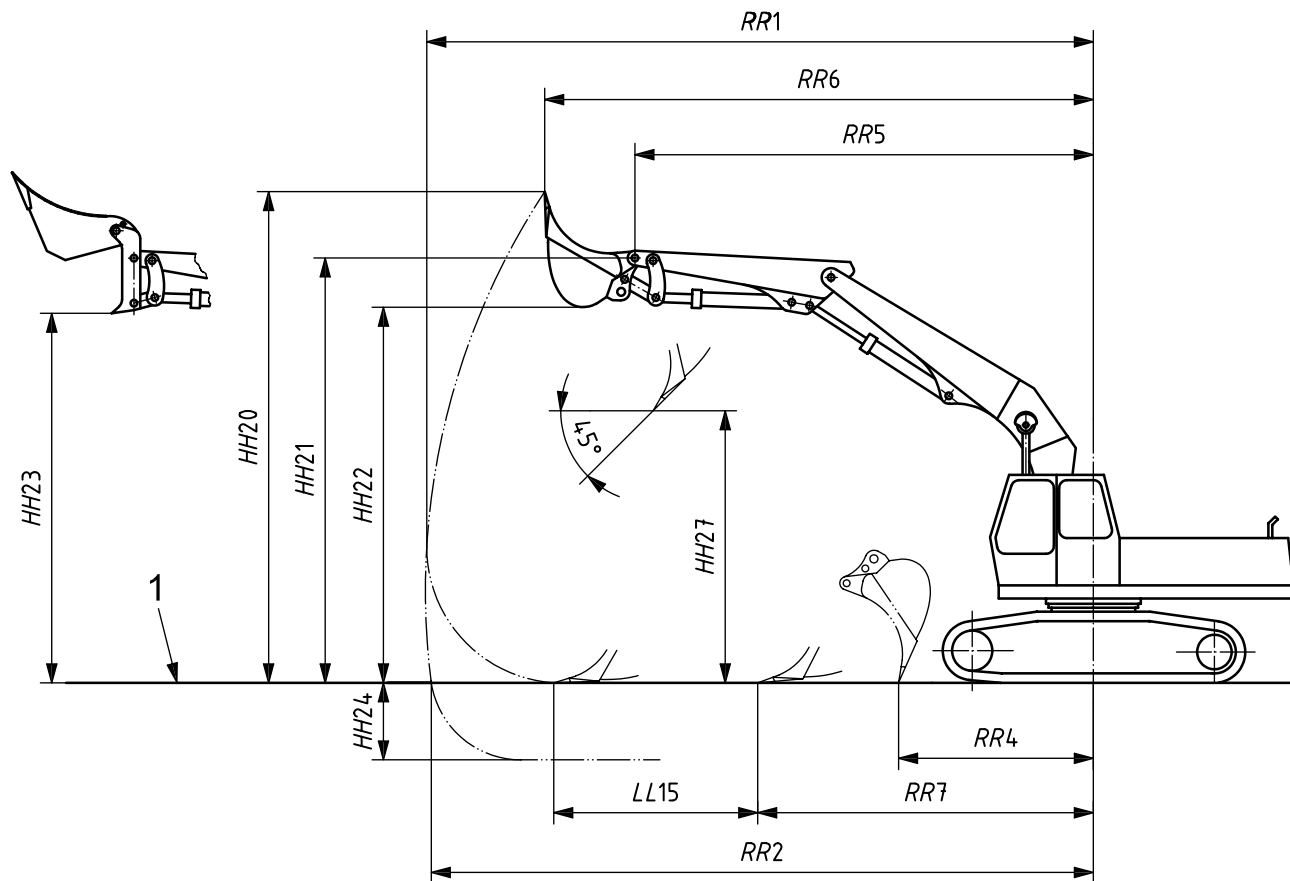
Figure 23 — Hoe equipment dimensions



Key

- 1 ground reference plane (GRP)

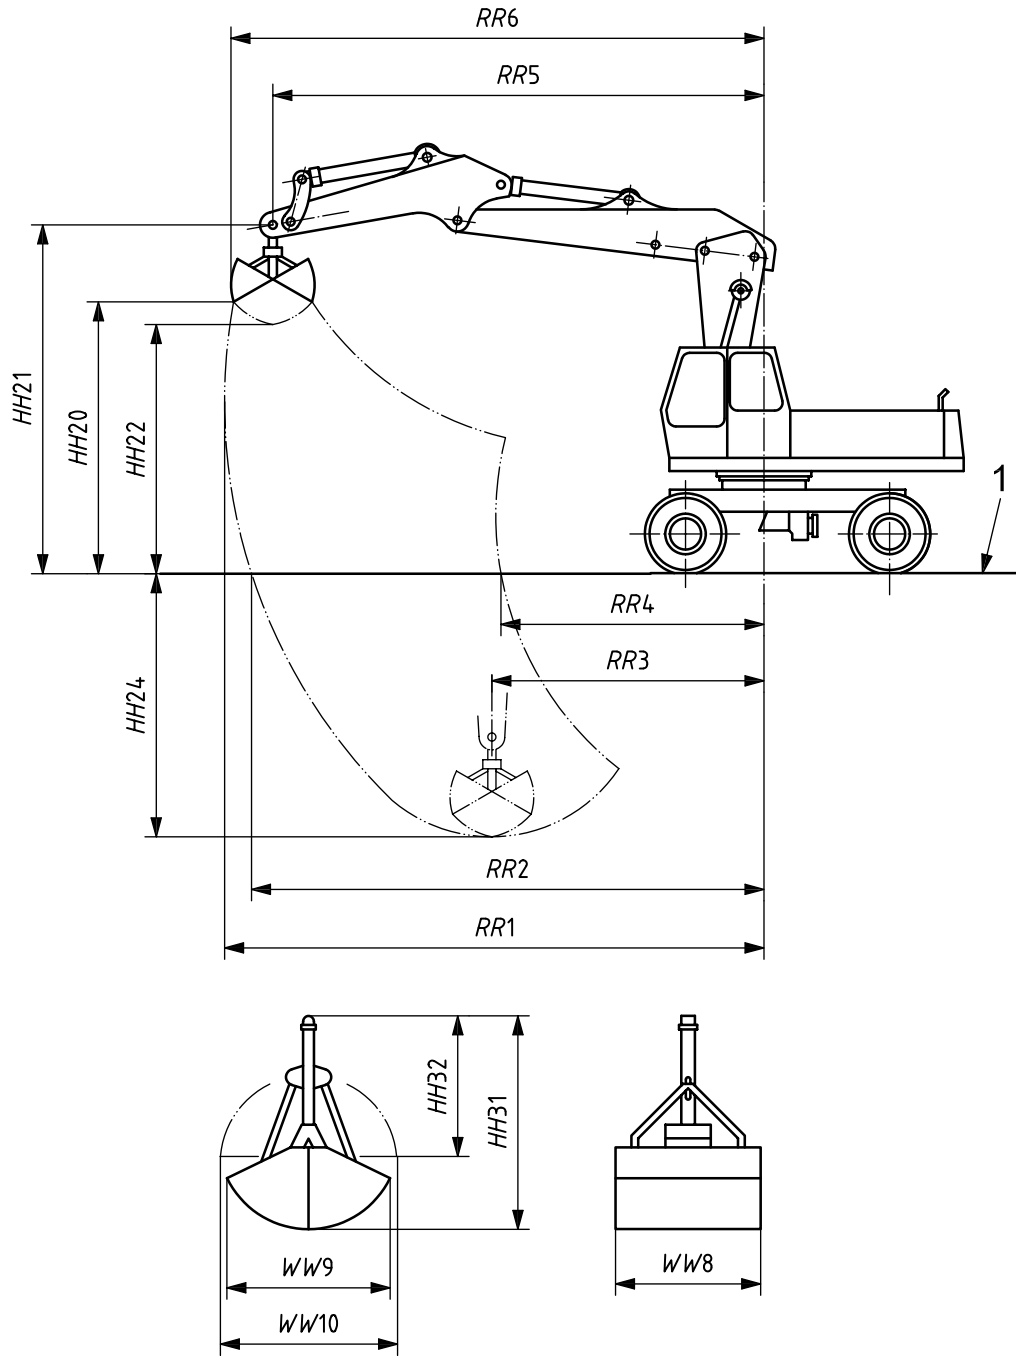
Figure 24 — Shovel equipment dimensions



Key

- 1 ground reference plane (GRP)

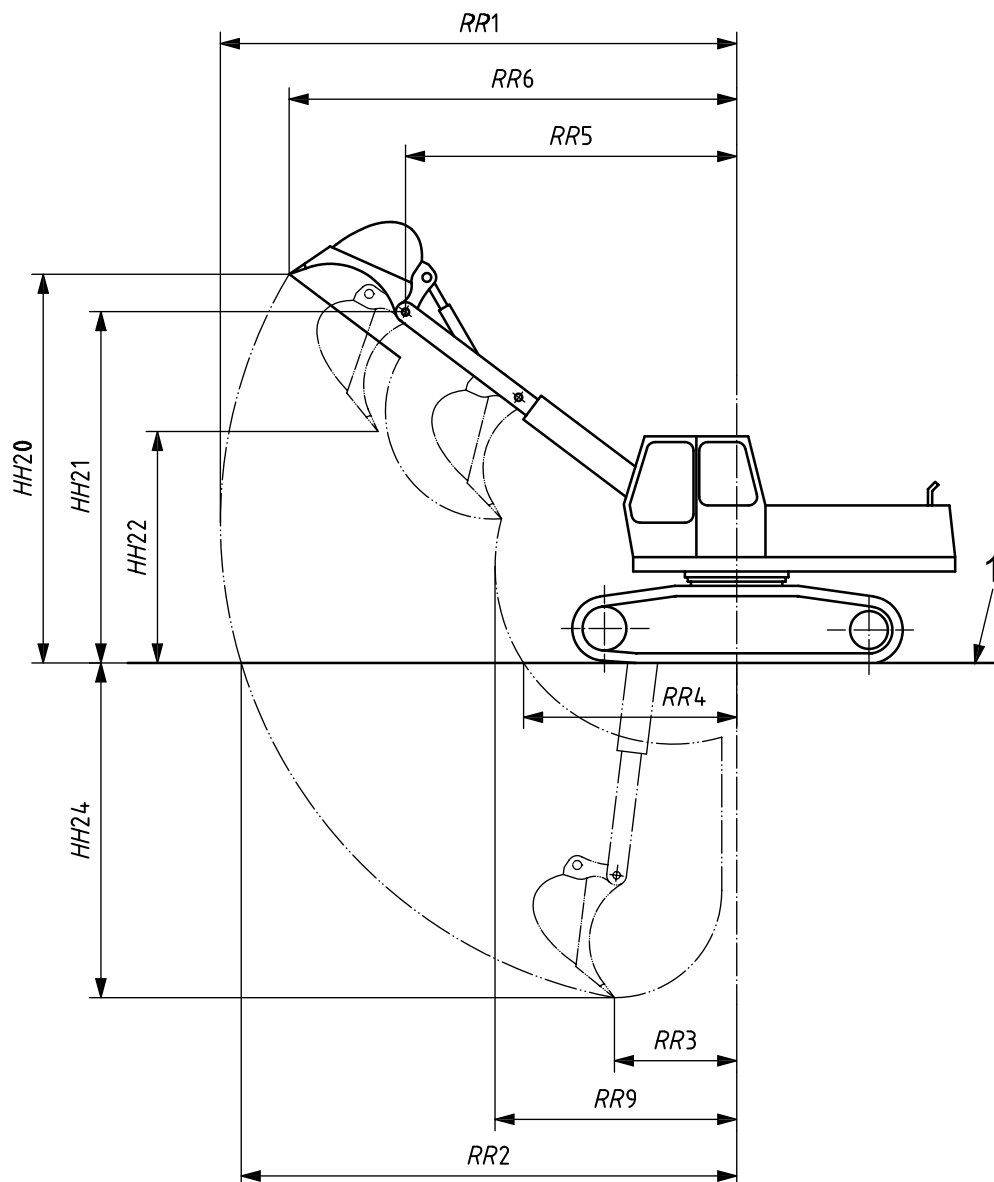Figure 25 — Grab/clamshell equipment dimensions



Key


- 1 ground reference plane (GRP)

Figure 26 — Telescopic boom equipment dimensions

5.3 Manoeuvring, road travelling and shipping

Dimensions related to the manoeuvring, road travelling and shipping of hydraulic excavators shall be in accordance with Figures 27 to 30.

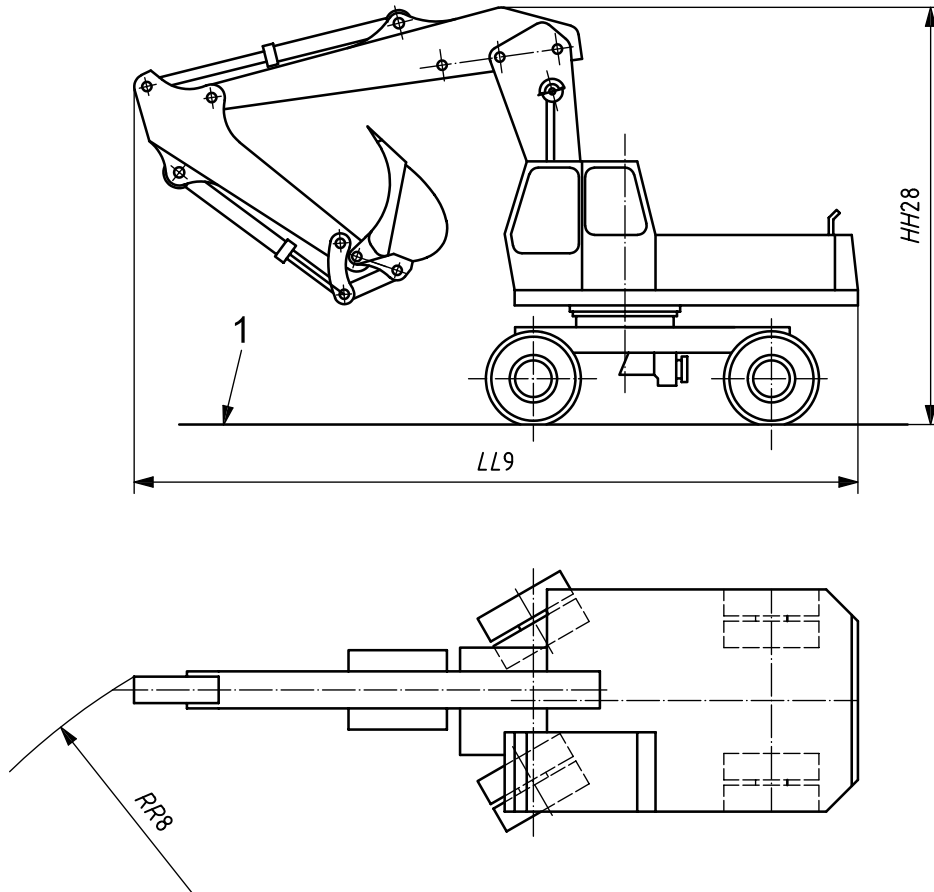
For the definitions of the dimensions, see Annex B.



Key

- 1 ground reference plane (GRP)

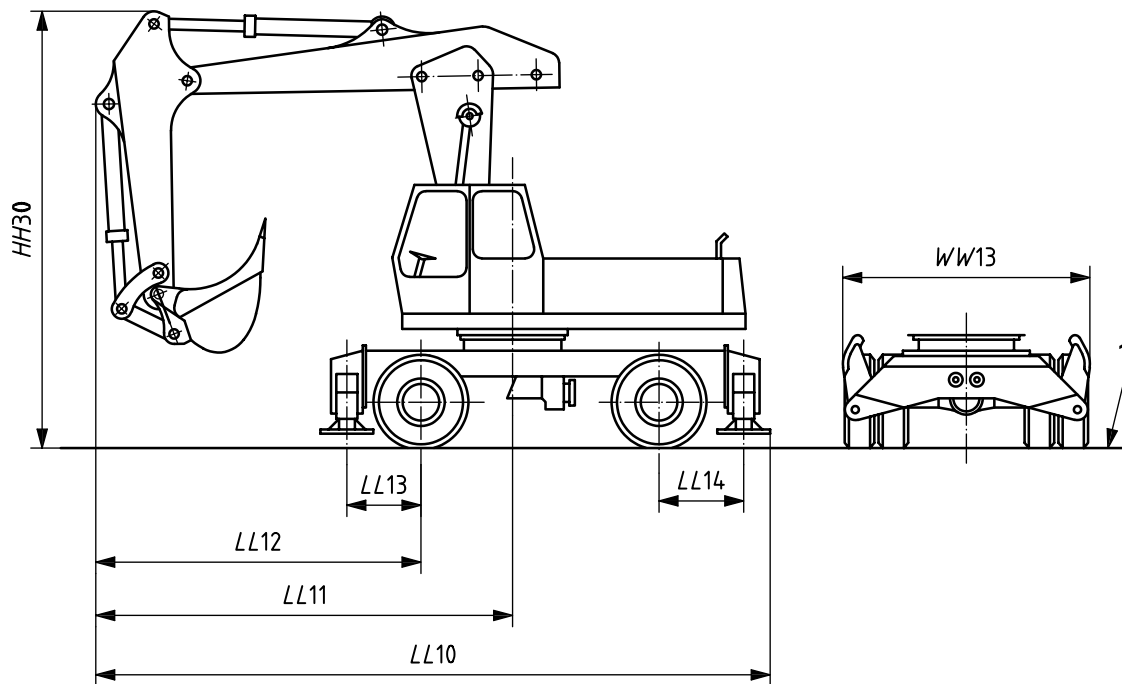
Figure 27 — Dimensions of wheeled excavator in manoeuvring position



Key

- 1 ground reference plane (GRP)

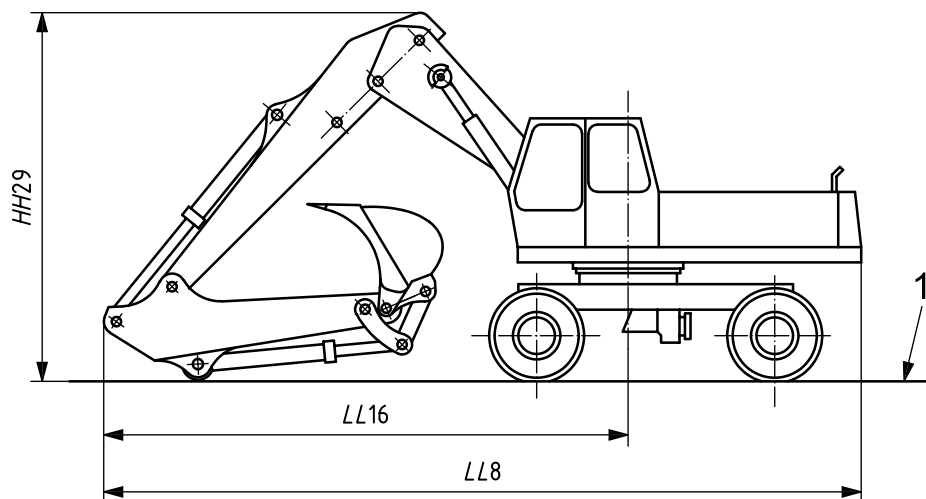
Figure 28 — Dimensions of wheeled excavator in travel position



Key

- 1 ground reference plane (GRP)

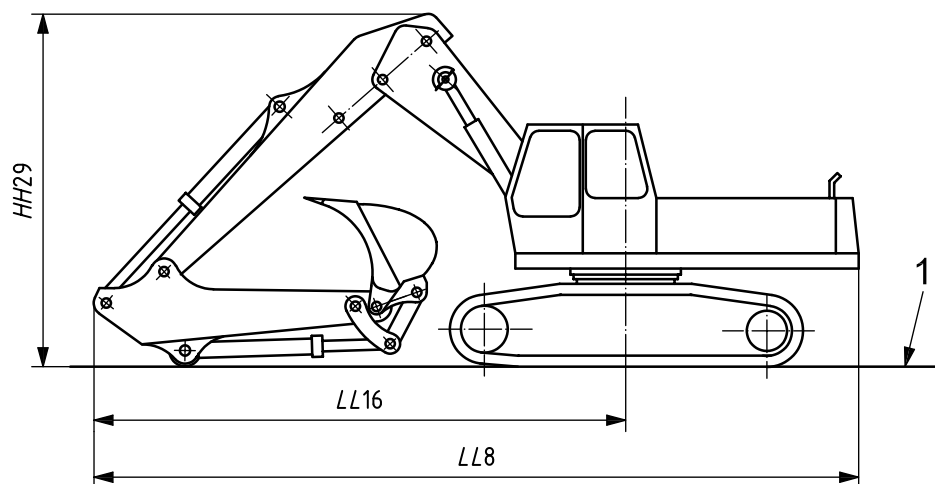Figure 29 — Dimensions of wheeled excavator in transport position



Key

1 ground reference plane (GRP)

Figure 30 — Dimensions of crawler excavator in transport position

6 Performance terminology

6.1 ISO net power (engine)

See ISO 9249 and ISO 14396.

6.2 Maximum travel speed

This is maximum speed obtained on a hard, level surface with an empty bucket, determined according to ISO 6014.

6.3 Maximum swing speed

This is maximum rotation speed in revolutions per minute of the revolving frame and equipment.

6.4 Braking performance

See ISO 3450 for wheeled excavators.

See ISO 10265 for crawler excavators.

6.5 Steering (wheeled excavators only)

See ISO 5010.

6.6 Digging force

See ISO 6015.

- Maximum hoe tool force using bucket cylinder
- Maximum hoe tool force using arm cylinder
- Maximum shovel tool force using bucket cylinder
- Maximum shovel tool force using arm cylinder

6.7 Rated lift capacity

See ISO 10567.

7 Commercial literature specifications (SI units)

7.1 Engine

Specify the following:

- a) ignition type, i.e. diesel or spark-ignition;
- b) type of cycle, i.e. two or four stroke;
- c) form of air aspiration, i.e. naturally aspirated, mechanically supercharged or turbocharged;
- d) number of cylinders;
- e) bore;
- f) stroke;
- g) displacement;
- h) ISO net flywheel power at given engine speed;
- i) maximum torque at a given engine.

The following are examples of other information relating to the engine that may be specified:

- manufacturer and model;
- cooling system, i.e. air- or liquid-cooled;
- type of fuel;
- starter type;
- electrical system voltage.

7.2 Hydraulic system

Specify the following:

- a) pump flow at a given pressure and a given engine speed;
- b) maximum normal system operating pressure.

Other information may be specified if desired.

7.3 System fluid capacities

Specify the capacities of

- a) the fuel tank, and
- b) the hydraulic system.

The following are examples of related information that may be specified:

- hydraulic tank;
- cooling system;
- engine crankcase;
- final drive case;
- pump drives;
- swing drive case.

7.4 Filtration system

The type of filtration system may be specified.

7.5 Crawler excavator

7.5.1 Steering and braking

Specify the type and actuation of the steering and braking systems.

EXAMPLE Drum or disc; wet or dry; hydraulic or mechanical.

7.5.2 Final drive

The type of final drive and related information may be specified.

EXAMPLE Single or double reduction, planetary; ratio; lubrication.

7.5.3 Track

Specify

- a) type, and
- b) dimensions.

The following are examples of other information that may be specified:

- ground contact area (calculation method to be defined);
- number of shoes (on each side);
- number of carrier rollers (on each side);
- number of track rollers (on each side).

7.6 Wheeled excavator

7.6.1 Driving axle

The type of driving axle may be specified.

EXAMPLE Fixed versus oscillating; bevel gear and pinion; differential; two-speed; hydrostatic; planetary final drive.

7.6.2 Steering

Specify the type of steering.

The following are examples of other information that may be specified:

- turning radius (left and right);
- articulation angle;
- machine clearance diameter.

7.6.3 Brakes

The following is information that may be specified:

- type and actuating system of the service brake;
- type and actuating system of the parking brake;
- type and actuating system of the secondary brakes;
- brake performance.

7.6.4 Tyres

Specify the size and type of the tyres.

The following are examples of other information that may be specified:

- tread;
- ply rating;
- rim size.

7.7 Operating mass

Specify the OM.

7.8 Shipping mass





Specify the SM.






Annex A (normative)




Base-machine dimensions

This annex defines base-machine height, width, length, radial and angular dimensions for excavators. See also Figure 5.

Code	Term and definition	Illustration
<i>H24</i>	<p>cab height</p> <p>distance on Z coordinate between platform of upper structure and highest point of the cab</p>	
<i>H25</i>	<p>crawler track height</p> <p>distance on Z coordinate between the GRP (1) and the highest point of the crawler tracks</p>	
<i>H26</i>	<p>clearance height under upper structure</p> <p>distance on Z coordinate between the GRP (1) and the lowest point of the upper structure</p>	
<i>W16</i>	<p>undercarriage overall width</p> <p>distance on Y coordinate between two Y planes passing through the furthest points on the sides of the undercarriage</p>	

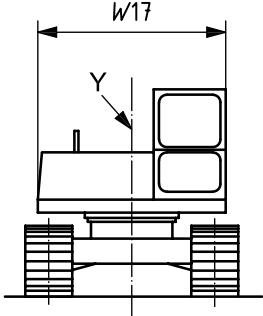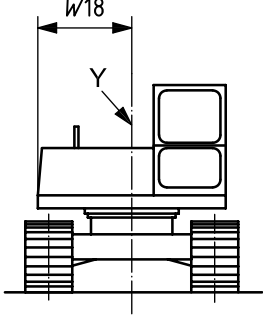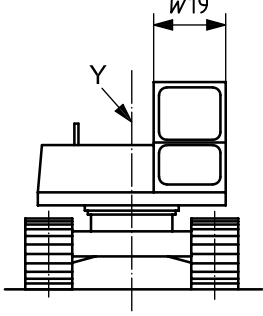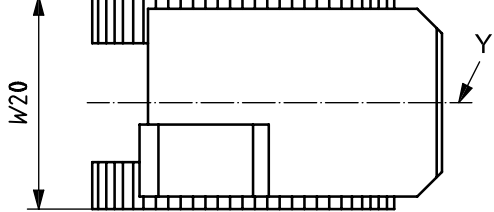Code	Term and definition	Illustration
W17	<p>upper structure overall width</p> <p>distance on Y coordinate between two Y planes passing through the furthest points on the sides of the upper structure</p>	
W18	<p>right-side upper structure distance from axis of rotation</p> <p>distance on Y coordinate between two Y planes passing respectively through the axis of rotation and the furthest right side of the upper structure</p>	
W19	<p>cab width overall</p> <p>distance on Y coordinate between two Y planes passing through the furthest points on the side of the cab</p>	
W20	<p>maximum width with track extended or retracted</p> <p>distance on Y coordinate between two Y planes passing through the extended or furthest points of the track for extended track or distance on Y coordinate between two Y planes passing through the outer surfaces of the track when the track is in the retracted position for retracted track</p>	

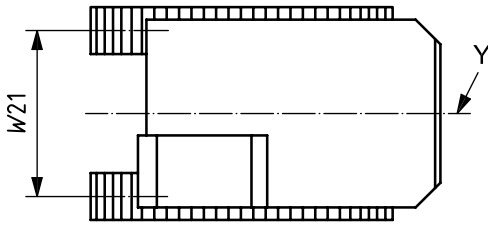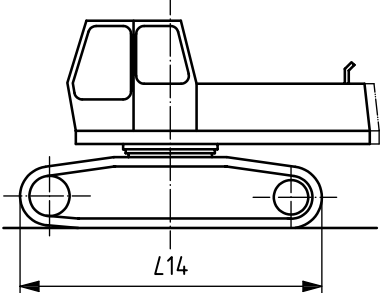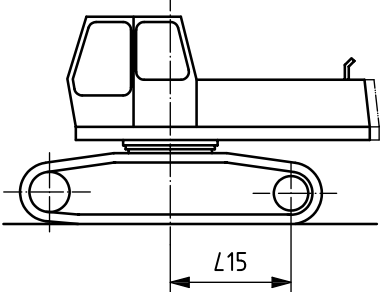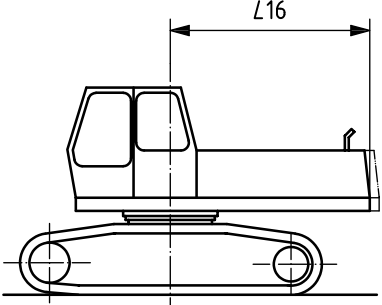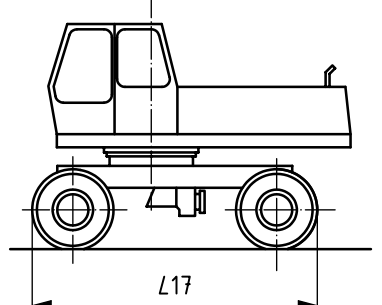Code	Term and definition	Illustration
W21	<p>track gauge with track extended or retracted</p> <p>distance on Y coordinate between two Y planes passing through the mid-width of the sprocket teeth</p>	
L14	<p>crawler overall length</p> <p>distance on X coordinates between two X planes passing through the furthest points on the front and rear of the crawler</p>	
L15	<p>sprocket axis to axis of rotations</p> <p>distance on X coordinate between two X planes passing respectively through the sprocket axis and the axis of rotation</p>	
L16	<p>upper structure rearmost distance from axis of rotation</p> <p>distance on X coordinate between two X planes passing respectively through the furthest point on the rear of upper structure and the axis of rotation</p>	
L17	<p>undercarriage overall length</p> <p>distance on X coordinate between two X planes passing respectively through the furthest points on the front and rear of the undercarriage</p>	

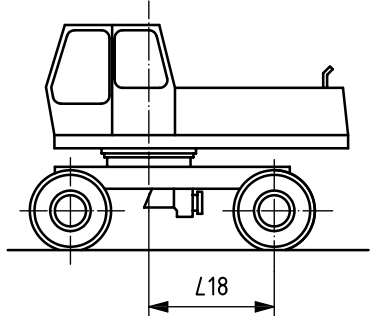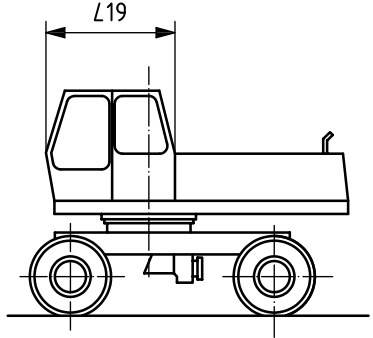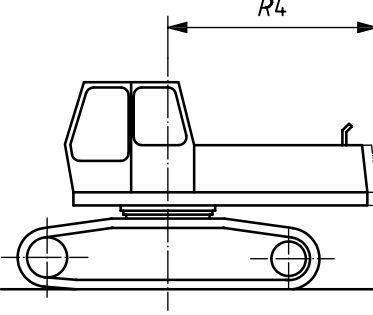Code	Term and definition	Illustration
L18	<p>rear axle to axis of rotation</p> <p>distance on X coordinate between two X planes passing respectively through the centre of the rear axle and the axis of rotation</p>	 <p>The illustration shows a side view of a tracked vehicle. A vertical dashed line represents the axis of rotation. A horizontal dimension line with arrows at both ends is drawn below the vehicle, extending from the vertical axis to the center of the rear track roller. This dimension is labeled 'L18'.</p>
L19	<p>cab overall length</p> <p>distance on X coordinate between two X planes passing through the furthest points on the front and rear of the cab</p>	 <p>The illustration shows a side view of a tracked vehicle. A horizontal dimension line with arrows at both ends is drawn above the cab, extending from the front-most point of the cab to the rear-most point. This dimension is labeled 'L19'.</p>
R4	<p>swing radius rear-end radius</p> <p>distance on Y coordinate (Z plane) between the axis of rotation and the furthest point of the upper structure</p>	 <p>The illustration shows a side view of a tracked vehicle. A vertical dashed line represents the axis of rotation. A horizontal dimension line with arrows at both ends is drawn above the vehicle, extending from the vertical axis to the furthest point of the upper structure. This dimension is labeled 'R4'.</p>





The X, Y and Z coordinates and X, Y and Z planes comprise the three-dimensional coordinate system used for defining the dimensions of earth-moving machinery in accordance with ISO 6746-1; the ground reference plane (GRP), indicated by "1" in the illustrations, is also defined therein.







Annex B (normative)





Dimensions of equipment and attachments






This annex defines height, width, length, radial and reach and angular dimensions for equipment and attachments used on hydraulic excavators. See also Figures 23 to 30.





Code	Term and definition	Illustration
<i>HH20</i>	<p>maximum height of cutting edge</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the highest point which can be reached</p>	
<i>HH21</i>	<p>maximum bucket hinge pin height</p> <p>distance on Z coordinate between the GRP (1) and the bucket hinge pin at the highest point which can be reached</p>	
<i>HH22</i>	<p>maximum bucket [grab] loading clearance</p> <p>distance on Z coordinate between the GRP (1) and the lowest point of the bucket [grab] closed position when the bucket pivot is in the highest position</p>	

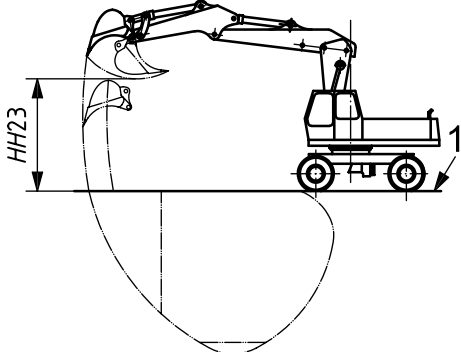
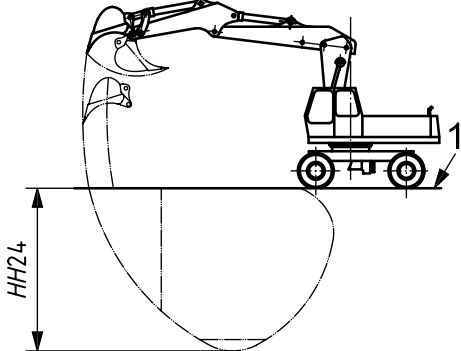
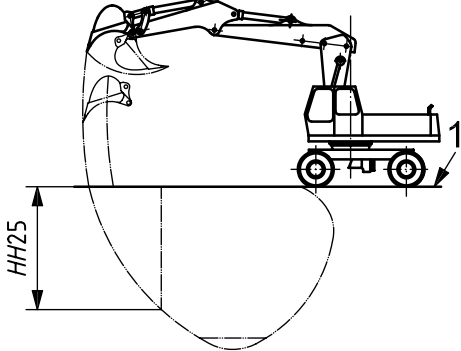
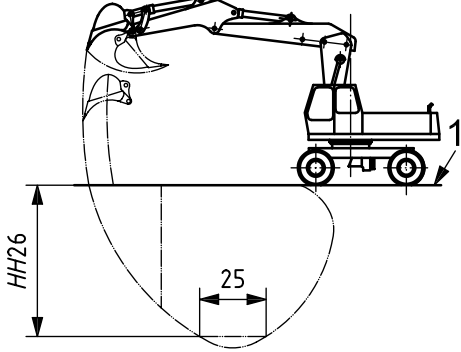
Code	Term and definition	Illustration
HH23	<p>maximum dumping height</p> <p>distance on Z coordinate between the GRP (1) and the lowest attainable point of the bucket when the bucket pivot is in the highest position</p>	
HH24	<p>maximum digging depth</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the deepest point which can be reached</p>	
HH25	<p>maximum vertical digging depth</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the deepest point which can be reached vertically</p>	
HH26	<p>maximum digging depth at 2,5 m floor length</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the deepest point which allows a 2,5 m floor length parallel to the X coordinate</p>	

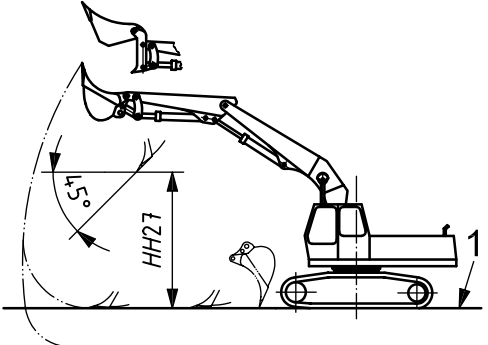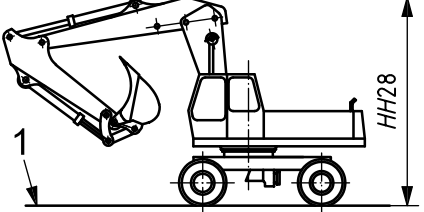
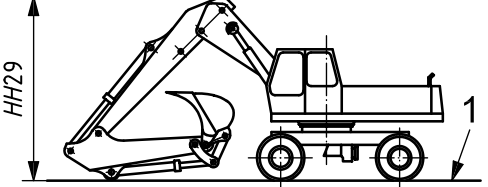
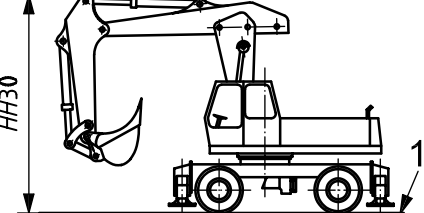
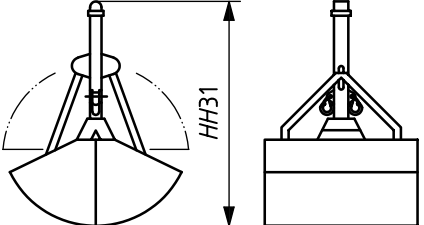
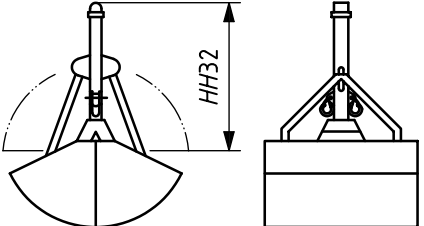
Code	Term and definition	Illustration
HH27	<p>maximum dumping height for shovel</p> <p>distance on Z coordinate between the GRP (1) and the cutting edge at the highest point which can be reached when the dump angle is 45°</p>	
HH28	<p>overall height in manoeuvring position</p> <p>distance on Z coordinate between the GRP (1) and the highest point of the equipment in manoeuvring position</p>	
HH29	<p>overall equipment height in transport position</p> <p>distance on Z coordinate between the GRP (1) and the highest point of the equipment in transport position</p>	
HH30	<p>overall height in travelling condition</p> <p>distance on Z coordinate between GRP (1) and the highest point of the machine in travelling position</p>	
HH31	<p>height of closed grab</p> <p>distance on Z coordinate between two Z planes passing respectively through the grab pivot and the lowest point of the grabs in closed position</p>	
HH32	<p>height of open grab</p> <p>distance on Z coordinate between two Z planes passing respectively through the grab pivot and the lowest point of the grab in open position</p>	

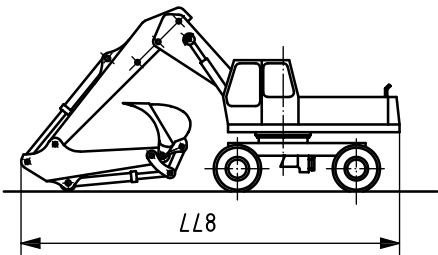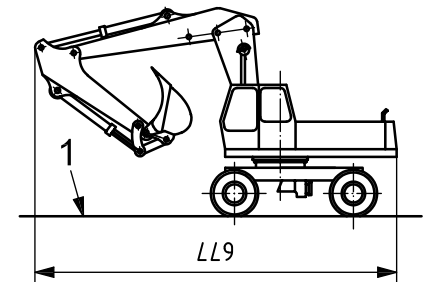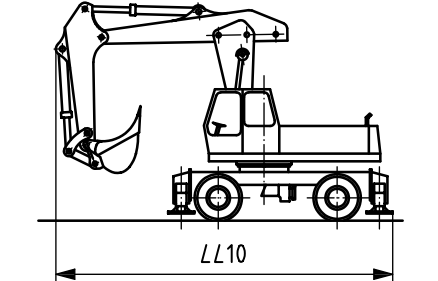
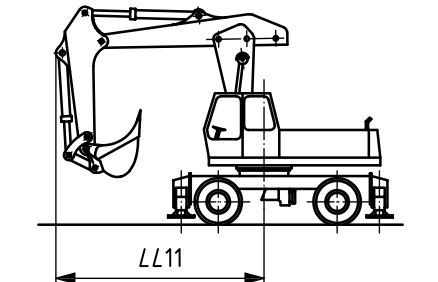
Code	Term and definition	Illustration
LL8	<p>overall length in transport position</p> <p>distance on X coordinate between two X planes passing through the furthest points on the front and rear of the machine in transport position</p>	
LL9	<p>overall length in manoeuvring position</p> <p>distance on X coordinate between two X planes passing through the furthest points on the front and rear of the machine in manoeuvring position</p>	
LL10	<p>overall length in travelling condition</p> <p>distance on X coordinate between two X planes passing through the furthest points on the front and rear of the machine in travelling position</p>	
LL11	<p>front distance to axis of rotation</p> <p>distance on X coordinate between two X planes passing through the axis of rotation and the furthest point on the front of the machine including the equipment in travelling position</p>	

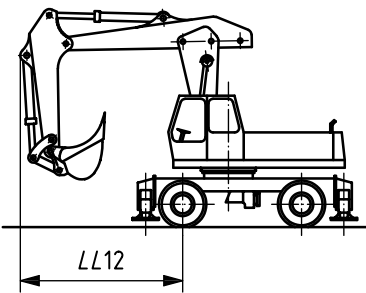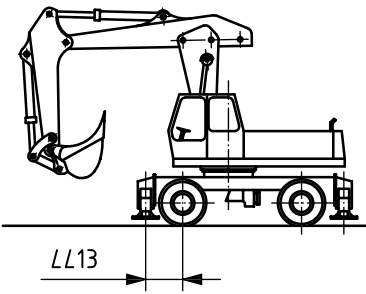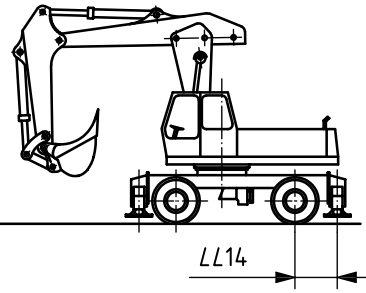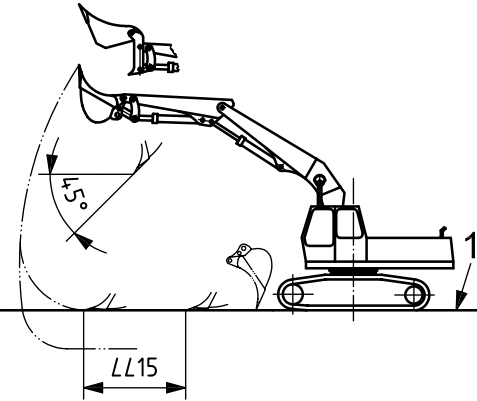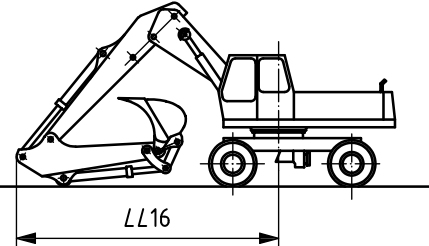Code	Term and definition	Illustration
LL12	<p>front distance to steering wheel centre</p> <p>distance on X coordinate between two X planes passing respectively through the steering wheel centre and the furthest point of the machine including the equipment in travelling position</p>	
LL13	<p>front pad centre to front axle</p> <p>distance on X coordinate between two X planes passing respectively through the centre of the front axle and the front outrigger pads centreline</p>	
LL14	<p>rear pad centre to rear axle</p> <p>distance on X coordinate between two X planes passing respectively through the centre of the rear axle and the rear outrigger pads centreline</p>	
LL15	<p>length of level floor cut</p> <p>distance on X coordinate on the GRP (1) which can be generated by the shovel cutting edge</p>	
LL16	<p>front distance to axis of rotation in transport position</p> <p>distance on X coordinate between two X planes passing respectively through the furthest point of hoe equipment at transport position and the axis of rotation</p>	

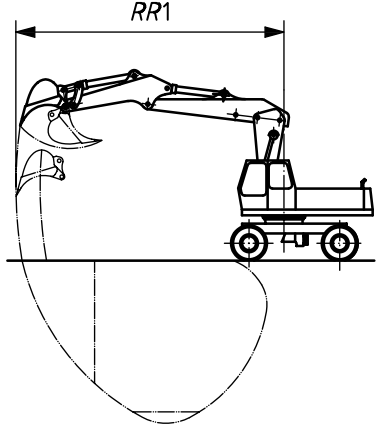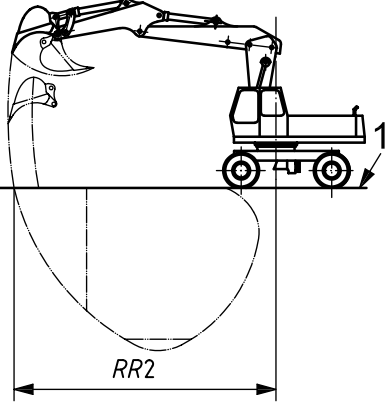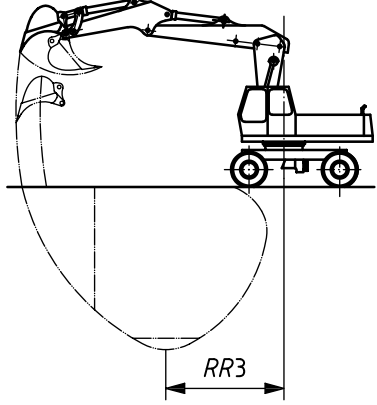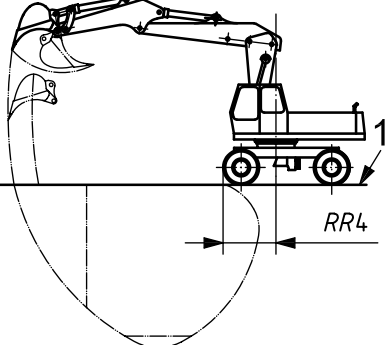Code	Term and definition	Illustration
RR1	<p>maximum reach</p> <p>distance on X coordinate (Z plane) between the axis of rotation and the farthest point of the cutting edge with the equipment extended to give maximum reach</p>	
RR2	<p>maximum reach at GRP</p> <p>distance on X coordinate (Z plane) between the axis of rotation and the farthest point of the cutting edge on the GRP (1) with the equipment extended to give maximum reach</p>	
RR3	<p>reach at maximum digging depth</p> <p>distance on X coordinate (Z plane) between the axis of rotation and depth point where the maximum digging (<i>HH24</i>) is reached</p>	
RR4	<p>minimum reach at GRP</p> <p>distance on X coordinate (Z plane) between the axis of rotation and the nearest point of the cutting edge on the GRP (1) to bucket centre pin</p>	

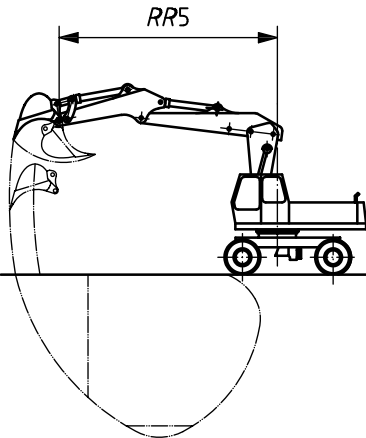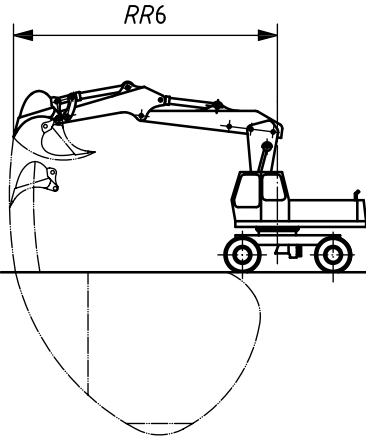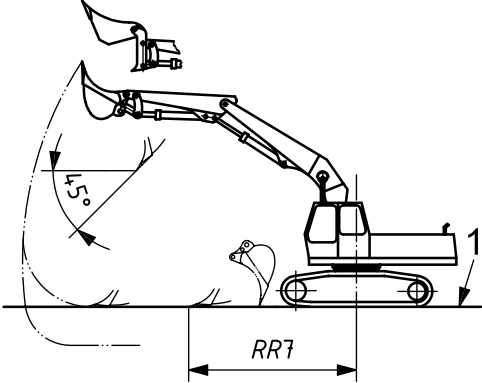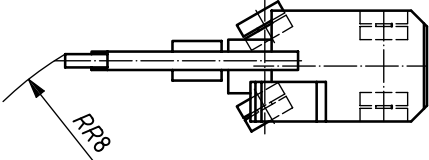Code	Term and definition	Illustration
RR5	<p>reach to bucket pin centre at minimum height</p> <p>distance on X coordinate (Z plane) between the axis of rotation and the bucket pivot centre with equipment raised to give maximum height</p>	
RR6	<p>reach at maximum height</p> <p>distance on X coordinate (Z plane) between the axis of rotation and the cutting edge at its maximum height</p>	
RR7	<p>minimum level floor radius</p> <p>distance on X coordinate (Z plane) between the axis of rotation and the cutting edge in the nearest position to the machine on the GRP (1) fitted to generate the level floor (LL15)</p>	
RR8	<p>outside machine clearance radius</p> <p>distance on X coordinate (Z plane) between the turning centre and the furthest point of the machine, including equipment in travelling position, which is executing its smallest practicable turn</p>	

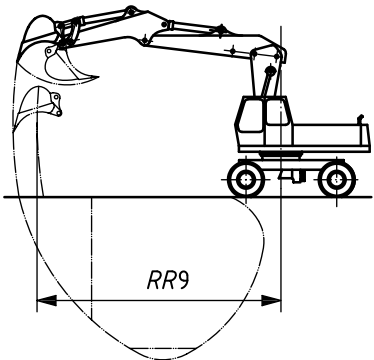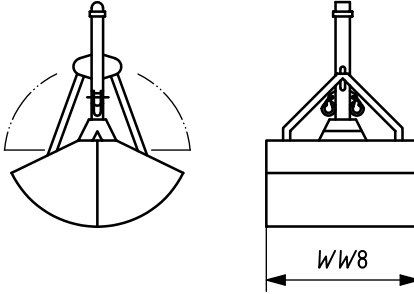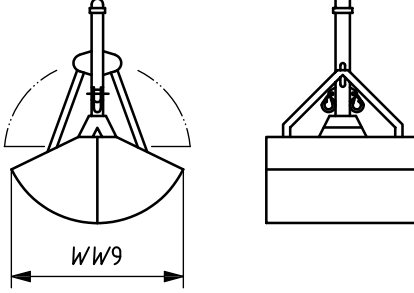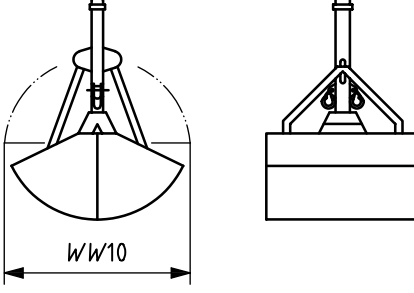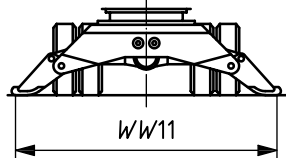Code	Term and definition	Illustration
RR9	<p>minimum reach</p> <p>distance on X coordinate (Z plane) between the axis of rotation and the nearest point of the cutting edge with the equipment retracted to the shortest position</p>	
WW8	<p>outside width of grab</p> <p>distance between the furthest points of the grab sides</p>	
WW9	<p>width of closed grab</p> <p>distance in a Z plane between the furthest points of the closed grab</p>	
WW10	<p>width of open grab</p> <p>distance in a Z plane between the furthest points of the cutting edges of the open grab</p>	
WW11	<p>width of pad centres outrigger or stabilizer extended</p> <p>distance on Y coordinate between two Y planes passing through the pads centreline</p>	

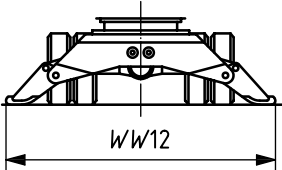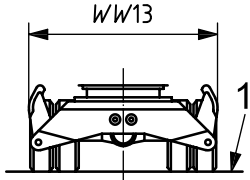Code	Term and definition	Illustration
<p><i>WW12</i></p>	<p>overall width including outriggers and supporting plates</p> <p>distance on Y coordinate between two Y planes passing through the furthest point on the sides of the outriggers and supporting plates</p>	
<p><i>WW13</i></p>	<p>overall width including outriggers at road travelling position</p> <p>distance on Y coordinate between two Y planes passing through the furthest point on the side of the outriggers at road travelling position</p>	

The X, Y and Z coordinates and X, Y and Z planes comprise the three-dimensional coordinate system used for defining the dimensions of equipment and attachments for earth-moving machinery according to ISO 6746-2; the ground reference plane (GRP), indicated by "1" in the illustrations, is also defined therein.

Bibliography

- [1] ISO 5353, *Earth-moving machinery, and tractors and machinery for agriculture and forestry — Seat index point*
- [2] ISO 6016:2008, *Earth-moving machinery — Methods of measuring the masses of whole machines, their equipment and components*

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services.

It presents the UK view on standards in Europe and at the international level.

It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001

Email: plus@bsigroup.com

Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website www.bsigroup.com/shop. In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

Email: orders@bsigroup.com

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.

Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005

Email: knowledgecentre@bsigroup.com

Various BSI electronic information services are also available which give details on all its products and services.

Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048

Email: info@bsigroup.com

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at www.bsigroup.com/BSOL

Further information about BSI is available on the BSI website at www.bsigroup.com/standards

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Manager.

Tel: +44 (0)20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001

Fax +44 (0)20 8996 7001

www.bsigroup.com/standards

raising standards worldwide™

