

BS ISO 7364:2016



BSI Standards Publication

# **Ships and marine technology — Deck machinery — Accommodation ladder winches**

**bsi.**

...making excellence a habit.™

**National foreword**

This British Standard is the UK implementation of ISO 7364:2016.

The UK participation in its preparation was entrusted to Technical Committee SME/32, Ships and marine technology - Steering committee.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.

Published by BSI Standards Limited 2016

ISBN 978 0 580 80634 6

ICS 47.020.50

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2016.

**Amendments/corrigenda issued since publication**

Date	Text affected
------	---------------

---

INTERNATIONAL  
STANDARD

BS ISO 7364:2016

**ISO**  
**7364**

Second edition  
2016-04-01

---

---

**Ships and marine technology — Deck  
machinery — Accommodation ladder  
winches**

*Navires et technologie maritime — Auxiliaires de pont — Treuils pour  
échelles de coupée*



Reference number  
ISO 7364:2016(E)

© ISO 2016



## **COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

Page

Foreword .....	iv
<b>1 Scope .....</b>	<b>1</b>
<b>2 Normative references .....</b>	<b>1</b>
<b>3 Terms and definitions .....</b>	<b>1</b>
<b>4 Design and operation .....</b>	<b>2</b>
<b>5 Characteristics .....</b>	<b>3</b>
<b>6 Acceptance tests (individual) .....</b>	<b>4</b>
6.1 General .....	4
6.2 Test without load (factory test) .....	4
6.3 Drum load test (factory test) .....	4
6.4 Static test under 1,5 holding load .....	5
6.5 On board test and inspections .....	5
<b>7 Designation .....</b>	<b>5</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#).

The committee responsible for this document is ISO/TC 8, *Ships and marine technology*, Subcommittee SC 1, *Lifesaving and fire protection*.

This second edition cancels and replaces the first edition (ISO 7364:1983), which has been technically revised.

# Ships and marine technology — Deck machinery — Accommodation ladder winches

## 1 Scope

This International Standard specifies requirements and characteristics of ships' accommodation ladder winches provided with hydraulic, pneumatic, electric or manual drive.

This International Standard is applicable to the design and test of accommodation ladder winches.

This International Standard does not include requirements for the prime mover used to operate the winch.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2408, *Steel wire ropes for general purposes — Minimum requirements*

ISO 3828, *Shipbuilding and marine structures — Deck machinery — Vocabulary and symbols*

ISO 5488:2015, *Ships and marine technology — Accommodation ladders*

IEC 60092-401, *Electrical installations in ships — Part 401: Installation and test of completed installation*

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 3828 and the following apply.

### 3.1

#### **nominal size**

used as a designation of a winch in accordance with this International Standard

Note 1 to entry: The nominal size corresponds to the drum load as given in [Table 1](#).

### 3.2

#### **drum load**

maximum rope tension in the rope or ropes at the drum exit either when the winch is hoisting an unloaded accommodation ladder at the nominal speed, with the rope or ropes wound on the drum in a single layer, or when the winch is placing the accommodation ladder in its stowage position

### 3.3

#### **holding load**

in static mode of the winch, the maximum rope tension in the rope or ropes at the drum exit in a single layer, shall be at least three times the *drum load* ([3.2](#))

## 3.4 Types of winches

### 3.4.1

#### **right-hand winch**

winch where the reduction gear or drive of the drum is on the right-hand side of the drum, in relation to an observer situated on the side of the motor or power supply

Note 1 to entry: See [Figure 1](#).

### 3.4.2

#### left-hand winch

winch where the reduction gear or drive of the drum is on the left-hand side of the drum, in relation to an observer situated on the side of the motor or power supply

Note 1 to entry: See [Figure 1](#).

### 3.4.3

#### symmetrical double drum winch

winch where the reduction gear or drive of the drums is between symmetrically situated drums

Note 1 to entry: See [Figure 1](#).

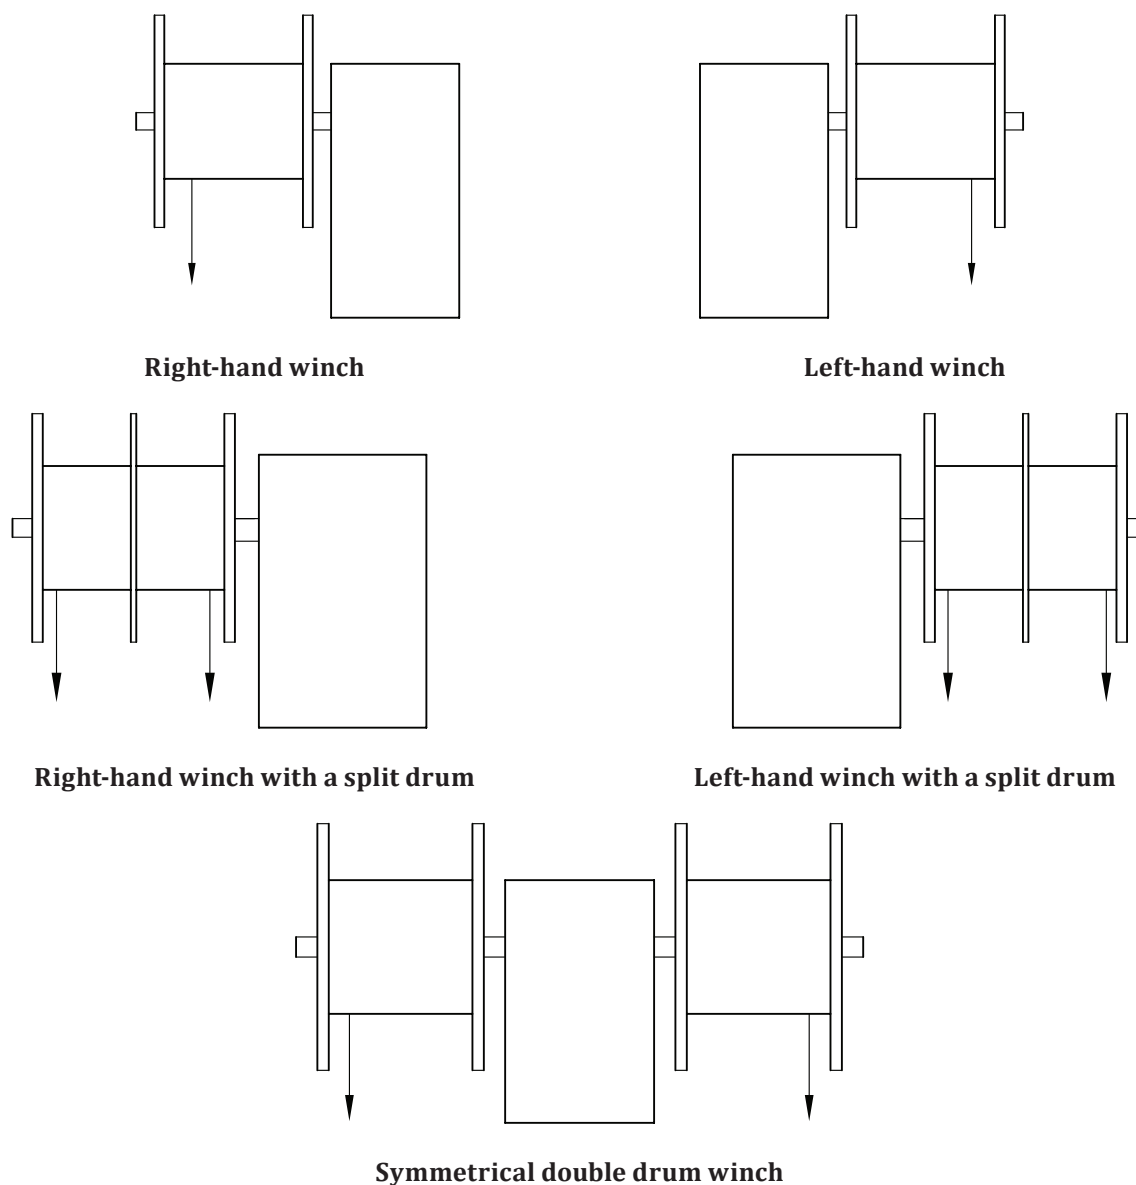


Figure 1 — Examples of accommodation ladder winches

## 4 Design and operation

4.1 The winches shall be equipped with one or two drums. The drum shall be a split drum where two ropes are to be wound on it.



**4.2** The drum length shall be such that the rope in effective working length can be wound on fully, in not more than three layers, while the rope can be wound on fully, in not more than five layers.

**4.3** The drum diameter shall be not less than 14 times the rope diameter given in [Table 1](#).

**4.4** The flange height shall be such that it will project at least 1,5 times the rope diameter beyond the outermost layer of the rope.

**4.5** Double drum winches intended for double flight accommodation ladders shall be fitted with a suitable device to allow independent holding, hoisting or lowering of each flight.

**4.6** The winch shall be provided with a device capable of holding the drum at 1,5 holding load. For powered winches, such device shall automatically operate when the drive is being shut off or if the power fails. Manual lowering and hoisting of the accommodation ladder shall be possible. A self-braking worm gearbox (or equivalent) may be considered a holding device if agreed between the purchaser and the manufacturer.

**4.7** For design purposes, the drum shall be based on the use of 6 × 37 galvanized steel wire rope with fibre core of 1 770 N/mm<sup>2</sup> tensile grade, as specified in ISO 2408. Wire rope diameters are listed in [Table 1](#). This requirement does not preclude the use of other types of rope in service.

In every case, the safety factor of the rope shall be not less than five in relation to the holding load as specified in ISO 5488:2015, 6.1.3.

NOTE Attention is drawn to the possibility of national authorities requiring a safety factor of more than five.

**4.8** The winch shall be designed to ensure that all bearing surfaces and corresponding sliding and rotating component parts of the winch are lubricated during operation.

**4.9** Stresses in component parts of the winch being acted upon with the drum load and holding load shall not exceed 0,4 times the proof stress of the material.

**4.10** The winch shall be fitted with a local emergency stop.

**4.11** Powered winches shall also be also provided with manual drive.

**4.12** Winches shall be provided with safety precautions to protect the operator against the possibility of being struck by a revolving crank handle.

**4.13** Electrical equipment of winches shall be installed in accordance with IEC 60092-401.

**4.14** Winches shall not be made of asbestos-containing material.

## 5 Characteristics

**5.1** The characteristics of the winch shall be as listed in [Table 1](#).

**5.2** For powered winches, the nominal speed of hoisting the accommodation ladder shall be not less than 0,05 m/s.

**5.3** It shall be possible to continuously overload the drive of the winch by 1,5 times the drum load for 2 min when the accommodation ladder is being hoisted, without causing failure.

5.4 When the accommodation ladder is being hoisted or lowered, the emergency stop of the winch shall be carried out. And the winch shall stop instantly and reliably.

**Table 1 — Performance data**

Nominal size	Drum load <sup>a</sup> kN	Holding load <sup>a</sup> kN	Winch load test procedure		Steel wire rope diameter actually selected <sup>d</sup> mm	
			Minimum rope strength <sup>a</sup> (5× holding load) KN	Steel wire rope diameter <sup>b,c</sup> mm	Single drum	Split drum or double drum
5	5	15	75	12	11	—
6	6,3	18	90	13	11	—
8	8	25	125	16	13	—
10	10	30	150	18	13	13
12	12,5	37,5	188	20	13	13
16	16	48	240	22	14(15)	14(15)
20	20	60	300	24	16(15)	16(15)
25	25	75	375	26	—	16
30	30	90	450	28	—	16

NOTE Choose the actual steel wire rope diameter of winches according to the following case that the breaking load of steel wire rope shall be not less than five times the actual holding load of accommodation ladder winches.

<sup>a</sup> For winches working with two ropes, the listed values are the sum of the forces on each rope.

<sup>b</sup> In column 4, based on a holding load safety factor of five, all values shall be selected in winch load test.

<sup>c</sup> The rope diameter given in column 4 is used only for static load test of winches with one rope according to 6.4.

<sup>d</sup> The rope diameter in brackets means that these values are included in national standard specifications.

## 6 Acceptance tests (individual)

### 6.1 General

The winch shall be tested as a complete unit, i.e. prime mover, drum, gearing and controls. The results of tests shall be recorded in the certificate.

### 6.2 Test without load (factory test)

The winch shall be run without load for 10 min continuously, 5 min in each direction. The temperature of bearings shall be checked.

### 6.3 Drum load test (factory test)

6.3.1 The winch shall be run under drum load through two lowering and hoisting cycles include haul-in operation, the length of the rope paid out being not less than one-third of the drum capacity. The results shall conform to the requirements of 5.2.

6.3.2 Continuously overload the drive of the winch by 1,5 times the drum load for 2 min. The results shall conform to the requirements of 5.3.

**6.3.3** When the accommodation ladder is being hoisted or lowered, the emergency stop of the winch shall be carried out once. The results shall conform to the requirements of [5.4](#). The following shall be checked:

- a) oil-tightness;
- b) input current or working pressure or hydraulic flow;
- c) nominal speed;
- d) presence of abnormal noise;
- e) correct operation of the control brake.

#### **6.4 Static test under 1,5 holding load**

A load equivalent to the 1,5 holding load shall be applied, with the rope wound in a single layer on the drum. The holding device shall prevent rotation of the drum when subjected to this load.

#### **6.5 On board test and inspections**

The winch shall be tested as a part of the complete accommodation ladder unit. The minimum extent of the test shall be as follows:

- a) twice hoisting the accommodation ladder up to its full height and lowering it (tested as in [6.3](#));
- b) holding a static load for the complete accommodation ladder unit loaded as specified in ISO 5488:2015, 6.1.3.

### **7 Designation**

Accommodation ladder winches conforming to this International Standard shall be designated as follows:

- a) safety operation specification or points for attention and direction indication of the rope or ropes at the drum exit;
- b) name of product;
- c) name and label of manufacturer;
- d) load limit, including drum load, holding load, drum capacity, hoisting speed, etc.;
- e) specification or type of product, including the following:
  - 1) type of drive (E - electric, P - pneumatic, H - hydraulic, U - unpowered);
  - 2) nominal size (according to [Table 1](#));
  - 3) type of winch:
    - R - right-hand;
    - L - left-hand;
    - D - single drum;
    - DD - split drum;
    - 2DS - symmetrical double drum;

EXAMPLE Designation of an electrically-driven accommodation ladder winch of nominal size 12, right-hand, with a single Split drum: Accommodation ladder winch ISO 7364-E-12RDD.

- f) date of manufacture;
- g) stamp of ship inspection department.







# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK