

BS ISO 7388-3:2016



BSI Standards Publication

Tool shanks with 7/24 taper for automatic tool changers

Part 3: Retention knobs of forms AD, AF, UD, UF, JD and JF

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 7388-3:2016. It supersedes BS ISO 7388-3:2013 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee MTE/18, Tools tips and inserts for cutting applications.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 90277 2

ICS 25.060.20

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 29 February 2016.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
7388-3

Third edition
2016-02-01

**Tool shanks with 7/24 taper for
automatic tool changers —**

**Part 3:
Retention knobs of forms AD, AF, UD,
UF, JD and JF**

*Queues d'outils à conicité 7/24 pour changement automatique
d'outils —*

Partie 3: Tirettes de formes AD, AF, UD, UF, JD et JF



Reference number
ISO 7388-3:2016(E)

© ISO 2016



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Dimensions	1
3.1 General.....	1
3.2 Retention knobs of form AD, for centric inner cooling lubricant supply.....	1
3.3 Retention knobs of form AF, without cooling lubricant supply.....	2
3.4 Retention knobs of form UD, for centric inner cooling lubricant supply.....	3
3.5 Retention knobs of form UF, without cooling lubricant supply.....	4
3.6 Retention knobs of form JD with centric inner cooling lubricant supply.....	5
3.7 Retention knobs of form JF, without cooling lubricant supply.....	6
3.8 Retention knobs with data medium.....	7
4 Material	7
5 O-ring	8
6 Designation	8
Bibliography	9

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 29, *Small tools*, Subcommittee SC 2, *Holding tools, adaptive items and interfaces*.

This third edition cancels and replaces the second edition (ISO 7388-3:2013), of which it constitutes a minor revision with the following changes:

- in the title and in all the text, “retention knobs for shanks of form” was changed to “retention knobs of form”;
- forms AC and UC have been deleted from the title and from the designation ([Clause 6](#));
- a footnote was added to [Tables 1](#) and [5](#).

ISO 7388 consists of the following parts, under the general title *Tool shanks with 7/24 taper for automatic tool changers*:

- *Part 1: Dimensions and designation of shanks of forms A, AD, AF, U, UD and UF*
- *Part 2: Dimensions and designation of shanks of forms J, JD, and JF*
- *Part 3: Retention knobs of forms AD, AF, UD, UF, JD and JF*

Introduction

The aim of ISO 7388 is to integrate existing standards which are most commonly used as an industrial standard. In addition, the different developments for cooling and data chip have been taken into account.

Tool shanks with 7/24 taper for automatic tool changers —

Part 3:

Retention knobs of forms AD, AF, UD, UF, JD and JF

1 Scope

This part of ISO 7388 specifies the dimensions of retention knobs of forms AD, AF, UD, UF, JD and JF for tool shanks with a 7/24 taper for automatic tool changers used on machines having an automatic gripping system for feeding tools from the magazine to the spindle and vice-versa. These tools are designed with the most important dimensions for use in spindle noses according to ISO 9270 (all parts).

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1629, *Rubber and latices — Nomenclature*

ISO 2768-1, *General tolerances — Part 1: Tolerances for linear and angular dimensions without individual tolerance indications*

ISO 2768-2, *General tolerances — Part 2: Geometrical tolerances for features without individual tolerance indications*

ISO 8015, *Geometrical product specifications (GPS) — Fundamentals — Concepts, principles and rules*


3 Dimensions

3.1 General

All dimensions and tolerances are given in millimetres; tolerancing is according to ISO 8015. Tolerances not specified shall be of tolerance class “m” in accordance with ISO 2768-1 and of class “k” in accordance with ISO 2768-2.

3.2 Retention knobs of form AD, for centric inner cooling lubricant supply

The dimensions of retention knobs of form AD shall be in accordance with the dimensions shown in [Figure 1](#) and given in [Table 1](#).

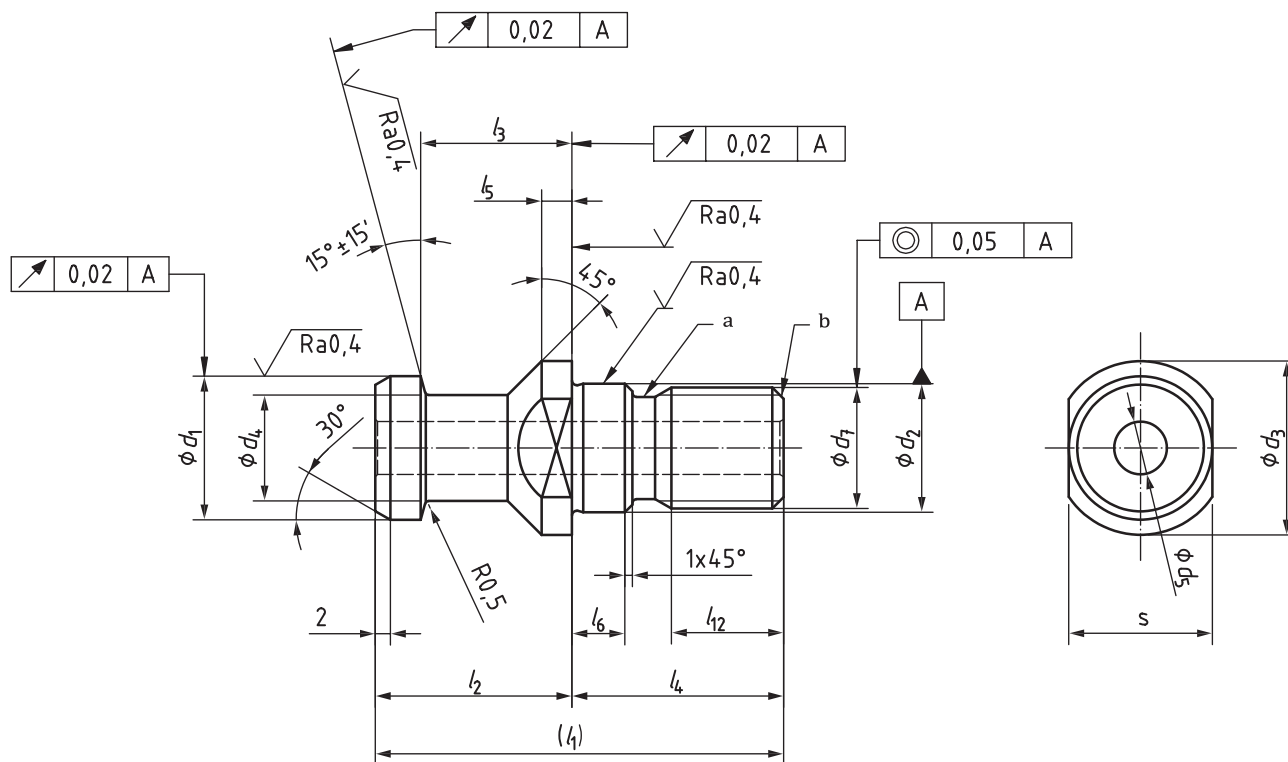

Key

- a Thread undercut, at the manufacturer's discretion.
- b Chamfered end (CH), according to ISO 4753.

Figure 1 — Retention knob — Form AD — Centric inner cooling lubricant supply

Table 1 — Retention knobs — Form AD — Dimensions

Shank no.	Dimension													
	d_1	d_2	d_3	d_4	d_5	d_7	l_1	l_2	l_3	l_4	l_5	l_6	l_{12}	s
	f7	f7	0 -0,2	0 -0,1	+0,1 0			±0,1	±0,1	+0,5 0			min.	0 -0,1
30 ^a	13	13	17	9	—	M12	44	24	19	20	4	5	10	14
40	19	17	23	14	7	M16	54	26	20	28	4	7	13	19
45	23	21	30	17	9,5	M20	65	30	23	35	5	8	16	24
50	28	25	36	21	11,5	M24	74	34	25	40	5	10	19	30
60	40	32	52	30	14	M30	90	40	30	50	6	12	24	46

^a Dimensions only for form AF.

3.3 Retention knobs of form AF, without cooling lubricant supply

The dimensions of retention knobs of form AF shall be in accordance with the dimensions shown in [Figure 2](#) and given in [Table 2](#). Other dimensions are the same as form AD.

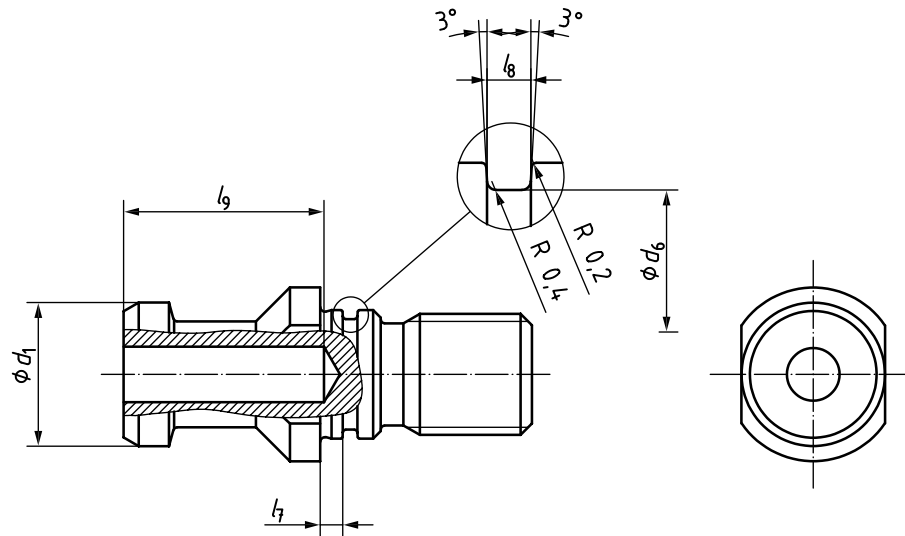



Figure 2 — Retention knob — Form AF — Without cooling lubricant supply

Table 2 — Retention knobs — Form AF — Dimensions

Shank no.	Dimension					O-ring
	d_1 f7	d_6 h11	l_7 0 -0,1	l_8 +0,2 0	l_9 +1 0	
30	13	11,5	2,3	1,4	—	11 × 1,0
40	19	14,6	3,0	1,9	27	14 × 1,5
45	23	17,8	3,3	2,5	33	17 × 2,0
50	28	20,8	4,5	3,0	37	20 × 2,5
60	40	27,8	5,5	3,0	45	27 × 2,5

3.4 Retention knobs of form UD, for centric inner cooling lubricant supply

The dimensions of retention knobs of form UD shall be in accordance with the dimensions shown in [Figure 3](#) and given in [Table 3](#).

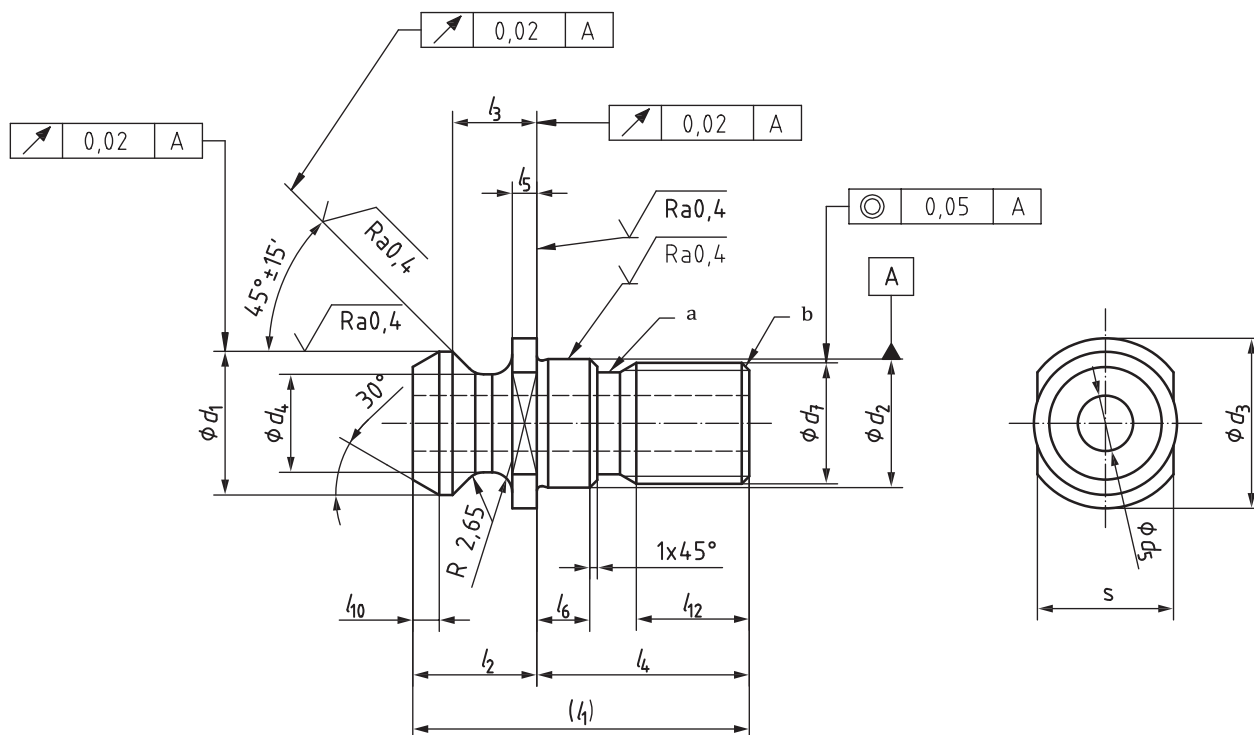

Key

- a Thread undercut, at the manufacturer's discretion.
- b Chamfered end (CH), according to ISO 4753.

Figure 3 — Retention knob — Form UD — Centric inner cooling lubricant supply

Table 3 — Retention knobs — Form UD — Dimensions

Shank no.	Dimension															
	d_1	d_2	d_3		d_4	d_5	d_7	l_1	l_2	l_3	l_4	l_5	l_6	l_{10}	s	
	0 -0,3	h6	nom.	tol.	0 -0,3	+0,1 0			0 -0,2	0 -0,3		0 -0,5	0 -0,5	0 -0,5	nom.	tol.
30	13,35	13	16,5	0 -0,5	9,3	4,15	M12	31,8	11,8	8,15	20	2,75	5	2,4	13	0 -0,27
40	18,95	17	22,5	0 -1	12,95	7,35	M16	44,4	16,4	11,15	28	3,25	7	3,5	18	0 -0,33
45	24,05	21	30	0 -2	16,3	9,25	M20	55,95	20,95	14,85	35	4,25	8	3,85	24	0 -0,39
50	29,1	25	37		19,6	11,55	M24	65,55	25,55	17,95	40	5,25	10	4,85	30	0 -0,65
60	37,25	32	50		24,95	13,85	M30	88,15	38,15	27,65	50	7,75	12	6,75	36	0 -0,75

3.5 Retention knobs of form UF, without cooling lubricant supply

The dimensions of retention knobs of form UF shall be in accordance with the dimensions shown in [Figure 4](#) and given in [Table 4](#). Other dimensions are as for form UD.

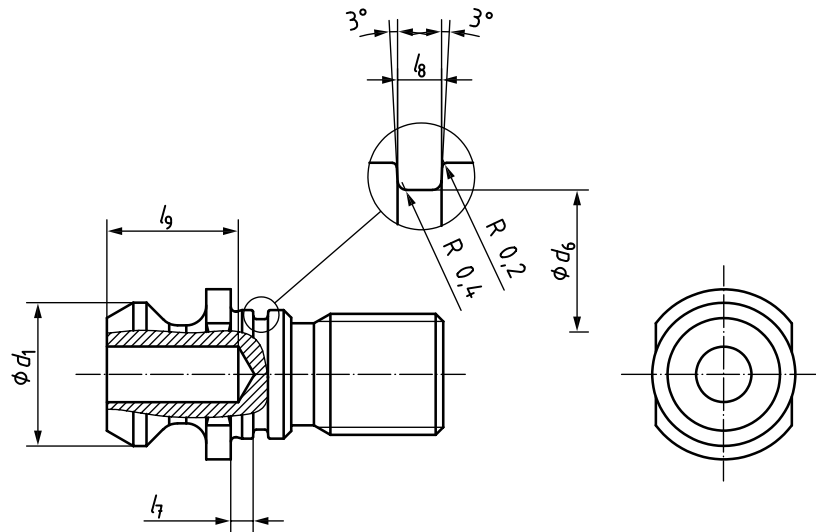



Figure 4 — Retention knob — Form UF — Without cooling lubricant supply

Table 4 — Retention knob — Form UF — Dimensions

Shank no.	Dimension					O-ring
	d_1	d_6	l_7	l_8	l_9	
	0 -0,3	h11		+0,2 0		
30	13,35	11,5	2,3	1,4	—	11 × 1,0
40	18,95	14,6	3,0	1,9	27	14 × 1,5
45	24,05	17,8	3,3	2,5	33	17 × 2,0
50	29,1	20,8	4,5	3,0	37	20 × 2,5
60	37,25	27,8	5,5	3,0	45	27 × 2,5

3.6 Retention knobs of form JD with centric inner cooling lubricant supply

The dimensions of retention knobs of form JD shall be in accordance with the dimensions shown in [Figure 5](#) and given in [Table 5](#).

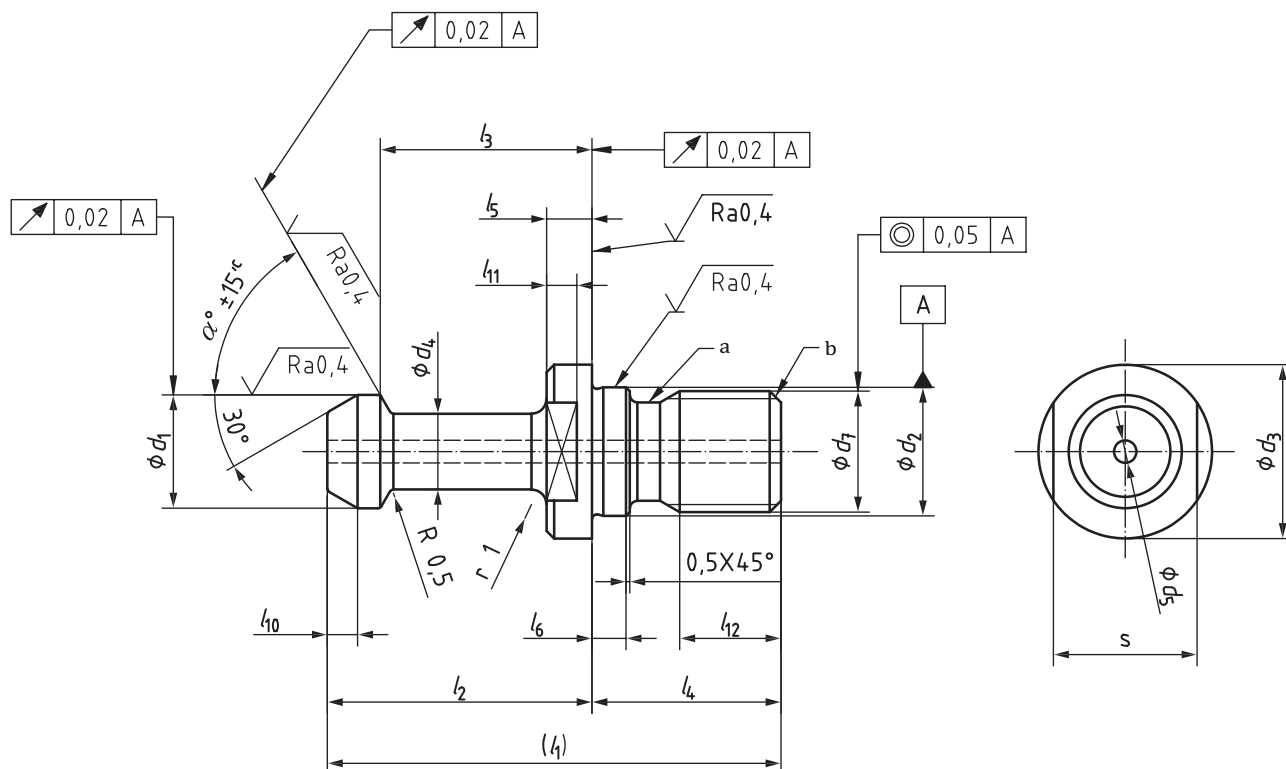

Key

- a Thread undercut, at the manufacturer's discretion.
- b Chamfered end (CH), according to ISO 4753.
- c $\alpha = 45^\circ$ or $\alpha = 60^\circ$. This information should be given and taken over in the designation (see [Clause 6](#)).

Figure 5 — Retention knob — Form JD — Centric inner cooling lubricant supply

Table 5 — Retention knobs — Form JD — Dimensions

Shank no.	Dimension																	
	d_1	d_2	d_3	d_4	d_5	d_7	l_1	l_2	l_3	l_4	l_5	l_6	l_{10}	l_{11}	l_{12}	r_1	s	
	0 -0,1	h7	0 -0,2	0 -0,1	+0,1 0	6h		0 -0,1	0 -0,1		0 -0,1		0 -0,5					0 -0,35
30 ^a	11	12,5	16,5	7	—	M12	43	23	18	20	5	4	2,5	3,5	10	2	13	
40 ^a	15	17	23	10	—	M16	60	35	28	25	6	5	4	4	13	3	19	
45	19	21	31	14	7	M20	70	40	31	30	8	6	5	6	16	4	24	
50	23	25	38	17	8,5	M24	85	45	35	40	10	8	5	8	19	5	30	
60	32	31	56	24	12	M30	115	65	53	50	14	10	7	11	24	5	46	

^a Dimensions only for form JF.

3.7 Retention knobs of form JF, without cooling lubricant supply

The dimensions of retention knobs of form JF shall be in accordance with the dimensions shown in [Figure 6](#). Other dimensions are as for form JD.

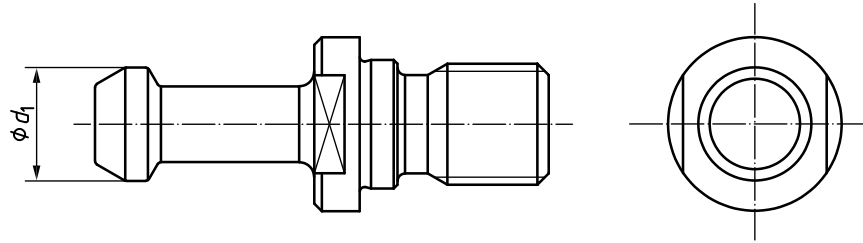


Figure 6 — Retention knob — Form JF — Without cooling lubricant supply

3.8 Retention knobs with data medium

For forms AF and UF without a hole, it is possible to install a data medium hole.

If a data medium hole is needed for form JF, the dimensions shall be defined by the manufacturer according to the data medium used. The location shall be as shown in [Figure 7](#).

See [Figures 2](#) and [4](#) and [Tables 2](#) and [4](#).

The general dimensions are given in [Table 6](#).

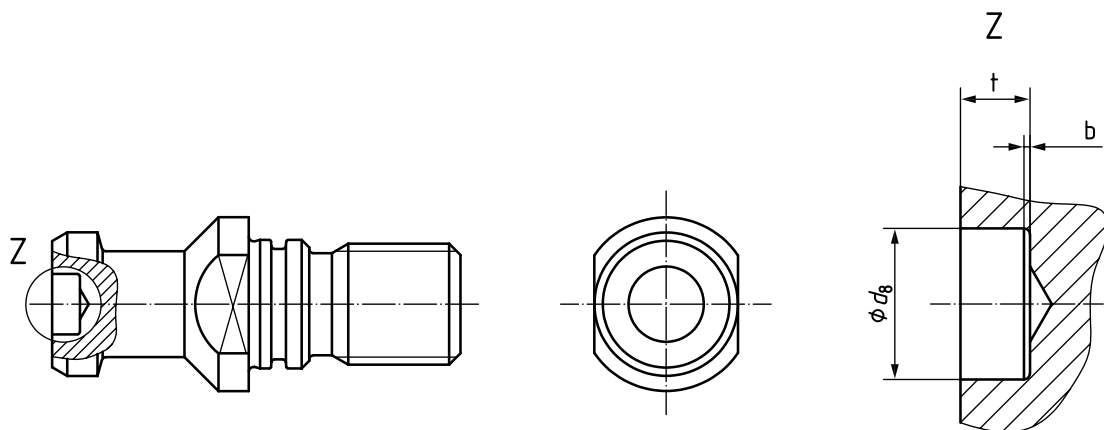


Figure 7 — Retention knob with data medium

Table 6 — Fitting dimension of the data medium

b_{\max}	$0,3 \times 45^\circ$ or R 0,3 ^a
d_8	$10 \begin{matrix} +0,09 \\ 0 \end{matrix}$
t	$4,6 \begin{matrix} +0,2 \\ 0 \end{matrix}$
^a At the manufacturer's discretion.	

4 Material

The steel is chosen at the manufacturer's discretion but shall have a tensile strength of at least 980 N/mm² and a hardness of from 55 HRC to 60 HRC.

No area of the retention knob shall be through hardened.

5 O-ring

The O-ring shall be according to ISO 1629 and shall be included as part of the delivery.

6 Designation

A retention knob in accordance with this part of ISO 7388 shall be designated as follows:

- a) "Retention knob";
- b) a reference to this part of ISO 7388, i.e. ISO 7388-3;
- c) a dash;
- d) form AD, AF, UD, UF, JD or JF;
- e) taper size;
- f) a dash;
- g) α values, in degrees (45° or 60°).

NOTE f) and g) only apply for retention knobs forms JD and JF.

EXAMPLE 1 Designation of a retention knob in accordance with ISO 7388-3, form AD, shank No. 40:

Retention knob ISO 7388-3-AD40

EXAMPLE 2 Designation of a retention knob in accordance with ISO 7388-3, form JD, shank No. 40 with a α angle of 45° :

Retention knob ISO 7388-3-JD40-45

Bibliography

- [1] ISO 4753, *Fasteners — Ends of parts with external ISO metric thread*
- [2] ISO 9270-1, *7/24 taper spindle noses for automatic tool changers — Part 1: Dimensions and designation of spindle noses of forms S and SF*
- [3] ISO 9270-2, *7/24 taper spindle noses for automatic tool changers — Part 2: Dimensions and designation of spindle noses of forms J and JF*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK