

Mechanical vibration — Evaluation of machine vibration by measurements on rotating shafts

Part 3: Coupled industrial machines

ICS 17.160

National foreword

This British Standard is the UK implementation of ISO 7919-3:2009. It supersedes BS ISO 7919-3:1996 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee GME/21/5, Vibration of machines.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2009

© BSI 2009

ISBN 978 0 580 64742 0

Amendments/corrigenda issued since publication

Date	Comments

**Mechanical vibration — Evaluation of
machine vibration by measurements on
rotating shafts —**

Part 3:
Coupled industrial machines

*Vibrations mécaniques — Évaluation des vibrations des machines par
mesurages sur les arbres tournants —*

Partie 3: Machines industrielles couplées



PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 7919-3 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration, shock and condition monitoring*, Subcommittee SC 2, *Measurement and evaluation of mechanical vibration and shock as applied to machines, vehicles and structures*.

This second edition cancels and replaces the first edition (ISO 7919-3:1996), of which it constitutes a minor revision. It also incorporates the Technical Corrigendum ISO 7919-3:1996/Cor.1:2007.

ISO 7919 consists of the following parts, under the general title *Mechanical vibration — Evaluation of machine vibration by measurements on rotating shafts*:

- *Part 1: General guidelines*
- *Part 2: Land-based steam turbines and generators in excess of 50 MW with normal operating speeds of 1 500 r/min, 1 800 r/min, 3 000 r/min and 3 600 r/min*
- *Part 3: Coupled industrial machines*
- *Part 4: Gas turbine sets with fluid-film bearings*
- *Part 5: Machine sets in hydraulic power generating and pumping plants*

Introduction

This part of ISO 7919 specifies guidelines for measuring transverse shaft vibration on coupled industrial machines. Evaluation criteria, based on previous experience, are given for use as guidelines for assessing the vibratory conditions of such machines.

A general description of the principles that are generally applicable for the measurement and evaluation of shaft vibration of non-reciprocating machines is outlined in ISO 7919-1.

Mechanical vibration — Evaluation of machine vibration by measurements on rotating shafts —

Part 3: Coupled industrial machines

1 Scope

This part of ISO 7919 gives guidelines for applying evaluation criteria of shaft vibration under normal operating conditions, measured at or close to the bearings of coupled industrial machines. These guidelines are presented in terms of both steady running vibration and any amplitude changes which can occur in these steady values. The numerical values specified are not intended to serve as the only basis for vibration evaluation since, in general, the vibratory condition of a machine is assessed by consideration of both the shaft vibration and the associated structural vibration.

This part of ISO 7919 applies to coupled industrial machines with fluid-film bearings, having maximum continuous rated speeds in the range 1 000 r/min to 30 000 r/min and not limited by size and power, comprising

- steam turbines,
- turbocompressors,
- turbogenerators,
- turbofans,
- electric drives and associated gears, where relevant, and
- rotodynamic pumps (turbo pumps).

The information relating to pumps provided in this part of ISO 7919 complements that given in ISO 10816-7. In particular, the conditions for *in-situ* operation, performing acceptance tests and the influence of bearing clearance given in ISO 10816-7 shall be taken into account when evaluating the shaft vibration of pumps

This part of ISO 7919 is neither applicable to land-based steam turbine-generator sets for power stations with outputs greater than 50 MW (see ISO 7919-2), nor machine sets in hydraulic power generating and pumping plants with outputs of 1 MW or greater (see ISO 7919-5).

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7919-1, *Mechanical vibration of non-reciprocating machines — Measurements on rotating shafts and evaluation criteria — Part 1: General guidelines*

3 Measurement procedures

The measurement procedures to be followed and the instrumentation which shall be used are specified in ISO 7919-1.

In industrial machines, shaft vibration relative to the bearing is normally measured. Therefore, unless stated otherwise, this part of ISO 7919 always refers to relative vibration displacement. In view of the relatively high rotational speeds involved with industrial machines, measuring methods using non-contacting transducers are most common and are generally preferred on rotor elements with operating speeds of 3 000 r/min and above. For monitoring purposes the measuring system shall be capable of covering overall vibration up to a frequency equivalent to 2,5 times the maximum service speed. However, it should be noted that for diagnostic purposes it might be desirable to cover a wider frequency range.

4 Evaluation criteria

The criteria for vibration magnitude, changes in vibration magnitude and operational limits are given in Annex A.

The vibration magnitude is the higher value of the peak-to-peak displacement measured in two selected orthogonal measurement directions. The values presented are the result of experience with machinery of this type and, if due regard is paid to them, acceptable operation can be expected. If only one measuring direction is used, care should be taken to ensure that it provides adequate information (see ISO 7919-1).

The criteria are presented for the specified steady-state operating conditions at the rated speed and load ranges. They apply for normal slow changes in load but do not apply when different conditions exist or during transient changes, for example during start-up and shut-down and when passing through resonance ranges. In these cases alternative criteria are necessary.

It should be noted that overall judgement of the vibratory state of a machine is often made on the basis of both shaft relative vibration as defined above and of measurements made on non-rotating parts (see ISO 10816-3)^[2].

Annex A (normative)

Evaluation criteria for relative shaft vibration of coupled industrial machines under specified operating conditions

A.1 General

Two evaluation criteria are used to assess the relative shaft vibration of coupled industrial machines, measured at or close to the bearings. One criterion considers the magnitude of the observed broad-band relative shaft vibration; the second considers changes in magnitude, irrespective of whether they are increases or decreases.

Caution should be exercised when using the criteria presented in Annex A to ensure that no contact occurs between the rotating shaft and stationary parts. Therefore, in certain cases the shaft displacement limits given in this part of ISO 7919 may exceed the available clearance. In such cases the evaluation zone limits should be adjusted accordingly.

A.2 Criterion I: Vibration magnitude at rated speed under steady operating conditions

This criterion is concerned with defining limits for shaft vibration magnitude consistent with acceptable dynamic loads on the bearings, adequate margins on the radial clearance envelope of the machine, and acceptable vibration transmission into the support structure and foundation. The maximum shaft vibration magnitude observed at each bearing is assessed against four evaluation zones established from international experience.

A.2.1 Evaluation zones

The following typical evaluation zones are defined to permit a qualitative assessment of the shaft vibration of a given machine and to provide guidelines on possible actions.

Zone A: The vibration of newly commissioned machines normally falls within this zone.

Zone B: Machines with vibration within this zone are normally considered acceptable for unrestricted long-term operation.

Zone C: Machines with vibration within this zone are normally considered unsatisfactory for long-term continuous operation. Generally, the machine may be operated for a limited period in this condition until a suitable opportunity arises for remedial action.

Zone D: Vibration values within this zone are normally considered to be of sufficient severity to cause damage to the machine.

A.2.2 Evaluation zone limits

In accordance with present accumulated experience of shaft vibration measurements in this field, the recommended values for the zone boundaries are inversely proportional to the square root of the maximum operating speed of the shaft, n (in revolutions per minute). The recommended values illustrated in Figure A.1 are derived from Equation (A.1), Equation (A.2) and Equation (A.3):

Zone A/B boundary limit, in micrometres

$$S_{(p-p)} = 4\,800 / \sqrt{n} \text{ } \mu\text{m} \quad (\text{A.1})$$

Zone B/C boundary limit, in micrometres

$$S_{(p-p)} = 9\,000 / \sqrt{n} \text{ } \mu\text{m} \quad (\text{A.2})$$

Zone C/D boundary limit, in micrometres

$$S_{(p-p)} = 13\,200 / \sqrt{n} \text{ } \mu\text{m} \quad (\text{A.3})$$

NOTE For a definition of $S_{(p-p)}$, see ISO 7919-1.

These values are not intended to serve as acceptance specifications, which shall be subject to agreement between the machine manufacturer and the customer. However, they provide guidelines for ensuring that gross deficiencies or unrealistic requirements are avoided.

In certain cases, there can be specific features associated with a particular machine, which would require different zone boundary values (lower or higher) to be used. For example, with a tilting pad bearing it might be necessary to specify alternative vibration values, whilst in the case of an elliptical bearing different vibration criteria can apply for the directions of maximum and minimum bearing clearance. In particular, it should be recognized that the allowable vibration can be related to the journal diameter since, generally, running clearances will be greater for larger diameter bearings. Consequently different values can apply for measurements taken at different bearings on the same rotor line. In such cases, it is normally necessary to explain the reasons for this and, in particular, to confirm that the machine will not be endangered by operating with higher vibration values.

Higher values of vibration can be permitted at other measuring positions and under transient conditions, such as start-up and run-down (including passage through critical speed ranges).

A.3 Criterion II: Change in vibration magnitude

This criterion provides an assessment of a change in vibration magnitude from a previously established reference or baseline value for particular steady-state conditions. A significant increase or decrease in shaft vibration magnitude can occur which would require some action even though zone C of Criterion I has not been reached. Such changes can be instantaneous or progressive with time and can indicate that damage has occurred or be a warning of an impending failure or some other irregularity. Criterion II is specified on the basis of the change in shaft vibration magnitude occurring under steady-state operating conditions.

The reference value for this criterion is the typical, reproducible normal vibration, known from previous measurements for the specific operating conditions. If this reference value changes by a significant amount, and certainly if it exceeds 25 % of the upper limit value for zone B, regardless of whether this increases or decreases the magnitude of vibration, steps should be taken to ascertain the reasons for the change. A decision on what action can be taken, if any, should then be made after consideration of the maximum value of vibration and whether the machine has stabilized at a new condition.

When Criterion II is applied, the vibration measurements being compared shall be taken at the same transducer location and orientation, and under approximately the same machine operating conditions.

It is necessary to appreciate that a criterion based on change of vibration has limited application, since significant changes of varying magnitude and rates can and do occur in individual frequency components, but the importance of these is not necessarily reflected in the broad-band vibration signal (see ISO 7919-1). For example, the propagation of a crack in a rotor can introduce a progressive change in vibration components at multiples of rotational frequency, but their magnitude might be small relative to the amplitude of the once-per-revolution rotational frequency component. Consequently, it can be difficult to identify the effects of the crack propagation by looking at the change in the broad-band vibration only. Therefore, although monitoring the change in broad-band vibration will give some indication of potential problems, it might be necessary in certain applications to use measuring and analysis equipment which is capable of determining the trends of the vector changes that occur in individual frequency components of the vibration signal. This equipment can be more sophisticated than that used for normal supervisory monitoring and its use and application requires specialist knowledge. Hence, the specification of detailed criteria for measurements of this type is beyond the scope of this part of ISO 7919.

A.4 Operational limits

For many machines, mainly those of small size or power, continuous monitoring of vibration is not necessary. However, for those machines for which continuous monitoring of vibration is employed, it is common practice to establish operational vibration limits. These limits take the form of ALARMS and TRIPS.

ALARMS: To provide a warning that a defined value of vibration has been reached or a significant change has occurred, at which remedial action may be necessary. In general, if an ALARM situation occurs, operation can continue for a period whilst investigations are carried out to identify the reason for the change in vibration and define any remedial action.

TRIPS: To specify the magnitude of vibration beyond which further operation of the machine may cause damage. If the TRIP limit is exceeded, immediate action should be taken to reduce the vibration or the machine should be shut down.

Different operational limits, reflecting differences in dynamic loading and support stiffness, may be specified for different measurement positions and directions.

A.4.1 Setting of ALARMS

The ALARM limits may vary considerably for individual machines. The values chosen will normally be set relative to a baseline value determined from experience for the measurement position or direction for that particular machine.

It is recommended that the ALARM limit be set higher than the baseline by an amount equal to 25 % of the zone boundary B/C. If the baseline is low, the ALARM may be below zone C.


Where there is no established baseline (for example, with a new machine) the initial ALARM setting should be based either on experience with other similar machines or relative to agreed acceptance values. After a period of time, the steady-state baseline value will be established and the ALARM setting should be adjusted accordingly.

If the steady-state baseline changes (for example, after a machine overhaul), the ALARM setting should be revised accordingly. Different operational ALARM settings may then exist for different bearings on the machine, reflecting differences in dynamic loading and bearing support stiffnesses.

A.4.2 Setting of TRIPS

The TRIP limits will generally relate to the mechanical integrity of the machine and be dependent on any specific design features which have been introduced to enable the machine to withstand abnormal dynamic forces. The values used will, therefore, generally be the same for all machines of similar design and would not normally be related to the steady-state baseline value used for setting ALARMS.

There can, however, be differences for machines of different design and it is not possible to give more precise guidelines for absolute TRIP limits. In general, the TRIP limit will be within zone C or zone D.

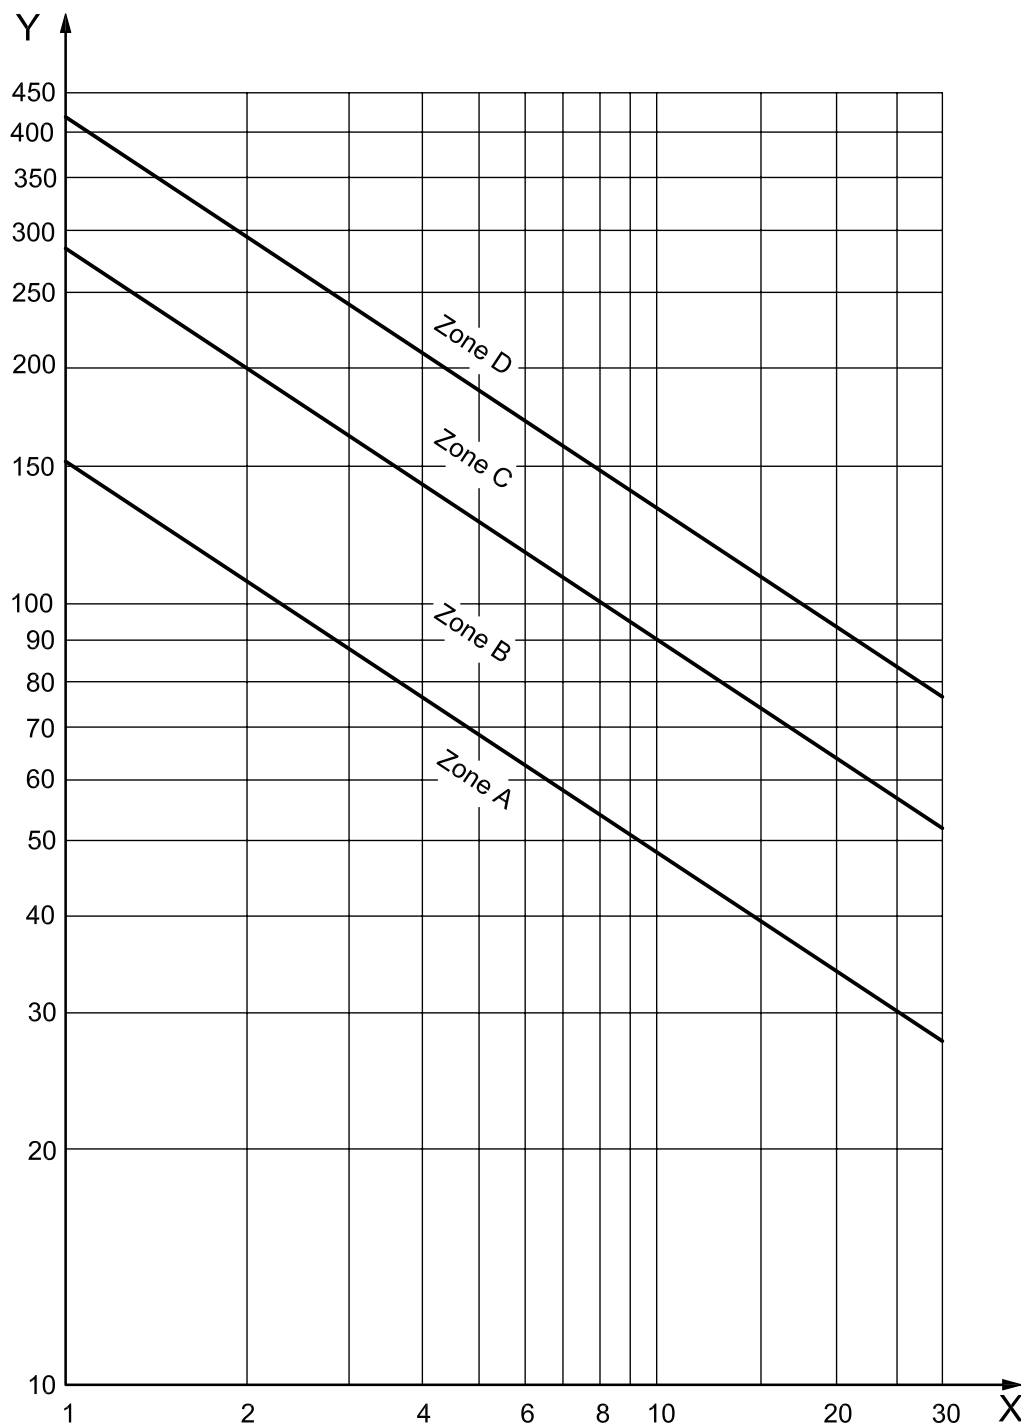

Key

- Y peak-to-peak shaft vibration displacement, relative to bearing (μm)
- X maximum operating speed of the shaft × 1 000 (r/min)

Figure A.1 — Recommended values for maximum relative displacement of the shaft as a function of the maximum service speed for coupled industrial machines

Bibliography

- [1] ISO 10816-1, *Mechanical vibration — Evaluation of machine vibration by measurements on non-rotating parts — Part 1: General guidelines*
- [2] ISO 10816-3, *Mechanical vibration — Evaluation of machine vibration by measurements on non-rotating parts — Part 3: Industrial machines with nominal power above 15 kW and nominal speeds between 120 r/min and 15 000 r/min when measured in situ*
- [3] ISO 10816-7, *Mechanical vibration — Evaluation of machine vibration by measurements on non-rotating parts — Part 7: Rotodynamic pumps for industrial applications, including measurements on rotating shafts*

BSI - British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: orders@bsigroup.com You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com