

BS ISO 9022-22:2012



BSI Standards Publication

Optics and photonics — Environmental test methods

Part 22: Combined cold, dry heat or
temperature change with bump or random
vibration

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 9022-22:2012. It supersedes BS ISO 9022-10:1998, BS ISO 9022-13:1998, BS ISO 9022-15:1998, BS ISO 9022-16:1998 and BS ISO 9022-19:1994 which are withdrawn.

The UK participation in its preparation was entrusted to Technical Committee CPW/172/1, Optics and Photonics - Fundamental Standards.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012. Published by BSI Standards Limited 2012

ISBN 978 0 580 71140 4

ICS 37.020

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 June 2012.

Amendments issued since publication

Date	Text affected
------	---------------

**Optics and photonics — Environmental
test methods —**

Part 22:
**Combined cold, dry heat or temperature
change with bump or random vibration**

Optique et photonique — Méthodes d'essais d'environnement —

*Partie 22: Chaleurs sèche, froid ou changement de température
combinés avec choc ou vibration aléatoire*





COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents		Page
Foreword		iv
Introduction		v
1 Scope		1
2 Normative references		1
3 Terms and definitions		1
4 General information and test conditions		1
5 Conditioning		2
5.1 General		2
5.2 Conditioning method 22: Cold, dry heat or temperature change combined with bump or random vibration		2
6 Procedure		3
6.1 General		3
6.2 Test sequence with cold or dry heat testing		3
6.3 Test sequence with temperature change		3
6.4 Operating condition of specimen		3
6.5 Mechanical conditioning of specimen		4
7 Environmental test code		4
8 Specification		5
Annex A (informative) Explanatory notes		6
Bibliography		7

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 9022-22 was prepared by Technical Committee ISO/TC 172, *Optics and photonics*, Subcommittee SC 1, *Fundamental standards*.

This first edition cancels and replaces ISO 9022-10:1998, ISO 9022-13:1998, ISO 9022-15:1998, ISO 9022-16:1998 and ISO 9022-19:1994 which have been technically revised.

ISO 9022 consists of the following parts, under the general title *Optics and photonics — Environmental test methods*:

- *Part 1: Definitions, extent of testing*
- *Part 2: Cold, heat and humidity*
- *Part 3: Mechanical stress*
- *Part 4: Salt mist*
- *Part 5: Combined cold, low air pressure*
- *Part 6: Dust*
- *Part 7: Resistance to drip or rain*
- *Part 8: High pressure, low pressure, immersion*
- *Part 9: Solar radiation*
- *Part 11: Mould growth*
- *Part 12: Contamination*
- *Part 14: Dew, hoarfrost, ice*
- *Part 17: Combined contamination, solar radiation*
- *Part 18: Combined damp heat and low internal pressure*
- *Part 20: Humid atmosphere containing sulfur dioxide or hydrogen sulfide*
- *Part 21: Combined low pressure and ambient temperature or dry heat*
- *Part 22: Combined cold, dry heat or temperature change with bump or random vibration*
- *Part 23: Low pressure combined with cold, ambient temperature and dry or damp heat¹⁾*

1) Under preparation.

Introduction

Optical and photonic instruments, including additional assemblies from other fields (e.g. mechanical, chemical and electronic devices) are affected during their use by a number of different environmental and handling parameters which they are required to resist without significant reduction in performance, while still remaining within defined specifications.

The type and severity of these parameters depend on the conditions of use of the instrument (for example in the laboratory or workshop) and on its geographical location. The environmental effects on optical instrument performance in tropical and subtropical climates are totally different from those found when they are used in the arctic regions. Individual parameters cause a variety of different and overlapping effects on instrument performance.

The manufacturer attempts to ensure, and the user naturally expects, that instruments will resist the likely rigours of their environment throughout their life. This expectation can be assessed by cumulated exposure of the instrument to a range of simulated environmental parameters under controlled laboratory conditions. The cumulative combination, degree of severity and sequence of these conditions can be selected to obtain meaningful results in a relatively short period of time.

In order to allow assessment and comparison of the response of optical instruments to appropriate environmental conditions, the ISO 9022 series contains details of a number of laboratory tests which reliably simulate a variety of different environments. The tests are based largely on IEC standards, modified where necessary to take into account features specific to optical instruments.

It should be noted that, as a result of continuous progress in all fields, optical instruments are no longer only precision-engineered optical products, but, depending on their range of application, also contain additional assemblies from other fields. For this reason, the principal function of the instrument must be assessed to determine which International Standard should be used for testing. If the optical function is of primary importance, then the relevant part of ISO 9022 is applicable, but if other functions take precedence, then the appropriate International Standard in the field concerned should be applied. Cases may arise where application of both the relevant part of ISO 9022 and other appropriate International Standards is necessary.

Optics and photonics — Environmental test methods —

Part 22:

Combined cold, dry heat or temperature change with bump or random vibration

1 Scope

This part of ISO 9022 specifies methods for the testing of optical instruments, including additional assemblies from other fields (e.g. mechanical, chemical and electronic devices) under equivalent conditions, for their ability to resist combined bump or random vibration, in cold, dry heat or temperature change.

The purpose of testing is to investigate to what extent the optical, thermal, chemical and electrical performance characteristics of the specimen are affected by combined cold, dry heat or temperature change with bump or random vibration.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9022-1, *Optics and photonics — Environmental test methods — Part 1: Definitions, extent of testing*

ISO 9022-2, *Optics and optical instruments — Environmental test methods — Part 2: Cold, heat and humidity*

ISO 9022-3, *Optics and optical instruments — Environmental test methods — Part 3: Mechanical stress*

IEC 60068-2-47, *Environmental testing — Part 2-47: Tests — Mounting of specimens for vibration, impact and similar dynamic tests*

IEC 60068-2-64, *Environmental testing — Part 2-64: Tests — Test Fh: Vibration, broadband random and guidance*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 9022-1 apply.

4 General information and test conditions

Exposure of the specimen to combined stress conditions renders the test much more severe than separate exposure to any of the environmental conditions cited. Stress conditions such as cold, dry heat or temperature change, combined with bump or random vibration, correspond to real conditions under use. In the case of the lifetime test, tests with higher degrees of severity for time reduction, damage-provoked tests, etc., combined test methods such as Burn-In, Run-In or Environmental Stress Screening (ESS) are useful.

Burn-In, Run-In or ESS are test methods for optical instruments and instruments containing optical components and/or their electronic assembly, in which the system is switched off or in operation, and exposed to their operating, storage, shipping or other temperature cycles, combined with sinusoidal or random vibration and operation with under or excess voltage.

The aforementioned methods of combined tests are suitable to force potential faults to be detected during first use and to eliminate them before delivery. There are stress factors with different impacts. The choice of combination of test methods should be specific to the products and is therefore not standardized.

The values of temperatures specified in Table 1 are selected from ISO 9022-2, conditioning methods 10, 11 and 14.

The values of mechanical loads specified in Table 1 are selected from ISO 9022-3, conditioning methods 31 and 37.

Conditioning methods 10, 11 or 14 are combined with conditioning methods 31 or 37. Combinations are listed in Table 1.

Testing shall be conducted in accordance with the requirements of ISO 9022-3.

The fixture for the specimen shall meet the requirements of IEC 60068-2-47 and shall be thermally insulated, if appropriate.

If the specimen is mounted on shock absorbers, time shall be allowed for temperature stabilization of the absorber elements.

For the purposes of this part of ISO 9022, the value of g_n is rounded up to the next highest integer, i.e. 10 m/s².

5 Conditioning

5.1 General

If temperature change testing is performed, the required exposure time starts with the beginning of temperature change. The temperature of the specimen and of the test chamber shall be the same.

When testing optical instruments, a half-sine shock pulse shall be applied. The specimen shall be subjected to one thousand shocks in each direction along each axis or a specific number of shocks shall be defined.

Random vibration shall be digitally controlled. The acceleration power spectral density shall be controlled with a vibration control system according to IEC 60068-2-64.

Other parameters such as temperature, cold or dry heat, temperature change, type of random vibration, exposure time to temperature, exposure time to vibration, number of shocks, repetition frequency of shocks, axis of bump or random vibration, state of operation, etc., shall be defined in the relevant specification.

5.2 Conditioning method 22: Cold, dry heat or temperature change combined with bump or random vibration

See Table 1.

Table 1 — Degrees of severity for conditioning method 22: Cold, dry heat or temperature change combined with bump or random vibration

Parameters to be defined in the relevant specification		Bump: 10 g_n , 6 ms (ISO 9022-31-01) ^a	Random vibration: 20 Hz to 150 Hz 0,02 g_n^2 /Hz (ISO 9022-37-01)	Random vibration: 20 Hz to 500 Hz 0,005 g_n^2 /Hz (ISO 9022-37-11)	Random vibration: 20 Hz to 2 000 Hz 0,001 g_n^2 /Hz (ISO 9022-37-21)
Cold:	–10 °C (ISO 9022-10-02)	Exposure time to temperature	Exposure time to temperature Exposure time to vibration		
	–25 °C (ISO 9022-10-05)	Number of shocks			
	–35 °C (ISO 9022-10-07)	Repetition frequency of shocks			

^a Environmental test code (see Clause 7).

Table 1 (continued)

Parameters to be defined in the relevant specification		Bump: 10 g_n , 6 ms (ISO 9022-31-01) ^a	Random vibration: 20 Hz to 150 Hz 0,02 g_n^2 /Hz (ISO 9022-37-01)	Random vibration: 20 Hz to 500 Hz 0,005 g_n^2 /Hz (ISO 9022-37-11)	Random vibration: 20 Hz to 2 000 Hz 0,001 g_n^2 /Hz (ISO 9022-37-21)
Dry heat:	40 °C (ISO 9022-11-02)	Exposure time to temperature	Exposure time to temperature Exposure time to vibration		
	55 °C (ISO 9022-11-03)	Number of shocks			
	63 °C (ISO 9022-11-04)	Repetition frequency of shocks			
Temperature change:	-10 °C/40 °C (ISO 9022-14-01)	Number of temperature cycles	Number of temperature cycles Exposure time to vibration		
	-25 °C/55 °C (ISO 9022-14-02)	Number of shocks			
	-35 °C/63 °C (ISO 9022-14-05)	Repetition frequency of shocks			

^a Environmental test code (see Clause 7).

6 Procedure

6.1 General

The tests shall be conducted in accordance with the requirements of the relevant specification and the reference documents.

6.2 Test sequence with cold or dry heat testing

Specimens may be repositioned for shock or vibration along another axis, at any temperature between ambient and test chamber temperature, provided that there is no formation of condensation, hoarfrost or ice.

6.3 Test sequence with temperature change

The first temperature cycle commences at ambient atmospheric conditions. The duration of a cycle is normally between 7 h and 8 h, regardless of temperature differences within the cycles, depending on the required severity. The mean heating and cooling rate of the chamber shall allow a continuous variation of temperature at the specimen (see Figure 1) or shall be stipulated in the relevant specification.

NOTE Conditioning method 14 of ISO 9022-2 specifies a test chamber temperature rate of change in the range between 0,2 K and 2 K per minute. However, higher rates may be appropriate depending on the individual application. Rates of 1 K per minute to 10 K per minute have proven to be convenient in practical application.

Specimens may be repositioned for shock or vibration along another axis, at any temperature between ambient and test chamber temperature, provided that there is no formation of condensation, hoarfrost or ice.


6.4 Operating condition of specimen

In the case of electrically operated specimens, the times at which the power supply is connected or disconnected and the voltage of the power supply within each temperature cycle shall be specified in the relevant specification.

The times at which other functions such as cooling, heating and various loads are switched on or off shall be stipulated in the relevant specification or controlled by a special type of test equipment.

6.5 Mechanical conditioning of specimen

If the specimen is operated by power supply, this shall be connected for the duration of the mechanical conditioning.

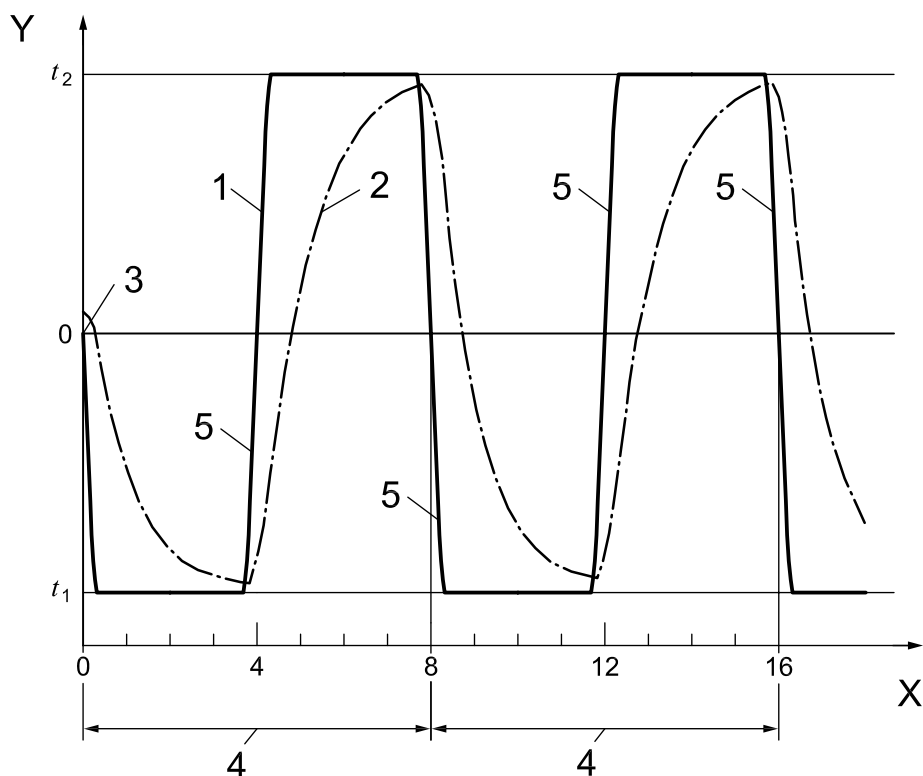

Key

- X duration, h
- Y test chamber temperature, °C
- 1 temperature of the chamber
- 2 temperature of the specimen
- 3 ambient temperature
- 4 temperature cycle (1st, 2nd, etc)
- 5 rate of temperature change, typically between 1 K and 10 K per minute

Figure 1 — Schematic representation of course of first two temperature cycles for temperature change with duration of 8 h per cycle

7 Environmental test code

The environmental test code shall be as defined in ISO 9022-1.

EXAMPLE The environmental test of optical instruments for resistance to combined temperature change, conditioning method 14, degree of severity 01, state of operation 1 and random vibration, conditioning method 37, degree of severity 01, state of operation 1, shall be identified as:

Environmental test ISO 9022-22-14-01/37-01-1

8 Specification

The relevant specification shall contain the following details:

- a) environmental test code;
- b) exposure time to temperature;
- c) test chamber temperature change rate;
- d) dwell time at temperatures;
- e) temperature difference;
- f) number of temperature cycles;
- g) exposure time to vibration;
- h) number of shocks;
- i) repetition frequency of shocks;
- j) shock axis and directions;
- k) state of operation;
- l) number of specimens;
- m) humidity, if relevant for combined test;
- n) preconditioning;
- o) type and scope of initial test;
- p) state of operation 2: period of operation;
- q) state of operation 2: type and scope of intermediate test;
- r) recovery;
- s) type and scope of final test;
- t) criteria for evaluation;
- u) type and scope of test report.

Annex A (informative)

Explanatory notes

A statistical evaluation of the results of similar or identical tests performed over many years has shown that these tests provide a relatively economical means of estimating the frequency of instrument failure.

The special value of these tests lies in the following.

A.1 It is possible at the development stage of instruments, to optimize materials, components and assemblies regarding reliability and instrument maintenance, and to recognize at an early stage their possible failure in long-term use. At this stage, it is advisable to test materials, components and assemblies rather than the complete instrument. By testing sufficient numbers, especially at the beginning of production (pilot run), further weaknesses in the assembly can be discovered and eliminated. The failure level which is to be expected in long-term use is decreased, and quality and reliability are improved.

A.2 The test is also suitable for monitoring production. For operative components and complete instruments alike, production-related defects or inaccuracies of a mechanical, electrical or optical nature can be recognized at an early stage and the quality of production thus improved.

A.3 The results of the test described in A.1 and A.2 can be used to derive instrument-specific endurance conditioning for the elimination of early failures and for the deliberate generation of ageing effects.

Bibliography

- [1] IEC 60068-2-27, *Environmental testing — Part 2-27: Tests — Test Ea and guidance: Shock*

ICS 37.020.00

Price based on 7 pages

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™