

BS ISO 9635-2:2014



BSI Standards Publication

Agricultural irrigation equipment — Irrigation valves

Part 2: Isolating valves

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 9635-2:2014. It supersedes BS ISO 9635-2:2006 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee AGE/30, Irrigation and drainage equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014. Published by BSI Standards Limited 2014

ISBN 978 0 580 80729 9

ICS 65.060.35

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2014.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

BS ISO 9635-2:2014

ISO
9635-2

Second edition
2014-11-15

**Agricultural irrigation equipment —
Irrigation valves —**

**Part 2:
Isolating valves**

*Matériel agricole d'irrigation — Vannes d'irrigation —
Partie 2: Vannes d'isolation*



Reference number
ISO 9635-2:2014(E)

© ISO 2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Design requirements	2
5 Performance requirements	2
5.1 General	2
5.2 Mechanical strength	2
5.3 Watertightness and airtightness	3
5.4 Hydraulic characteristics	5
5.5 Resistance to chemicals and fertilizers	5
5.6 Endurance	5
6 Conformity assessment	6
6.1 General	6
6.2 Type tests	6
6.3 Control of production process and quality system	6
7 Marking	6
8 Packaging	6
Annex A (normative) Test method for resistance of valves to operating loads	8
Annex B (normative) Torque requirements for gate valves to be operated by ring key and bar	9
Annex C (normative) Test method for operation of valves	10
Annex D (normative) Test method for endurance of valves	11
Annex E (normative) Method for sizing operating element	12
Bibliography	15

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 18, *Irrigation and drainage equipment and systems*.

This second edition cancels and replaces the first edition (ISO 9635-2:2006), which has been technically revised.

ISO 9635 consists of the following parts, under the general title *Agricultural irrigation equipment — Irrigation valves*:

- *Part 1: General requirements*
- *Part 2: Isolating valves*
- *Part 3: Check valves*
- *Part 4: Air valves*
- *Part 5: Control valves*

Agricultural irrigation equipment — Irrigation valves —

Part 2: Isolating valves

1 Scope

This part of ISO 9635 specifies construction and performance requirements and test methods for isolating valves, intended for operation in irrigation systems with water at temperatures not exceeding 60 °C, which can contain fertilizers and other chemicals of the types and concentrations used in agriculture.

It is applicable to isolating irrigation valves of DN 8 in diameter or greater, designed to operate in the fully open and fully closed positions, but which can also operate for extended time periods in any intermediate position.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9635-1:2014, *Agricultural irrigation equipment — Irrigation valves — Part 1: General requirements*

ISO 9644, *Agricultural irrigation equipment — Pressure losses in irrigation valves — Test method*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 9635-1:2014 and the following apply.

3.1

clear way valve

valve designed to have an unobstructed flow path which allows the passage of a theoretical sphere with a diameter which is not less than the inside diameter of the body end port

[SOURCE: EN 736-3]

3.2

flow coefficient

K_V

proportionality factor equal to the flow rate, in cubic metres per hour, of water at a temperature between 5 °C to 50 °C, passing through the valve and causing a loss of static head of 1 bar

Note 1 to entry: $Q = K_V \sqrt{\Delta p}$, where Q is the flow rate in cubic metres per hour (m³/h), and Δp is the pressure drop across the valve, in bar or kilopond/kilogram-force per square centimetre (kp/cm², kgf/cm²).

Note 2 to entry: 1 bar = 0,1 MPa = 10⁵ Pa; 1 MPa = 1 N/mm².

Note 3 to entry: Adapted from EN 736-3.

3.3

full bore valve

valve with a seat diameter of not less than 90 % of the internal diameter of the body end port

[SOURCE: EN 736-3]

3.4

isolating valve

valve intended for use only in the fully closed or fully open position

[SOURCE: EN 736-1]

4 Design requirements

Isolating valves shall be designed in accordance with the requirements given in Clause 4 of ISO 9635-1:2014.

5 Performance requirements

5.1 General

Perform all tests on the valve as it was delivered to the test facility.

5.2 Mechanical strength

5.2.1 Resistance to internal pressure of shell and all pressure-containing components

Carry out testing in accordance with ISO 9635-1:2014, 5.2.1. Test results shall comply with the requirements of ISO 9635-1:2014, 5.2.1.

5.2.2 Resistance of obturator to differential pressure

Carry out testing in accordance with ISO 9635-1:2014, 5.2.2. Test results shall comply with the requirements of ISO 9635-1:2014, 5.2.2.

Except for valves to be used for a single flow direction, perform the test successively in each flow direction.

5.2.3 Resistance of valve to bending

Carry out testing in accordance with ISO 9635-1:2014, 5.2.3, applying a bending moment, M , during the test appropriate to the DN value of the valve in accordance with [Table 1](#). Test results shall comply with the requirements of ISO 9635-1:2014, 5.2.3.

Table 1 — Bending moments

DN	Bending moment M N · m
8	610
10	615
20	640
25	670

NOTE For plastic-bodied valves, the applied bending moment should be equal to the bending moment exerted by a 6 m long plastic tube of the same diameter (DN).

Table 1 (continued)

DN	Bending moment M N · m
32	730
40	825
50	1 050
65	1 400
80	1 500
100	2 200
125	3 200
150	4 800
200	7 200
250	11 000
300	15 000
350	19 000
400	24 000
450	28 000
500	33 000

NOTE For plastic-bodied valves, the applied bending moment should be equal to the bending moment exerted by a 6 m long plastic tube of the same diameter (DN).

5.2.4 Resistance of valves to operating loads

Test results shall comply with the requirements of ISO 9635-1:2014, 5.2.4.

In order to verify this requirement, test the valve in accordance with [Annex A](#), with the application of a closing torque and an opening torque equal to the minimum strength torque (mST), following which it shall satisfy the requirements of the operating tests in accordance with [5.3.3](#), and the seat tightness tests in accordance with [5.3.2.1](#) and [5.3.2.2](#).

The minimum strength torque shall be equal to twice the maximum operating torque given in [5.3.3](#). In testing gate valves as specified in [5.3.3 c](#)), apply a minimum strength torque (mST) as set out in [Annex A](#) equal to 5 × the maximum operating torque (MOT). In the case of valves as specified in [5.3.3 d](#)), the test is applicable only when there is an additional manual operating element.

5.3 Watertightness and airtightness

5.3.1 Watertightness and airtightness of shell and all pressure-containing components

5.3.1.1 Internal pressure

Conduct testing in accordance with ISO 9635-1:2014, 5.3.1.1.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.3.1.1.

5.3.1.2 External pressure

Conduct testing in accordance with ISO 9635-1:2014, 5.3.1.2.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.3.1.2.

5.3.2 Seat tightness

5.3.2.1 Seat tightness at high differential pressure

Conduct testing in accordance with ISO 9635-1:2014, 5.3.2.1.

After closing the valve by application of the maximum operating torque (see 5.3.3), the leakage rate shall not exceed rate A for resilient seated valves and shall not exceed rate B for metallic-seated valves. Maintain the test pressure for 10 min.

Except for valves to be used in a single flow direction, perform the test successively in each flow direction.

5.3.2.2 Seat tightness at low differential pressure

Conduct testing in accordance with ISO 9635-1:2014, 5.3.2.2

After closing the valve by application of the maximum operating torque (see 5.3.3), the leakage rate shall not exceed rate A for resilient seated valves and shall not exceed rate B for metallic seated valves. Maintain the test pressure for 10 min.

Except for valves to be used in a single flow direction, perform the test successively in each flow direction.

5.3.3 Maximum operating torque (MOT) for operation and watertightness and airtightness

In order to verify this requirement, test the isolating valve as set out in Annex C. The measured torque shall not exceed the MOT as specified in a) to d) below.

a) Valves delivered with their operating element

- 1) In the case of a hand wheel, use Formula (1):

$$MOT=0,5 \times F \times D \quad (1)$$

NOTE This is expressed in newton metres (N · m).

where

F is the maximum operating manual force (F refers to operating the valve, F_{max} , to seating and unseating the valve, see Annex E), expressed in newtons (N);

D is the diameter of the hand wheel, in metres (m).

- 2) In the case of a lever, use Formula (2):

$$MOT=F \times L \quad (2)$$

NOTE This is expressed in newton metres (N · m).

where

F is the maximum operating manual force (F refers to operating the valve, F_{max} , to seating and unseating the valve, see Annex E), expressed in newtons (N);

L is the length of the lever, in metres (m).

b) Valves delivered without operating element and intended to be operated by T-shaped key

1) For butterfly valves, use Formula (3):

$$\text{MOT}=125 \text{ N} \cdot \text{m} \quad (3)$$

2) For gate valves, use Formula (4):

$$\text{MOT}=1 \times \text{DN} \quad (4)$$

NOTE This is expressed in newton metres ($\text{N} \cdot \text{m}$).

3) For other types of valves, use Formula (5):

$$\text{MOT}=\text{value given by the manufacturer} \quad (5)$$

c) **Gate valves delivered without operating element and intended to be operated by ring key and bar**

See [Annex B](#).

d) **Valves operated electrically, hydraulically, or pneumatically**

MOT=value given by the manufacturer

5.3.4 Watertightness and airtightness of gearboxes to external pressure

Conduct testing in accordance with ISO 9635-1:2014, 5.3.1.2.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.3.1.2.

5.4 Hydraulic characteristics

Test results shall comply with ISO 9635-1:2014, 5.4. The characteristic given by the manufacturer shall be the flow coefficient, K_V .

It is recommended that the manufacturer show the head loss of valves in the form of a table or graph.

When measured in accordance with ISO 9644, K_V resulting from the head loss curve shall be within $\pm 5\%$ of the value declared by the manufacturer.

5.5 Resistance to chemicals and fertilizers

Conduct testing in accordance with ISO 9635-1:2014, 5.5.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.5.

5.6 Endurance

The endurance of isolating valves is evaluated as follows:

- a) Subject the isolating valve to an endurance test as set out in [Annex D](#) at a differential pressure equal to the allowable operating pressure across the obturator.
- b) Test the isolating valve in accordance with [5.3.1](#), [5.3.2](#), and [5.3.3](#), with the application of a torque not exceeding either
 - $1,2 \times$ the maximum operating torque (with the same leakage rate), or
 - the maximum operating torque (with leakage allowed to increase by one rate level).

See ISO 9635-1:2014, Table G.2, for leakage rates.

Complete the following number of opening/closing cycles during the endurance test:

- for manually-operated valves, 250 cycles;
- for electrically-operated, hydraulically-operated, or pneumatically-operated valves, 2 500 cycles.

Apply this test to isolating valves of DN 8 up to and including DN 500.

6 Conformity assessment

6.1 General

Test results shall comply with the requirements of ISO 9635-1:2014, 6.1.

6.2 Type tests

Perform the type tests set out in [Table 2](#).

Test results shall comply with the requirements of ISO 9635-1:2014, 6.2.

6.3 Control of production process and quality system

Test results shall comply with the requirements of ISO 9635-1:2014, 6.3.

NOTE The production control tests given in [Table 2](#) are for information only.

7 Marking

Requirements shall comply with ISO 9635-1:2014, Clause 7.

8 Packaging

Requirements shall be in accordance with ISO 9635-1:2014, Clause 8.

Table 2 — Requirements and tests

Subclause of ISO 9635-1:2014	Corresponding requirement	Type tests ^a	Production tests (informative)
4.1	Materials	See drawings and part lists	—
4.2	DN	See drawings	—
4.3	Pressures	See technical documentation	—
4.4	Temperatures	See materials	—
4.5	Design of shell and obturator	See test report or calculation report	—
4.6	End types and interchangeability	See drawings and marking	—
4.7	Operating direction	See drawings	—
4.8	Maximum water velocity	See Clause 4	—
4.9	All wetted valve part materials, including lubricants, in contact with water intended for human consumption	See test reports in accordance with national regulations	—

^a References to subclauses in this column are to this part of ISO 9635.

Table 2 (continued)

Subclause of ISO 9635-1:2014	Corresponding requirement	Type tests ^a	Production tests (informative)
4.10	Internal corrosion and ageing resistance	See drawings, part lists and technical documentation	Visual inspection of coatings
4.11	External corrosion and ageing resistance	See drawings, part lists and technical documentation	Visual inspection of coatings
5.2.1	Resistance of shell and all pressure containing components to internal pressure	See 5.2.1	See 5.2.1
5.2.2	Resistance of obturator to differential pressure	See 5.2.2	—
5.2.3	Resistance of valves to bending	See 5.2.3	—
5.2.4	Resistance of valves to operating loads	See 5.2.4	—
5.3.1.1	Leak-tightness to internal pressure	See 5.3.1.1	See 5.3.1.1
5.3.1.2	Leak-tightness to external pressure	See 5.3.1.2	—
5.3.2.1	Seat tightness at high differential pressure	See 5.3.2.1 and 5.3.3	See 5.3.2.1 and 5.3.3
5.3.2.2	Seat tightness at low differential pressure	See 5.3.2.2 and 5.3.3	—
5.3.1.2	Leak-tightness of gearboxes to external pressure	See 5.3.4	—
5.4	Hydraulic or airflow characteristics	See 5.4	—
5.5	Resistance to chemicals and fertilizers	See 5.5	—
5.6	Endurance	See 5.6	—

^a References to subclauses in this column are to this part of ISO 9635.

Annex A (normative)

Test method for resistance of valves to operating loads

A.1 General

Perform the test at ambient temperature.

Begin the test with the obturator fully or partially open.

A.2 Test procedure

The test procedure is the following.

- a) Place the valve on the test bench.
- b) Apply a torque at the shaft (see ISO 9635-1:2014) in order to close the obturator. In the specific case of valves to be operated by means of a ring key and bar (see [Annex B](#)), apply the torque and the bending moment simultaneously.
- c) Increase the closing torque until it reaches the mST.
- d) Maintain the minimum strength torque for at least 10 min.
- e) Rotate the obturator until it reaches the fully open position.
- f) Increase the opening torque until it reaches the mST.
- g) Maintain the mST for at least 10 min.
- h) Check the performance as set out in [5.3.3](#) and the seat tightness as set out in [5.3.2](#).

Annex B (normative)

Torque requirements for gate valves to be operated by ring key and bar

Where gate valves are operated by means of a ring key and bar, they are required to have higher minimum strength torques as set out in [Table B.1](#).

Table B.1 — Torque requirements

Maximum operating torque	Minimum strength torque
N · m	N · m
DN + 60	5 × maximum operating torque ^a
^a Applied simultaneously with a bending moment of 1 500 N · m on the operating mechanism.	

Annex C (normative)

Test method for operation of valves

C.1 General

Perform the test at a water temperature of (23 ± 3) °C.

Begin the test with the obturator in the fully open position.

C.2 Test procedure

The test procedure is as follows.

- a) Fit a solid plate containing a vent valve to the outlet flange, and the inlet to a hydrostatic pressure source.
- b) Partially open the obturator and the vent valve.
- c) Fully fill the body with water and vent all the air from the valve.
- d) Close the obturator and apply a torque equal to the maximum operating torque.
- e) The pressure should be raised progressively and smoothly by increasing it in approximately 15 s intervals for every bar from zero until it reaches the allowable operating pressure and maintain it for at least 1 min.
- f) Check for seat tightness.
- g) Open the valve. During opening, the running torque should not exceed the maximum operating torque.
NOTE A large volume of water is evacuated from the vent valve.
- h) Close the valve. During closing, the running torque should not exceed the maximum operating torque.
- i) Note the maximum torque required during the test and check that it does not exceed MOT.
- j) Restart the test on the other side.

Annex D (normative)

Test method for endurance of valves

D.1 General

Carry out the test at a water temperature of (23 ± 3) °C.

The test assembly should be designed to minimize water consumption and cycle time.

D.2 Test procedure

The test procedure is as follows.

- a) Fix the valve on a test bench, with the obturator fully open.
- b) Blank off one end of the valve and provide means to
 - 1) vent air from the valve,
 - 2) pressurize the closed end with water, and
 - 3) measure the pressure.
- c) Bring the obturator to the fully closed position as follows:
 - for a valve with an actuator, close the obturator by means of the actuator using the appropriate energy source and apply the maximum operating torque at the maximum level specified by the manufacturer;
 - for a manually operated valve, close the obturator and apply a torque equal to the maximum operating torque.
- d) Fill the space between the obturator and the blank flange with water, and vent the air.
- e) Increase the water pressure progressively and smoothly until it reaches a minimum of the allowable operating pressure and maintain the pressure for at least 60 s.
- f) Open the obturator fully.
- g) Repeat the cycle closing/pressurizing/opening for the specified number of cycles as specified in [5.6](#).
- h) Check the watertightness and airtightness of the shell and of all the pressure containing components as set out in [5.3.1](#).
- i) Check the seat tightness as set out in [5.3.2](#). Apply a closing torque equal to the maximum operating torque and check that the leakage rate does not exceed the value given in [5.3.2](#) by one rate level (see ISO 9635-1:2014, Table G.2). If it is exceeded, increase the applied torque to $1,2 \times$ the maximum operating torque and check that the leakage rate does not exceed the value given in [5.3.2](#).
- j) Check that the operating torque does not exceed the maximum operating torque as set out in [5.3.3](#).
- k) Record the test conditions and test results, noting the calibration status of all measuring devices. All measuring instruments should be valid and calibrated by an ISO/IEC 17025 accredited laboratory.

Annex E (normative)

Method for sizing operating element

E.1 General

The purpose of this Annex is to specify the requirements for establishing the minimum size of the operating element supplied with an irrigation valve, considering the force applied by one person to operate the valve under specified working conditions.

This Annex applies to manual operating elements of sizes 100 mm to 1 000 mm that are

- directly mounted on valves,
- mounted on valve reduction gearboxes, or
- used for manual operation of power-actuated valves.

This Annex is not applicable to

- impactor hand wheels,
- T-keys, or
- chainwheels.

E.2 Symbols

- D diameter of hand wheel, in millimetres (mm);
- L length of lever or radius of crank circle, in millimetres (mm);
- T torque, under specified conditions, required to operate the valve, in newton metres (N · m);
- T_S maximum torque, under specified conditions, required to seat or unseat the obturator or to overcome temporary intermediate dynamic conditions, in newton metres (N · m);
- F operating manual force for sizing the manual operating element, in newtons (N);
- F_S maximum manual force for sizing the manual operating element, in newtons (N).

E.3 Requirements

Determine the value of the operating manual force, F , and the maximum manual force, F_S , used to calculate the size of the operating element as specified in [Table E.1](#).

Table E.1 — Manual forces

Force N	<i>D</i> or <i>L</i> ^a mm											
	100	125	160	200	250	315	400	500	630	720	800	1 000
<i>F</i>	250	300	300	350	400	400	400	400	400	400	400	400
<i>F</i> _S	500	600	600	700	800	800	1 000	1 000	1 000	1 000	1 000	1 000

^a See Figure E.1 and Figure E.2.

For intermediate values of *D* and *L*, calculate the applicable values of *F* and *F*_S by linear interpolation of the tabulated values.

Force, *F*, is the assumed manual force which one person is capable of applying to the operating element under the following conditions:

- operator in standing position;
- operating element at approximately waist level;
- no space restrictions;
- firm footing;
- operating time no longer than 5 min.

Force, *F*_S, is the assumed manual force which one person is capable of applying under the same conditions as force *F* except that the time period is short.

If other conditions apply, the values of *F* and *F*_S to be used are subject to an agreement between the manufacturer and the test laboratory.

Calculate the size of the operating element (see Figure E.1 and Figure E.2) to comply with conditions a) and b) [Formula (6) and Formula (7)], below.

a) **Hand wheel**

D shall be greater than or equal to

$$\frac{2\,000 \times T}{F} \text{ and } \frac{2\,000 \times T_S}{F_S} \quad (\text{E.1})$$

b) **Lever or crank**

L shall be greater than or equal to

$$\frac{1\,000 \times T}{F} \text{ and } \frac{1\,000 \times T_S}{F_S} \quad (\text{E.2})$$

Maximum torque T_S is a greater torque than T and is applied during a short time (10 s is recommended). When specified by the test laboratory, the manufacturer shall quantify this duration in terms of a percentage of the valve travel.

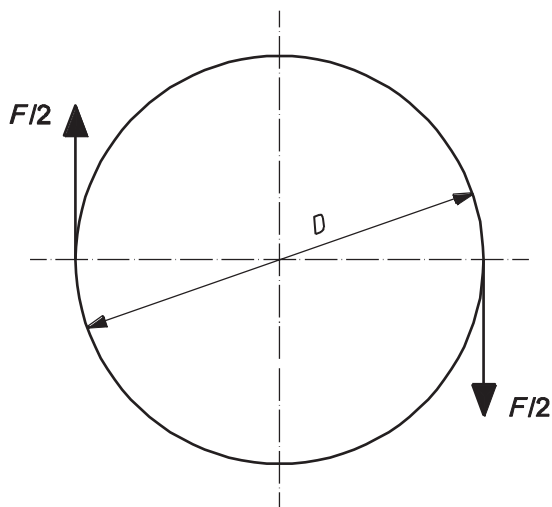


Figure E.1 — Hand wheel

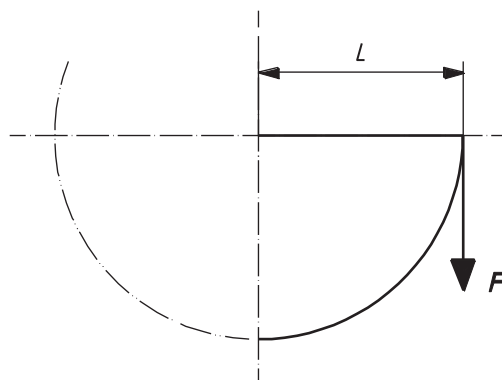


Figure E.2 — Lever or crank

Bibliography

- [1] EN 805, *Water supply — Requirements for systems and components outside buildings*
- [2] EN 736-1, *Valves — Terminology — Part 1: Definition of types of valves*
- [3] EN 736-3, *Valves — Terminology — Part 3: Definition of terms*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™