

BS ISO 9635-5:2014



BSI Standards Publication

Agricultural irrigation equipment — Irrigation valves

Part 5: Control valves

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 9635-5:2014. It supersedes BS ISO 9635-5:2006 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee AGE/30, Irrigation and drainage equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014. Published by BSI Standards Limited 2014

ISBN 978 0 580 80894 4

ICS 65.060.35

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 December 2014.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
9635-5

Second edition
2014-12-01

**Agricultural irrigation equipment —
Irrigation valves —**

**Part 5:
Control valves**

*Matériel agricole d'irrigation — Vannes d'irrigation —
Partie 5: Vannes de contrôle*



Reference number
ISO 9635-5:2014(E)

© ISO 2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Design requirements	2
5 Performance requirements	2
5.1 Mechanical strength.....	2
5.2 Watertightness.....	4
5.3 Hydraulic characteristics.....	5
5.4 Resistance to chemicals and fertilizers.....	5
5.5 Endurance.....	5
6 Conformity assessment	5
6.1 General.....	5
6.2 Type tests.....	6
6.3 Control of production process and quality system.....	6
7 Marking	7
8 Packaging	7
Annex A (normative) Test method for hydraulic characteristics of control valves providing flow regulation function	8
Annex B (normative) Test method for hydraulic characteristics of control valves providing pressure regulation function	9
Annex C (normative) Test method for hydraulic characteristics of control valves providing level regulation	11
Annex D (normative) Test method for endurance of control valves	12
Bibliography	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is Technical Committee ISO/TC 23, *Tractors and machinery for agriculture and forestry*, Subcommittee SC 18, *Irrigation and drainage equipment and systems*.

This second edition cancels and replaces the first edition (ISO 9635-5:2006), which has been technically revised.

ISO 9635 consists of the following parts, under the general title *Agricultural irrigation equipment — Irrigation valves*:

- *Part 1: General requirements*
- *Part 2: Isolating valves*
- *Part 3: Check valves*
- *Part 4: Air valves*
- *Part 5: Control valves*

Agricultural irrigation equipment — Irrigation valves —

Part 5: Control valves

1 Scope

This part of ISO 9635 specifies construction and performance requirements and test methods for control valves, intended for operation in irrigation systems with water at temperatures not exceeding 60 °C, which can contain fertilizers and other chemicals of the types and concentrations used in agriculture.

It is applicable to hydraulically-operated control irrigation valves of DN 15 (1/2 inch) diameter or greater, designed to operate in any position, from fully open to fully closed. The valves can either be directly operated (i.e. the force applied via a spring or diaphragm to the obturator), or pilot-operated (i.e. the force is applied through an adjustable pilot valve via a diaphragm). These valves can also function as check valves.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 9635-1:2014, *Agricultural irrigation equipment — Irrigation valves — Part 1: General requirements*

ISO 9635-2:2014, *Agricultural irrigation equipment — Irrigation valves — Part 2: Isolating valves*

ISO 9644, *Agricultural irrigation equipment — Pressure losses in irrigation valves — Test method*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 9635-1 and the following apply.

3.1

control valve

device intended to regulate, within specified limits, one or more functions

Note 1 to entry: The functions are flow rate, water level, and pressure control (upstream or downstream). The valves are also used to start or terminate irrigation system operation.

3.1.1

autonomous control valve

control valve (3.1) that uses the energy from the conveyed water to adjust the position of the obturator for the regulation of a specific function

3.1.2

non-autonomous control valve

control valve (3.1) that requires external power to adjust the position of the obturator for the regulation of a specific function

3.1.3

pressure-reducing valve

control valve (3.1) that reduces a higher inlet pressure to a constant lower outlet pressure regardless of variations in the flow rate or variations of the inlet pressure

3.1.4

pressure-sustaining valve

control valve (3.1) that maintains a constant pressure at the inlet regardless of variations in the flow rate or variations in the outlet pressure

3.2

flow coefficient

K_v
number equal to the flow rate of water, in cubic metres per hour, that will flow through a fully open valve with a 100 kPa pressure loss across the valve

Note 1 to entry: $Q = K_v \sqrt{\Delta p}$, where Q is the flow rate in cubic metres per hour (m³/h), and Δp is the pressure in bar.

Note 2 to entry: 1 bar = 0,1 MPa = 10⁵ Pa; 1 MPa = 1 N/mm².

Note 3 to entry: Adapted from EN 736-3.

3.3

maximum differential pressure

highest differential pressure of the control valve in operation

Note 1 to entry: It is a value given by the manufacturer.

4 Design requirements

Control valves shall be designed in accordance with ISO 9635-1:2014, Clause 4.

Control valves designed to control pressure or water level shall be tightly seated when closed (see ISO 9635-1:2014, Table G.2, Rate A).

The manufacturer shall indicate in the relevant technical documentation the working limits of the valve and any special conditions for installation and commissioning.

5 Performance requirements

Perform all tests on the valve as delivered to the test facility.

5.1 Mechanical strength

5.1.1 Resistance of shell and all pressure-containing components to internal pressure

Carry out testing in accordance with ISO 9635-1:2014, 5.1.1.

If the manufacturer indicates that any feature of the control valve is not designed to withstand a high pressure, the technical documentation shall indicate the appropriate means to be used (for example, isolating valves of the control system), in order to protect that feature during the test.

Test the features protected by these means to the pressure given in ISO 9635-1:2014, 5.1.2.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.1.1.

5.1.2 Resistance of obturator to differential pressure

The valve shall comply with the requirement and test in ISO 9635-1, 5.1.2.

If a control valve is designed not to seat tightly, the requirement and test for the obturator shall be modified as follows: the differential pressure which the obturator shall withstand shall be the lower of (1,5 × PM) bar and (PM + 5) bar where PM is the maximum differential pressure of the control valve in

operation (value to be given by the manufacturer). After the test, the valve shall comply with the control performances of this part of ISO 9635 (see [5.2](#)).

After the test, the valve shall meet the performance requirements of [5.3](#).

5.1.3 Resistance of valves to bending

Carry out testing in accordance with ISO 9635-1:2014, 5.1.3.

The bending moment, M , to be applied during the test shall be as set out for the appropriate value of DN as set out in [Table 1](#).

Test results shall comply with the requirements of ISO 9635-1:2014, 5.1.3.

Table 1 — Bending moments

DN	Bending moment M N · m
8	610
10	615
20	640
25	670
32	730
40	825
50	525
65	700
80	750
100	1 100
125	1 600
150	2 400
200	3 600
250	5 500
300	7 500
350	9 500
400	12 000
450	14 000
500	16 500

5.1.4 Resistance of valves to operating loads

Carry out testing in accordance with ISO 9635-1:2014, 5.1.4 or in accordance with the manufacturer's instructions.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.1.4.

5.2 Watertightness

5.2.1 Watertightness of shell and all pressure-containing components

5.2.1.1 Internal pressure

Carry out testing in accordance with ISO 9635-1:2014, 5.2.1.1. Test results shall comply with the requirements of ISO 9635-1:2014

5.2.1.2 External pressure

Carry out testing in accordance with ISO 9635-1:2014, 5.2.1.2.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.2.1.2.

5.2.2 Seat tightness

This test is applicable only to control valves where seat tightness is a requirement or is claimed by the manufacturer (see [Clause 4](#)).

For level control and pressure control valves, select rate A for the leakage rate not to be exceeded (see ISO 9635-1:2014, Table G.2), for the conditions defined in the manufacturer's documentation. For other valves, select a leakage rate as specified in the manufacturer's documentation.

Check the seat tightness at the highest and lowest values of the differential pressure, as follows:

- a) $1,1 \times$ allowable operating pressure;
- b) the lowest differential pressure allowed as specified in manufacturer's documentation.

For both cases, carry out the testing in accordance with ISO 9635-1:2014, 5.2.2.1, with the values of the differential pressure as defined in a) and b), above.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.2.2.1.

5.2.3 Maximum operating torque for operation and watertightness

This test is applicable only to control valves whose main obturator can be operated manually to override or limit the control function.

Carry out tests in accordance with ISO 9635-2:2014, 5.2.3. Test results shall comply with the requirements of ISO 9635-2:2014, 5.2.3.

If the required maximum operating torque exceeds the limits according to this part of ISO 9635, this should be specified in the manufacturer's product literature.

5.2.4 Watertightness and air-tightness of gearboxes to external pressure

Carry out testing in accordance with ISO 9635-1:2014, 5.2.1.2.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.2.1.2.

5.3 Hydraulic characteristics

5.3.1 Flow coefficient, K_v

The manufacturer shall give the flow coefficient, K_v , obtained from the head loss curve performed in accordance with ISO 9644.

- For both autonomous and non-autonomous control valves, K_v shall be given as a function of the fully open position.

When measured in accordance with ISO 9644, the flow coefficient shall be within a range of $\pm 5\%$ of the value given by the manufacturer.

5.3.2 Regulation hydraulic characteristics

This test is applicable to both autonomous control valves and to non-autonomous control valves where the manufacturer claims specific hydraulic characteristics linked to a designated control system.

5.3.2.1 Control valves providing flow regulation function

Test the control valve as set out in [Annex A](#). The values obtained shall be within the tolerances given in the manufacturer's documentation or if not indicated, within $\pm 10\%$ of the values given in the manufacturer's documentation.

5.3.2.2 Control valves providing pressure regulation function

Test the control valve as set out in [Annex B](#). The values obtained shall be within the tolerances given in the manufacturer's documentation or if not indicated, within $\pm 10\%$ of the values given in the manufacturer's documentation.

5.3.2.3 Control valves providing level regulation function

Test the control valve as set out in [Annex C](#). The values obtained shall be within the tolerances given in the manufacturer's documentation or if not indicated, within $\pm 10\%$ of the values given in the manufacturer's documentation.

5.4 Resistance to chemicals and fertilizers

Carry out testing in accordance with ISO 9635-1:2014, 5.4.

Test results shall comply with the requirements of ISO 9635-1:2014, 5.4.

5.5 Endurance

After completion of the endurance test as set out in [Annex D](#), the valve shall pass the following:

- the hydraulic tests as set out in [5.3](#), with values within the range of $\pm 5\%$ of those measured before the endurance test;
- the tests as set out in [5.2.1](#) and [5.2.2](#), with the same leakage rate.

6 Conformity assessment

6.1 General

Test results shall comply with the requirements of ISO 9635-1:2014, 6.1.

6.2 Type tests

Perform type tests as indicated in [Table 2](#).

Test results shall comply with the requirements of ISO 9635-1:2014, 6.2.

6.3 Control of production process and quality system

Test results shall comply with the requirements of ISO 9635-1:2014, 6.3.

NOTE The production control tests given in [Table 2](#) are for information only.

Table 2 — Requirements and testing

Subclause of ISO 9635-1:2014	Corresponding requirement	Type tests ^a	Production tests (informative)
4.1	Materials	See drawings and part lists	—
4.2	DN	See drawings	—
4.3	Pressures	See technical documentation	—
4.4	Temperatures	See materials	—
4.5	Design of the shell and obturator	See test report or calculation report	—
4.6	End types and interchangeability	See drawings and marking	—
4.7	Operating direction	See drawings	—
4.8	Maximum water velocity	See Clause 4	—
4.9	All wetted valve part materials, including lubricants, in contact with water intended for human consumption	See test reports in accordance with national regulations	—
4.10	Internal corrosion and ageing resistance	See drawings, part lists, and technical documentation	Visual inspection of coatings
4.11	External corrosion and ageing resistance	See drawings, part lists, and technical documentation	Visual inspection of coatings
5.1.1	Resistance of shell and all pressure containing components to internal pressure	See 5.1.1	See 5.1.1
5.1.2	Resistance of obturator to differential pressure	See 5.1.2	—
5.1.3	Resistance of valves to bending	See 5.1.3	—
5.1.4	Resistance of valves to operating loads	See 5.1.4	—
5.2.1.1	Leak-tightness to internal pressure	See 5.2.1.1	See 5.2.1.1
5.2.1.2	Leak-tightness to external pressure	See 5.2.1.2	—
5.2.2	Seat tightness	See 5.2.2	See 5.2.2
5.2.1.2	Leak-tightness of gearboxes to external pressure	See 5.2.4	—
5.3.1	Flow coefficient, K_v	See 5.3.1	—
5.3.2	Regulation hydraulic characteristics	See 5.3.2	—
5.4	Resistance to chemicals and fertilizers	See 5.4	—
5.5	Endurance	5.5	—

^a References to subclauses in this column are to this part of ISO 9635.

7 Marking

Requirements shall be in accordance with ISO 9635-1:2014, Clause 7. In addition, the direction of flow shall be marked.

8 Packaging

Requirements shall be in accordance with ISO 9635-1:2014, Clause 8.

Annex A (normative)

Test method for hydraulic characteristics of control valves providing flow regulation function

A.1 General


Perform the test at ambient temperature.

A.2 Test procedure (see [Figure A.1](#))

At flow Q equal to the minimum allowed flow value as given by the manufacturer, apply four different values of differential pressure, Δp , to the valve (Δp_{\min} , Δp_{\max} , and two intermediate values), while measuring the controlled flow.

The difference between the measured flow rate corresponding to the maximum differential pressure, Δp_{\max} , and the measured flow rate corresponding to the minimum differential pressure, Δp_{\min} , shall be within the tolerance ΔQ given in the manufacturer's documentation.

Repeat the same procedure, choosing a flow equal to the maximum flow as given by the manufacturer.

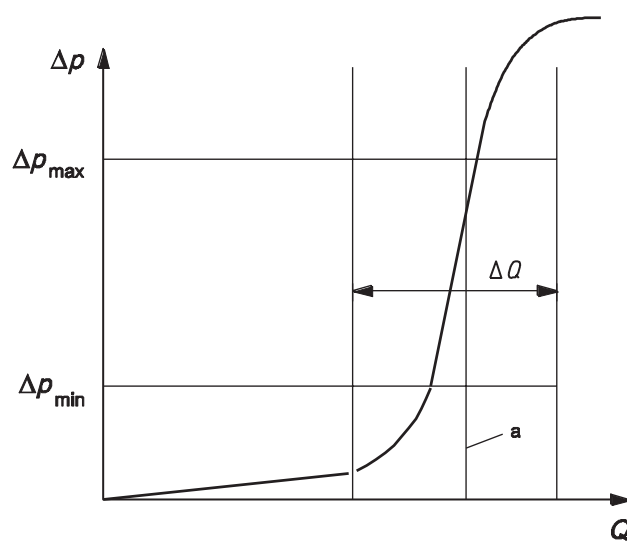

Key

^a Set point Q .

Figure A.1 — Hydraulic characteristics

Annex B (normative)

Test method for hydraulic characteristics of control valves providing pressure regulation function

B.1 General

Perform the test at ambient temperature avoiding cavitation while doing so.

B.2 Test procedure (see [Figures B.1](#) and [B.2](#))


The test procedure is the following.

At set point p of a controlled pressure equal to the minimum pressure as given by the manufacturer, establish four different values of flow (Q_{\min} , Q_{\max} , and two intermediate values), while measuring the controlled pressure.

Maintain the differential pressure at the minimum value allowed by the manufacturer's documentation.

The absolute difference between the measured controlled pressure corresponding to the maximum flow rate, Q_{\max} , and the measured controlled pressure corresponding to the minimum flow rate, Q_{\min} , shall be within the tolerance Δp given in the manufacturer's documentation.


Repeat the same procedure at the maximum pressure as given by the manufacturer.

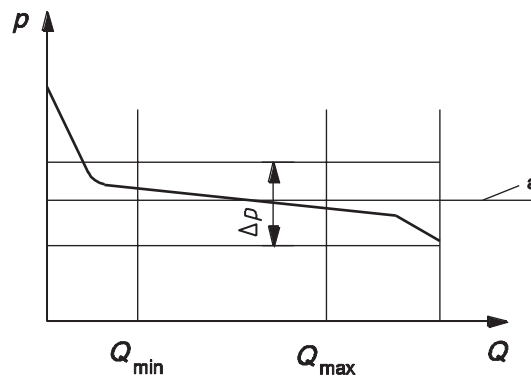

Key

a Set point Q .

Figure B.1 — Pressure-reducing valve

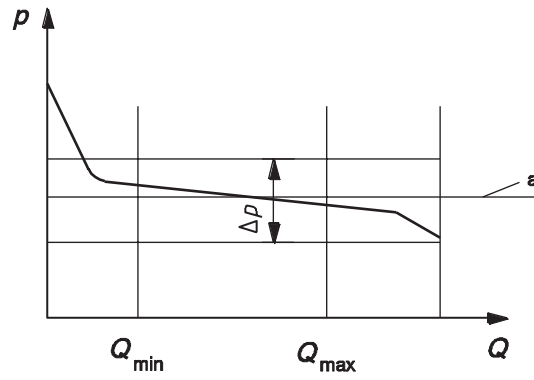

Key

a Set point Q .

Figure B.2 — Pressure-sustaining valve

Annex C (normative)

Test method for hydraulic characteristics of control valves providing level regulation

C.1 General

Perform the test at ambient temperature on a valve, avoiding cavitation while doing so.

C.2 Test procedure (see [Figure C.1](#))

The test procedure is the following.

- Open the valve and fill the tank up to the set point, H_{\max} .
- Increase the pressure to $1,1 \times$ the allowable operating pressure, checking that the flow has stopped and that the height in the tank is not higher than H_{\max} .
- Decrease the upstream pressure of the valve to zero, then decrease the level in the tank by the value ΔH given in the manufacturer's documentation.
- Increase the upstream pressure until the flow starts again and note the value of the pressure.
- Allow the tank to fill to H_{\max} .
- Increase the pressure to $1,1 \times$ the allowable operating pressure and check that the height in the tank is not higher than H_{\max} when the flow stops. If the manufacturer claims an adjustable value of H_{\max} , perform the test at both limits of the range.

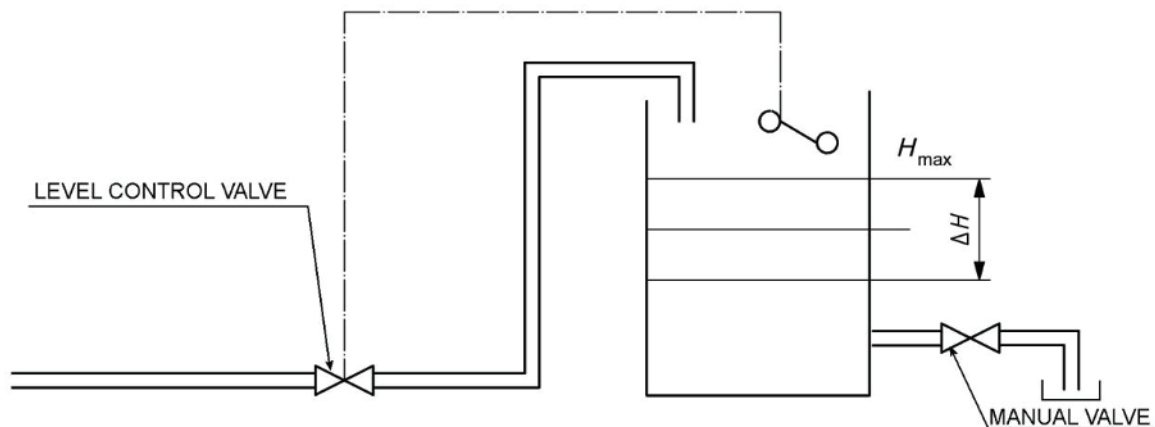


Figure C.1 — Test installation

Annex D (normative)

Test method for endurance of control valves

D.1 General

Perform the test at ambient temperature on a valve which has passed the tests in accordance with [Annex A](#), [B](#), or [C](#).

For valves equipped with a pilot, the pilot and the main valve may be tested separately.

D.2 Test procedure

The test procedure is the following.

- a) Set the control valve to its open position as given in the manufacturer's technical documentation and maintain it in this position for a minimum of 15 s with a pressure equal to the maximum allowable pressure $\pm 10\%$.
- b) Set the control valve to its maximum closed position as given in the manufacturer's technical documentation and increase the differential pressure up to the maximum allowable pressure $\pm 10\%$.
- c) Maintain in this position for a minimum of 15 s. Repeat the procedure for 5 000 cycles.
- d) On completion of the test, subject the valve to a re-test in accordance with [Annex A](#), [Annex B](#), or [Annex C](#) at a single test setting point.

The result of the re-test shall be within $\pm 5\%$ of the original test result.

Bibliography

- [1] EN 736-1, *Valves — Terminology — Part 1: Definition of types of valves*
- [2] EN 736-3, *Valves — Terminology — Part 3: Definition of terms*
- [3] EN 805, *Water supply — Requirements for systems and components outside buildings*
- [4] EN 1074 (all parts), *Valves for water supply — Fitness for purpose requirements and appropriate verification tests*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™