

BS ISO 10552:2014



BSI Standards Publication

Timekeeping instruments — Crowns and sealed tubes — Designs and dimensions

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 10552:2014. It supersedes BS ISO 10552:2012 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee STI/53, Specifications and test methods for jewellery and horology.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014. Published by BSI Standards Limited 2014

ISBN 978 0 580 85125 4

ICS 39.040.01

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2014.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
10552

Third edition
2014-10-01

**Timekeeping instruments — Crowns
and sealed tubes — Designs and
dimensions**

*Instruments horaires — Couronnes et tubes étanches — Constructions
et dimensions*



Reference number
ISO 10552:2014(E)

© ISO 2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	1
4.1 Crowns.....	1
4.2 Sealed tubes.....	2
5 Crowns and sealed tubes — Designs and dimensions	2
5.1 Crowns with one gasket.....	2
5.2 Sealed tubes.....	2
6 Designations	3

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 114, *Horology*, Subcommittee SC 7, *Overall dimensions*.

This third edition cancels and replaces the second edition (ISO 10552:2012), which has been technically revised.

Timekeeping instruments — Crowns and sealed tubes — Designs and dimensions

1 Scope

This International Standard specifies designs and dimensions of crowns and sealed tubes and their tolerances.

This International Standard is applicable to crowns and sealed tubes of mechanical, electromechanical, and electronic wristwatches of water-resistant designs.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 286-1, *Geometrical product specifications (GPS) — ISO code system for tolerances on linear sizes — Part 1: Basis of tolerances, deviations and fits*

ISO 6426-2, *Horological vocabulary — Part 2: Technical and commercial definitions*

ISO 22810, *Horology — Water-resistant watches*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 6426-2 apply.

4 Symbols

4.1 Crowns

- D_1 outer diameter of the crown (types 1, 2, and 3)
- D_2 diameter of the thread (types 1, 2, and 3)
- D_3 diameter of the crown hub (types 1, 2, and 3)
- D_4 countersink reaming diameter for water-resistant tube into the crown (types 1, 2, and 3)
- C height of the knurled surface (types 1, 2, and 3)
- F_1 protrusion of the crown hub (types 1 and 3)
- F_2 sinking of the crown hub (type 2)
- F_3 positional dimension of the groove (type 3)
- H height of the crown (types 1, 2, and 3)
- P_1 countersink depth of crown for water-resistant tube (types 1, 2, and 3)
- P_2 the tapped part shall be at least three threads long (types 1, 2, and 3)

4.2 Sealed tubes

- d_1 fitting diameter (type 1) or head diameter (types 2, 3, and 4)
 d_2 diameter of the hole for the winding stem (type 3)
 d_3 fitting diameter (types 2 and 3)
 d_4 diameter of the hole (types 1, 2, and 4) or of the bore (type 3) for the crown hub
 l total length (types 1, 2, 3, and 4)
 l_1 length of protrusion of the sealed tube (type 1) or height of the head (types 2, 3, and 4)
 l_2 depth of the hollow for the crown hub (type 3)

5 Crowns and sealed tubes — Designs and dimensions

5.1 Crowns with one gasket

Dimensions C and H (see [Figure 1](#)) are variable depending on the customer's specifications.

Other dimensions and tolerances are specified in [Tables 1](#) and [2](#). Tolerances are specified in accordance with ISO 286-1.

The minimum depth, P_1 , of the crowns (see [Figure 1](#)) shall be greater than the length, l_1 , of the sealing tubes (see [Figure 2](#)).

The inside diameter of the gaskets of the crowns of types 1 and 2 (see [Figure 1](#)) shall be 0,20 mm to 0,25 mm less than the diameter, d_1 , of the sealing tubes of types 1, 2, and 3 (see [Figure 2](#)).

For crowns of types 1 and 2 (see [Figure 1](#)), the finished thickness after drilling (H minus P_2) shall be not less than 0,60 mm.

For crowns of type 1 (see [Figure 1](#)), the protrusion, F_1 , of the crown hubs shall be 0,50 mm (tol. js12).

For crowns of type 2 (see [Figure 1](#)), the end of the crown hubs, F_2 , shall be recessed 0,10 mm (tol. js12) into the crown with tubes of types 1 and 2, and 0,20 mm (tol. js12) with tubes of type 3.

For crowns of types 1 and 2 (see [Figure 1](#) and [Table 1](#)), the diameter of the crown hub, D_3 , shall be defined as:

- $D_3 = d_4 - 0,08$ mm, and
- $D_3 \geq D_2 + 0,27$ mm.

For crowns of type 3 (see [Figure 1](#) and [Table 2](#)), the protrusion, F_1 , of the crown hubs shall be between 1,60 mm and 2,60 mm (tol. js12).

For crowns of type 3 (see [Figure 1](#) and [Table 3](#)), the positional dimension, F_3 , of the groove shall be between 1,40 mm and 2,00 mm (tol. js12).

5.2 Sealed tubes

In order to maintain a flat surface at the external tube end for types 1, 2, and 3 (see [Figure 2](#)), for dimensions with $d_1 = 1,50$ mm and 1,60 mm, the tube edge curvature shall be shifted (towards the tube end) while remaining tangent to the outer surface indicated by the diameter d_1 .

Dimensions and tolerances for tubes of types 1, 2, 3, and 4 are specified in [Tables 3](#) to [5](#).

For tubes with wall thicknesses of less than 0,125 mm, the tube shall be soldered.

For stepped tubes, the minimum length of step shall be not less than the stepped diameter.

The total length, l , of the tube shall be specified in each case. Values from 0,10 mm, in 0,10 mm graduations, are recommended.

The control of sealability shall be carried out on watches completed in accordance with ISO 22810.

The use of two gaskets is permissible for crowns of types 1, 2, and 3.

The following dimensions are not recommended for gold tubes:

- tubes of types 1 and 2: $d_1 = 1,50$ mm; $d_1 = 1,60$ mm;
- tubes of type 3: $d_1 = 1,50$ mm;
- tubes of type 4: $d_1 = 1,40$ mm.

6 Designations

The abbreviated designation of a sealed crown is $D_1 \times D_2 \times D_3 \times P_1 \times F_1$ type ... ISO 10552.

EXAMPLES

4,00 × S 0,80 × 1,17 × 0,50 type 1 ISO 10552.

4,00 × S 0,80 × 1,05 × 1,80 type 3 ISO 10552.

The abbreviated designation of a sealed tube is $d_1 \times l_1 \times l$ type ... ISO 10552.

EXAMPLE

2,00 × 1,90 × 3,50 type 2 ISO 10552.

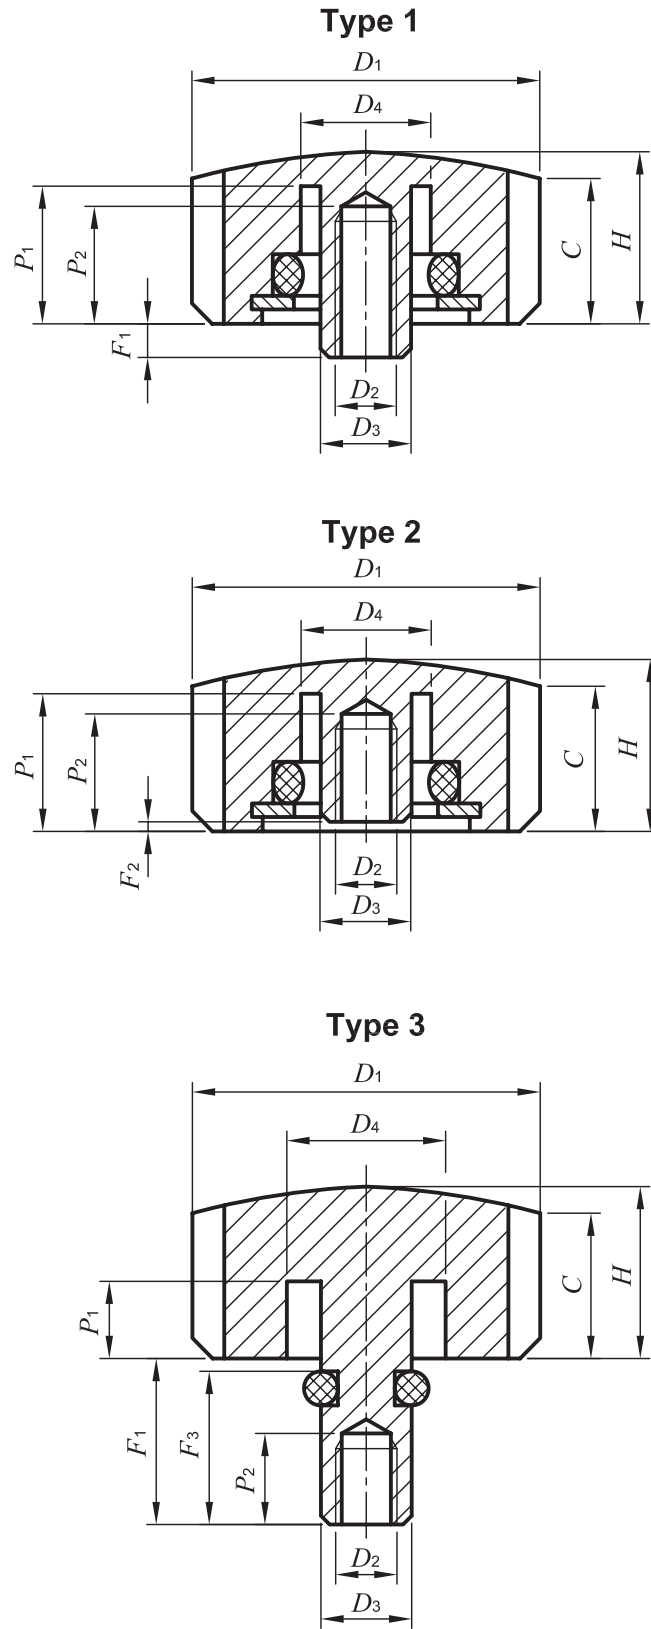


Figure 1 — Crowns

Table 1 — Crowns of types 1 and 2

Dimensions in millimetres

D_1	D_2	P_1
js13	—	js12
3,00	S 0,80	1,50
	S 0,90	2,00
		2,20
		2,40
3,50	S 0,80	1,50
	S 0,90	2,00
		2,20
		2,40
4,00	S 0,80	1,60
	S 0,90	2,00
	S 1,00	2,20
		2,40
4,50	S 0,90	1,60
	S 1,00	2,00
		2,20
		2,40
5,00	S 0,90	1,60
	S 1,00	2,00
		2,20
		2,40
5,50	S 0,90	1,60
	S 1,00	2,00
		2,20
		2,40
6,00	S 0,90	1,60
	S 1,00	2,00
		2,20
		2,40
6,50	S 0,90	1,60
	S 1,00	2,00
		2,20
		2,40
7,00	S 0,90	1,60
	S 1,00	2,00
		2,20
		2,40

Table 2 — Crowns of type 3

Dimensions in millimetres

D_1	D_2	D_3	P_1
js13	—	js11	js12
2,50	S 0,60	0,85	0,80
	S 0,70	0,95	1,00
			1,20
			1,40
3,00	S 0,60	0,85	0,80
	S 0,70	0,95	1,00
	S 0,80	1,05	1,20
			1,40
3,50	S 0,60	0,85	0,80
	S 0,70	0,95	1,00
	S 0,80	1,05	1,20
			1,40
4,00	S 0,70	0,95	0,80
	S 0,80	1,05	1,00
	S 0,90	1,20	1,20
	S 1,00	1,30	1,40
4,50	S 0,80	1,05	0,80
	S 0,90	1,20	1,00
	S 1,00	1,30	1,20
			1,40
5,00	S 0,80	1,05	0,80
	S 0,90	1,20	1,00
	S 1,00	1,30	1,20
			1,40
5,50	S 0,80	1,05	0,80
	S 0,90	1,20	1,00
	S 1,00	1,30	1,20
			1,40
6,00	S 0,90	1,20	0,80
	S 1,00	1,30	1,00
			1,20
			1,40

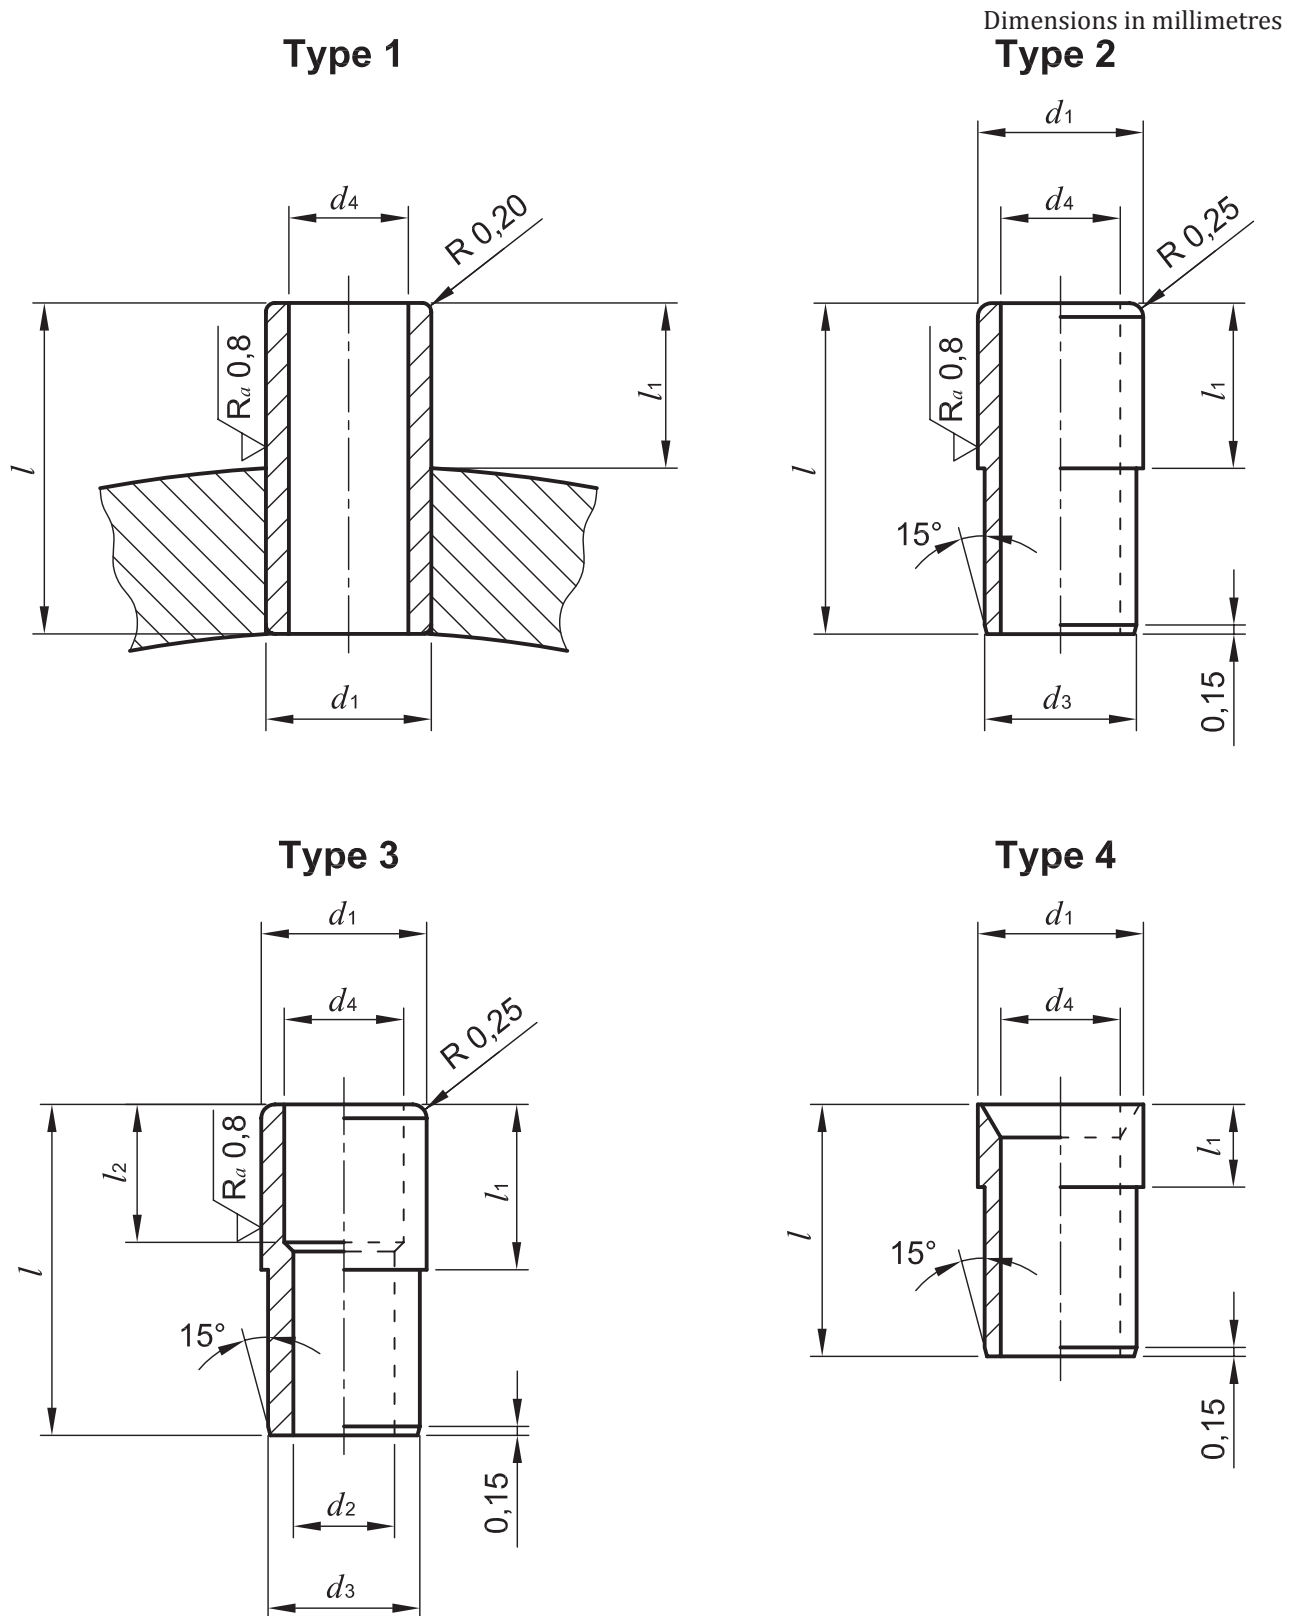


Figure 2 — Sealed tubes

Table 3 — Tubes of types 1 and 2

Dimensions in millimetres

d_1	d_4	Winding stem stroke	l_1	d_3
k7	H10	—	h10	k7
1,50	1,25	0,40	1,40	1,40
		0,80	1,90	
		1,00	2,10	
		1,20	2,30	
1,60	1,25	0,40	1,40	1,50
		0,80	1,90	
		1,00	2,10	
		1,20	2,30	
2,00	1,40	0,40	1,50	1,80
		0,80	1,90	
		1,00	2,10	
		1,20	2,30	
2,00	1,50	0,40	1,50	1,80
		0,80	1,90	
		1,00	2,10	
		1,20	2,30	
2,50	1,40	0,40	1,50	2,00
		0,80	1,90	
		1,00	2,10	
		1,20	2,30	
2,50	1,50	0,40	1,50	2,00
		0,80	1,90	
		1,00	2,10	
		1,20	2,30	

Table 4 — Tubes of type 3

Dimensions in millimetres

d_1	d_2	d_3	d_4	Winding stem stroke	l_1	l_2
k7	H10	k7	H10	—	h10	js10
1,50	1,05	1,30	1,25	0,40	1,40	1,25
				0,80	1,90	1,75
				1,00	2,10	1,95
				1,20	2,30	2,15
1,60	1,10	1,40	1,25	0,40	1,40	1,25
				0,80	1,90	1,75
				1,00	2,10	1,95
				1,20	2,30	2,15
2,00	1,30	1,60	1,40	0,40	1,50	1,35
				0,80	1,90	1,75
				1,00	2,10	1,95
				1,20	2,30	2,15
2,00	1,30	1,60	1,50	0,40	1,50	1,35
				0,80	1,90	1,75
				1,00	2,10	1,95
				1,20	2,30	2,15
2,50	1,30	1,80	1,40	0,40	1,50	1,35
				0,80	1,90	1,75
				1,00	2,10	1,95
				1,20	2,30	2,15
2,50	1,30	1,80	1,50	0,40	1,50	1,35
				0,80	1,90	1,75
				1,00	2,10	1,95
				1,20	2,30	2,15

Table 5 — Tubes of type 4

Dimensions in millimetres

d_1	d_4	l_1
js11	JS11	js12
1,40	0,95	0,75
		0,95
		1,15
		1,35
1,60	1,05	0,75
		0,95
		1,15
		1,35
1,70	1,15	0,75
		0,95
		1,15
		1,35
2,00	1,30	0,75
		0,95
		1,15
		1,35
2,00	1,40	0,75
		0,95
		1,15
		1,35

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™