

BS ISO 10656:2016



BSI Standards Publication

Resistance welding equipment — Transformers — Integrated transformers for welding guns

National foreword

This British Standard is the UK implementation of ISO 10656:2016.

The UK participation in its preparation was entrusted to Technical Committee WEE/29, Resistance welding.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016. Published by BSI Standards Limited 2016

ISBN 978 0 580 87929 6

ICS 25.160.30; 29.180

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2016.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

BS ISO 10656:2016

ISO
10656

Second edition
2016-05-01

**Resistance welding equipment —
Transformers — Integrated
transformers for welding guns**

*Matériel de soudage par résistance — Transformateurs —
Transformateurs incorporés pour pinces à souder*



Reference number
ISO 10656:2016(E)

© ISO 2016



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
1 Scope	1
2 Normative references	1
3 Dimensions and characteristics of transformers	1
4 Additional equipment	6
4.1 Grounding provision.....	6
4.2 Thermal protection.....	6
4.3 Output current sensing coil.....	6
5 Marking	7
5.1 General.....	7
5.2 Rating plate.....	7
5.3 Colour of exterior finish.....	7
6 Designation	7
7 Test conditions	8
7.1 Type tests.....	8
7.1.1 Mechanical strength.....	8
7.1.2 Dynamic behaviour of the output terminals.....	8
7.2 Thermal test (type test).....	9
Annex A (informative) Secondary current and duty cycle	10
Bibliography	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 44, *Welding and allied processes*, Subcommittee SC 6, *Resistance Welding and allied mechanical joining*.

This second edition cancels and replaces the first edition (ISO 10656:1996), which has been technically revised. It also incorporates the Technical Corrigendum ISO 10656:1996/Cor 1:2000.

Requests for official interpretations of any aspect of this [International Standard] should be directed to the Secretariat of ISO/TC 44/SC 6 via your national standards body. A complete listing of these bodies can be found at www.iso.org.

Resistance welding equipment — Transformers — Integrated transformers for welding guns

1 Scope

This International Standard specifies additional requirements to those given in ISO 5826 for single-phase transformers used in AC welding. It is intended to be used in conjunction with ISO 5826, whose requirements it amends.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 5826:2014, *Resistance welding equipment — Transformers — General specifications applicable to all transformers*

IEC 60417-DB:2011, *Graphical symbols for use on equipment*

3 Dimensions and characteristics of transformers

The dimensions and characteristics of transformers shall be in accordance with

- [Table 1](#) for 50 Hz transformers,
- [Table 2](#) for 60 Hz transformers,
- [Figures 1](#) and [2](#) for type H transformers, and
- [Figures 3](#) and [4](#) for type J transformers.

The cooling water flow rate, Q , shall be 4 l/min.

The transformers are suitable for duty cycles up to 20 % (see [Annex A](#)).

Table 1 — 50 Hz transformer types, lengths and electrical characteristics

Type ^a	AC no-load voltage U_{20} V	Overall length $l_{1\max}$ mm	Mounting hole spacing l_2 mm	Minimum permanent output current I_{2p} kA	Mass (approximate) m kg
H	4,5	245	170	4	18
H	5,6	270	170	4	23
J	6,3	275	190	5,4	26
J	7,1	295	190	5,4	29
J	8	310	230	5,4	32
J	10	370	260	5,4	39
J	13,5	460	350	5,4	52


^a See ISO 5826:2014, Annex D

Table 2 — 60 Hz transformer types, lengths and electrical characteristics

Type ^a	AC no-load voltage U_{20} V	Overall length $l_{1\max}$ mm	Mounting hole spacing l_2 mm	Minimum permanent output current I_{2p} kA	Mass (approximate) m kg
H	5,4	245	170	4	18
H	6,7	270	170	4	23
J	7,6	275	190	5,4	26
J	8,5	295	190	5,4	29
J	9,6	310	230	5,4	32
J	12	370	260	5,4	39
J	16,2	460	350	5,4	52

^a See ISO 5826:2014, Annex D

Dimensions in millimetres

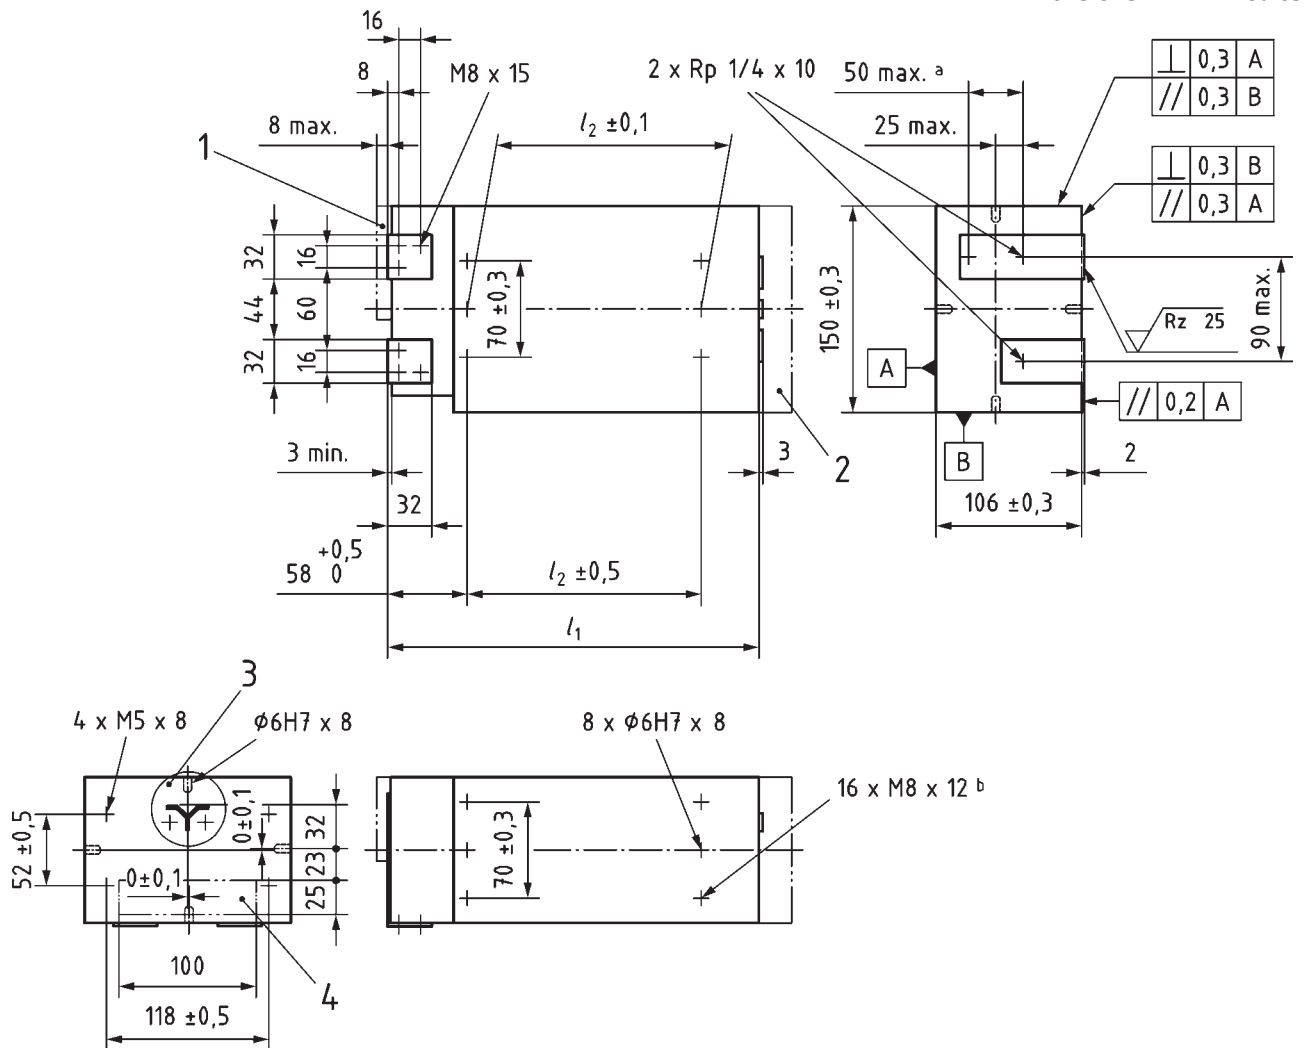

Key

- 1 maximum permissible protuberance for measuring coil
- 2 connection box
- 3 for detailed view, see [Figure 2](#)
- 4 output area for M and T


l_1, l_2 see [Tables 1](#) and [2](#)

^a Water holes can be positioned anywhere along this dimension.

^b Fitted with steel inserts — wire type inserts are not acceptable.

NOTE For marking, see [Clause 5](#).

Figure 1 — Dimensions of type H transformers

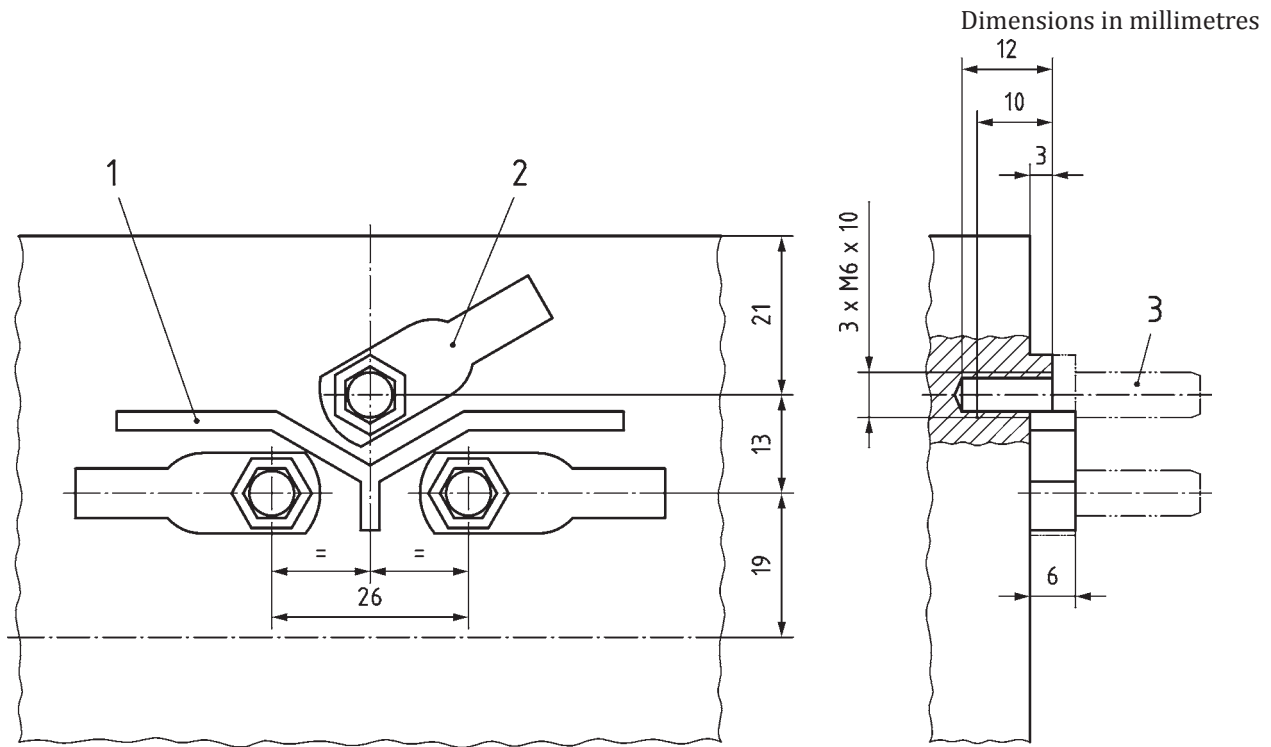


Key

- 1 insulating barrier
- 2 $\varnothing 6$ lug, 10 mm² cable
- 3 $\varnothing 6$ contact pin

NOTE This is a detailed view of [Figure 1](#).

Figure 2 — Size and location of the three M6 holes intended for supply connection of type H transformers

Dimensions in millimetres

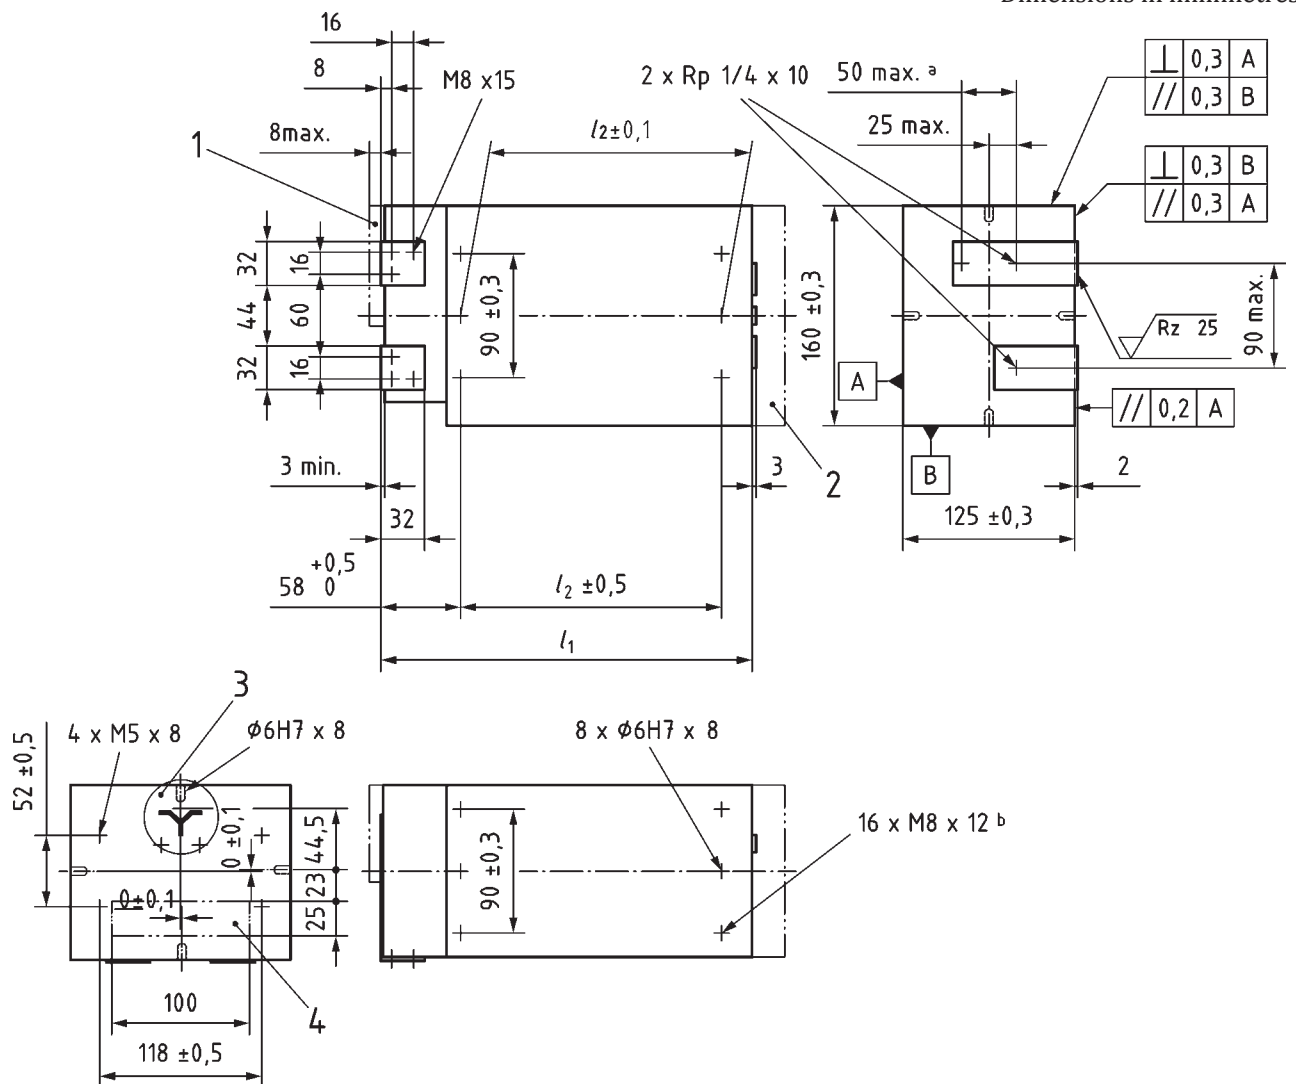

Key

- 1 maximum permissible protuberance for measuring coil
- 2 connection box
- 3 for detailed view, see [Figure 4](#)
- 4 output area for M and T


l_1, l_2 see [Tables 1](#) and [2](#)

^a Water holes can be positioned anywhere along this dimension.

^b $16 \times M10 \times 15$ for $U_2 = 13,5 \text{ V}$ only: fitted with steel inserts — wire type inserts are not acceptable.

NOTE For marking, see [Clause 5](#).

Figure 3 — Dimensions of type J transformers

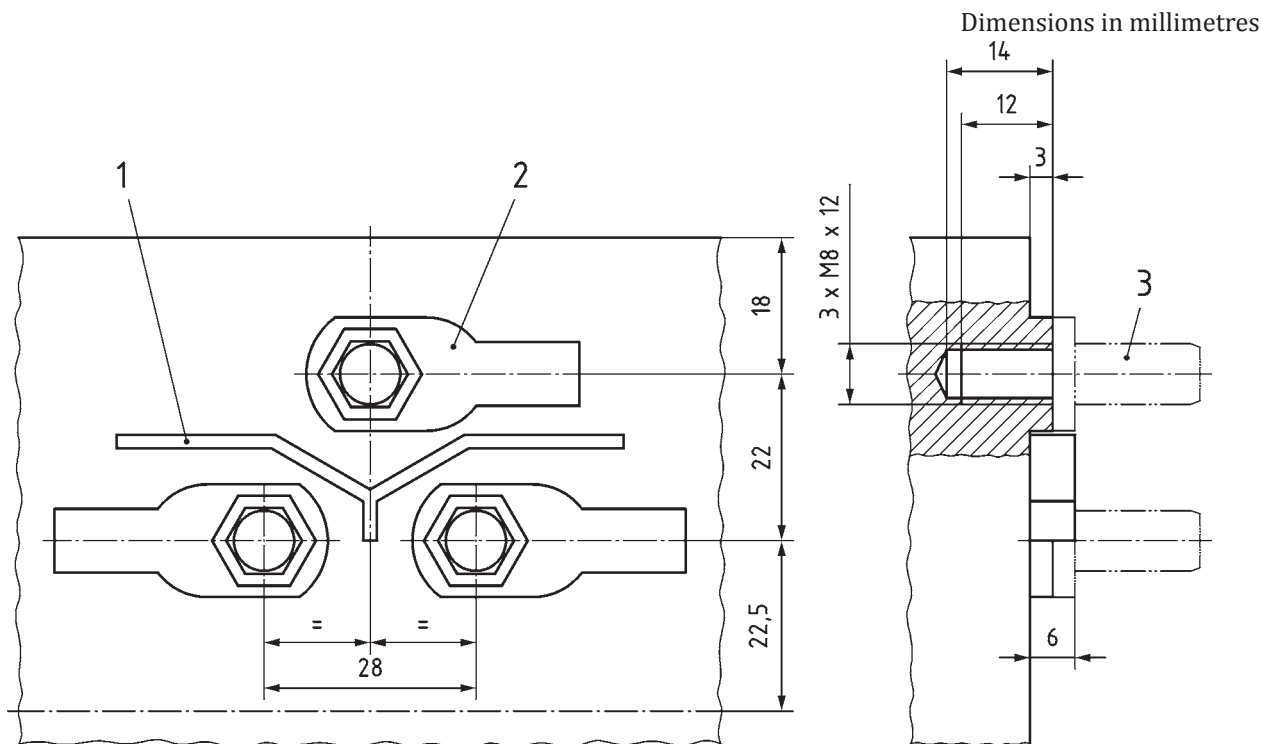

Key

- 1 insulating barrier
- 2 $\varnothing 8$ lug, 16 mm² cable
- 3 $\varnothing 8$ contact pin

NOTE This is a detailed view of [Figure 3](#).

Figure 4 — Size and location of the three M8 holes intended for supply connection of type J transformers

4 Additional equipment

4.1 Grounding provision

The centre point of the secondary coil shall be connected to the transformer case by a removable link.

4.2 Thermal protection

Primary and secondary windings of the transformer shall be equipped with thermostiches. The position of the wiring shall be in accordance with [Figure 1](#) and [Figure 3](#).

The wiring colour shall be as follows:

- light blue for thermostat on primary winding;
- black for thermostat on secondary winding.

Additional requirements are given in ISO 5826.

4.3 Output current sensing coil

Transformers shall include an output current sensing coil and conform to ISO 5826.

5 Marking

5.1 General

Identification of the voltage and earth connections shall be clearly marked: U, V and the symbol \oplus in accordance with IEC 60417-DB:2011.

The polarity of the output terminals should be indicated on the transformer and in the technical documentation.

5.2 Rating plate

The rating plate shall be in conformance with ISO 5826 except that box 4 shall reference this International Standard and its year of publication, i.e. ISO 10656:2016.

5.3 Colour of exterior finish

The transformer exterior finish colour shall be in accordance with [Table 3](#) for 50 Hz transformers and [Table 4](#) for 60 Hz transformers.

Table 3 — 50 Hz transformer exterior colour

AC no-load voltage U_{20} V	Colour
4,5	orange
5,6	lilac
6,3	blue
7,1	green
8	grey
10	yellow
13,5	brown

Table 4 — 60 Hz transformer exterior colour

AC no-load voltage U_{20} V	Colour
5,4	orange
6,7	lilac
7,6	blue
8,5	green
9,6	grey
12	yellow
16,2	brown

6 Designation

The designation shall comprise the following information in the order given:

- reference to this International Standard;
- type of transformer (e.g. "J");
- AC no load voltage U_{20} , minimum permanent output current I_{2p} , rated supply voltage U_{1N} ;

- d) T, indicating the presence of thermostiches;
- e) M, indicating the presence of an output current sensing coil.

EXAMPLE ISO 10656 — J - 7,1 - 5,4 - 400 - TM

7 Test conditions

Testing shall be carried out in accordance with ISO 5826 and the following additional tests.

7.1 Type tests

7.1.1 Mechanical strength

The transformer shall be solidly secured on two plates through the four M8 or M10 mounting holes on two opposite sides. A tensile load of 10 kN shall be progressively applied on both sides, such that the maximum loading is reached after 1 min and maintained for an additional 1 min. The test shall be repeated on the other two sides.

After testing, the transformer shall exhibit no permanent deformation or visible damage.


7.1.2 Dynamic behaviour of the output terminals

The transformer-rectifier shall withstand the dynamic loads produced by a repetitive flow of welding or test current, which shall be as high as possible, but not more than 5 times the secondary permanent output current, I_{2p} , in the test configuration shown in [Figure 5](#).

The duty cycle shall be 1 % and the weld time shall be 160 ms.

The number of cycles shall be 2 500.

The dimension, a , shall be measured before and after the test has been performed. The deformation of the output terminals shall not cause the dimension, a , to change by more than 10 mm.

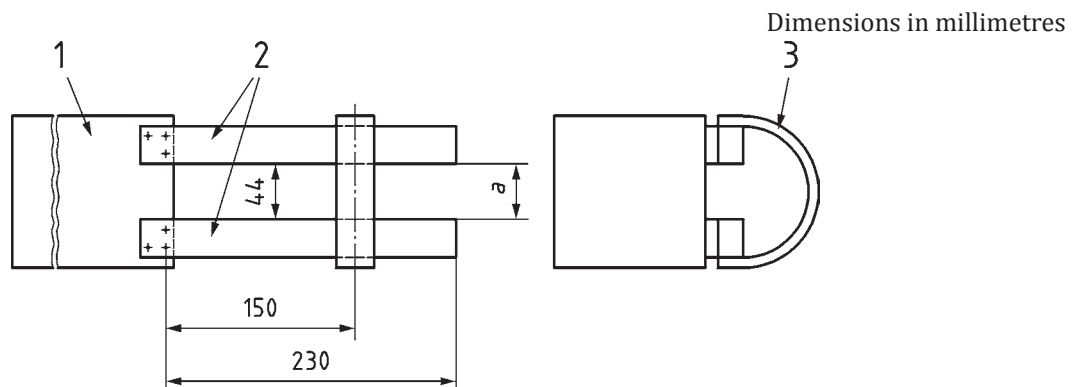

Key

- 1 transformer
- 2 copper bars 30 × 30
- 3 flexible shunt
- a See [7.1.2](#).

Figure 5 — Device for the dynamic type test

7.2 Thermal test (type test)

The heat rise and temperature limits shall conform to ISO 5826 up to a duty cycle of 20 %.

The test shall be done with nominal primary voltage at a load time of 240 ms and a duty cycle of 20 %.

Annex A (informative)

Secondary current and duty cycle

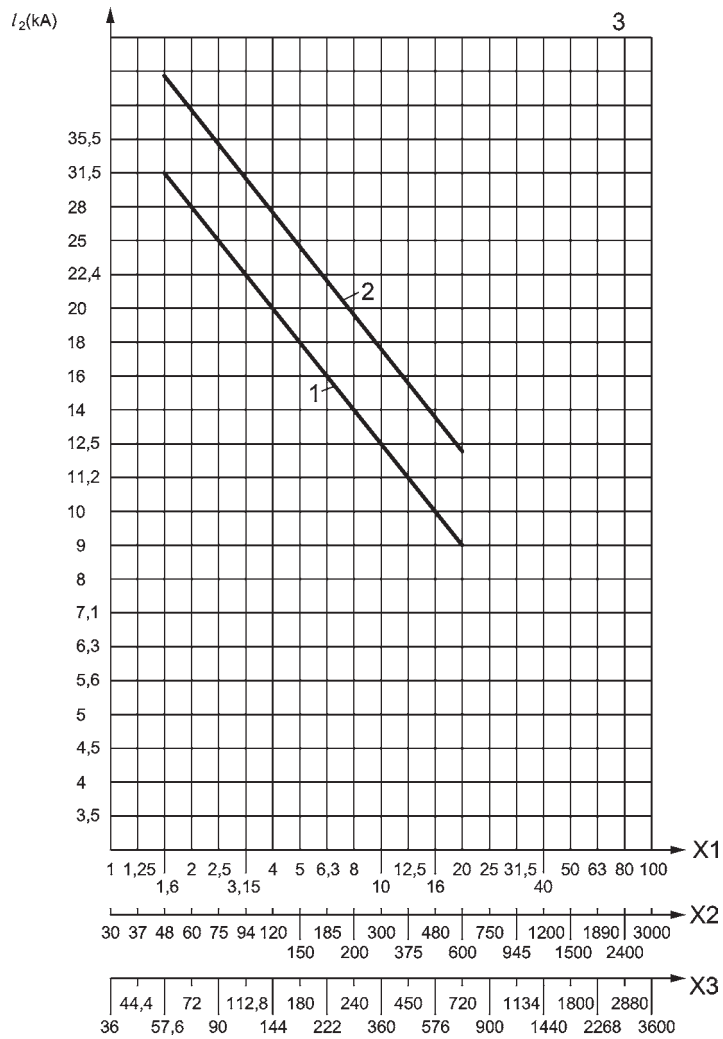


Figure A.1 — Relationship between secondary current I_2 and duty cycle

Bibliography

- [1] ISO 7-1, *Pipe threads where pressure-tight joints are made on the threads — Part 1: Dimensions, tolerances and designation*
- [2] ISO 1302, *Geometrical Product Specifications (GPS) — Indication of surface texture in technical product documentation*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK