

BS ISO 10771-1:2015



BSI Standards Publication

Hydraulic fluid power — Fatigue pressure testing of metal pressure-containing envelopes

Part 1: Test method

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 10771-1:2015. It supersedes BS ISO 10771-1:2002 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee MCE/18/-/8, Product testing.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015. Published by BSI Standards Limited 2015

ISBN 978 0 580 79400 1

ICS 23.100.99

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 July 2015.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

BS ISO 10771-1:2015

ISO
10771-1

Second edition
2015-08-01

**Hydraulic fluid power — Fatigue
pressure testing of metal pressure-
containing envelopes —**

Part 1:
Test method

*Transmissions hydrauliques — Essais de fatigue des enveloppes
métalliques sous pression —*

Partie 1: Méthode d'essai



Reference number
ISO 10771-1:2015(E)

© ISO 2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Test conditions	2
5 Test equipment and preparation	2
6 Accuracy	3
7 Test procedure	3
7.1 Cyclic pressure test.....	3
7.1.1 Test pressure waveform.....	3
7.1.2 Pressure test cycle.....	4
7.1.3 Number of test cycles.....	4
7.1.4 Test frequency and time period, T_1	4
7.2 General.....	5
8 Failure criteria	5
9 Test report	6
10 Test declaration	6
11 Identification statement (reference to this part of ISO 10771)	6
Annex A (normative) Specific requirements for pumps and motors	7
Annex B (normative) Specific requirements for hydraulic cylinders	8
Annex C (normative) Specific requirements for gas-loaded accumulators	11
Annex D (normative) Specific requirements for valves	13
Bibliography	14

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#).

The committee responsible for this document is ISO/TC 131, *Fluid power systems*, Subcommittee SC 8, *Product testing*.

This second edition cancels and replaces the first edition (ISO 10771-1:2002), which has been technically revised.

ISO 10771 consists of the following parts, under the general title *Hydraulic fluid power — Fatigue pressure testing of metal pressure-containing envelopes*:

- *Part 1: Test method*
- *Part 2: Rating methods* [Technical Report]

[Annex A](#) to [Annex D](#) form a normative part of this part of ISO 10771.

Introduction

In hydraulic fluid power systems, power is transmitted and controlled under pressure within an enclosed circuit. It is important for the manufacturer and user of hydraulic components to have information on their global reliability because of the importance of the fatigue failure mode and the relationship this has with the functional safety and service life of such components. This part of ISO 10771 provides a method for fatigue testing the pressure-containing envelope provided by hydraulic components.

During operation, components in a system can be subjected to loads that arise from the following:

- internal pressure;
- external forces;
- inertia and gravitational effects;
- impact or shock;
- temperature changes or gradients.

The nature of these loads can vary from a single static application to continuously varying amplitudes, repetitive loadings, and even shocks. It is important to know how a component can withstand these loads, but this part of ISO 10771 addresses only the loading due to internal pressure.

There are many ways in which internal pressure loads are imposed upon a component. This part of ISO 10771 considers a broad range of waveforms within prescribed time limits, temperatures, and environmental conditions, and only upon metals. It is expected that these limitations could still provide sufficient common ground for a method of fatigue pressure testing metal pressure-containing envelopes in hydraulic fluid power components. This method, therefore, provides the system designer with certain information to assist in a selection of components for an application. The system designer still has the responsibility of considering the other loading characteristics described above and determining how they could affect the component's pressure-retaining capability.

Hydraulic fluid power — Fatigue pressure testing of metal pressure-containing envelopes —

Part 1: Test method

1 Scope

This part of ISO 10771 specifies a method of fatigue testing the pressure-containing envelopes of components used in hydraulic fluid power systems under sustained steady cyclic internal pressure loads.

This part of ISO 10771 is only applicable to component pressure-containing envelopes that

- are manufactured from metals,
- are operated at temperatures that exclude creep and low-temperature embrittlement,
- are only subjected to pressure-induced stresses,
- are not subjected to loss of strength due to corrosion or other chemical action, and
- might include gaskets, seals, and other non-metallic components; however, these are not considered part of the pressure-containing envelope being tested (see [5.7](#)).

This part of ISO 10771 does not apply to piping as defined in ISO 4413 (i.e. connectors, hose, tubing, pipe). See ISO 6803 and ISO 6605 for methods of fatigue testing of piping devices.

This part of ISO 10771 establishes a general test method that is applicable for many hydraulic fluid power components, but additional requirements or more specific methods that can be required for particular components are contained in the annexes or other standards.

Test pressure is to be determined by the user. See ISO/TR 10771-2 for a possible rating method.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4413, *Hydraulic fluid power — General rules and safety requirements for systems and their components*

ISO 5598, *Fluid power systems and components — Vocabulary*

ISO 9110-1, *Hydraulic fluid power — Measurement techniques — Part 1: General measurement principles*

ISO 9110-2, *Hydraulic fluid power — Measurement techniques — Part 2: Measurement of average steady-state pressure in a closed conduit*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 5598 and the following apply.

3.1
upper cyclic test pressure

p_U
minimum value of the highest level of the specified test pressure cycle

3.2
lower cyclic test pressure

p_L
maximum value of the lowest level of the specified test pressure cycle

3.3
cyclic test pressure range

Δp
difference between the upper and lower cyclic test pressures during a fatigue test

3.4
pressure-containing envelope

elements of a component that contain the pressurized hydraulic fluid and the means to secure the elements (bolts, welds, etc.)

Note 1 to entry: Gaskets and seals are not considered as part of the pressure-containing envelope.

Note 2 to entry: See annexes for component definitions.

4 Test conditions

4.1 Remove entrapped air from the test component and circuit before starting each test.

4.2 The temperature of the hydraulic fluid in the component shall be in the range of 15 °C to 80 °C. The temperature of the component shall be a minimum of 15 °C.

5 Test equipment and preparation

5.1 The test equipment and circuit shall be able to generate and repeat the pressure cycle as specified in [7.1](#).

5.2 Pressure transducer(s) shall be mounted directly into the test component, or as near as possible, so as to record the internal conditions applied to the component. Any restrictions between the transducers and the pressure-containing envelope being tested should be avoided.

5.3 Any non-corrosive hydraulic fluid that has a kinematic viscosity not greater than 60 mm²/s at the test temperature shall be used as the pressurizing medium.

5.4 Different pressures shall be applied to separate portions of the test components as dictated by design specifications.

5.5 It shall be verified that the ratio of induced stress to pressure, under static loading conditions, is also attained at the test cycling rate, especially when

- pressures have to penetrate between close-fitting parts,
- large components are tested, and
- hysteresis in joints can significantly affect stresses.

Strain gauges can be used to verify this ratio and, if used, should be located externally in an area of high strain.

5.6 It is permissible to make modifications to the test samples to facilitate cyclic or burst tests, provided that such modifications do not increase the pressure capabilities of the pressure-containing envelope.

5.7 It is permissible to replace gaskets and seals that fail during the test, as long as preloads in stressed elements are the same after reassembly as they were before disassembly. It is possible that fastener preloads can decrease during fatigue testing. Fastener preloads should be set to this reduced level when seals or gaskets are replaced.

5.8 Safety procedures shall be followed in order to protect personnel and test equipment during the test as specified in ISO 4413.

6 Accuracy

6.1 Instrumentation shall be accurate to within the following limits:

- pressure: $\pm 1,0$ % of the upper cyclic test pressure;
- strain: ± 1 % of the value obtained at the upper cyclic test pressure;
- time: $\pm 0,002$ s resolution;
- temperature: ± 2 °C.

6.2 Use pressure transducers, amplifiers, and recording devices with a combined system frequency response such that in the frequency range 0 kHz to 2 kHz, the amplitude ratio is within 0 dB and -3 dB.

6.3 Instruments and procedures shall conform to ISO 9110-1 and ISO 9110-2.


7 Test procedure

7.1 Cyclic pressure test

7.1.1 Test pressure waveform

The test pressure waveform shall achieve the upper and lower levels for the time periods as specified in [7.1.2](#). The wave form is not specified and may be of any shape.

NOTE For the purposes of illustration only, a typical test pressure waveform is shown in [Figure 1](#).

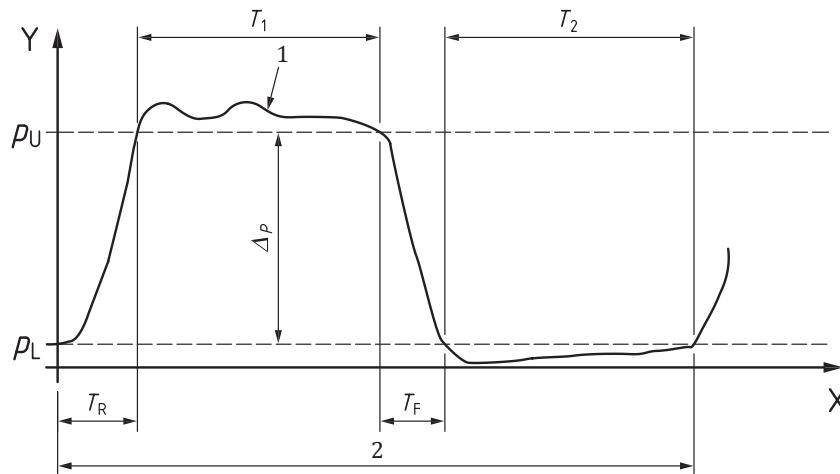

Key

- 1 actual test pressure
- 2 test period = $T = 1/\text{test frequency} = 1/f = T_R + T_1 + T_F + T_2$
- X time
- Y pressure

Figure 1 — Test pressure waveform

7.1.2 Pressure test cycle

- a) Upper cyclic test pressure (p_U)

The actual test pressure shall equal, or exceed, the upper cyclic test pressure for a time period T_1 equal to or greater than $0,3T$.

- b) Time period of pressure rise (T_R)

The actual test pressure shall rise to the upper cyclic test pressure within the time period T_R so that

$$0,4T \leq (T_R + T_1) \leq 0,6T$$

- c) Lower cyclic test pressure (p_L)

The lower cyclic test pressure shall not exceed 5 % of the upper cyclic test pressure unless specified otherwise in the annexes. The actual test pressure shall not exceed the lower cyclic test pressure in the time period in the cycle T_2 , where T_2 is given by

$$0,9T_1 \leq T_2 \leq 1,1T_1$$

7.1.3 Number of test cycles

Select the number of test cycles required in the range of 10^5 to 10^7 .

7.1.4 Test frequency and time period, T_1

Cycle the test pressure at the selected frequency of: $f = 1/T$.

The fatigue life of hydraulic components depends upon the time period, T_1 , of the pressure variations at a given pressure amplitude. Consequently, the results of the test on a component at a given time

period cannot be used to predict the number of cycles that the component will successfully withstand at a different period. For a given test pressure, frequencies (f) of ≤ 3 Hz or time periods of $T_1 \geq 100$ ms are to be used unless there is satisfactory experience of testing at a higher frequency. Such experience should be stated in the test report.

7.2 General

7.2.1 Inspect all of the test components, using non-destructive methods, in order to verify conformity to the manufacturing specification.

7.2.2 If required, place metal balls or other loosely-fitting pieces within the test components in order to reduce the volume of pressurized fluid, ensuring that any such pieces do not prevent the correct pressure from reaching all test areas and do not affect the fatigue life of the components (e.g. by shot peening the surfaces).

7.2.3 When a hydraulic fluid power component has internal chambers that are designed for different pressure capabilities, the fatigue of the mechanical features forming the separation between these chambers shall also be tested as if it were part of the pressure-containing envelope (see component [Annexes A, B, C and D](#)).

8 Failure criteria

The following are criteria for failure:

- external leakage of any amount caused by fatigue (subject to the requirements of [5.5](#));
- internal leakage of any amount caused by fatigue (subject to the requirements of [5.5](#));
- material separation (e.g. cracks).

9 Test report

A test report shall be prepared containing the following data:

- a) number of this part of ISO 10771, i.e. ISO 10771-1, and the identification of the annex used;
- b) place of test;
- c) identity of the testing personnel and date of test;
- d) component description (manufacturer, material) and date of manufacture, date code, or serial number;
- e) number of components tested;
- f) upper and lower cyclic test pressures (p_U , p_L);
- g) cyclic test frequency (f) and time period (T_1);
- h) number of completed pressure cycles;
- i) type of test fluid;
- j) plot of a typical cycle (pressure/time);
- k) fluid and ambient temperatures;
- l) replacement of gaskets and seals, at their cycle life and method of re-establishing the fastener preload;
- m) frequency response of the instrumentation systems and transducers;
- n) description (either graphical or text) of any modifications to the component that were required in order to complete the test;
- o) any other remarks.

10 Test declaration

The conditions of the pressure fatigue test shall be declared by stating the information in a), d), f), g), and h) of [Clause 9](#).

EXAMPLE ISO 10771-1 D\\Relief valve (xxx, steel)\\25/0,5 MPa (250/5 bar)\\3 Hz/120 ms\\ 10^7 cycles.

11 Identification statement (reference to this part of ISO 10771)

Use the following statement in test reports, catalogues, and sales literature when electing to comply with this International Standard.

“Method for fatigue pressure testing conforms to ISO 10771-1, *Hydraulic fluid power — Fatigue pressure testing of metal pressure-containing envelopes — Part 1: Test method*”.

Annex A (normative)

Specific requirements for pumps and motors

A.1 General

The requirements specified in this part of ISO 10771 shall apply, subject to the variations given in [A.2](#) and [A.3](#).

Complete assembled units shall be used for the test.

Inlet ports, drain ports, and high-pressure ports can require different cyclic test pressures applied to them during this test.

NOTE An important criterion when conducting this test is whether the driving mechanism of the test unit rotates and produces high pressure itself or whether it does not rotate and is stressed by a separate pressure source.

A.2 Test procedure

If it is chosen to pressurize more than one port, the phase relationship of the cyclic pressures shall be chosen to achieve the highest fatigue loading.

If the test is conducted with a non-rotating shaft, the angular position of the rotary group is important in determining the load on the pressure-containing envelope and shall be controlled.

The displacement of the unit is important in determining the load on the pressure-containing envelope and should be controlled. When displacement is changed on a variable displacement unit, the displacement waveform and the pressure waveform shall both be recorded.

A.3 Test report

The following information shall be added to the test report [including a) to o) from [Clause 9](#)]:

- a) whether the primary shaft is rotating or non-rotating;
- b) if non-rotating, a description of the angular position of the fluid displacement elements;
- c) whether the test unit is operated as a pump or a motor;
- d) speed and direction of rotation;
- e) for a variable displacement unit report, the displacement waveform and the phase relationship to the pressure waveform;
- f) the upper cyclic test pressure, p_U , and the lower cyclic test pressure, p_L , for each port pressurized, the phase relationship for each port pressurized, and the pressure level applied to any other port.

Annex B (normative)

Specific requirements for hydraulic cylinders

B.1 General

B.1.1 This Annex specifies the method for conducting a fatigue test of the pressure-containing envelope of hydraulic cylinders. It is applicable to cylinders with bores of up to and including 200 mm that conform to ISO design standards, e.g. ISO 6020-1, of the following types:

- tie rod type;
- bolted type;
- welded type;
- types with other fastening methods.

B.1.2 The testing method is not applicable if

- side loads are applied on the piston rod, and
- the piston rod is under load/stress causing buckling.

B.1.3 The pressure-containing envelope for a hydraulic cylinder includes the following:

- cylinder body;
- end heads and caps;
- seal housings;
- piston;
- piston-to-rod connection;
- any pressurized elements, such as cushioning throttle valves, check valves, air bleed plugs, closure plugs, etc.;
- fasteners (e.g. snap rings, bolts, tie rods, nuts, etc.) that secure end heads/caps, seal housings, piston, and retaining rings.


NOTE 1 Other items, such as mountings, mounting accessories, and cushion parts, are not considered part of the pressure-containing envelope.

NOTE 2 Although the mountings are not pressure-containing elements, they can be fatigue tested for endurance using the test methods described in this Annex.

B.2 Test arrangement for the basic cylinder pressure-containing envelope

The cylinder stroke length shall be at least as long as that determined in [Figure B.1](#).

Dimensions in mm

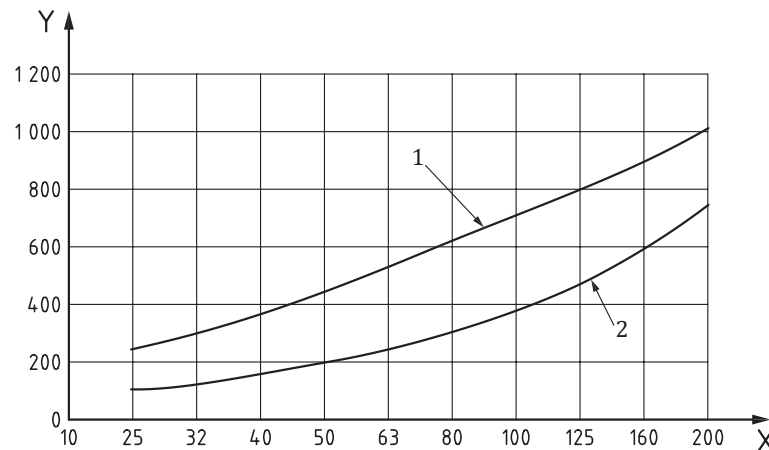

Key

- 1 tie rod cylinders
- 2 all other cylinders
- X bore
- Y stroke

Figure B.1 — Shortest stroke as a function of bore diameter

Provide a test arrangement that attaches to the external end of the piston rod and fastens to the rod end head in a concentric manner to the piston rod (modifications to the rod end head to accomplish this are permissible). The test arrangement shall position the piston approximately so that the length, L , (see [Figure B.2](#)) is within 3 mm to 6 mm from the cap end for tie rod cylinders and approximately in the middle of the cylinder body length for non-tie rod cylinders.

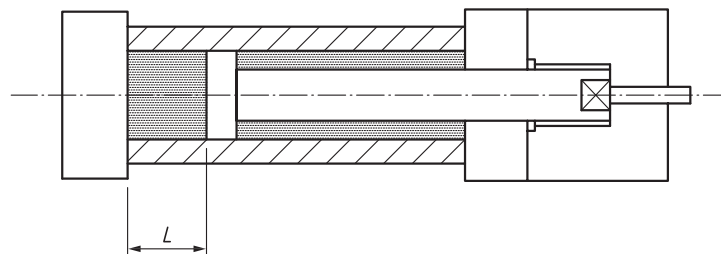


Figure B.2 — Cylinder test arrangement

A filler material (e.g. steel shot, spacers, etc.) may be used in the pressure-containing envelope in order to reduce the volume pressurized, but the filler material shall not restrict application of the pressure to the test components.


B.3 Application of test pressure

Both end heads/caps should have two sets of ports; one to connect to the pressure-generating source and one to facilitate connection of the pressure-measuring equipment.

Apply the test pressure at a level above the cyclic test pressure (p_U) first to one side of the piston with the test pressure at a level below the lower cyclic test pressure (p_L) on the other side; then reverse the pressures, generating one pressure cycle, as shown in [Figure B.3](#).

The time period T_2 for the unpressurized side of the piston shall be longer than T_1 . In order to achieve this, the time period T_1 for each side of the piston shall not begin until the pressure on the other side has dropped to below p_L . The time period T_1 for each side of the piston shall end before the pressure on the other side begins to rise above p_L .

The wave shape is not specified and may be of any shape.

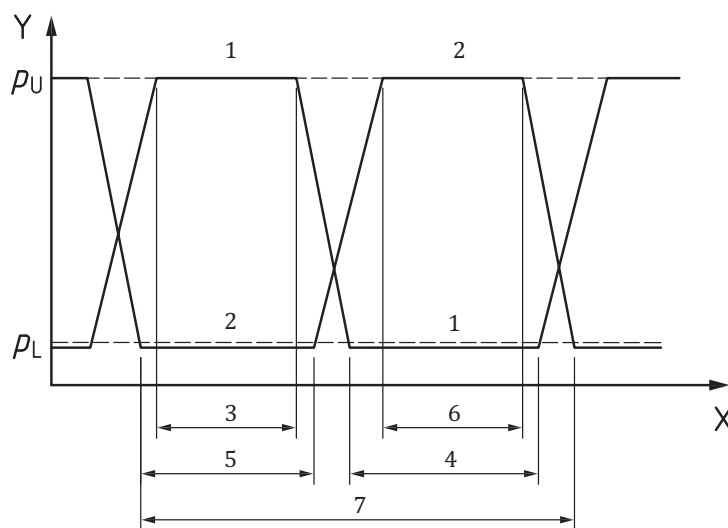

Key

- 1 side 1
- 2 side 2
- 3 T_1 side 1
- 4 T_2 side 1
- 5 T_2 side 2
- 6 T_1 side 2
- 7 1 cycle
- X time
- Y pressure

Figure B.3 — Test pressure waveform

Annex C **(normative)**

Specific requirements for gas-loaded accumulators

C.1 General

This Annex shall apply to gas-loaded accumulators in addition to the requirements specified in the main document. It covers the pressure-containing envelope of the following accumulator types:

- piston;
- bladder;
- diaphragm.

This Annex also covers gas bottles for use as additional gas capacity for transfer accumulators.

C.2 Test sample(s)

C.2.1 Bladder accumulators shall consist of

- shell,
- hydraulic port valve assembly, and
- gas port valve assembly.

C.2.2 Piston accumulators shall consist of

- body,
- end caps, and
- gas port valve assembly.

C.2.3 Diaphragm accumulators shall consist of

- body with integral ports, and
- gas port valve assembly.

C.2.4 Gas bottles, depending on their construction, shall consist of

- body,
- valve assemblies, and
- end caps.

If test sample(s) contain a fluid separator such as a piston, bladder or diaphragm, fluid shall be on both sides of the separator.

Fittings connected to the accumulator (e.g. gas valves) may be tested separately if the fixation is the same as when mounted on the accumulator.

C.3 Test procedure

Since accumulators have a pre-charge pressure, the lower cyclic test pressure during operation will be near the pre-charge pressure. The lower cyclic test pressure (p_L) during a fatigue test may be set at the pre-charge level in special applications. It is recognized that this results in limited use for operation between those levels.

This also requires the end user to maintain the pre-charge pressure in order to avoid increasing the pressure range from gas leakage during operation. The choice of selecting the lower cyclic test pressure at 5 % of the upper cyclic test pressure provides the maximum reliability for unlimited applications.

Test specimens may be connected in series or parallel, provided that the test pressure wave form is present and measured in all test specimens (see [5.1](#) and [5.2](#)).

Annex D (normative)

Specific requirements for valves

D.1 General

In general, valves consist of several chambers. Each of these can experience different pressures (e.g. system pressure, the pressures at the service port connections, control pressures, and return line pressure).

D.2 Guide for the test procedure

Valves should be tested as complete assemblies. Attachments (e.g. solenoid tubes, body end covers, etc.) can be tested as an integral part of the valve or as independent components.

If internal walls or boundaries of the chamber can experience a reversal of pressure loading in service (which can be the case for internal sections between the pressure and service ports of a directional valve), then one cycle shall consist of the maximum pressure difference applied alternately to each side of the wall or boundary.

A pressure pulse may be applied to several chambers simultaneously if the chambers are not adjacent.

Bibliography

- [1] ISO 6020-1, *Hydraulic fluid power — Mounting dimensions for single rod cylinders, 16 MPa (160 bar) series — Part 1: Medium series*
- [2] ISO 6605, *Hydraulic fluid power — Hoses and hose assemblies — Test methods*
- [3] ISO 6803, *Rubber or plastics hoses and hose assemblies — Hydraulic-pressure impulse test without flexing*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™