

BS ISO 11529:2013



BSI Standards Publication

# **Milling cutters — Designation — Shank-type and bore- type milling cutters of solid or tipped design or with indexable cutting edges**

**bsi.**

...making excellence a habit.™

**National foreword**

This British Standard is the UK implementation of ISO 11529:2013. It supersedes BS ISO 11529-1:2005 and BS ISO 11529-2:2005 which are withdrawn.

The UK participation in its preparation was entrusted to Technical Committee MTE/18, Tools tips and inserts for cutting applications.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2013. Published by BSI Standards Limited 2013

ISBN 978 0 580 76122 5

ICS 25.100.20

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2013.

**Amendments issued since publication**

Date	Text affected
------	---------------

---

INTERNATIONAL  
STANDARD

**ISO**  
**11529**

First edition  
2013-05-01

---

---

**Milling cutters — Designation —  
Shank-type and bore-type milling  
cutters of solid or tipped design or  
with indexable cutting edges**

*Fraises — Désignation — Fraises deux tailles, à queue monobloc ou à lames ou fraises à alésage à plaquettes amovibles*



Reference number  
ISO 11529:2013(E)

© ISO 2013



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Summary explanation of the designation system</b> .....	<b>1</b>
<b>4 Designation symbols</b> .....	<b>2</b>
4.1 Symbol identifying the diameter — Position 1.....	2
4.2 Symbol identifying the type of milling cutter — Position 2.....	2
4.3 Symbol identifying the number of effective cutting edges.....	5
4.4 Symbol identifying the hand of cutting.....	5
4.5 Symbol identifying the cutting-edge angle, $\kappa_r$ .....	5
4.6 Symbol identifying the design of end mill or milling cutter.....	5
4.7 Symbol identifying the maximum cutting depth or width, $a_p$ .....	6
4.8 Symbol identifying the helix angle or shape of insert.....	6
4.9 Symbol identifying the type (symbol 9) and the style (symbol 10) of shank.....	7
4.10 Symbol identifying the size of shank.....	10
<b>5 Manufacturer's information</b> .....	<b>10</b>
<b>6 Additional information on cutting part material</b> .....	<b>11</b>
<b>Annex A (informative) Relationship between designations in this International Standard and ISO 13399 (all parts)</b> .....	<b>12</b>
<b>Bibliography</b> .....	<b>13</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 11529 was prepared by Technical Committee ISO/TC 29, *Small tools*, Subcommittee SC 9, *Tools with cutting edges made of hard cutting materials*.

The first edition of ISO 11529 cancels and replaces ISO 11529-1:2005 and ISO 11529-2:2005, which have been technically revised.

# Milling cutters — Designation — Shank-type and bore-type milling cutters of solid or tipped design or with indexable cutting edges

## 1 Scope

This International Standard establishes a designation system for shank-type and bore-type milling cutters of either solid or tipped design or with indexable cutting edges with the purpose of simplifying communication between the users and suppliers of such tools.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3002-1, *Basic quantities in cutting and grinding — Part 1: Geometry of the active part of cutting tools — General terms, reference systems, tool and working angles, chip breakers*

ISO 3002-3, *Basic quantities in cutting and grinding — Part 3: Geometric and kinematic quantities in cutting*

## 3 Summary explanation of the designation system

Shank-type and bore-type milling cutters are designated by codes comprising symbols which identify the important features of the mills.

Extensions to the designation codes to include manufacturer's or supplier's information about the milling cutters are described in [Clause 5](#).

No addition to or extension of the designation system given in this International Standard shall be made without consultation with ISO/TC 29 and without its agreement. The designation code shall consist of the following:

Position	Definition of designation symbols
1	Number symbol identifying the diameter, $\emptyset$ (see <a href="#">4.1</a> )
2	Letter symbol identifying the type of milling cutter (see <a href="#">4.2</a> )
3	Number symbol identifying the number of effective cutting edges (see <a href="#">4.3</a> )
4	Letter symbol identifying the hand of cutting (see <a href="#">4.4</a> )
5	Number symbol identifying the cutting-edge angle, $\kappa_r$ (see <a href="#">4.5</a> )
6	Letter symbol identifying the design of end mill or milling cutter (see <a href="#">4.6</a> )
7	Number symbol identifying the maximum cutting depth or width, $a_p$ (see <a href="#">4.7</a> )
8	Letter symbol identifying the helix angle or shape of insert (see <a href="#">4.8</a> )
9	Letter symbol identifying the type of shank (see <a href="#">4.9</a> )

10 Number symbol identifying the style of shank (see 4.9)

11 Number symbol identifying the size of shank (see 4.10)

EXAMPLE

Position	1	2	3	4	5	6	7	8	9	10	11
End milling cutter of solid design	32	G	04	R	090	A	012	S	ZYL	10	032
Milling cutter of indexable design	250	A	12	R	075	S	075	S	HSK	01	100

## 4 Designation symbols

### 4.1 Symbol identifying the diameter — Position 1

The diameter of end mills or milling cutters for each letter symbol is shown in the illustrations in Table 1.

The number symbol identifying the diameter is a one-digit to three-digit number and corresponds to the diameter, in millimetres.

EXAMPLE 1 Ø6 symbol “6”

EXAMPLE 2 Ø32 symbol “32”

EXAMPLE 3 Ø125 symbol “125”

### 4.2 Symbol identifying the type of milling cutter — Position 2

Table 1 — Type of milling cutter


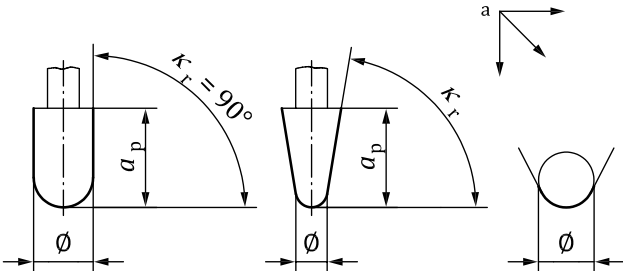




Letter symbol	Type of milling cutter	Shape
A	Face mill Square shoulder face mill $a_p < \emptyset$ side cutting	
B	Face mill Square shoulder face mill $a_p < \emptyset$ side cutting and ramping	
C	Full side and face mill $a_p < \emptyset$	



Table 1 (continued)

Letter symbol	Type of milling cutter	Shape
D	Slitting cutter $a_p < \emptyset$	
E	Half side and face mill $a_p < \emptyset$	
F	T-slot cutter $a_p < \emptyset$	
G	End mill – side cutting ( $\kappa_r = 90^\circ$ ) Tapered end mill – side cutting $a_p > \emptyset$	
H	End mill – side and centre cutting ( $\kappa_r = 90^\circ$ ) Tapered end mill – side and centre cutting $a_p > \emptyset$	
J	End mill – side cutting and ramping ( $\kappa_r = 90^\circ$ ) Tapered end mill – side cutting and ramping $a_p > \emptyset$	

Table 1 (continued)

Letter symbol	Type of milling cutter	Shape
K	Ball-nosed end mill – side and centre cutting $a_p \leq 0,5 \varnothing$	
L	Ball-nosed cylindrical end mill – side and centre cutting ( $\kappa_r = 90^\circ$ ) Ball-nosed tapered end mill – side and centre cutting $a_p > 0,5 \varnothing$	
M	Spot facing cutter centre cutting = $a_p = 0,5 \varnothing$ not centre cutting = $a_p < 0,5 \varnothing$	
N	Toroidal end mill $a_p < \varnothing$	
P	Double half-side and face mill $a_p < \varnothing$	
T	Thread milling cutter	

a Feed.

b See 4.3.

### 4.3 Symbol identifying the number of effective cutting edges

The number symbol identifying the number of cutting edges is a two-digit number corresponding to the number of effective cutting edges.

EXAMPLE 1 12 effective cutting edges: symbol “12”.

EXAMPLE 2 2 effective cutting edges: symbol “02”.

NOTE The number of effective cutting edges is defined as “the number of cutting edges used to calculate the feed per tooth in the direction of feed motion from which  $\kappa_r$  is defined”.

### 4.4 Symbol identifying the hand of cutting

The letter symbol for the hand of cutting for a milling cutter is as shown in [Table 2](#):

**Table 2 — Hand of cutting**

Letter symbol	Hand of cutting
L	Left-hand
R	Right-hand
N	Neutral (both sides)

### 4.5 Symbol identifying the cutting-edge angle, $\kappa_r$

The number symbol identifying the cutting edge angle is a three-digit number, corresponding to the nominal cutting edge angle, in degrees, and omitting any decimals.  $\kappa_r$  is defined for the various types of end mill in [4.2](#), and in ISO 3002-1, 5.1.1.1.

The three-digit number designates also milling cutters of “dove tail” design, where the cutting edge angle is larger than 90°.

EXAMPLE 1 Cutting edge angle 90°: symbol “090”.

EXAMPLE 2 Dove tail milling cutter with cutting edge angle 120°: symbol “120”.

For end mills of types K and N (see [4.2](#)), the symbol identifying the cutting edge angle shall be replaced by 000 [triple (or treble) zero].

If end mills and milling cutters are assembled with cartridges that are carrying the cutting edges, the cutting edge angle shall be replaced by OCA (zero, upper case letter C, upper case letter A).

If  $\kappa_r$  is a decimal value, the symbol identifying the cutting edge angle shall be replaced by XXX, and the actual value shown as the manufacturer’s information (see [Clause 5](#)).

### 4.6 Symbol identifying the design of end mill or milling cutter

The symbol 6 defines either the design of the end mill or milling cutter, if it is of solid or tipped design, or the design of how the replaceable cutting edges are fixed on to the tool body.

For end mills or milling cutters of solid or tipped design, the letter symbol shall be as shown in [Table 3](#):

**Table 3 — Designation for solid or tipped design**

Letter symbol	Design
A	Solid with plain (continuous) cutting edges
B	Solid with interrupted (serrated) cutting edges
D	With brazed tips and plain (continuous) cutting edges
E	With brazed tips and interrupted (serrated) cutting edges
F	With mechanically clamped tips and plain (continuous) cutting edges
G	With mechanically clamped tips and interrupted (serrated) cutting edges

For end mills or milling cutters with indexable inserts, the letter symbol shall be as shown in [Table 4](#):

**Table 4 — Designation for insert clamping design**

Letter symbol	Design
C	Top clamp
K	Milling cutter equipped with cartridges or cassettes
M	Top and hole clamp, insert with hole
P	Hole clamp, insert with hole
S	Screw clamp, insert with partly cylindrical hole
T	Tangentially mounted, insert with hole
V	Tangentially mounted, insert without hole
W	Wedge clamp, insert without hole
X	Special features

#### 4.7 Symbol identifying the maximum cutting depth or width, $a_p$

The number symbol identifying the maximum cutting depth or width,  $a_p$  (see definition in position 2, and in ISO 3002-3, is a three-digit number. If the value of  $a_p$  is an integer, it is given in millimetres for all types of cutters. If not,  $a_p$  may be given as “T”, followed by the value in tenths (1/10) of a millimetre. The latter possibility only applies if  $a_p$  is less than 10 mm.

EXAMPLE 1 Maximum cutting depth or width 105 mm: symbol “105”

EXAMPLE 2 Maximum cutting depth or width 80 mm: symbol “080”

EXAMPLE 3 Maximum cutting depth or width 6 mm: symbol “006”

EXAMPLE 4 Maximum cutting depth or width 7,5 mm: symbol “T75”

NOTE  $a_p$  is described in ISO 3002-3 as “back engagement of the cutting edge”.

#### 4.8 Symbol identifying the helix angle or shape of insert

For end mills and milling cutters of solid or tipped design (letters “A”, “B”, “D”, “E”, “F”, “G” of symbol 6), the letter symbol shall be as shown in [Table 5](#):

**Table 5 — Designation for helix angle**

Normal helix angle $\lambda_s$	Letter symbol	
	Right-hand helix	Left-hand helix
0°	A	A
0° < $\lambda_s \leq 5^\circ$	B	M
5° < $\lambda_s \leq 10^\circ$	C	N
10° < $\lambda_s \leq 15^\circ$	D	P
15° < $\lambda_s \leq 20^\circ$	E	Q
20° < $\lambda_s \leq 25^\circ$	F	S
25° < $\lambda_s \leq 30^\circ$	G	T
30° < $\lambda_s \leq 35^\circ$	H	U
35° < $\lambda_s \leq 45^\circ$	J	V
45° < $\lambda_s \leq 60^\circ$	K	W
OTHERS	X	Y

For end mills and milling cutters with indexable insert design (letters “C”, “K”, “M”, “P”, “S”, “T”, “V”, “W”, “X” of symbol 6), the letter symbol shall be as shown in [Table 6](#):

**Table 6 — Designation for insert shapes**

Letter symbol	Insert shape	Insert type
H	Hexagonal	Equilateral and equiangular
O	Octagonal	
P	Pentagonal	
S	Square	
T	Triangular	
C	Rhombic with 80° included angle	Equilateral but non-equiangular
D	Rhombic with 55° included angle	
E	Rhombic with 75° included angle	
M	Rhombic with 86° included angle	
V	Rhombic with 35° included angle	
W	Trigon with 80° included angle	
L	Rectangular	Non-equilateral but equiangular
A	Parallelogram-shaped with 85° included angle	Non-equilateral and non-equiangular
B	Parallelogram-shaped with 82° included angle	
K	Parallelogram-shaped with 55° included angle	
R	Round	Round
U	Cutters equipped with cartridges or cassettes or nests	
X	Cutters equipped with other shapes of inserts	
Y	Cutters equipped with more than one shape of insert	










#### 4.9 Symbol identifying the type (symbol 9) and the style (symbol 10) of shank

Symbol 9 (type of shank or bore) and symbol 10 (style of shank or bore) are according to ISO/TS 13399-60. See [Table 7](#).


Table 7 — Designation for shank type and shank style

Letter symbol type of shank or bore <sup>a</sup>	Number symbol style of shank or bore <sup>b</sup>	Description of shank or bore	Illustration
ZYL	01	Straight cylindrical shank (ISO 3338-1)	
ZYL	03	Straight cylindrical shank with attachment thread	
ZYL	10	Straight cylindrical shank with plain clamping surface - Weldon shank	
ZYL	13	Straight cylindrical shank with 2° inclined clamping surface - Whistle notch shank without plain contact surface	
ZYL	14	Straight cylindrical shank with plain clamping surface and 2° inclined clamping surface	
ZYL	17	Straight cylindrical shank with plain clamping surface and attachment thread	
MKG	1x	Morse taper shank with attachment thread (for the second digit describing the coolant supply, see ISO/TS 13399-60)	
MKG	4x	Morse taper shank with attachment thread and positive drive (for the second digit describing the coolant supply, see ISO/TS 13399-60)	
BRP	01	Combined tapered and threaded shank with short cylinder - Bridgeport shank form R8	
SKG	1x	Taper 7/24 ISO 7388-1 A	
	2x	taper 7/24 ISO 297 N.M.T.B (DIN 2080-1)	
	3x	taper 7/24 ANSI Inch	
	4x	taper 7/24 ISO 7388-1 U	
	5x	taper 7/24 ISO 7388-1 J	
		steep taper (for the second digit describing the coolant supply, see ISO/TS 13399-60)	

Table 7 (continued)

Letter symbol type of shank or bore <sup>a</sup>	Number symbol style of shank or bore <sup>b</sup>	Description of shank or bore	Illustration
HSK	01	Hollow taper shank form A	
	05	hollow taper shank form C according to ISO 12164-1	
FDA	01	Longitudinal drive	
FDA	22	Milling cutter arbor with transversal drive and socket head cap screw (ISO 6462 A)	
FDA	12	Milling cutter arbor with transversal drive and cutter retaining screw (ISO 6462 B)	
SPK	01	Holding arbor with bolt circle: diameter 66,7 mm	
	02	diameter 101,6 mm	
	03	diameter 177,8 mm	
	04	diameter 66,7 mm and 177,8 mm	
	05	diameter 101,6 mm and 177,8 mm	
CCS	01	Polygonal taper with flange contact surface ISO 26623-1	

**Table 7** (continued)

Letter symbol type of shank or bore <sup>a</sup>	Number symbol style of shank or bore <sup>b</sup>	Description of shank or bore	Illustration
KMT	01	Modular taper with ball track system ISO 26622-1	
<p><sup>a</sup> Letter symbol type of shank or bore according to ISO/TS 13399-60.  <sup>b</sup> Number symbol style of shank or bore according to ISO/TS 13399-60.</p>			

#### 4.10 Symbol identifying the size of shank

The size of bore or shank shall be identified using a three-digit number symbol as shown in Examples 1 to 3:

- a) for cutters with bores; the nominal diameter of the bore, in millimetres;
- b) for bores smaller than 100 mm, the first digit is a zero;  
EXAMPLE 1 bore diameter  $\varnothing$  40 the symbol is "040"
- c) for cylindrical shanks, the nominal diameter, in millimetres;
  - 1) for shanks smaller than 100 mm and greater than or equal to 10 mm, the first digit is a zero;
  - 2) for shanks smaller than 10 mm, the first and second digit is a zero;  
EXAMPLE 2 shank diameter  $\varnothing$  25 the symbol is "025"  
EXAMPLE 3 shank diameter  $\varnothing$  8 the symbol is "008"
- d) for Morse taper shanks, the number of the Morse taper, preceded by two zeros;  
EXAMPLE 4 Morse taper size no. 4 the symbol is "004"
- e) for steep taper shanks (7/24 taper shanks), the number of the shank preceded by a zero;  
EXAMPLE 5 steep taper no 50 the symbol is "050"
- f) for hollow taper shanks (HSK), the nominal diameter, in millimetres;
  - for shanks smaller than 100 mm, the first digit is a zero.

EXAMPLE 6 HSK 125 the symbol is "125"

EXAMPLE 7 HSK 63 the symbol is "063"

## 5 Manufacturer's information

If manufacturers need to give additional information (e.g. to distinguish between different corner configurations), the designation code should be extended and explanatory details given, for example in their handbooks.

The extension shall be separated from the standard code by a hyphen (-).

An example of an extension of the standard code is as follows:

EXAMPLE



1	2	3	4	5	6	7	8	9	10	11	Manufacturer's information
32	G	04	R	090	A	012	S	ZYL	10	032	- .....

## 6 Additional information on cutting part material

When information is given about the material from which the cutting part of the end mill is made, this shall be given after the designation code, as necessary following the extension for the manufacturer's information.

An example of an extension of the standard code to include the manufacturer's additional information and information about the cutting part is as follows:

### EXAMPLE

1	2	3	4	5	6	7	8	9	10	11	Manufacturer's information	Cutting part material
32	G	04	R	090	A	012	S	ZYL	10	032	- .....	

## Annex A (informative)

### Relationship between designations in this International Standard and ISO 13399 (all parts)

#### A.1 Relationship between designations

For the relationship between designations in this International Standard and preferred symbols according to ISO 13399 (all parts), see [Table A.1](#).

**Table A.1 — Relationship between designations in this International Standard and ISO 13399 (all parts)**

Letter/number symbol in ISO 11529 (this International Standard)	Reference in ISO 11529 (this International Standard)	Property name in the ISO 13399 series	Symbol in the ISO 13399 series	Reference in the ISO 13399 series
Diameter (symbol 1)	4.1	Cutting diameter	DC	-ISO/TS 13399-3 ID-# 71D084653E57F
Type of milling cutter (symbol 2)	4.2	Not available		no ID-no.
Number of effective cutting edges (symbol 3)	4.3	— Face effective cutting edge count	-ZEFF	- ISO/TS 13399-3 ID-# 71DCCD00239812
		— peripheral effective cutting edge count	-ZAFP	- ISO/TS 13399-3 ID-# 71DCCFF75E485
Hand of cutting (symbol 4)	4.4	Hand	HAND	- ISO/TS 13399-3 ID-# 71CF29872F0AB
Cutting edge angle (symbol 5)	4.5	Tool cutting edge angle	KAPR	- ISO/TS 13399-3 ID-# 71D078F683C9B
Design of end mill or milling cutter (symbol 6)	4.6	Solid type: not available indexable type: insert mounting style code	IFS	- ISO/TS 13399-2 ID-# 71CE7A97711B8
Maximum cutting depth or width (symbol 7)	4.7	Cutting depth: depth of cut maximum	APMX	- ISO/TS 13399-3 ID-# 71D07576C0558
		Cutting width: cutting width maximum	CWX	- ISO/TS 13399-3 ID-# 71D07569F8BC3
Helix angle or shape of insert (symbol 8)	4.8	Helix: flute helix angle insert: insert shape code	FHA	- ISO/TS 13399-3 ID-# 71DCCFEC20115
			SC	- ISO/TS 13399-2 ID-# 71CE7A9F0C79F
Type of shank (symbol 9)	4.9	item_feature_class: connection_interface_feature		- ISO/TS 13399-60 ID-# 71CE7A72B6DA7
Style of shank (symbol 10)	4.9	item_feature_class: variant of connection_interface_feature		- ISO/TS 13399-60 ID-#
Size of shank (symbol 11)	4.10	Connection size code machine side	CZCMS	- ISO/TS 13399-60 ID-# 71FC193318002

## Bibliography

- [1] ISO 296, *Machine tools — Self-holding tapers for tool shanks*
- [2] ISO 297, *7/24 tapers for tool shanks for manual changing*
- [3] ISO 3338-1, *Cylindrical shanks for milling cutters — Part 1: Dimensional characteristics of plain cylindrical shanks*
- [4] ISO 3338-2, *Cylindrical shanks for milling cutters — Part 2: Dimensional characteristics of flatted cylindrical shanks*
- [5] ISO 3338-3, *Cylindrical shanks for milling cutters — Part 3: Dimensional characteristics of threaded shanks*
- [6] ISO 5413, *Machine tools — Positive drive of Morse tapers*
- [7] ISO 6462, *Face and shoulder milling cutters with indexable inserts — Dimensions*
- [8] ISO 7388-1, *Tool shanks with 7/24 taper for automatic tool changers — Part 1: Dimensions and designation of shanks of forms A, AD, AF, U, UD and UF*
- [9] ISO 12164-1, *Hollow taper interface with flange contact surface — Part 1: Shanks — Dimensions*
- [10] ISO 13399 (all parts), *Cutting tool data representation and exchange*
- [11] DIN 2080-1, *7/24 taper shanks for tools and clamping devices - Part 1: Type A*





# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™