

BS ISO 12617:2015



BSI Standards Publication

Road vehicles — Liquefied natural gas (LNG) refuelling connector — 3,1 MPa connector

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 12617:2015.

The UK participation in its preparation was entrusted to Technical Committee GSE/40, Gas supply equipment for natural gas vehicles.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.
Published by BSI Standards Limited 2015

ISBN 978 0 580 66556 1

ICS 43.060.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2015.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
12617

First edition
2015-03-15

**Road vehicles — Liquefied natural
gas (LNG) refuelling connector — 3,1
MPa connector**

*Véhicules routiers — Connecteur pour le remplissage de gaz naturel
liquéfié (GNL) — Connecteur à 3,1 MPa*



Reference number
ISO 12617:2015(E)

© ISO 2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General construction requirements	3
4.1 General.....	3
4.2 LNG refuelling nozzles.....	3
4.3 LNG nozzles and receptacles.....	3
4.4 Pressure rating.....	4
4.4.1 Working pressure (maximum allowable pressure).....	4
4.4.2 Maximum service pressure.....	4
4.4.3 Hydrostatic pressure.....	4
4.4.4 Working temperature.....	4
4.5 Materials.....	4
4.5.1 Corrosion protection.....	4
4.5.2 LNG nozzle and receptacles.....	4
4.5.3 Material of the bodies of the receptacle and of the nozzle.....	4
4.6 Hand operation.....	4
4.7 Sealing exchange.....	4
4.8 Installation.....	5
5 Nozzles	5
5.1 Venting depressurization.....	5
5.2 Identification.....	5
5.3 Internal check valve.....	5
6 Standard receptacle dimensions	5
6.1 Drawing.....	5
7 Receptacle	6
7.1 Cycle life.....	6
7.2 Design.....	6
7.3 Protective cap.....	6
7.4 Mounting.....	7
7.5 Maximum working temperature.....	7
8 Instructions	7
8.1 Clarity.....	7
8.2 List of tools.....	7
9 Marking	7
9.1 Clarity.....	7
9.2 Manufacturer and International Standard information.....	7
9.3 Date of manufacture.....	8
9.3.1 First and second digits.....	8
9.3.2 Third and fourth digits.....	8
9.4 Alternative marking.....	8
9.5 Additional marking.....	8

Contents

Page

10	Tests	8
10.1	General requirements	8
10.2	User interface	9
10.2.1	Positive locking	9
10.2.2	Safe disconnection	9
10.2.3	Manual force in warm conditions	9
10.2.4	Manual force at cold conditions under frost	9
10.3	Impact resistance of a nozzle	9
10.4	Receptacle protective cap	10
10.5	Leakage at room temperature	10
10.5.1	Nozzle	10
10.5.2	Receptacle	10
10.6	Abnormal loads	11
10.6.1	General	11
10.6.2	Test in the unpressurized condition	11
10.6.3	Test in pressurized condition	11
10.7	Durability of the device (Cycle life)	12
10.7.1	Concept of the test of a device	12
10.7.2	Cycle definition	12
10.7.3	Test series	12
10.7.4	Exchange of seal of the nozzle and/or receptacle	12
10.8	Electrical conductivity	12
10.9	Hydrostatic strength	13
10.9.1	Test configurations	13
10.9.2	Test procedure and evaluation	13
10.10	Corrosion resistance	13
10.11	Non-igniting evaluation	13
	Bibliography	14

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 25, *Vehicles using gaseous fuels*.

Road vehicles — Liquefied natural gas (LNG) refuelling connector — 3,1 MPa connector

1 Scope

This International Standard specifies liquefied natural gas (LNG) refuelling nozzles and receptacles constructed entirely of new and unused parts and materials for road vehicles powered by LNG. An LNG refuelling connector consists of, as applicable, the receptacle and its protective cap (mounted on the vehicle) and the nozzle. This International standard is applicable only to such devices designed for a maximum working pressure of 3,4 MPa (34 bar) to those using LNG as vehicle fuel and having standardized mating components.

NOTE All references to pressures given in megapascals and bar (1 bar = 0,1 MPa = 105 Pa; 1 MPa = 1 N/mm²) are to be considered gauge pressures, unless otherwise specified.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14469, *Road vehicles — Compressed natural gas (CNG) refuelling connector*

ISO 15500-2, *Road vehicles — Compressed natural gas (CNG) fuel system components — Part 2: Performance and general test methods*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

check valve

part of the receptacle, or of the nozzle, mounted inside which prevents return flow or venting of fuel after the nozzle was disconnected from the receptacle

3.2

cycle life

number of refuelling cycles, as specified in this International Standard, which the component can withstand without leak or without another fail of function

3.3

device

nozzle or receptacle

3.4

dry air

air with moisture content such that the dew point of the air at the required test pressure is at least 11 °C below the ambient test temperature

3.5

hydrostatic pressure

pressure to which a component is taken to verify the structural strength of the component

3.6
liquefied natural gas (LNG)

cryogenic liquid produced by reducing the temperature of natural gas to about -162 °C at atmospheric pressure

3.7
LNG refuelling connector

joined assembly of *LNG refuelling nozzle* (3.8) and receptacle

Note 1 to entry: Both parts have to have integrated mechanically opened *check valves* (3.1) which are operated by each other. The volume between the two check valves shall be reduced to a minimum to minimize the loss of fuel during the disconnection process.

3.8
LNG refuelling nozzle

device (3.3) which permits quick connection and disconnection of fuel supply hose to the LNG receptacle in a safe manner

3.9
LNG refuelling receptacle

device (3.3) connected to a vehicle or storage system which receives the *LNG refuelling nozzle* (3.8) and permits safe transfer of fuel

Note 1 to entry: The receptacle consists as minimum from a receptacle body and from a *check valve* (3.1) mounted inside the body.

3.10
maximum service pressure

maximum pressure of the fuel delivered by the fuelling station

3.11
nominal flow rate

flow rate through the connector at specified density of LNG and at specified pressure difference

3.12
poppet

movable closing part of the *check valve* (3.1)

3.13
positive locking means

feature which requires actuation of an interlocking mechanism to allow connection/disconnection of the nozzle from the receptacle

Note 1 to entry: It shall not be possible, except by actuation of the interlocking mechanism, to disconnect under unsafe conditions when an uncontrolled release of LNG can happen which causes damage to the user and/or the environment.

3.14
probe

part of the nozzle which enters inner space of the receptacle

3.15
working pressure (maximum allowable pressure)

maximum pressure that an *LNG refuelling connector* (3.7) can be expected to withstand in actual service

3.16
vapour spillage space

dead volume between the nozzle and the receptacle measured with trapped water

4 General construction requirements

4.1 General

This International Standard was developed to use in the examination, testing, and certification of newly produced liquefied natural gas (LNG) vehicle refuelling nozzles and receptacles and, as such, applies only to the nozzles and receptacles used in LNG refuelling systems and not to the system itself.

A nozzle certified to this International Standard will be functionally compatible from a safety and performance perspective with all listed receptacles of compatible profile and system pressure. Similarly, a certified receptacle will be functionally compatible from a safety and performance perspective with all the listed nozzles of compatible profile and system pressure.

As there may eventually be many different kinds of nozzles and receptacles available from a variety of manufacturers which, for safety reasons, must all be compatible with one another, this International Standard specifies a receptacle profile. The nozzle probe shall comply with the receptacle profile. This standard profile incorporates the design specification (mating dimensions, geometry and tolerances, and material requirements) which can be considered in the certification of a submitted nozzle or receptacle. This International Standard refers only to one working pressure and one application.

The construction and performance of nozzles and receptacles are based on the observation that three main parameters affect user safety and system compatibility, namely the following:

a) working pressure;

All nozzles and receptacles are designed to have a working pressure of 3,4 MPa.

b) design cycle life;

Frequency of use is the second parameter to be considered. Since frequency of use will differ with the nozzle/receptacle application (i.e. public sector, fleet employee, and residential), all receptacles will be tested at 10 000 connect/disconnect cycles for compliance with this International Standard (one fill per day for 27 years). In addition, all nozzles will be tested to a durability test of 20 000 cycles.

c) training.

Operator training required is in accordance with national requirements.

4.2 LNG refuelling nozzles

LNG fuelling nozzles, hereafter referred to as LNG nozzles, and receptacles, hereinafter both also referred to as devices, manufactured in accordance with this International Standard shall be designed in accordance with reasonable concepts of safety, durability, and maintainability.

4.3 LNG nozzles and receptacles

LNG nozzles and receptacles shall be

- designed to minimize the possibility of incorrect assembly,
- designed to be secure against displacement, distortion, warping, or other damage,
- constructed to maintain operational integrity under normal and reasonable conditions of handling and usage, and
- designed with a vapour spillage space less than 25 cm³.

4.4 Pressure rating

4.4.1 Working pressure (maximum allowable pressure)

3,4 MPa.

4.4.2 Maximum service pressure

3,1 MPa.

4.4.3 Hydrostatic pressure

2,5 times working pressure.

4.4.4 Working temperature

4.4.4.1 Receptacle working temperature range (–196 °C to +85 °C)

4.4.4.2 Nozzle working temperature range

The nozzle shall be designed for the temperature of the fuel –196 °C and for an ambient temperature range of –40 °C to +85 °C.

4.5 Materials

4.5.1 Corrosion protection

Corrosion-resistant materials shall be used (see [10.10](#)). Unless suitably protected against electrolytic corrosion, dissimilar metals shall not be used in contact with each other.

4.5.2 LNG nozzle and receptacles

LNG nozzles and receptacles shall be manufactured of materials suitable and compatible for use with LNG at the pressure and the temperature ranges to which they will be subjected which shall be declared by the manufacturer in the component documentation delivered with the product.

4.5.3 Material of the bodies of the receptacle and of the nozzle

Material of the bodies of the receptacle and of the nozzle should be

- a) suitable for the working temperature range,
- a) conductive [only conductive materials comply with the electric conductivity test (see [10.8](#))], and
- b) non-sparking according to [10.11](#).

4.6 Hand operation

LNG nozzles and receptacles shall be so designed as to be operated without the use of tools and excessive force for connecting and disconnecting.

4.7 Sealing exchange

Design of a device and its check valve sealing shall make possible exchange of the check valve sealing from the front side using suitable jig and related tools.

4.8 Installation

The receptacle shall be installed outside engine compartment.

5 Nozzles

5.1 Venting depressurization

Venting depressurization of all nozzle types is required prior to disconnection. Disconnection of all nozzles shall be accomplished in accordance with [10.2](#).

5.2 Identification

The nozzle shall bear a marking in accordance with [Clause 9](#), if necessary, indicating the direction of the open and shut off operation of the actuating mechanism.


5.3 Internal check valve

The nozzle is equipped with an internal check valve to prevent the escape of gas. The check valve poppet face contacts with the receptacle poppet face during connection and pushes the receptacle poppet into the open position to allow rated flow. The reaction force of a nozzle poppet in fully open position, typically supported by firm stop, shall be larger than the reaction force of receptacle in fully open position, defined by the stroke of the nozzle, as specified in [7.1](#). Provision shall be made that movement of receptacle is not limited by any mechanical part within its stroke as defined in [Clause 6](#).

6 Standard receptacle dimensions

6.1 Drawing

The receptacle shall comply with the dimensions shown in [Figure 1](#).

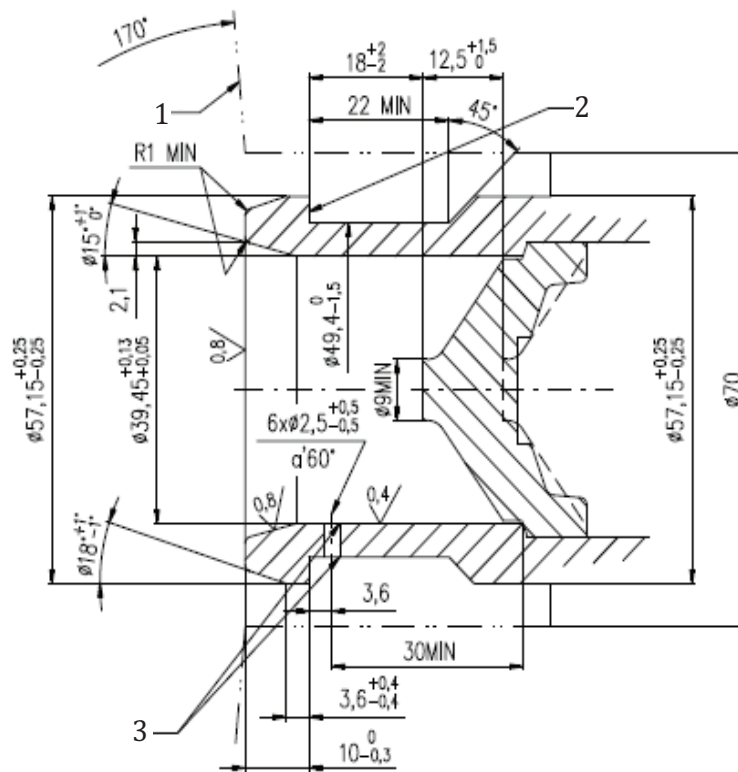

Key

- 1 clearance
- 2 nozzle
- 3 edge radius

Figure 1 — Dimensions of the receptacle

7 Receptacle

7.1 Cycle life

Receptacle shall have a cycle life as specified in [4.1](#).

7.2 Design

The receptacle shall be equipped with an internal check valve to prevent the escape of gas. The poppet of the check valve shall be pressed against the seat with a force of minimum 200 N at a non-pressurized receptacle. The back force of the receptacle poppet in fully open position shall be maximum of 460 N.

7.3 Protective cap

A receptacle manufacturer validated cap or equivalent design feature shall be provided to prevent dust, moisture, and other foreign debris from entering the receptacle. This also requires prevention of the dust entry through the venting holes. The cap has to allow small gas venting originated by warming the cold gas inside or a minor leak of the receptacle poppet (see [10.5.2](#)). The cap shall be marked by an undeletable writing of "LNG ONLY".

7.4 Mounting

The receptacle shall have provisions to be firmly attached to the vehicle and shall comply with applicable abnormal load tests (see 10.6).

7.5 Maximum working temperature

The receptacle shall not be installed in an area in which the temperature exceeds 85 °C.

8 Instructions

8.1 Clarity

Information required under this Clause for instructions and provisions for nozzles and receptacles to be specified shall be given in an easily understood form.

The manufacturers of receptacles and nozzles shall provide clear and concise printed instructions and diagrams in a form that can be easily understood and adequate for

- a) proper field assembly, installation,
- b) maintenance and periodic inspection,
- c) replacement of components as appropriate,
- d) safe operation by all users,
- e) suitability and use, and
- f) storage and handling.

8.2 List of tools

Special tools required for connection of nozzles and receptacles to tubing and assembly and disassembly of parts shall be clearly identified in the instructions.

9 Marking

9.1 Clarity

Information required under this Clause to be marked shall be in an easily understood form. Marking should be embossed, cast, stamped, or otherwise, formed in the part. This includes markings baked into an enamelled surface.

9.2 Manufacturer and International Standard information

Nozzles and receptacles shall bear the following information:

- manufacturer's name;
- trademark or symbol;
- model designation and/or part number;
- identification of this International Standard, i.e. ISO 12617.

9.3 Date of manufacture

Nozzles and receptacles shall each bear a date code marking.

The four-digit date code marking shall consist of at least four adjacent digits determined in the following Clauses.

9.3.1 First and second digits

It shall indicate the calendar year in which the nozzle, receptacle, or three-way valve was manufactured (e.g. 96 for 1996, 00 for 2000).

9.3.2 Third and fourth digits

It shall indicate the week in which the nozzle, receptacle, or three-way valve was manufactured (e.g. 03 for the third week of the year). For the purpose of this marking, a week shall begin at 00:01 h on Sunday and end at 24:00 h on Saturday.

A date code can be used for more than one week. However, it shall not be used for more than four consecutive weeks or for more than two weeks in the next calendar year.

9.4 Alternative marking

When a four-digit date code is not practical, the manufacturer shall submit a plan acceptable to the certifying agency which will outline means of establishing the date of manufacture so that it is traceable to the purchaser.

9.5 Additional marking

Additional numbers, letters, or symbols can follow the four digit number specified in a) and b). If additional numbers are used, they shall be separated from the date code.

Possible additional information:

- material of the body and its traceability number.

10 Tests

10.1 General requirements

The nozzle and receptacle tested shall be of the receptacle and nozzle designs specified in this International Standard.

Unless otherwise stated

- a) tests shall be conducted at room temperature (20 ± 5) °C;
- b) all pressure or leak tests, except hydrostatic test ([10.9](#)), shall be conducted with dry air or dry nitrogen as test gas;
- c) whenever cryogenic fluid is required, tests shall be conducted with liquid nitrogen or LNG;
- d) devices shall be conditioned to attain thermal equilibrium conditions.

Nozzle tests shall be done with the test fixtures which would use the receptacle dimensions as defined in [Clause 6](#). They can be equipped with special ports for test fluids more inboard than the flange plane.

10.2 User interface

10.2.1 Positive locking

It shall not be possible to deliver LNG unless the nozzle and receptacle are connected properly and positively locked.

10.2.2 Safe disconnection

Upon disconnection, the nozzle and the receptacle shall stop the flow of fluid. No hazardous condition shall result from disconnection.

10.2.3 Manual force in warm conditions

On depressurized devices, the axial force to connect and lock or unlock and disconnect the device shall be <90 N. The nozzle shall be capable of being disconnected with the forces or torques not exceeding 225 N or 7 Nm. In case of operation with two hands in one direction, total of both hands forces shall be under the required limit.


10.2.4 Manual force at cold conditions under frost

Effect of frost on removal force: the nozzle shall be conditioned to the temperature of liquid nitrogen under atmospheric pressure. It shall then be allowed to rest for 10 min while exposed to 95 % to 100 % relative humidity. The removal force or torque shall then be measured. The forces and torque moments shall be in compliance with [10.2.3](#).

10.3 Impact resistance of a nozzle

A nozzle shall be connected to a 5 m long and 25 mm nominal internal diameter (ID) refuelling hose, full of liquid nitrogen (LIN) under atmospheric pressure, conditioned to the temperature of the fluid, and then dropped 1,8 m onto a concrete floor as shown in [Figure 2](#). The nozzle shall be dropped four times from which the first drop shall be on the most critical area and the remaining three drops shall be equally distributed to each 90° rotational increment from this location. Then, the nozzle shall be conditioned to atmospheric temperature pressurized by dry nitrogen to 80 % of working pressure and subjected to four additional drops in the same locations as specified above. Following this, the nozzle shall be capable of normal connection and disconnection to the receptacle. In addition, the nozzle shall comply with all leakage tests specified in [10.5](#).

There shall be no evidence of damage to the nozzle that would affect the performance of the unit. If the carrying handles are bent following the test to a level sufficient enough to prevent operation, they shall be bent back to a position that allows operation. Breakage of the handles shall be considered a failure.

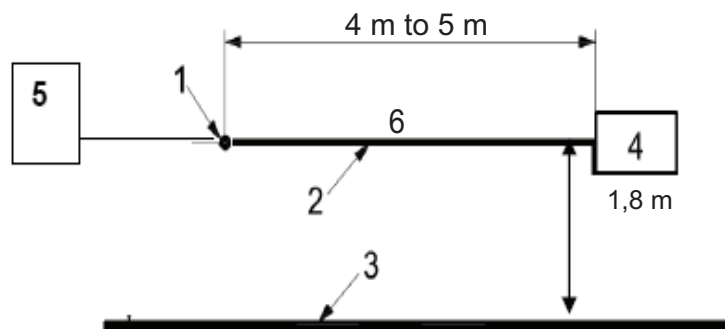

Key

- 1 suitable support
- 2 refuelling horse
- 3 concrete floor
- 4 nozzle
- 5 LIN vessel under atmospheric pressure
- 6 slope 10% to the right

Figure 2 — Impact resistance test arrangement

10.4 Receptacle protective cap

Receptacle manufacturer's or car manufacturer's declaration on suitability for as minimum 2 000 open/close operations and five year aging shall be available for approval.

10.5 Leakage at room temperature

10.5.1 Nozzle

A nozzle, whether coupled or uncoupled, shall be either bubble free for 1 min during the leak test or have a specified leak rate when tested as follows.

Tests shall be conducted at 0,5 MPa (5 bar) at the working pressure and then again at 0,5 MPa (5 bar). The maximum allowed leak is 30 cm³/h at 0,5 MPa and 60 cm³/h at working pressure.

Pressurized air or nitrogen shall be applied to the inlet of the coupled (or uncoupled) device. The external body shall then be checked for bubble tight leakage using immersion in room temperature water.

All connectors shall be checked for leakage for the period of five minutes after connection is finished and before disconnection is started. If there are no bubbles for a period of 1 min, the sample passes the test. If bubbles are detected, then the leak rate shall be measured by accumulation of the test gas leak trapped under water.

Alternatively, other methods of leak detection with equivalent or better sensitivity are applicable.

10.5.2 Receptacle

The receptacle check valve shall have a leak rate not exceeding 30 cm³/h at 0,5 MPa (5 bar) and 60 cm³/h at the working pressure or be bubble free for 5 min.


10.6 Abnormal loads

10.6.1 General

The connected nozzle and receptacle shall be subjected to the following abnormal loads for a period of 5 min in service. These tests (Figure 3) are to be conducted separately:

- a) force a pulls along the longitudinal axis of the nozzle or receptacle;
- b) moment b is applied in a worst-case direction.

The nozzle and receptacle shall be able to withstand abnormal loads of $a = 1\,350\text{ N}$ and $b = 120\text{ Nm}$ without distortion or damage and of $a = 2\,700\text{ N}$ and $b = 240\text{ Nm}$ without becoming so damaged as to leak. For moment b , the moment arm shall be measured as the length, L , from the reference point which is 0,048 m from the front of the receptacle to the hose inlet of the nozzle. The load for achieving the moment b shall be $F_b = b/L$ (see Figure 3). After completing these tests, the receptacle shall comply with 10.5.

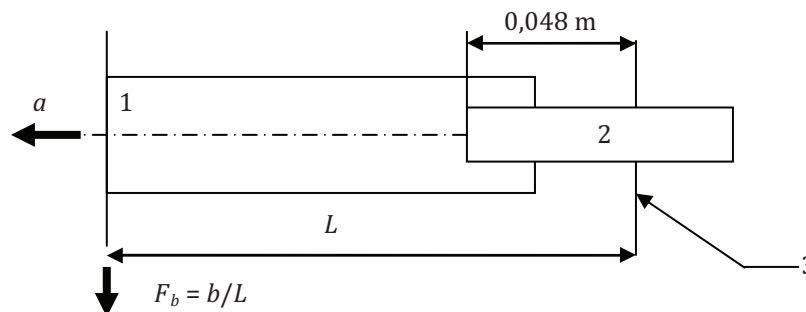

Key

- 1 nozzle
- 2 receptacle
- 3 reference point
- a force acting in the axis of the nozzle and receptacle
- F_b force acting perpendicularly to the axis in the distance, L , from the reference point

Figure 3 — Scheme of the loads for tests

10.6.2 Test in the unpressurized condition

The receptacle test fixture and nozzle shall not be pressurized during the abnormal load tests.

The receptacle shall be mounted as a cantilever to a supporting member in accordance with the manufacturer's instructions. For the purposes of this test, the supporting member shall be capable of withstanding the specified loads without displacement or deflection.

The loads applied and the device's ability to resist damage shall be as specified in 10.6.1.

After completion of the tests, the receptacle shall comply with 10.5.

10.6.3 Test in pressurized condition

The receptacle test fixture and nozzle shall be pressurized to 80 % of working pressure during the abnormal load tests.

The test fixture shall be mounted as a cantilever to a supporting member. The supporting member shall be capable of withstanding the specified loads without displacement or deflection. The nozzle shall be properly connected to the test fixture.

The loads applied and the devices' ability to resist damage shall be as specified in [10.6.1](#).

After completion of the tests, the receptacle shall comply with [10.5](#).

10.7 Durability of the device (Cycle life)

10.7.1 Concept of the test of a device

The test of the nozzle or receptacle shall be done for the number of refuelling cycles as specified in [4.1](#). Each cycle shall be sequence of actions as specified in [10.7.2](#). The test can then be split into test series as defined in [10.7.3](#).

10.7.2 Cycle definition

- a) A pressure of 1,4 MPa shall be applied to the nozzle and held during the test.
- b) The receptacle pressure shall be allowed to fluctuate as needed to sustain the required flow.
- c) The nozzle shall be connected to the receptacle.
- d) A continuous flow of cryogenic liquid shall be established.
- e) The flow shall be stopped.
- f) The nozzle shall be disconnected from the receptacle.

Frost can be removed according to the manufacturer's instructions.

10.7.3 Test series

A nozzle and receptacle can be operated in test series for number of cycles as defined before the test, but as minimum 1 000 cycles. The number of the cycles can be adjusted to the lifetime of the seal of the nozzle and/or of the receptacle and/or nozzle shroud seal or any other seal that can lead to leakages, whichever device is subject of the test, as specified by the manufacturer. No visible leakage of cryogenic liquid shall be observed during testing. In case the leak is rectified by exchange of the seal, it is not any reason for failing of the cycle test of the device (refer to [10.7.4](#)). Upon completion of any of the series, the leakage test in accordance with [10.5](#) can be conducted, but in any case, it shall be done after the full number of cycles required for the device. Failure of any leakage test during the durability cycling shall constitute a failure of the device.

10.7.4 Exchange of seal of the nozzle and/or receptacle

The seals of the nozzle or receptacle can be replaced according to the device manufacturer instructions after the leakage test following every series of cycles or in the middle of the series if the sealing fails. If replacement is needed, note of the replacement shall be made in the test report.

10.8 Electrical conductivity

The electrical resistance of the connected receptacle and nozzle shall not be greater than 1 000 ohms in both the pressurized and unpressurized state. Tests shall be conducted prior to and after durability tests ([10.7](#)).

10.9 Hydrostatic strength

CAUTION — Since the hydrostatic strength test is a terminal test, do not use the test samples for any further testing.

For safety reasons, water or another suitable liquid can be applied as test fluid.

10.9.1 Test configurations

The hydrostatic test shall be applied to the following assemblies:

- a) an uncoupled nozzle from the inlet side (with the check valve closed);
- b) an uncoupled receptacle from the outlet side (with the check valve closed);
- c) a connected nozzle and receptacle (with the check valves open).

10.9.2 Test procedure and evaluation

Any uncoupled nozzle, uncoupled receptacle, and coupled nozzle and receptacle shall not rupture when subjected to the following test. Outlet openings of the respective assembly, a) to c), shall be plugged and valve seats or internal blocks made to assume the open position.

Hydrostatic pressure according to [4.4.3](#) shall be applied to the assembly for at least 3 min.

10.10 Corrosion resistance

Nozzles and receptacles shall not sustain corrosion or loss of protective coatings and shall be capable of performing safely subsequent to the following test.

Previously untested samples shall be used. Protective caps shall be in place. Vent holes shall not be plugged.

The devices shall be supported in a horizontal position. The devices shall be exposed to a salt spray in accordance with ISO 15500-2.

A pressure of 0,5 MPa (5 bar) air shall also be continuously applied to the inlet of the nozzle. The nozzle shall be operated once an hour to dispense air to the atmosphere through a dummy receptacle during the first 8 h of the test period.

After being rinsed and gently cleaned of salt deposits, the nozzles and receptacles shall then comply with room temperature leakage tests (see [10.5](#)).

10.11 Non-igniting evaluation

Materials which have been demonstrated to be non-sparking shall be deemed as being non-igniting. Otherwise, they shall be subjected to no igniting evaluation according to ISO 14469.

Bibliography

- [1] IEC 60534, *Industrial-process control valves*
- [2] ISO 12614-1, *Road vehicles — Liquefied natural gas (LNG) fuel system components — Part 1: General requirements and definitions*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™