

BS ISO 13110:2012



BSI Standards Publication

Cigarettes — Determination of menthol in smoke condensates — Gas-chromatographic method

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 13110:2012.

The UK participation in its preparation was entrusted to Technical Committee AW/40, Tobacco and tobacco products.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2012.
Published by BSI Standards Limited 2012

ISBN 978 0 580 75142 4

ICS 65.160

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 October 2012.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
13110

First edition
2012-10-15

**Cigarettes — Determination of
menthol in smoke condensates — Gas-
chromatographic method**

*Cigarettes — Dosage du menthol dans les condensats de fumée —
Méthode par chromatographie en phase gazeuse*



Reference number
ISO 13110:2012(E)

© ISO 2012



COPYRIGHT PROTECTED DOCUMENT

© ISO 2012

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 13110 was prepared by Technical Committee ISO/TC 126, *Tobacco and tobacco products*.

Introduction

No machine smoking regimen can represent all human smoking behaviour:

- it is recommended that cigarettes also be tested under conditions of a different intensity of machine smoking than those specified in this International Standard;
- machine smoking testing is useful to characterize cigarette emissions for design and regulatory purposes, but communication of machine measurements to smokers can result in misunderstandings about differences in exposure and risk across brands;
- smoke emission data from machine measurements may be used as inputs for product hazard assessment, but they are not intended to be nor are they valid as measures of human exposure or risks. Communicating differences between products in machine measurements as differences in exposure or risk is a misuse of testing using ISO standards.

Cigarettes — Determination of menthol in smoke condensates — Gas-chromatographic method

1 Scope

This International Standard specifies a method for the gas-chromatographic determination of menthol in the total particulate matter (TPM) of mentholated cigarette smoke condensates. The smoking of cigarettes and the collection of mainstream smoke are carried out in accordance with ISO 4387 with some exceptions (see Annex A).

Encapsulated menthol in specific products may lead to specific handling not described in this International Standard.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4387, *Cigarettes — Determination of total and nicotine-free dry particulate matter using a routine analytical smoking machine*

ISO 8243, *Cigarettes — Sampling*

3 Principle

The total particulate matter from the mainstream smoke is dissolved in a solvent containing an internal standard. The menthol content of an aliquot of the solution is determined by gas chromatography, and the menthol content of the total particulate matter of the mainstream smoke is calculated.

4 Reagents

Use only reagents of recognized analytical grade.

4.1 Carrier gas: helium, nitrogen or hydrogen of high purity.

4.2 Auxiliary gases: air and hydrogen of high purity for the flame ionization detector.

4.3 Propan-2-ol, methanol or ethanol may also be used.

4.4 Internal standard: *n*-heptadecane (of purity at least 99 %). Other appropriate internal standards (such as, but not limited to, carvone, anethole) may be used after assessment of their stability, purity and confirmation that the internal standard does not co-elute with other components of the smoke extract from the gas chromatographic column.

The peak area of internal standard in the smoke extract of samples and standards should be consistent. In cases where inconsistencies are found, analysis of an extraction of a smoke sample without the internal standard in the extraction solution should be performed to confirm the absence of a peak in the smoke extract eluting at the same time as the internal standard.

4.5 Extraction solvent: propan-2-ol (4.3) containing an appropriate mass concentration of internal standard (4.4); this is normally in the range of 0,2 mg/ml to 0,5 mg/ml. Other appropriate solvents (such as, but not limited to, ethanol, methanol) may be used after assessment of their extraction efficiency. Solvent not stored in a temperature-controlled laboratory shall be allowed to equilibrate to room temperature before use.

NOTE Room temperature should be indicative of temperatures around 22 °C. If the room temperature is substantially different from 22 °C then all solvents and internal standards need to be tested to prove their viability for use in the method under the temperature conditions of the laboratory.

4.6 Reference substance: menthol, of known purity (> 99 %).

NOTE It is recommended to store menthol in an air tight container not exposed to a heat source and light. Storage at a temperature lower than 4 °C is recommended.

4.7 Calibration solutions

Dissolve the menthol (4.6) in the extraction solvent (4.5) to produce a series of at least four calibration solutions whose mass concentrations cover the range expected to be found in the test portion (usually 0,02 mg/ml to 1,0 mg/ml). Solvent and solutions stored at low temperatures shall be allowed to equilibrate to room temperature before use.

For the stock solution, store in a refrigerator and replace after a maximum of three months, or a time proven to show equivalent stability.

For the working standards, store in a refrigerator and replace after a maximum of one month or a time proven to show equivalent stability

NOTE Room temperature should be indicative of temperatures around 22 °C. If the room temperature is substantially different from 22 °C then all solvents, internal standards, and calibration standards need to be tested to prove their viability for use in the method under the temperature conditions of the laboratory.

5 Apparatus

Usual laboratory apparatus and, in particular, the following items.

5.1 Gas-chromatograph, equipped with a split/splitless multimode injector, a flame ionization detector, and a computerized controlled data acquisition and processing system.

NOTE A recorder and integrator are acceptable if proven to be operational for intended purpose.

5.2 Column, DB-WAX¹⁾, 1 µm film thickness, 0,53 mm internal diameter and preferably 30 m length or any other type of column showing equivalent separation capability. An example chromatogram is given in Figure C.1.

6 Procedure

6.1 Sampling

Sampling is done in accordance with ISO 8243.

NOTE For special precautions to be taken in sampling, see Annex B.

1) DB-WAX is an example of a suitable product available commercially. This information is given for the convenience of users of this document and does not constitute an endorsement by ISO of this product.

6.2 Test portion

Prepare the test portion by dissolving the total particulate matter obtained by the machine smoking of a known number of cigarettes in a fixed volume of the extraction solvent (4.5) of 20 ml for 44 mm filter discs (pads), or 50 ml for 92 mm filtered discs (pads), ensuring that the disc (pad) is fully covered and shake the sample on an orbital shaker or shaker shown to be equivalent for minimum of 20 min. The volume may be adjusted to give a concentration of menthol appropriate for the calibration curve (see 6.4) provided that there is adequate volume for effective extraction of the smoke condensate. For standard smoking, refer to ISO 4387 and Annex A of this International Standard (i.e. ISO 13110).

6.3 Setting up the apparatus

Set up the apparatus and operate the gas chromatograph (5.1) in accordance with the manufacturer's instructions. Ensure that the peaks for solvent, internal standard, menthol and other smoke component peaks are well resolved. It is recommended to equip the gas chromatograph with an autosampler for sample injection.

Suitable operating conditions may be as follows for the column described in 5.2:

- carrier gas: helium at a flow rate of about 12 ml/min;
- make up gas: helium at a flow rate of about 5 ml/min;
- injection temperature: 200 °C;
- split ratio (approximately): 10/1;
- injection volume: 1 µl;
- oven temperature 1: 100 °C;
- time period 1 (*initial*): 2 min;
- temperature program 1: 10 °C/min;
- oven temperature 2: 150 °C;
- time period 2 (*intermediate*): 0,2 min;
- temperature program 2: 20 °C/min;
- oven temperature 3: 200 °C;
- time period 3 (*final*): 3 min;
- detector temperature: 250 °C.

Using the above conditions, the analysis time is about 6 min to 8 min per sample.

NOTE The column conditions are dependent on the column specified in 5.2, or an appropriate alternative that has been tested.

6.4 Calibration of the gas chromatograph

Inject an aliquot (such as 1 µl) of each of the calibration solutions (4.7) into the gas chromatograph. Record the peak areas of the menthol and internal standard (4.4).

Calculate the ratio of the menthol peak to the internal standard peak from the peak area data for each of the calibration solutions. Generate a calibration curve by calculating a linear regression equation of the peak area ratios as a function of the concentration of menthol. The intercept of the regression line should be close to zero; if the intercept is not close to zero an investigation should occur to explain the situation, and the calibration should be repeated if necessary.

Perform this full calibration procedure daily before use. In addition, inject an aliquot of an intermediate concentration standard, which should be prepared from a separate stock, after every 20 sample determinations. If the calculated concentration for this solution differs by more than 3 % from the original value, repeat the full calibration procedure.

6.5 Determination

Inject aliquots (1 µl) of the test portion (6.2) into the gas chromatograph. Calculate the ratio of the menthol peak/internal standard peak from the peak area data and obtain the concentration of menthol in the solution by input of this ratio in the calibration curve.

7 Expression of results

From the concentration of menthol in the test portion, determine the amount of menthol in the total particulate matter. Express the test results in milligrams per cigarette, m_M , for each channel to the nearest 0,01 mg, and the average per cigarette to the nearest 0,01 mg.

8 Repeatability and reproducibility

An international collaborative study involving 17 laboratories and three samples, conducted in 2010, showed that when cigarettes are smoked in accordance with ISO 4387 and the resulting smoke solutions are analysed by this method, the following values for the repeatability limit (r) and the reproducibility limit (R) are obtained.

Data analysis gave the estimates as summarized in Table 1.

Table 1 — Estimates given by data analysis

Brand	Mean value	Repeatability limit	Reproducibility limit
	m_M	r	R
	mg per cigarette	mg per cigarette	mg per cigarette
A	0,173	0,014	0,060
B	0,079	0,018	0,045
C	0,741	0,047	0,160

9 Test report

The test report shall state the yield of menthol per cigarette smoked and the method used, and shall include all conditions which may affect the result (e.g. test conditions, smoking regime). It shall also give all details necessary for the identification of the cigarette sample smoked.

Annex A (normative)

Smoking procedure for the determination of menthol in smoke condensates

The cigarettes are smoked according to the procedure described in ISO 4387. However, in the determination of the menthol content, **the following exceptions** concerning the preparation and conditioning of the cigarette samples apply.

- After sample receipt, samples shall be stored in such a way as to avoid loss of menthol, and the possible contamination of non-mentholated products.
- Conditioning of the cigarettes cannot be carried out as usual due to the sublimation of menthol, therefore cigarettes have to be conditioned in their sealed pack.
- During sample preparation for smoking, samples shall be prepared as quickly as possible on the day of analysis in order to minimize loss of menthol. After sample preparation, including butt marking, is complete, the cigarettes shall be kept in a closed container until they are smoked. The maximum storage time in these containers shall not exceed 4 h.
- After the smoking process is complete, leave the cigarette butt in place for at least 30 s to enable deposition of any residual smoke in the trap.

Annex B **(informative)**


Precautions to be taken for the sampling

Menthol can be applied on different parts of the product or of the packaging. Depending on the chosen method of menthol application it may be necessary to keep the closed packs for a minimum number of days (e.g. 21 d) in a conditioning atmosphere of (22 ± 2) °C and (60 ± 5) % RH before proceeding with the smoking. Menthol also diffuses slowly out of the packs, therefore it is recommended to smoke the cigarettes within three months from the day of production.

Encapsulated menthol in specific products may require specific handling not described in this International Standard for the determination.

Annex C (informative)

Example chromatogram

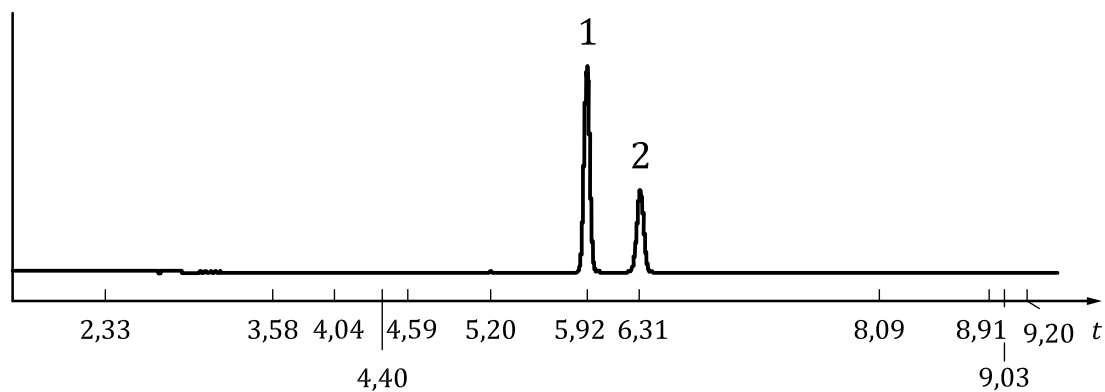

Peak identification

- 1 menthol
- 2 internal standard (*n*-heptadecane)

NOTE 1 *t* denotes time (minutes).

NOTE 2 A column according to 5.2 and gas chromatograph settings according to 6.3 have been used.

Figure C.1 — Example chromatogram

Bibliography

- [1] ISO 3308, *Routine analytical cigarette-smoking machine — Definitions and standard conditions*
- [2] ISO 3402, *Tobacco and tobacco products — Atmosphere for conditioning and testing*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™