

BS ISO 13674-1:2010



BSI Standards Publication

Road vehicles — Test method for the quantification of on- centre handling

Part 1: Weave test

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

raising standards worldwide[™]

Provided by IHS
No reproduction or networking permitted without license from IHS

Not for Resale



National foreword

This British Standard is the UK implementation of ISO 13674-1:2010. It supersedes BS ISO 13674-1:2003 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee AUE/15, Safety related to vehicles.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© BSI 2010

ISBN 978 0 580 67634 5

ICS 43.020

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2010

Amendments issued since publication

Date	Text affected
------	---------------

**Road vehicles — Test method for the
quantification of on-centre handling —**

**Part 1:
Weave test**

*Véhicules routiers — Méthode d'essai pour la quantification
du centrage —*

Partie 1: Essai en petite sinusoïde au volant



Reference number
ISO 13674-1:2010(E)

© ISO 2010

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2010

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction.....	v
1 Scope	1
2 Normative references	1
3 Terms, definitions and symbols	1
4 Principle.....	2
5 Variables.....	2
5.1 Reference system	2
5.2 Variables to be measured	2
6 Measuring equipment	3
6.1 Description	3
6.2 Transducer installations	3
6.3 Data processing.....	3
7 Test conditions	3
7.1 General	3
7.2 Test track.....	4
7.3 Wind velocity	4
7.4 Test vehicle	4
8 Procedure	5
8.1 Warm-up	5
8.2 Initial driving condition	5
8.3 Weave test procedure	5
9 Data evaluation and presentation of results.....	6
9.1 General	6
9.2 Time histories	6
9.3 Calculated lateral acceleration.....	6
9.4 Characteristic values	6
Bibliography.....	9

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 13674-1 was prepared by Technical Committee ISO/TC 22, *Road vehicles*, Subcommittee SC 9, *Vehicle dynamics and road-holding ability*.

This second edition cancels and replaces the first edition (ISO 13674-1:2003), which has been technically revised.

ISO 13674 consists of the following parts, under the general title *Road vehicles — Test method for the quantification of on-centre handling*:

- *Part 1: Weave test*
- *Part 2: Transition test*

Introduction

The main purpose of this part of ISO 13674 is to provide repeatable and discriminatory test results.

The dynamic behaviour of a road vehicle is a very important aspect of active vehicle safety. Any given vehicle, together with its driver and the prevailing environment, constitutes a closed-loop system that is unique. The task of evaluating the dynamic behaviour is therefore very difficult since the significant interaction of these driver-vehicle-environment elements are each complex in themselves. A complete and accurate description of the behaviour of the road vehicle necessarily involves information obtained from a number of different tests.

Since this test method quantifies only one small part of the complete vehicle handling characteristics, the results of these tests can only be considered significant for a correspondingly small part of the overall dynamic behaviour.

Moreover, insufficient knowledge is available concerning the relationship between overall vehicle dynamic properties and accident avoidance. A substantial amount of work is necessary to acquire sufficient and reliable data on the correlation between accident avoidance and vehicle dynamic properties in general and the results of these tests in particular. Consequently, any application of this test method for regulation purposes will require proven correlation between test results and accident statistics.

.....

Road vehicles — Test method for the quantification of on-centre handling —

Part 1: Weave test

1 Scope

This part of ISO 13674 specifies a test schedule that addresses a particular aspect of the on-centre handling characteristics of a vehicle: the weave test. It is applicable to passenger cars in accordance with ISO 3833, and to light trucks.

NOTE The manoeuvre specified in this test method is not representative of real driving conditions but is useful for obtaining measures of vehicle on-centre handling behaviour in response to a specific type of steering input under closely controlled test conditions. Other aspects of on-centre handling are addressed in the companion ISO/TS 20119 and ISO 13674-2.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 1176, *Road vehicles — Masses — Vocabulary and codes*

ISO 2416, *Passenger cars — Mass distribution*

ISO 3833, *Road vehicles — Types — Terms and definitions*

ISO 8855, *Road vehicles — Vehicle dynamics and road-holding ability — Vocabulary*

ISO 15037-1:2006, *Road vehicles — Vehicle dynamics test methods — Part 1: General conditions for passenger cars*

3 Terms, definitions and symbols

For the purposes of this document, the terms, definitions and symbols given in ISO 1176, ISO 2416, ISO 3833, ISO 8855 and the following apply.

3.1

on-centre handling

description of the steering “feel” and precision of a vehicle during nominally straight-line driving and in negotiating large radius bends at high speeds but low lateral accelerations

3.2

ordinate deadband

vertical width of the hysteresis loops at abscissa zero

- 3.3**
abscissa deadband
horizontal width of the hysteresis loops at ordinate zero
- 3.4**
gradient
ratio of change in the ordinate with respect to a unit change in the abscissa, evaluated on each side of the hysteresis loop

4 Principle

On-centre handling represents that part of the straight-line directional stability characteristics of the vehicle existing at lateral acceleration levels, typically no greater than 1 m/s^2 . On-centre handling is concerned primarily with features that directly influence the driver's steering input, such as steering system and tyre characteristics. Thus, test schedules for the evaluation of on-centre handling behaviour seek to minimize other factors that influence the wider aspects of straight-line directional stability, such as disturbance inputs due to ambient winds and road irregularities.

This part of ISO 13674 defines a test schedule that involves driving the vehicle in a nominally straight line at a constant forward speed. During the test, driver inputs and vehicle responses are measured and recorded. From the recorded signals, characteristic values are calculated.

5 Variables

5.1 Reference system

The variables of motion used to describe vehicle behaviour in a test-specific driving situation relate to the intermediate axis system (X, Y, Z) (see ISO 8855).

The location of the origin of the vehicle axis system (X_V, Y_V, Z_V) is the reference point and therefore should be independent of the loading condition. The origin is therefore fixed in the longitudinal plane of symmetry at half-wheelbase and at the same height above the ground as the centre of gravity of the vehicle at complete vehicle kerb mass (see ISO 1176).

5.2 Variables to be measured

When using this test method, the following variables shall be measured:

- steering-wheel angle, δ_H ;
- steering-wheel torque, M_H ;
- yaw velocity, $\frac{d\psi}{dt}$;
- longitudinal velocity, v_X .

The following variables should be measured:

- lateral acceleration, a_Y ;
- steering-wheel angular velocity, $\frac{d\delta_H}{dt}$.

See ISO 8855.

6 Measuring equipment

6.1 Description

All variables shall be measured by means of appropriate transducers and their time histories shall be recorded by a multi-channel recording system. Typical operating ranges and recommended maximum errors of the combined transducer and recording system are shown in Table 1.

Table 1 — Variables, typical operating ranges and recommended maximum errors

Variable	Typical operating range ^a	Recommended maximum error of combined system ^b
Steering-wheel angle	$\pm 50^\circ$	$\pm 0,1^\circ$
Steering-wheel torque	$\pm 0,1 \text{ N} \cdot \text{m}$	$\pm 0,1 \text{ N} \cdot \text{m}$
Yaw velocity	$\pm 10 \text{ }^\circ/\text{s}$	$\pm 0,1 \text{ }^\circ/\text{s}$
Longitudinal velocity	0 m/s to 50 m/s	$\pm 0,5 \text{ m/s}$
Lateral acceleration	$\pm 5 \text{ m/s}^2$	$\pm 0,1 \text{ m/s}^2$
Steering-wheel angular velocity	$\pm 100 \text{ }^\circ/\text{s}$	$\pm 1 \text{ }^\circ/\text{s}$
Transducers for measuring some of the listed variables are not widely available and are not in general use. Many such instruments are developed by users. If any system error exceeds the recommended maximum value, this and the actual maximum error shall be stated in the test report (see ISO 15037-1:2006, Annex A).		
^a These transducer ranges are appropriate for the standard test conditions and might not be suitable for non-standard test conditions.		
^b The values for maximum errors are provisional until more experience and data are available.		

6.2 Transducer installations

The transducers shall be installed according to the manufacturers' instructions, where such instructions exist, so that the variables corresponding to the terms and definitions of ISO 8855 can be determined.

If a transducer does not measure a variable directly, appropriate transformations into the specified reference system shall be carried out.

NOTE Lateral acceleration, as defined, is measured in the intermediate XY -plane. However, for the purpose of this test procedure, measurement of "sideways" acceleration in the vehicle $X_V Y_V$ -plane (i.e. corrupted by vehicle roll) is typically adequate, provided that the roll angle versus lateral acceleration characteristic for the vehicle is known and an appropriate correction in respect of roll angle can be made to the "sideways" acceleration.

6.3 Data processing

See ISO 15037-1:2006, 4.3.

7 Test conditions

7.1 General

See ISO 15037-1:2006, Clause 5.

7.2 Test track

The test track requirements shall be in accordance with those of ISO 15037-1:2006, 5.2. In addition, the gradient of the test surface should not exceed 1 %, and the test track shall follow a straight-line path.

7.3 Wind velocity

During a test, the ambient wind velocity shall not exceed 5 m/s when measured at a height above ground of not less than 1 m. Ideally, the maximum ambient wind velocity should not exceed 1,5 m/s. If this cannot be achieved, then conditions of significant “gusting” should be avoided, i.e. testing should be avoided in conditions where changes in wind velocity exceed a range of 1,5 m/s. In the event that the ambient velocity exceeds 1,5 m/s or the range of “gusting” exceeds 1,5 m/s, or both, the vehicle should be tested in a direction such that the ambient wind is a tail wind. For each test, the climatic conditions shall be recorded in the test report (see ISO 15037-1:2006, Annex B).

Where measurement of wind velocity is not possible, estimation using the Beaufort scale is suggested (see Table 2).

Table 2 — Estimation scale for wind intensity for observer without measuring instrument (Beaufort scale)

Wind intensity (Beaufort scale)	0	1	2	3	4
Name	Calm	Light air	Light breeze	Gentle breeze	Moderate breeze
Velocity m/s	0 to 0,2	0,3 to 1,5	1,6 to 3,3	3,4 to 5,4	5,5 to 7,9
Identification sign	Smoke rises vertically in a straight line	Wind direction indicated only by smoke	Leaves rustle, wind felt in face	Leaves and thin twigs move	Moves twigs and thin branches, dust rises

7.4 Test vehicle

7.4.1 General data

See ISO 15037-1:2006, 5.4.1.

7.4.2 Tyres

For general information regarding tyres used for test purposes, see ISO 15037-1:2006, 5.4.2. In addition, the following recommendations are offered for guidance.

Since tyre characteristics can have a profound effect upon the vehicle behaviour being measured in this procedure, tyres with known characteristics should be used wherever possible. Failing this, original equipment rather than replacement market tyres should be used.

For similar reasons, caution should be exercised if worn tyres are to be used. For example, it is known that some tyre characteristics affecting vehicle on-centre handling change significantly during the early wear life (up to several thousand kilometres) of the tyre, but continue to change throughout the life of the tyre. In any event, tyres without a known history should be avoided.

All wheel/tyre assemblies should be balanced before use. Assemblies exhibiting large run-out or imbalance (detectable as vibration at road wheel rotational frequency) should be avoided.

7.4.3 Operating components

See ISO 15037-1:2006, 5.4.3.

7.4.4 Loading conditions of vehicle

See ISO 15037-1:2006, 5.4.4.

8 Procedure

8.1 Warm-up

See ISO 15037-1:2006, 6.1.

8.2 Initial driving condition

This test schedule does not mandate any specific initial driving condition. However, the user may find a steady-state, straight-ahead run useful for establishing the vehicle at the required longitudinal test velocity and obtaining transducer reference values. In this event, the procedure in accordance with ISO 15037-1:2006, 6.2.2 and Figure 2, should be used. The user could find it useful to end the steer input by re-establishing the steady-state, straight-ahead condition at the end of the test run.

See ISO 15037-1:2006, 6.2, for guidance on selection of the appropriate transmission gear for performing the test.

8.3 Weave test procedure

The weave test is an open-loop procedure conducted on a test track that follows a straight-line path. The vehicle is driven at a nominally constant longitudinal velocity.

The standard test velocity is 100 km/h.

Other longitudinal velocities may be used: they should be decremented or incremented by 20 km/h from the standard velocity. Details shall be recorded in the test report (see ISO 15037-1:2006, Annex B, under *Test method specific data*).

The transducer signals shall be recorded throughout the initial driving condition, if applicable, and for the duration of the test. In order to ensure that the required data are not affected by the instrumentation system, recording should be continued for a further 1 s after the test runs.

The weave test procedure requires the steering-wheel to be subjected to an oscillatory input. The preferred steering input waveform is nominally sinusoidal, but other steering input waveforms (e.g. triangular) may be used. The frequency of the steering input shall be $0,2 \text{ Hz} \pm 10 \%$.

The amplitude of the steering input shall be sufficient to produce the required peak value of vehicle lateral acceleration $\pm 10 \%$. To ensure that good and adequate test data are available for analysis at lateral acceleration levels of 1 m/s^2 and that the vehicle and its subsystems are working outside of hysteresis effects, the standard peak value is 2 m/s^2 , but lower values and values up to 4 m/s^2 may also be used.

Details of the steering input waveform and the lateral acceleration amplitude shall be recorded in the test report (see ISO 15037-1:2006, Annex B, under *Test method specific data*).

Throughout the test, both the peak amplitude of the steering angle and the angular velocity of the steering-wheel through the centre position shall be as near constant as possible. In addition, variation in the position of the accelerator pedal shall be kept to a minimum, consistent with maintaining vehicle longitudinal velocity within required limits. The longitudinal velocity during the test sequence or sequences to be used for data analysis shall not vary from the nominal value by more than $\pm 3 \%$.

Choice of data used for analysis is based upon consistency of steering input and of vehicle longitudinal velocity relevant to that data. A minimum of four consistent cycles of steering input and of vehicle response are required for subsequent data analysis.

The steering input for this test may be made manually or with a steering robot machine. Where manual input is used, in order to obtain the minimum number of cycles required for analysis, the test should be performed for a minimum continuous duration of 40 s, sufficient to capture at least eight cycles of data. Where proving-ground space limitations prohibit a run of this duration, and consequently the reliable capture of a sufficiently long sequence of consistent data, it is permissible to perform a series of shorter runs and to combine the data for analysis. In this event, a nominal 20 cycles of data should be captured and statistical methods should be used during analysis. The use of a steering robot offers the possibility of enhanced consistency of steering input and hence of test data, allowing fewer test cycles.

9 Data evaluation and presentation of results

9.1 General

General data shall be presented in the test report in accordance with ISO 15037-1:2006, Annexes A and B. For every change in vehicle loading or configuration, the general data shall be documented again.

At the present level of knowledge, it is not yet known which variables best represent the subjective feeling of the driver and which variables — i.e. which characteristic values — best describe the dynamic reactions of vehicles. Therefore, the following specified variables represent only examples for the evaluation of results.

NOTE Variables evaluated from runs performed at different nominal peak amplitudes of lateral acceleration, or from runs performed using different waveforms of steering input, might not be comparable.

9.2 Time histories

Time histories serve to monitor correct test performance and functioning of the transducers. In particular, the time histories of steering angle amplitude, steering-wheel angular velocity, vehicle longitudinal velocity and vehicle lateral acceleration are examined to identify valid data for evaluation. A minimum of four consistent cycles, for which the control criteria are best met, shall be selected for data analysis. Time histories of the variables listed in Clause 5 shall be presented for the data selected for analysis.

9.3 Calculated lateral acceleration

Instead of using measured lateral acceleration, a_Y , in the derivation of several of the characteristic values identified in 9.4, the parameter “calculated lateral acceleration” may be used. Calculated lateral acceleration, a_{YC} , is calculated as the product of yaw velocity, $d\psi/dt$ (in radians per second) and longitudinal velocity, v_X , and is expressed in units of metres per second squared:

$$a_{YC} = \frac{d\psi}{dt} v_X$$


NOTE Characteristic values evaluated using calculated lateral acceleration are not comparable with those evaluated using measured lateral acceleration.

9.4 Characteristic values

9.4.1 General

The recorded variables are taken in pairs (see 9.4.2 to 9.4.6) and plotted one against the other on Cartesian co-ordinates. For each pair of variables, this produces a series of hysteresis loops laid one over another, the number of loops corresponding to the number of data cycles analysed.

The hysteresis loops should be “averaged” by some suitable method. The recommended method is to make a polynomial curve fit to the combined data over the range “A” for each of the upper and lower sides of the combined hysteresis loops, where “A” is an appropriate percentage of the peak-to-peak abscissa range of the data (see Figure 1). The recommended order for the polynomial curve fit is 3, and the recommended value for “A” is between 50 % and 70 %. The value chosen for “A” should be sufficiently large to adequately cover the range of data of interest, but sufficiently restrictive to avoid end effects from the limits of the loops.

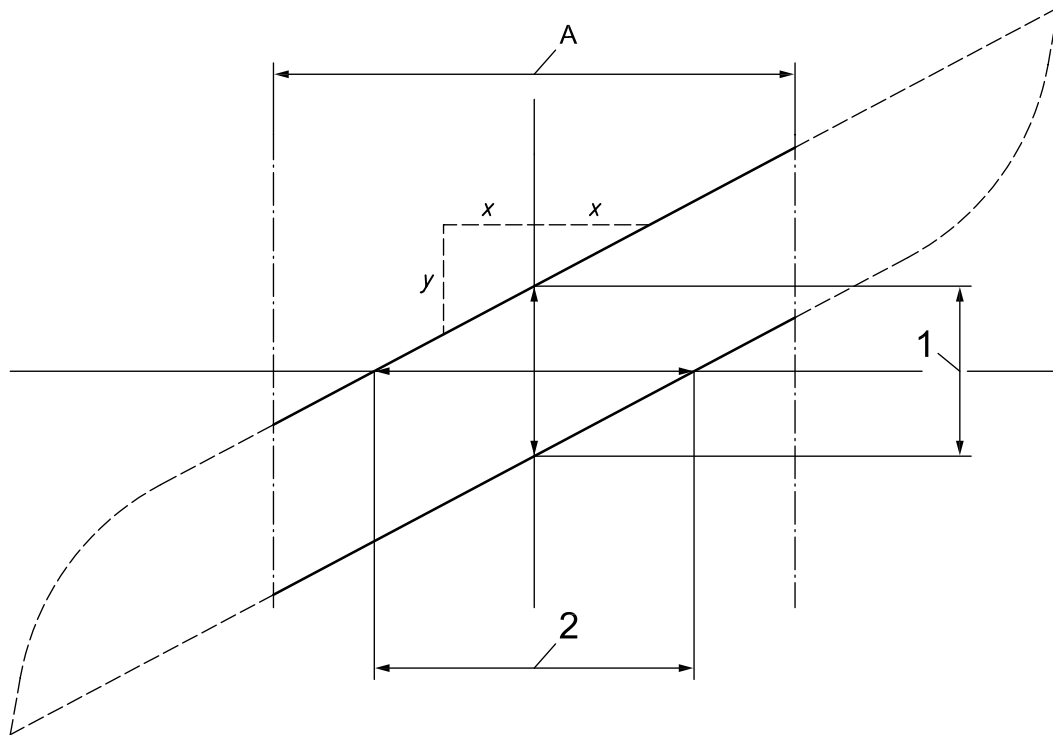

$$\text{Gradient} = \frac{y}{2x}$$

Key

- A range of polynomial curve fit
- 1 abscissa deadband
- 2 ordinate deadband

Figure 1 — Definition of parameters

The recommended method for evaluating a gradient is to make a best straight line fit to the polynomial in the region of interest. For an average gradient, this would be over a specified range (as detailed below), and for an “instantaneous” gradient, this would be over a small interval around the point of interest; typically, the size of the interval would correspond to that defined by a lateral acceleration of $\pm 0,1 \text{ m/s}^2$.

Other methods may be employed for analysing and averaging the data. For example, straight line rather than polynomial curve fitting may be used. Each hysteresis loop may be analysed individually and the characteristic parameters, yielded from all the loops, averaged to obtain overall results.

The actual procedures and details used will depend upon the analysis software package employed and the nature of the data, and shall be stated in the test report (see ISO 15037-1:2006, Annex B, under *Test method specific data*).

From the polynomial curve fits to the combined hysteresis loops, the following parameters are evaluated:

- ordinate deadband;
- abscissa deadband;
- gradient.

The pairs of variables to be plotted (ordinate given first) and the characteristics that can be evaluated are given in 9.4.2 to 9.4.6.

9.4.2 Steering-wheel torque versus steering-wheel angle (M_H vs. δ_H)

Steering stiffness:	average gradient over range $\pm x^\circ$, where $x = 10\%$ of the peak steering angle
Steering stiffness at zero steer:	gradient evaluated at zero steering angle
Steering friction:	ordinate deadband
Angle hysteresis:	abscissa deadband

9.4.3 Yaw velocity versus steering-wheel angle ($d\psi/dt$ vs. δ_H)

Yaw velocity response gain:	average gradient over range $\pm x^\circ$, where $x = 20\%$ of the peak steering angle
Yaw velocity time delay:	time delay of yaw velocity with respect to steering angle input

9.4.4 Yaw velocity versus steering-wheel torque ($d\psi/dt$ vs. M_H)

Response deadband:	abscissa deadband
--------------------	-------------------

9.4.5 Lateral acceleration versus steering-wheel angle (a_Y vs. δ_H)

Steering sensitivity:	average gradient over range $\pm x^\circ$, where $x = 20\%$ of the peak steering angle
Minimum steering sensitivity:	minimum instantaneous gradient evaluated within range $\pm 1 \text{ m/s}^2$
Steering sensitivity at 1 m/s^2 :	gradient evaluated at 1 m/s^2 while steering away from centre
Lateral acceleration deadband:	ordinate deadband
Angle deadband:	abscissa deadband
Steering hysteresis:	area bounded by hysteresis loop and ordinate values $\pm 1 \text{ m/s}^2$, divided by 2 m/s^2 (equivalent to average angle deadband)
Lateral acceleration time delay:	time delay of lateral acceleration with respect to steering angle input

NOTE The evaluation of lateral acceleration time delay is *invalid* where lateral acceleration is calculated rather than measured.

9.4.6 Steering-wheel torque versus lateral acceleration (M_H vs. a_Y)

Torque at 0 m/s^2 :	\pm torque levels at zero m/s^2
Torque at 1 m/s^2 :	\pm torque levels at $\pm 1 \text{ m/s}^2$ while steering away from centre
Lateral acceleration at $0 \text{ N} \cdot \text{m}$:	\pm lateral acceleration levels at $0 \text{ N} \cdot \text{m}$
Torque gradient at 0 m/s^2 :	gradient evaluated at 0 m/s^2
Torque gradient at 1 m/s^2 :	gradient evaluated at 1 m/s^2 while steering away from centre
Torque hysteresis:	ordinate deadband
Lateral acceleration hysteresis:	abscissa deadband

Bibliography

- [1] ISO/TS 20119, *Road vehicles — Test method for the quantification of on-centre handling — Determination of dispersion metrics for straight-line driving*
- [2] SAE 840069, *Objective Evaluation of On-Center Handling Performance*
- [3] SAE 930827, *An Objective Measurement Technique for the Quantification of On-Center Handling Quality*
- [4] SOMMERVILLE, J., FARRER, D.G., WHITEHEAD, J.P. Improvements in the Quantification of On-Center Handling Quality. *IMechE* C466/049/93J

ICS 43.020

Price based on 9 pages

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services.

It presents the UK view on standards in Europe and at the international level.

It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001

Email: plus@bsigroup.com

Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website www.bsigroup.com/shop. In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

Email: orders@bsigroup.com

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.

Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005

Email: knowledgecentre@bsigroup.com

Various BSI electronic information services are also available which give details on all its products and services.

Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048

Email: info@bsigroup.com

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at www.bsigroup.com/BSOL

Further information about BSI is available on the BSI website at www.bsigroup.com/standards

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Manager.

Tel: +44 (0)20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001

Fax +44 (0)20 8996 7001

www.bsigroup.com/standards

raising standards worldwide™