

**Refrigerated light
hydrocarbon fluids —
Measurement of liquid
levels in tanks
containing liquefied
gases —
Microwave-type level
gauge**

ICS 17.060; 75.180.30

National foreword

This British Standard reproduces verbatim ISO 13689:2001 and implements it as the UK national standard.

The UK participation in its preparation was entrusted by Technical Committee PTI/12, Petroleum measurement and sampling, to Subcommittee PTI/12/2, Measurement of light hydrocarbon fluids, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

This British Standard, having been prepared under the direction of the Sector Committee for Materials and Chemicals, was published under the authority of the Standards Committee and comes into effect on 15 June 2001

Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii to iv, pages 1 to 7, and a back cover.

The BSI copyright date displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

INTERNATIONAL STANDARD

ISO
13689

First edition
2001-04-01

Refrigerated light hydrocarbon fluids — Measurement of liquid levels in tanks containing liquefied gases — Microwave-type level gauge

*Hydrocarbures légers réfrigérés — Mesurage des niveaux de liquide
dans les réservoirs contenant des gaz liquéfiés — Jauges de niveau à
micro-ondes*



Reference number
ISO 13689:2001(E)

Contents		Page
Foreword		iv
1	Scope	1
2	Normative reference	1
3	Terms and definitions	1
4	Function and construction of microwave-type level gauges	2
5	Performance	3
6	Installation	3
7	Initial verification of accuracy	3
8	Subsequent periodical verification of accuracy	3
Annex A (normative) Instructions on installation		6
Bibliography		7

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 13689 was prepared by Technical Committee ISO/TC 28, *Petroleum products and lubricants*, Subcommittee SC 5, *Measurement of light hydrocarbon fluids*.

Annex A forms a normative part of this International Standard.

Refrigerated light hydrocarbon fluids — Measurement of liquid levels in tanks containing liquefied gases — Microwave-type level gauge

1 Scope

This International Standard specifies the essential requirements and verification procedures for microwave-type level gauges to be used for ship and shore tanks containing refrigerated light hydrocarbon fluids.

2 Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

IEC 60079-10:1995, *Electrical apparatus for explosive gas atmospheres — Part 10: Classification of hazardous areas*.¹⁾

3 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

3.1

antenna

generic term for equipment that radiates into, and receives from, the tank vapour space, electromagnetic energy in the microwave frequency band

3.2

datum level

reference level, equal to the zero level in the tank calibration table, from which liquid level L is calculated

3.3

dead zone

zone above the minimum measurable ullage

3.4

deflection plate

metal plate set obliquely near the tank bottom to avoid influence of microwave reflection from the bottom or any obstacles

NOTE A deflection plate may also be used to reduce unwanted reflections from the tank structure or fittings

1) Reference for level gauges in shore tanks and ships' tanks.

ISO 13689:2001(E)

3.5

hazardous area

space where gas or vapour may form a flammable mixture, as described in IEC 60079-10

NOTE This is similar to gas-dangerous space on board the ships as described in the IMO IGC Code (1993).

3.6

upper reference point

basic point for measurement of ullage, set on the level-gauge centre-line near the gauge flange

NOTE The height of the upper reference point is the distance between the datum level and the upper reference point (H in Figure 1).

3.7

L

liquid level

distance between the liquid surface in a tank and the datum level

NOTE See Figure 1.

3.8

microwave

generic form for electromagnetic radiation, with wave length lying in the range 3 mm to 300 mm (equivalent to a frequency of 100 GHz to 1 GHz)

3.9

microwave beam

main directional beam formed by the electromagnetic signals radiated from the antenna into free space

3.10

still pipe

perforated metal pipe, extending throughout the height of the tank, used to reduce surface turbulence in the liquid that may cause fluctuations in the reflected signal

NOTE It may also be used to guide the microwave signal in difficult installation conditions

3.11

ullage

distance between the liquid surface in a tank and the upper reference point, measured along the vertical measurement axis

4 Function and construction of microwave-type level gauges

4.1 A microwave-type level gauge functions by using electromagnetic radiation determining the distance from its antenna to the liquid surface.

The distance is then subtracted from the height of the upper reference point and the level of liquid in the tank thereby computed and transmitted electronically to a point outside the tank.

4.2 A microwave-type level gauge consists of functional components comprising an antenna, microwave transceiver and other optional items.

Figures 1 and 2 show examples of arrangements.

4.3 The materials and construction of a microwave-type level gauge shall be such that it can operate safely and effectively under applicable environmental conditions for which it is intended.

4.4 A microwave-type level gauge shall be of gastight construction in order to prevent the escape of vapour from the tank.

4.5 All microwave-type level gauges shall be manufactured and installed in accordance with appropriate National and International electrical safety codes and standards (IMO, IEC, ISO, etc.). All level gauges shall be certified for use in the hazardous-area classification appropriate to their installation.

NOTE The design and installation of the microwave-type level gauges may be subject to the approval of the national measurement organizations and classification societies, who may have issued a general type approval for the design of the microwave-type level gauge for the particular service for which it is to be employed. The type approval is normally issued after the microwave-type level gauge has been subject to a specific series of tests and is subject to the microwave-type level gauge being installed in an approved manner. Type-approval tests may include the following: visual inspection, resistance, vibration, performance, humidity, dry heat, inclination, electromagnetic compatibility, and fluctuation in power supplies.

5 Performance

5.1 Indication: minimum range display resolution shall not be greater than 1 mm.

5.2 Maximum permissible error: $\pm (3,3 + 0,08D)$ mm where D is the distance, in metres, from the upper reference point to the liquid surface.

5.3 If the level gauge fails to meet the performance requirements of this clause, the cause shall be investigated. If the level gauge needs to be adjusted or components replaced, with the tank in service, it should be reverified in accordance with clause 8.

6 Installation

The microwave-type level gauge shall be installed in accordance with the manufacturer's instructions.

7 Initial verification of accuracy

After installation, accuracy of the level gauge shall be verified by means of an appropriate proven method under atmospheric temperature and pressure in the tank. The error shall not exceed that defined in 5.2.


After a tank is opened up for survey, the accuracy of the gauge should be rechecked using this method.

8 Subsequent periodical verification of accuracy

A means of verification shall be provided, whereby the level-gauge accuracy can be checked at high and low tank levels, with the tank in service.


The high-level verification point shall be capable of being used when the tank is fully loaded. The error shall not exceed that described in 5.2.

This procedure should be used following maintenance on the level gauge or as required by the sale and purchase agreement.

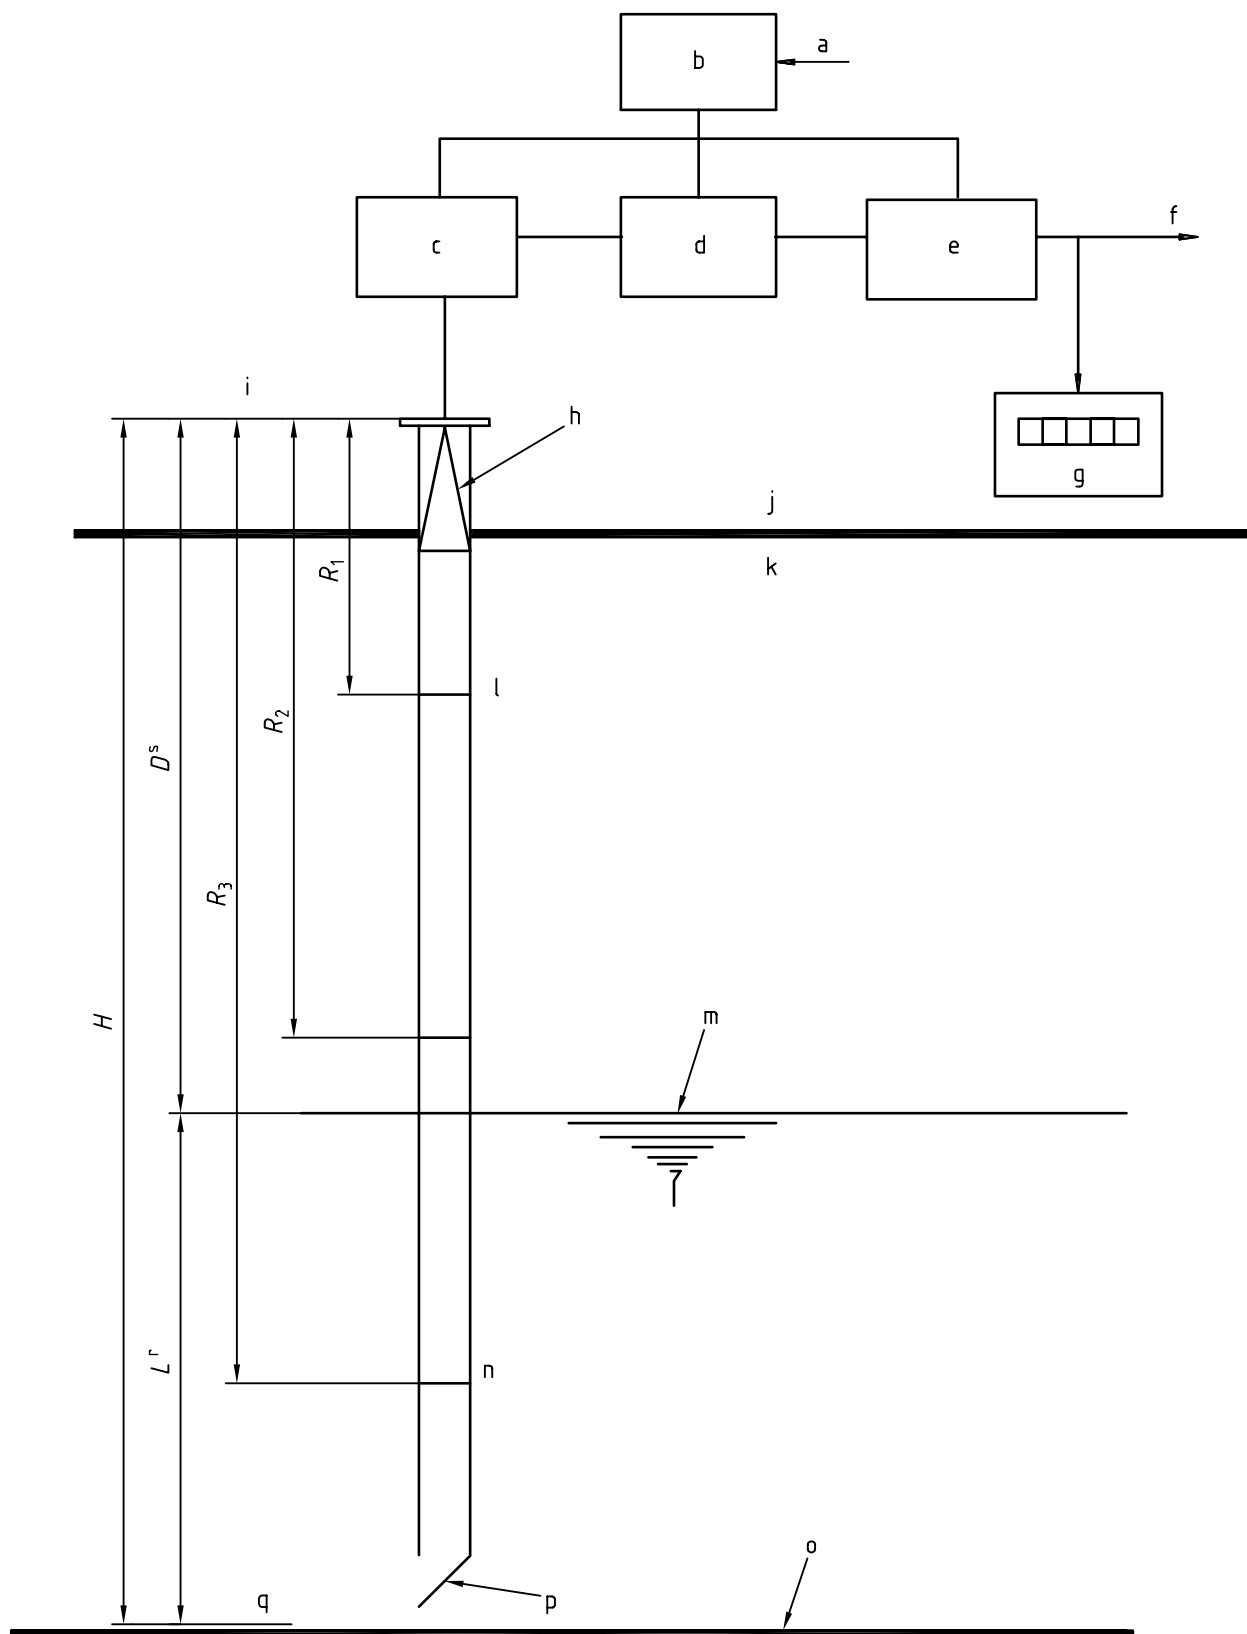

- | | | | | | | | |
|---|-----------------------|---|-----------------------|---|--------------------|---|------------------|
| a | Power source | f | Level signal output | k | Inside tank | p | Deflection plate |
| b | Power supply unit | g | Display | l | Verification level | q | Datum level |
| c | Transceiver unit | h | Antenna | m | Liquid surface | r | Liquid level |
| d | Computer unit | i | Upper reference point | n | Verification level | s | Ullage |
| e | Data transmitter unit | j | Outside tank | o | Tank bottom | | |

Figure 1 — Example of installation with a still pipe including optional devices

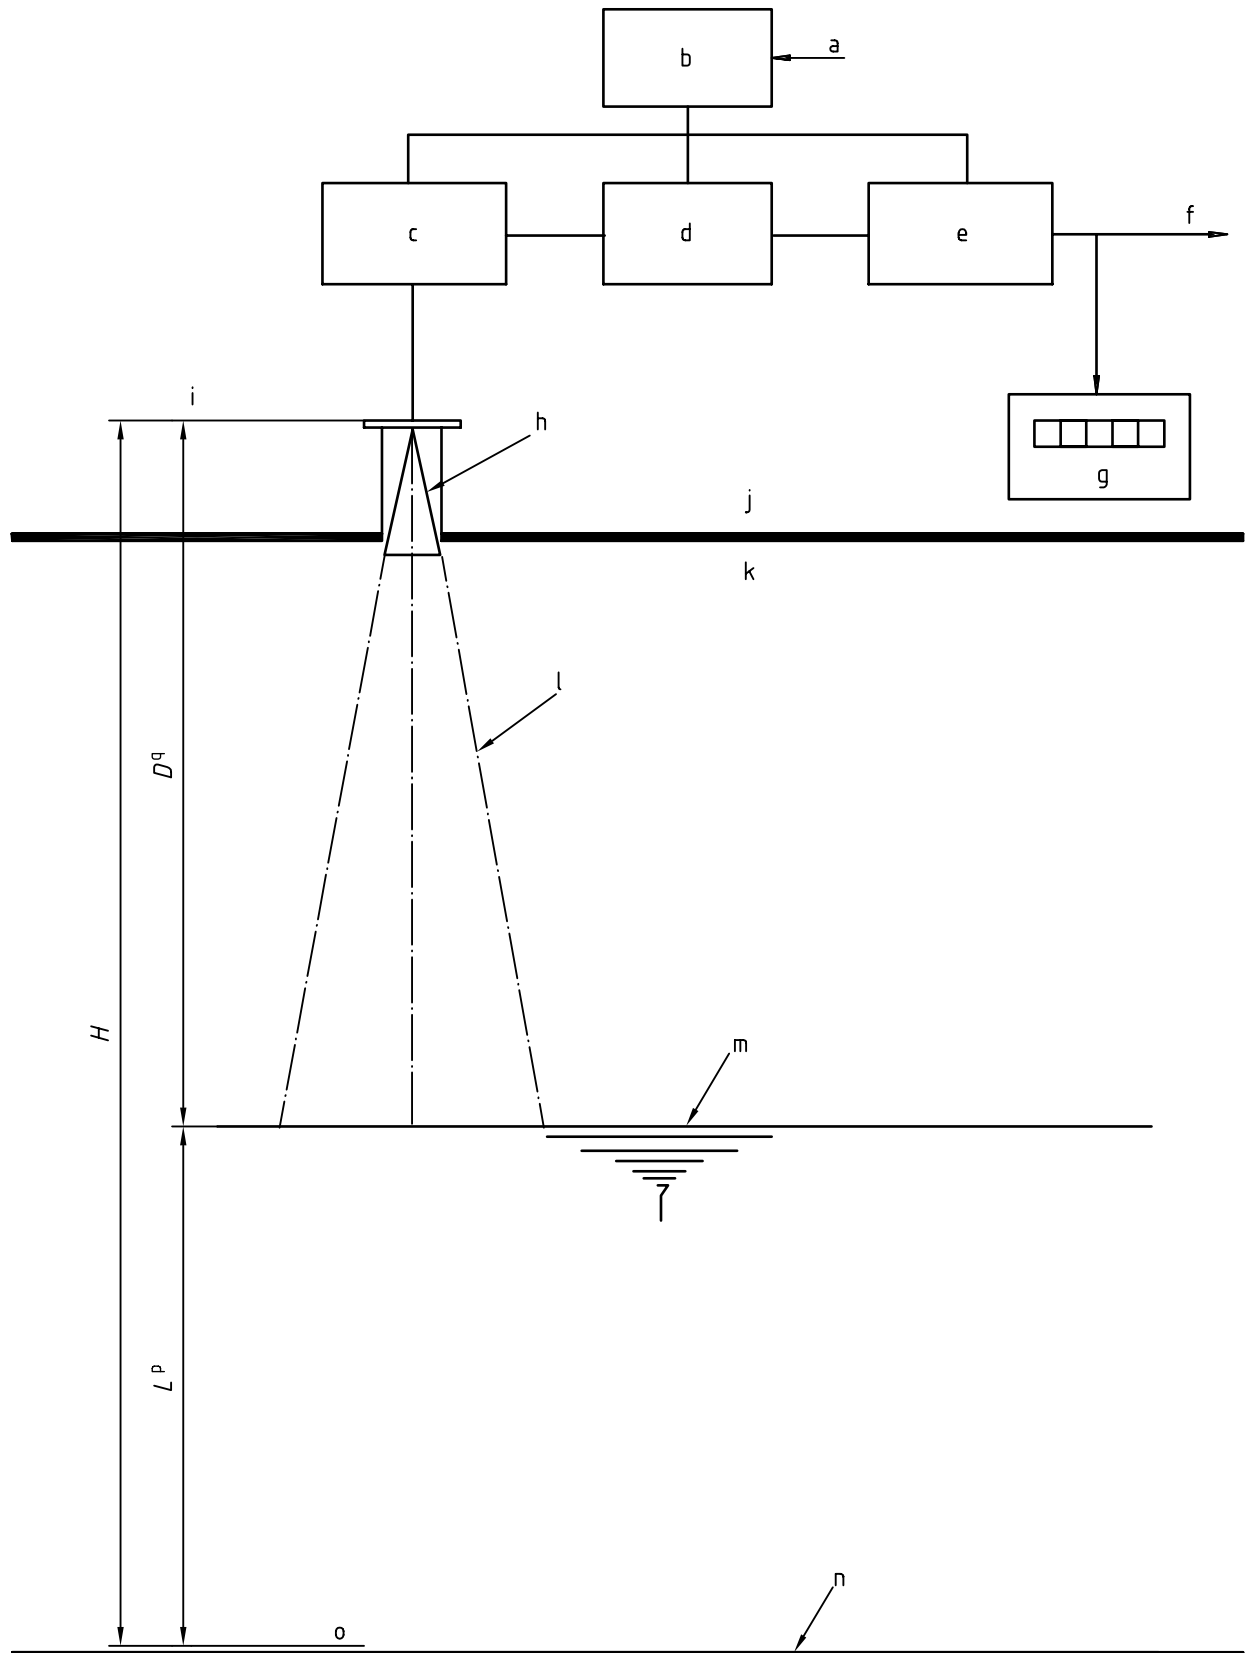

- | | | | | | | | |
|---|-----------------------|---|-----------------------|---|--------------------|---|--------------|
| a | Power source | f | Level signal output | k | Inside tank | p | Liquid level |
| b | Power supply unit | g | Display | l | Microwave beam | q | Ullage |
| c | Transceiver unit | h | Antenna | m | Liquid surface | | |
| d | Computer unit | i | Upper reference point | n | Verification level | | |
| e | Data transmitter unit | j | Outside tank | o | Datum level | | |

Figure 2 — Example of installation without a still pipe including optional devices

Annex A (normative)

Instructions on installation

A.1 The antenna shall be installed in a position such that the upper dead zone does not interfere with the accurate measurement of the liquid level when the tank is at full capacity.

A.2 The still pipe shall be a metal tube with a smooth, uniform bore. Its wall should be perforated at intervals by holes or slits in order to allow the inner and outer liquid level to equalize. Targets may be provided in the still pipe at the known distance from the upper reference point to enable verification to take place.

A.3 The still pipe may be dispensed with where there is no turbulence of the liquid surface exposed to the microwave beam and the transmission and reception of microwave signals is not subject to interference from equipment inside the tank, such as pipe work.

An example is shown in Figure 2.

A.4 A deflection plate, or a device with a similar function, e.g. an attenuator, may be set directly underneath the antenna so that the signal reflected at the bottom of the tank is deflected in such a way that it does not interfere with the signal reflected from the liquid surface. The deflection plate, or a device with a similar function, may be omitted where the signal reflected from the tank bottom causes no interference with the reflection from the liquid surface. Some signal-processing techniques can also be used to eliminate fixed echoes without any reflector.

Bibliography

- [1] IEC 60079-0:1998, *Electrical apparatus for explosive gas atmospheres — Part 0: General requirements.*^{2) 3)}
- [2] IEC 60079-1:1990, *Electrical apparatus for explosive gas atmospheres — Part 1: Construction and verification test of flameproof enclosures of electrical apparatus.*²⁾
- [3] IEC 60092-502:1999, *Electrical installations in ships — Part 502: Tankers — Special features.*
- [4] IEC 60092-504:1994, *Electrical installations in ships — Part 504: Special features — Control and instrumentation.*³⁾
- [5] IEC 60654-1:1993, *Industrial-process measurement and control equipment — Operating conditions — Part 1: Climatic conditions.*
- [6] IEC 60654-2:1979, *Operating conditions for industrial-process measurement and control equipment — Part 2: Power.*²⁾
- [7] IMO (International Maritime Organization) — *International code for the construction and equipment of ships carrying liquefied gases in bulk: IGC Code 1993.*³⁾

2) Reference for level gauges in shore tanks.

3) Reference for level gauges in ships' tanks.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001. Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.