

BS ISO 13948-1:2015



BSI Standards Publication

Diesel engines — Fuel injection pumps and fuel injector low-pressure connections

Part 1: Threaded connections

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 13948-1:2015.

The UK participation in its preparation was entrusted to Technical Committee MCE/22, Engines for road vehicles.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.
Published by BSI Standards Limited 2015

ISBN 978 0 580 83942 9

ICS 43.060.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 August 2015.

Amendments/corrigenda issued since publication

| Date | Text affected |
|------|---------------|
|------|---------------|

INTERNATIONAL
STANDARD

ISO
13948-1

Second edition
2015-08-15

**Diesel engines — Fuel injection
pumps and fuel injector low-pressure
connections —**

Part 1:
Threaded connections

*Moteurs diesels — Raccords basse pression pour pompes d'injection
de combustible et porte-injecteurs de combustible complets —*

Partie 1: Raccords filetés



Reference number
ISO 13948-1:2015(E)

© ISO 2015



COPYRIGHT PROTECTED DOCUMENT

© ISO 2015, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

| | Page |
|--|-----------|
| Foreword | iv |
| Introduction | v |
| 1 Scope | 1 |
| 2 Normative references | 1 |
| 3 Terms, definitions and symbols | 1 |
| 3.1 Terms and definitions..... | 1 |
| 3.2 Symbols..... | 2 |
| 4 Connection designs and applications | 2 |
| 4.1 General..... | 2 |
| 4.2 Types of connection..... | 2 |
| 4.2.1 Type A: banjo connection (see Figure 1)..... | 2 |
| 4.2.2 Type B: O-ring seal connection (see Figure 2)..... | 2 |
| 4.2.3 Type C: compression seal connection (see Figure 3)..... | 2 |
| 4.2.4 Type D: internal rubber ring seal “flexible” connection (see Figure 4)..... | 3 |
| 4.2.5 Type E: external rubber ring seal “flexible” connection (see Figure 5)..... | 3 |
| 5 Dimensions and tolerances | 3 |
| 6 Designation | 3 |
| Bibliography | 9 |

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 34, *Propulsion, powertrain, and powertrain fluids*.

This second edition cancels and replaces the first edition (ISO 13948-1:2000), which has been technically revised. The following changes have been made: the tables and figures have been revised.

ISO 13948 consists of the following parts, under the general title *Diesel engines — Fuel injection pumps and fuel injector low-pressure connections*:

- *Part 1: Threaded connections*
- *Part 2: Non-threaded (push-on) connections*

Introduction

It is recognized that a large variety of low-pressure connections for fuel injection pumps and injectors exist, using different sealing principles as well as designs. ISO 13948 attempts to provide the user with a common set of preferred types.

ISO 13948 is divided into two parts, covering threaded connections (ISO 13948-1) and non-threaded (push-on) connections (ISO 13948-2) for use with low-pressure fuel supply and return, boost air pressure and lubricating oil supply and return.

Diesel engines — Fuel injection pumps and fuel injector low-pressure connections —

Part 1: Threaded connections

1 Scope

This part of ISO 13948 specifies dimensions and requirements for mechanical, threaded connections used on diesel fuel injection pumps and fuel injectors for the connection of low-pressure fuel, lubrication oil or air supply.

Five types of threaded connections (types A to E) are described in this part of ISO 13948. Type A is commonly used for both pumps and injectors, while types B to E are for diesel fuel injection pumps only.

NOTE Low-pressure connections to fuel filters are covered in other International Standards; see the Bibliography. High-pressure end-connections for pumps and injectors are covered in ISO 2974

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 261, *ISO general purpose metric screw threads — General plan*

ISO 4288, *Geometrical Product Specifications (GPS) — Surface texture: Profile method — Rules and procedures for the assessment of surface texture*

ISO 6149-1, *Connections for hydraulic fluid power and general use — Ports and stud ends with ISO 261 metric threads and O-ring sealing — Part 1: Ports with truncated housing for O-ring seal*

ISO 7876-1, *Fuel injection equipment — Vocabulary — Part 1: Fuel injection pumps*

ISO 7876-2, *Fuel injection equipment — Vocabulary — Part 2: Fuel injectors*

ISO 7876-3, *Fuel injection equipment — Vocabulary — Part 3: Unit injectors*

ISO 7876-4, *Fuel injection equipment — Vocabulary — Part 4: High-pressure pipes and end-connections*

ISO 7876-5, *Fuel injection equipment — Vocabulary — Part 5: Common rail fuel injection system*

3 Terms, definitions and symbols

3.1 Terms and definitions

For the purposes of this part of ISO 13948, the terms and definitions given in ISO 7876-1 to ISO 7876-5 apply.

3.2 Symbols

| | |
|-------|--|
| D_T | Thread size |
| D_1 | Clearance diameter for mating connection |
| D_2 | Major diameter for washer sealing face |
| D_3 | Minor diameter for washer sealing face / cone diameter |
| D_4 | Pipe/seal bore diameter |
| D_5 | Connecting hole diameter |
| T_1 | Minimum depth of full thread form |
| T_2 | Tapping drill depth |
| T_3 | Pipe seat depth |

4 Connection designs and applications

4.1 General

[Tables 1](#) to [5](#) indicate the preferred designs, sizes and key dimensions for three different low-pressure connection applications for fuel injection pumps and injectors:

- fuel: inlet, back-leakage and any other fuel connection on pumps;
- lubrication oil: for use mainly with inline pumps that have a separate lubrication supply to the fuel feeding system;
- air: for the connection of an engine inlet pressure signal.

Five different design principles are shown in [Figures 1](#) to [5](#) (combined with typical mating pipe end-connections) as types A to E. Types C and D have features in common with type A and therefore can be used as type A connections.

4.2 Types of connection

4.2.1 Type A: banjo connection (see [Figure 1](#))

This design uses external sealing washers each side of a “banjo” end-connection on the mating low-pressure pipe, the flow from which is usually directed at right angles to the plane of flow of the connection. The pipe end-connection is secured to the pump connection by means of a “banjo” bolt.

The specified configuration on the housing site may be used for the adaption of a straight connector also.

4.2.2 Type B: O-ring seal connection (see [Figure 2](#))

This design is based on a similar design contained in SAE J2244/1 (ISO 6149-1) and utilizes an O-ring seal on a cone provided on the pump connection, outboard of the connection thread.

4.2.3 Type C: compression seal connection (see [Figure 3](#))

The principle used in this design is compression sealing on a cone provided on the pump connection inboard of the connection thread.

4.2.4 Type D: internal rubber ring seal “flexible” connection (see [Figure 4](#))

This type of connection provides an internal sealing diameter, inboard of the connection thread, which is used in conjunction with a rubber sealing ring that is compressed by applying a torque to the pipe end-connection and is sealed by radial compression.

4.2.5 Type E: external rubber ring seal “flexible” connection (see [Figure 5](#))

This type of connection provides a sealing face (radius and internal bore) external to the main body of the connection. This sealing face is used in conjunction with a rubber sealing ring (fitted around the mating pipe) that is axially compressed a fixed amount by the connecting nut.

Type E is preferred to type B for flexible pipe fittings.

5 Dimensions and tolerances

For dimensions and tolerances for each of the five types of low-pressure connection, see [Tables 1 to 5](#).

The preferred size for each type of application is indicated by a cross (×).

Connection sizes shall be determined by the fuel injection system designer taking account of system flow rate requirements, standardization, cost and other factors.

All threads are recommended to be of tolerance grade 6H / 6g (medium).

6 Designation

Connections in accordance with this part of ISO 13948 shall be designated by the following elements:

- a) reference to this part of ISO 13948;
- b) the type of connection, in accordance with [Figures 1 to 5](#) and [Tables 1 to 5](#);
- c) the thread designation, in accordance with ISO 261.

EXAMPLE A low-pressure fuel connection of type A with an M10 × 1,25 thread is designated as follows:

ISO 13948-1 – A – M10 × 1,25

Dimensions in millimetres
 Surface roughness in micrometres, measured according to ISO 4288

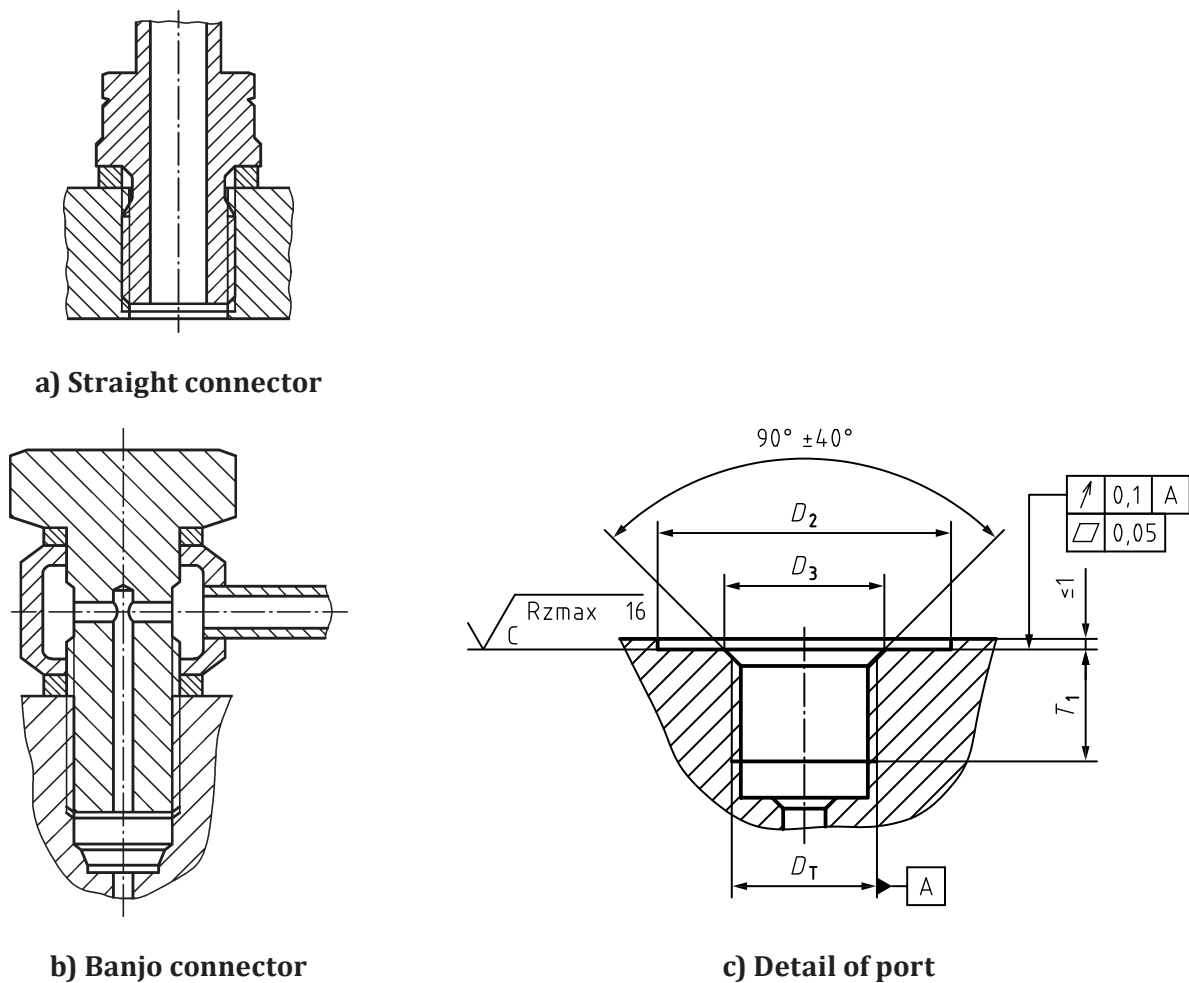



Figure 1 — Type A connection

Table 1 — Dimensions for type A


Dimensions in millimetres

| Fuel | Oil | Air | Thread D_T | D_2 min. | D_3 | T_1 min. |
|------|-----|-----|--------------|---------------|------------|---------------|
| × | | × | M6 × 1 | 13 | 6,5 ± 0,3 | 7 |
| × | | × | M8 × 1 | 13 | 8,5 ± 0,3 | 8 |
| × | | × | M8 × 1,25 | 13 | 8,5 ± 0,3 | 8 |
| × | × | × | M10 × 1 | 14 | 10,5 ± 0,3 | 9 |
| × | | × | M10 × 1,25 | 16 | 10,5 ± 0,3 | 8,3 |
| × | × | × | M12 × 1,5 | 17 | 12,5 ± 0,3 | 10 |
| × | × | | M14 × 1 | 18 | 14,5 ± 0,3 | 10 |
| × | × | | M14 × 1,5 | 19 | 14,5 ± 0,3 | 10 |
| × | × | | M16 × 1,5 | 22 | 16,5 ± 0,3 | 12 |
| × | × | | M18 × 1,5 | 24 | 18,5 ± 0,3 | 14 |

Dimensions in millimetres
 Surface roughness in micrometres, measured according to ISO 4288

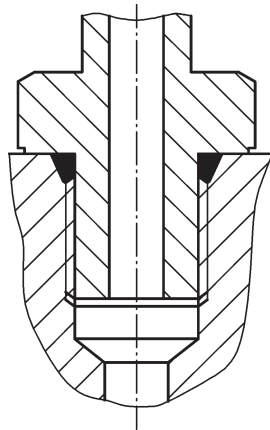

a) Schematic connection

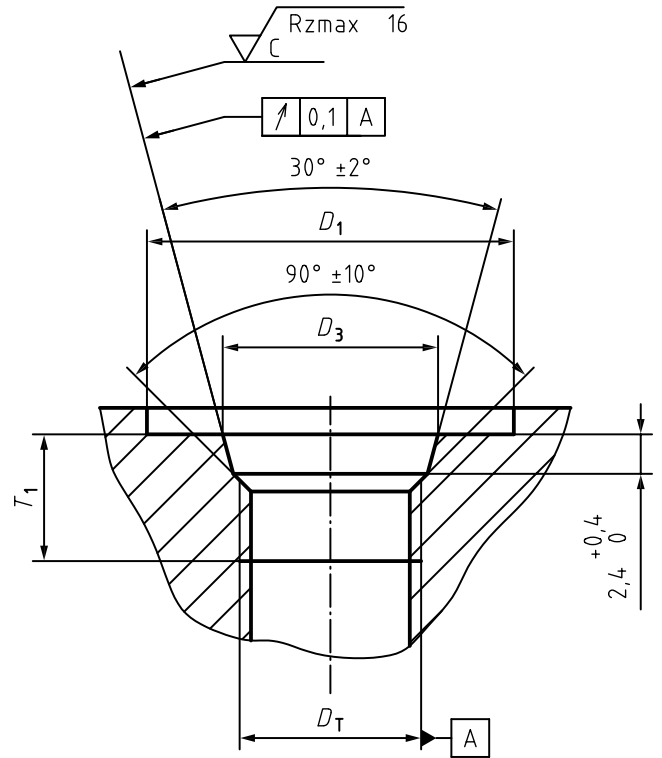

b) Detail of port

Figure 2 — Type B connection


Table 2 — Dimensions for type B

Dimensions in millimetres

| Fuel | Oil | Air | Thread D_T | D_1^a min. | D_3 +0,1 0 | T_1 min. |
|------|-----|-----|--------------|-----------------|--------------------|---------------|
| × | | | M12 × 1,5 | 19 | 13,8 | 11,5 |
| × | | | M14 × 1,5 | 21 | 15,8 | 11,5 |

^a Spotface dimension, if required.

Dimensions in millimetres
 Surface roughness in micrometres, measured according to ISO 4288

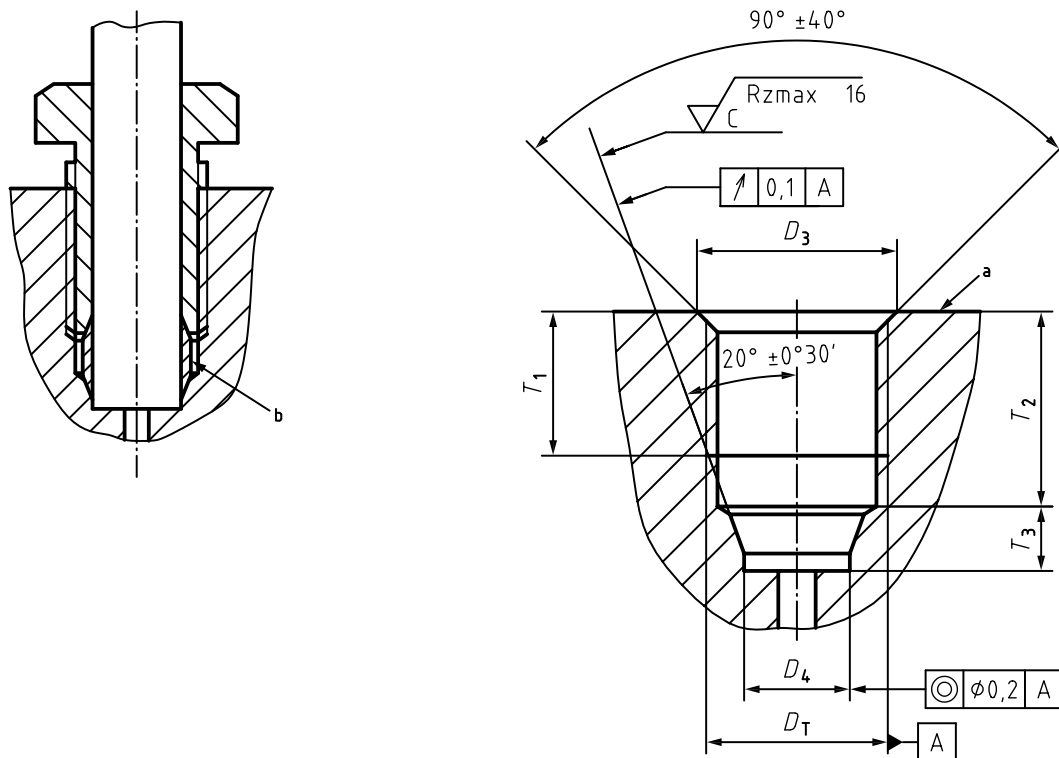

a) Schematic connection

b) Detail of port

Key

- a Type A Top Face sealing alternative permissible. See [Figure 1](#) and [Table 1](#) for face details.
- b Sealing element.


Figure 3 — Type C connection

Table 3 — Dimension for type C

Dimensions in millimetres

| Fuel | Oil | Air | Thread D_T | D_3 $\pm 0,3$ | T_1 min. | T_3 $\pm 0,1$ | T_2 $\pm 0,2$ | D_4 $\pm 0,1$ |
|------|-----|-----|--------------|--------------------|---------------|--------------------|--------------------|--------------------|
| × | × | × | M10 × 1 | 10,5 | 9 | 3,4 | 10,75 | 5,1 |
| × | × | × | M12 × 1,5 | 12,5 | 10 | 3,2 | 11,1 | 8,13 |
| × | × | | M14 × 1,5 | 14,5 | 10 | 3,4 | 13,7 | 8,25 |

Dimensions in millimetres
 Surface roughness in micrometres, measured according to ISO 4288

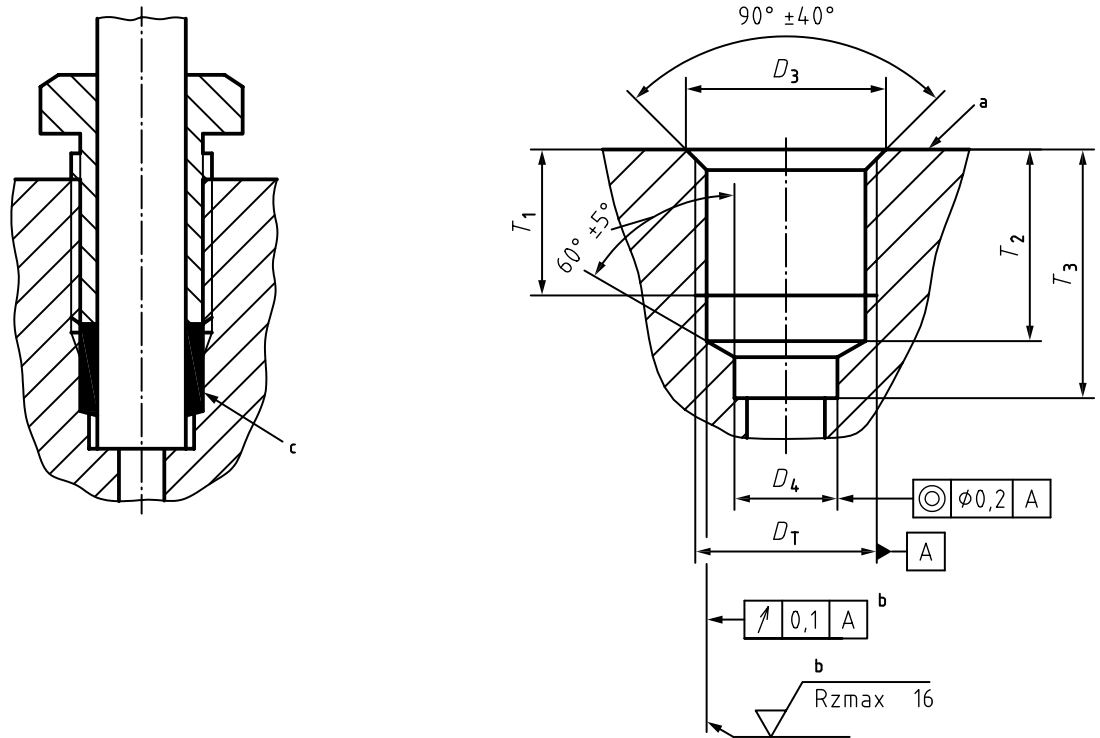

a) Schematic connection

b) Detail of port

Key


- a Type A Top Face sealing alternative permissible. See [Figure 1](#) and [Table 1](#) for face details.
- b Over unthreaded portion of bore.
- c Sealing element.

Figure 4 — Type D connection

Table 4 — Dimension for type D

Dimensions in millimetres

| Fuel | Oil | Air | Thread D_T | D_3 $\pm 0,3$ | T_1 min. | T_3 $\pm 0,1$ | T_2 $\pm 0,2$ | D_4 $\pm 0,1$ |
|------|-----|-----|--------------|--------------------|---------------|--------------------|--------------------|--------------------|
| x | x | | M14 × 1,5 | 14,5 | 10 | 23,6 | 17,5 | 8,5 |

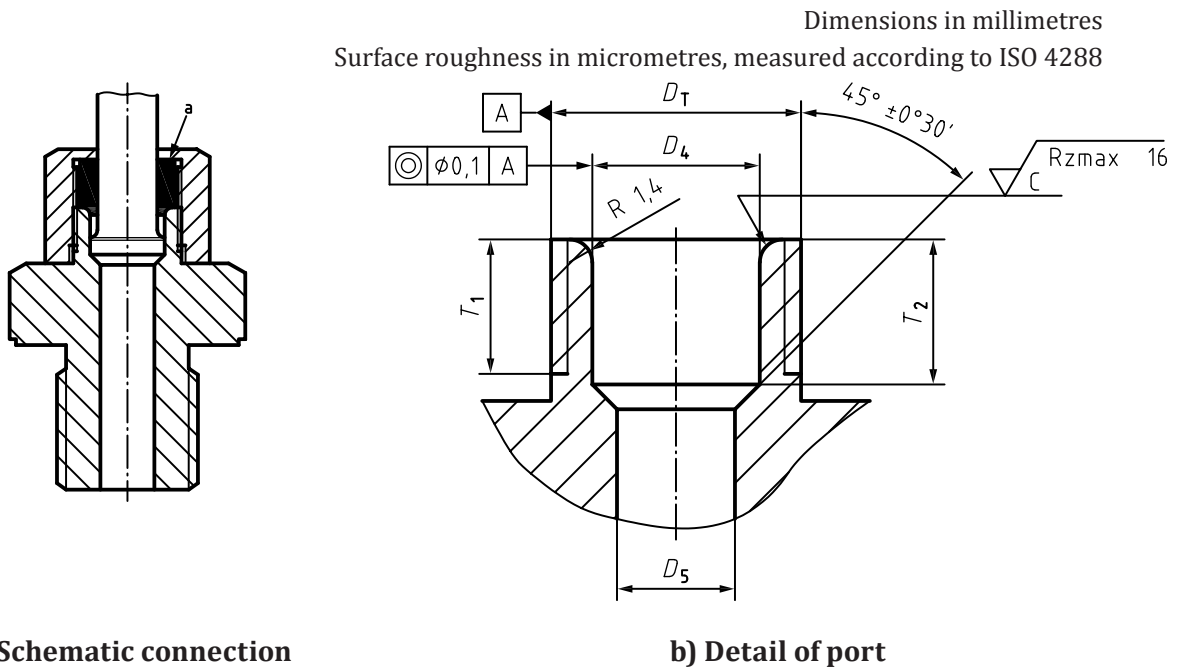

Key
a Sealing element.

Figure 5 — Type E connection

Table 5 — Dimension for type E

Dimensions in millimetres

| Fuel | Oil | Air | Thread D_T | T_1 min. | T_2 $\pm 0,2$ | D_5 $\pm 0,1$ | D_4 $\pm 0,13$ |
|------|-----|-----|--------------|---------------|--------------------|--------------------|---------------------|
| × | | | M12 × 1,5 | 9 | 10,75 | 5,1 | 8,3 |
| × | | | M14 × 1,5 | 10 | 11,1 | 8,13 | 9,86 |
| × | | | M16 × 1,5 | 10 | 13,7 | 8,25 | 11,4 |

Bibliography

- [1] ISO 68-1, *ISO general purpose screw threads — Basic profile — Part 1: Metric screw threads*
- [2] ISO 68-2, *ISO general-purpose screw threads — Basic profile — Part 2: Inch screw threads*
- [3] ISO 262, *ISO general purpose metric screw threads — Selected sizes for screws, bolts and nuts*
- [4] ISO 724, *ISO general-purpose metric screw threads — Basic dimensions*
- [5] ISO 965-1, *ISO general purpose metric screw threads — Tolerances — Part 1: Principles and basic data*
- [6] ISO 965-2, *ISO general purpose metric screw threads — Tolerances — Part 2: Limits of sizes for general purpose external and internal screw threads — Medium quality*
- [7] ISO 1302, *Geometrical Product Specifications (GPS) — Indication of surface texture in technical product documentation*
- [8] ISO 2306, *Drills for use prior to tapping screw threads*
- [9] ISO 2974, *Diesel engines — 60 degree female cones for high-pressure fuel injection components*
- [10] ISO 7310, *Diesel engines — Heads for spin-on fuel filters with horizontal flange — Mounting and connecting dimensions*
- [11] ISO 7311, *Diesel engines — Heads for fuel filters with vertical flange — Mounting and connecting dimensions*
- [12] ISO 7576, *Road vehicles — Two-stage fuel filters for compression-ignition engines — Mounting and connecting dimensions*
- [13] ISO 7654, *Road vehicles — Spin-on fuel filters for diesel engines — Mounting and connecting dimensions*
- [14] ISO 13948-2, *Diesel engines — Fuel injection pumps and fuel injector low-pressure connections — Part 2: Non-threaded (push-on) connections*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™