

BS ISO 14513:2016



BSI Standards Publication

Road vehicles — Pedestrian protection — Head impact test method

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 14513:2016. It supersedes BS ISO 14513:2006 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee AUE/7, Automobile occupant restraint systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 91327 3

ICS 43.040.80

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2016.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
14513

Second edition
2016-04-01

**Road vehicles — Pedestrian protection
— Head impact test method**

*Véhicules routiers — Protection des piétons — Méthode d'essai de
choc de la tête*



Reference number
ISO 14513:2016(E)

© ISO 2016



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Test equipment	3
4.1 Impact test site.....	3
4.2 Head form impactor.....	3
5 Requirements	4
5.1 Head form impactor.....	4
5.1.1 Size and mass.....	4
5.1.2 Instrumentation.....	4
5.2 Impact area.....	4
5.3 Impact angle.....	4
5.4 Head form impactor calibration.....	5
5.5 Propulsion of head form impactor.....	5
5.6 Rear face of head impactor.....	5
6 Preparation of test vehicle	5
6.1 Components.....	5
6.2 Parking brake.....	5
6.3 Time.....	6
7 Test conditions	6
7.1 Impact angle and impact velocity.....	6
7.1.1 Direction of impact.....	6
7.1.2 Angle of velocity vector.....	6
7.2 Impact points.....	6
7.2.1 Bonnet top.....	6
7.2.2 Testing points.....	6
8 Recording of test results	6
8.1 Data acquisition.....	6
8.2 Head form impactor data.....	6
Annex A (normative) Calibration method for head form impactor	8
Annex B (normative) Velocity and angle	10
Bibliography	12

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 36, *Safety and impact testing*.

This second edition cancels and replaces the first edition (ISO 14513:2006), of which it constitutes a minor revision.

It also incorporates the Technical Corrigendum ISO 14513:2006/Cor 1:2007.

Introduction

The intent of this International Standard is to help reduce pedestrian head injuries by providing a standardized test method which will allow different test organizations to use the results from pedestrian impact tests conducted by other organizations. The test method specified applies to adults, but it is anticipated that biomechanical data for children will later be studied in order to determine the potential for child pedestrian protection.

Road vehicles — Pedestrian protection — Head impact test method

1 Scope

This International Standard specifies a test method to simulate the head impact of an adult pedestrian to the bonnet top of passenger vehicles or light truck vehicles of up to 3,5 t (GVM), as defined in ISO 3833. The impact device to be used in this test method will be robust for a vehicle impact velocity of up to 11 m/s. The test method specified addresses the reduction of an adult pedestrian head injury risk; it does not test for injuries to other regions of the pedestrian. The evaluation of injury risk to other pedestrian body regions is to be determined using other test methods. This test method does not consider downward pitching of the vehicle due to pre-impact braking. This test method and the corresponding HIC measurement utilizes a free flight head form impactor and does not consider the kinematics of the pedestrian body as a whole, nor does it consider the subsequent post-impact kinematics and potential injury risk.

NOTE The test method covers an adult pedestrian head in a simulated impact with a motorized road vehicle. Research suggests vehicle safety improvements in vehicle derived from such pedestrian impact tests may be beneficial also to bicyclists in vehicle front impact.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3784, *Road vehicles — Measurement of impact velocity in collision tests*

ISO 6487, *Road vehicles — Measurement techniques in impact tests — Instrumentation*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

normal ride attitude

vehicle attitude in driving order positioned on the ground, with the tires inflated to recommended pressures, the front wheels in the straight-ahead position, with maximum capacity of all fluids necessary for operation of the vehicle (with all standard as provided by the vehicle manufacturer), with one adult male 50th percentile dummy or an equivalent mass placed on the driver's seat and with one adult male 50th percentile dummy or an equivalent mass placed on the passenger's seat, and the suspension set in normal running conditions specified by the manufacturer (especially for vehicles with an active suspension or a device for automatic levelling)


3.2

ground reference plane

horizontal plane, either real or imaginary, that passes through all tire contact points of a vehicle while the vehicle is in its *normal ride attitude* (3.1)

Note 1 to entry: See [Figure 1](#).

Note 2 to entry: If the vehicle is resting on the ground, then the ground plane and the ground reference plane are one and the same. If the vehicle is raised off the ground such as to allow extra clearance below the bumper, then the ground reference plane is above the ground plane.

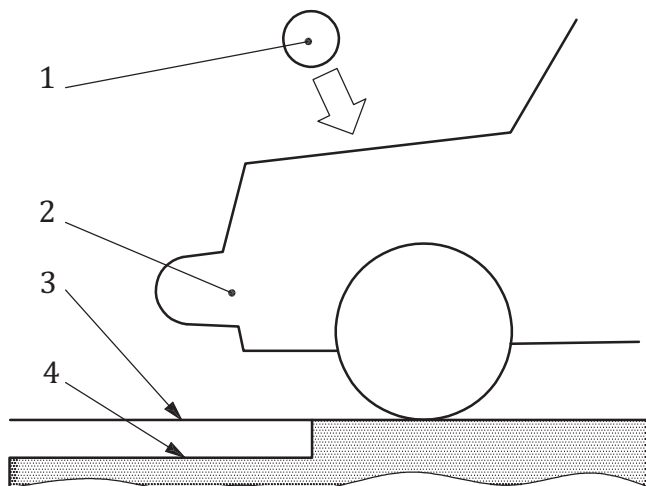

Key

- 1 impactor
- 2 vehicle
- 3 ground reference plane
- 4 ground

Figure 1 — Configuration of ISO head impact test method

**3.3
bonnet top**

outer structure that includes the upper surfaces of the bonnet (hood) and of the wings (outer fenders), the scuttle (cowl top), and the lower edge of the windscreen

**3.4
wrap around distance**

geometric trace described on the top of the bonnet by one end of a long flexible tape, the other end held in contact with the *ground reference plane* (3.2) when it is held in a vertical fore and aft plane of the vehicle and traversed across the front of the bonnet and bumper of the vehicle, when it is in the normal ride attitude


Note 1 to entry: See [Figure 2](#).

Note 2 to entry: The tape is held taut throughout the operation with one end held in contact with the ground reference plane, vertically below the front face of the bumper and the other end held in contact with the bonnet top. The length of the tape is the same as values of wrap around distance required in [5.2](#).

**3.5
bonnet side reference line**

geometric trace of the highest points of contact between a straight edge and the side of a bonnet, when the straight edge, held parallel to the lateral vertical plane of the vehicle and inclined inwards at 45° is traversed down the side of the bonnet, while maintaining contact with the surface of the body shell


Note 1 to entry: See [Figure 3](#).

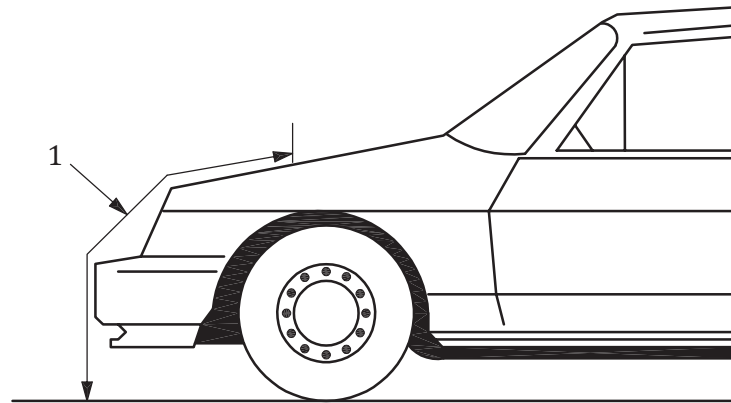

Key

- 1 wrap around distance

Figure 2 — Determination of wrap around distance

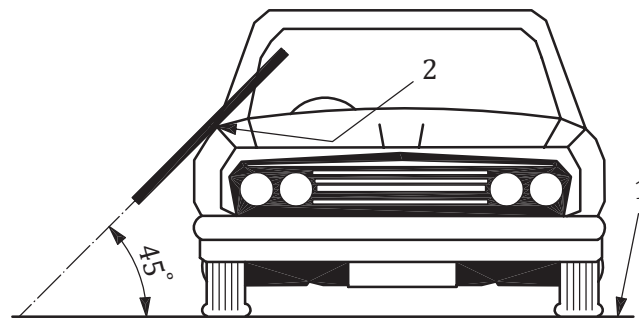

Key

- 1 straight line reference
- 2 bonnet side reference line

Figure 3 — Determination of bonnet side reference line

3.6
head injury criterion
HIC

calculated value describing the injury risk to pedestrian head colliding with a vehicle, and calculated from the head resultant acceleration time history

4 Test equipment

4.1 Impact test site

The test shall be conducted on a flat, smooth, and hard surface with a slope not exceeding 1 %.

4.2 Head form impactor

Head form impactor described in [Clause 5](#) shall be used in this test method.

5 Requirements

5.1 Head form impactor

5.1.1 Size and mass

The contact surface of the head form impactor shall be spherical. The diameter is 165 mm as shown in [Figure 4](#). The mass shall be $(4,5 \pm 0,1)$ kg. The centre of gravity of the head form impactor shall be located in the geometric centre of the sphere with a tolerance of ± 5 mm.

5.1.2 Instrumentation

A recess in the sphere shall allow for mounting one triaxial or three uniaxial accelerometers within ± 10 mm seismic mass location tolerance from the centre of the sphere for the measurement axis, and ± 1 mm seismic mass location tolerance from the centre of the sphere for the perpendicular direction to the measurement axis.

If three uniaxial accelerometers are used, one of the accelerometers shall have its sensitive axis perpendicular to the mounting face and its seismic mass shall be positioned within a cylindrical tolerance field of 1 mm radius and 20 mm length. The centre line of the tolerance field shall run perpendicular to the mounting face and its mid-point shall coincide with the centre of the sphere of the headform impactor.

The remaining accelerometers shall have their sensitive axes perpendicular to each other and parallel to the mounting face A and their seismic mass shall be positioned within a spherical tolerance field of 10 mm radius. The centre of the tolerance field shall coincide with the centre of the sphere of the headform impactor.

The instrumentation response value CFC, as defined in ISO 6487, shall be 1,000. The CAC response value, as defined in ISO 6487, shall be 500 g for the acceleration.


5.2 Impact area

Bonnet top shall be bounded by the geometric trace of the 1 500 mm wrap around distance in the front, as defined in [3.4](#), and the bonnet side reference lines, as defined in [3.5](#), in which the angle of the straight edge inclined inwards shall be 45° and rear boundary shall be the forward most of either the 2 100 mm wrap around distance or the rear most line created when the head form makes contact with the bonnet without first contacting the windscreen.

5.3 Impact angle

The head form impactor shall be propelled at a given angle into the bonnet top so as to ensure that the impact angle at the impact moment is as specified in [7.1](#).

Dimensions in millimetres

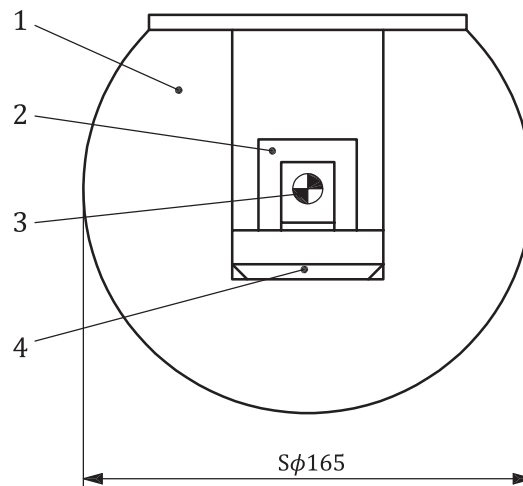

Key

- 1 spherical
- 2 accelerometer
- 3 impactor centre of gravity
- 4 accelerometer mount

Figure 4 — Head form impactor

5.4 Head form impactor calibration

The head form impactor shall meet the calibration requirements specified in [Annex A](#).

5.5 Propulsion of head form impactor

The head form impactor shall be propelled into a stationary vehicle. The method of head form impactor propulsion is at the discretion of the test office; however, the head form impactor should be launched to free flight at a required velocity.

5.6 Rear face of head impactor

This is a plane at the outer surface of the head form impactor which is perpendicular to the direction of travel, and typically perpendicular to the axis of one of the accelerometers, as well as being a flat plate used for access to the accelerometers and an attachment point for the propulsion system.

6 Preparation of test vehicle

6.1 Components

Either a complete vehicle or a cut-body, adjusted to the following conditions, shall be used for the test. All the parts of the vehicle structure and components that may be involved in a pedestrian head impact shall be in place in the test vehicle.

6.2 Parking brake

The parking brake shall be applied, or the cut-body shall be securely mounted.

6.3 Time

Sufficient time shall be allowed before testing for the temperature of all vehicle components to stabilize (see [7.1](#)).

7 Test conditions

7.1 Impact angle and impact velocity

7.1.1 Direction of impact

The direction of impact shall be in the fore and aft vertical plane of the section of the vehicle to be tested. The tolerance is $\pm 2^\circ$. The direction of impact of tests to the bonnet top shall be downward and rearward, as if the vehicle were on the ground.

7.1.2 Angle of velocity vector

The angle of the velocity vector of the head form impactor at impact with respect to Ground Reference Level shall be $(65 \pm 2)^\circ$, as explained in [Annex B](#). The velocity of the head impactor at the time of impact shall be selected based on the objectives of the test and the relationship between head impact velocity and vehicle impact velocity as presented in [Annex B](#).

7.2 Impact points

7.2.1 Bonnet top

Tests shall be made to the bonnet top within the boundaries as defined in [5.2](#). During all tests the centre of the head form impactor shall, at the time of first contact, be a minimum of 82,5 mm inside the defined bonnet side reference line (see [3.5](#)).

7.2.2 Testing points

The points selected for testing shall be indicated in the test report.

8 Recording of test results

8.1 Data acquisition

Data shall be acquired in accordance with ISO 6487.

8.2 Head form impactor data

8.2.1 The velocity of the head form impactor shall be measured during the free flight immediately before impact, in accordance with the method specified in ISO 3784. The accuracy of velocity measurement shall be $\pm 0,1$ m/s. The measured velocity shall be adjusted considering all factors which may affect the impactor between the point of measurement and the point of impact to give the velocity of the impactor at the time of impact. The angle of the velocity vector at the time of impact shall be measured.

8.2.2 The acceleration time histories shall be recorded, and HIC shall be calculated as follows:

$$\text{HIC} = \left[\frac{1}{t_2 - t_1} \int_{t_1}^{t_2} a dt \right]^{2,5} (t_2 - t_1) \quad (1)$$

$$t_2 - t_1 \leq 15 \text{ ms}$$

where

a is the resultant acceleration as a multiple of g ;

t_1 and t_2 are the two time instants (expressed in seconds) during the impact, defining the beginning and the end of the recording for which the value of HIC is a maximum.

8.2.3 The location of the first point of contact on the bonnet top of the vehicle shall be recorded.

Annex A (normative)

Calibration method for head form impactor

A.1 Performance criteria

The head form impactor shall meet the requirements specified in [A.2](#) when tested as specified in [A.3](#).

A.2 Requirements

A.2.1 Range for acceleration

When the head form impactor is dropped from a height of 376 mm in accordance with [A.3](#), the peak resultant acceleration, measured by one triaxial (or three uniaxial) accelerometer (accelerometers) in the head form impactor, shall be not less than 225 *g* and not more than 275 *g*. The acceleration time curve shall be unimodal.

A.2.2 CFC and CAC

The instrumentation response values CFC and CAC for the accelerometer shall be 1 000 Hz and 500 *g* respectively, as defined in ISO 6487.

A.2.3 Temperature conditions

The head form impactor shall have a temperature of (20 ± 5) °C at the time of impact.

A.3 Test method

A.3.1 The head form impactor shall be suspended from a drop rig, as shown in [Figure A.1](#).


A.3.2 The head form impactor shall be dropped from the specified height by means that ensure instant release onto a rigidly supported flat horizontal steel plate, 50 mm thick and 600 mm², which has a clean dry surface and a surface finish of between 0,2 µm and 2,0 µm.

A.3.3 The head form impactor shall be dropped with the rear face of the impactor at the test angle chosen in [7.1.2](#) with respect to the vertical, as specified in [Figure A.1](#).

The suspension of the head form impactor shall be such that the head form impactor does not rotate during the fall.

A.3.4 The drop test shall be performed three times, with the head form impactor rotated 120° around its symmetrical axis after each test

Dimensions in millimetres

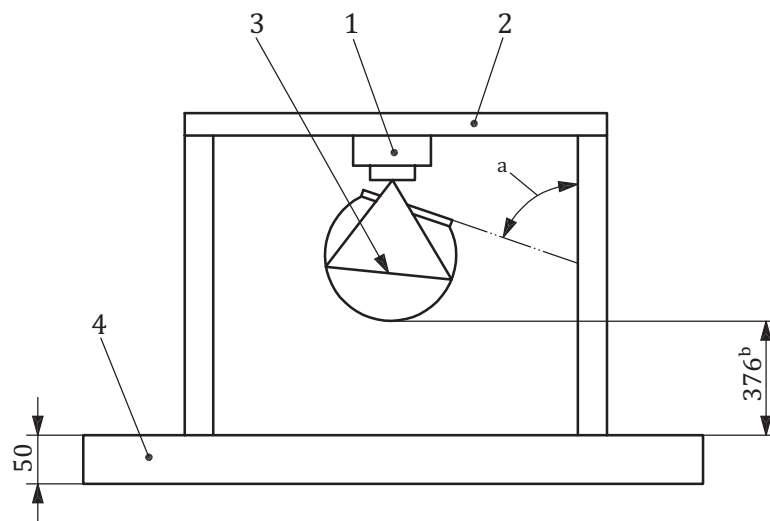

Key

- 1 release mechanism
- 2 drop rig
- 3 support system
- 4 rigid steel plate
- a Drop angle.
- b Drop height.

Figure A.1 — Test set-up for dynamic head form impactor calibration test

Annex B (normative)

Velocity and angle

B.1 Relationship between the vehicle impact velocity and the adult head impact velocity

Studies have shown a relationship to exist between the vehicle impact velocity and the head impact velocity relative to the bonnet at the time of contact in a pedestrian impact. Data representing this relationship is given in [Figure B.1](#). Various studies have shown that the head impact velocity to be related to vehicle impact velocity as follows:

$$v_{HF} = kv \quad (B.1)$$


where

v_{HF} is the head impact velocity on the bonnet;

k is a constant;

v is the vehicle impact velocity.

The value of k has been determined to be in the range from 0,4 to 1,1. To facilitate uniformity, it is recommended that a value of 0,75 be used for k .

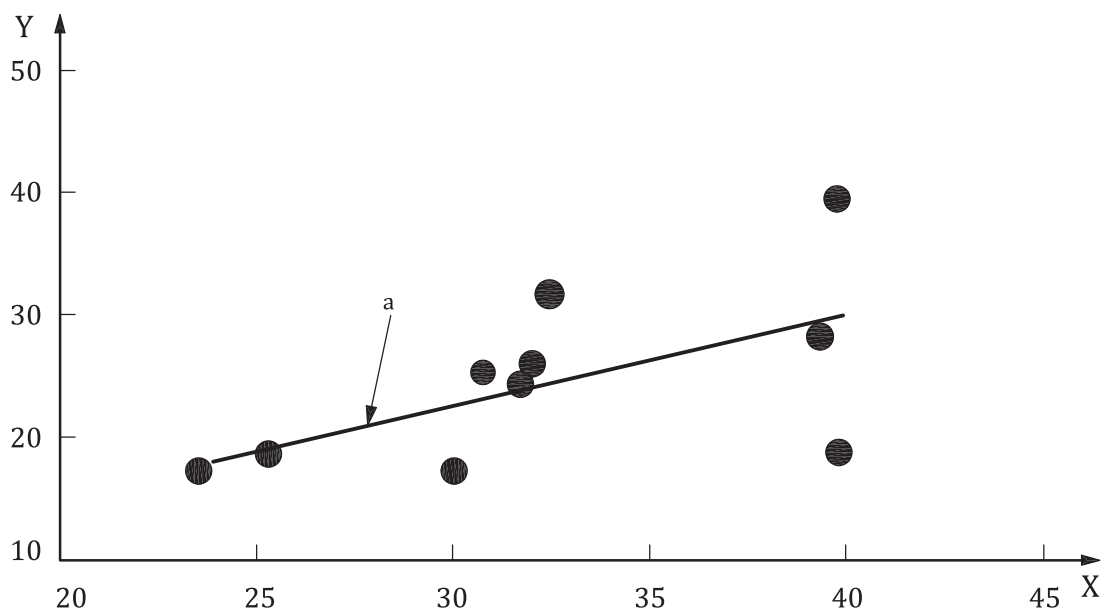

Key

X vehicle impact velocity, v (km/h)


Y head impact velocity, v_{HF} (km/h)

a Bonnet contact, $v_{HF} = 0,75 v$.

Figure B.1 — Characteristics between the vehicle impact velocity and the head impact velocity

B.2 Relationship between vehicle impact velocity and head impact angle

In a pedestrian impact to the front of a vehicle where the bonnet leading edge is below the height of the pedestrian's neck, the head rotates down toward the bonnet at the same time that it translates rearward with respect to the vehicle. This gives rise to a velocity vector at the time of first contact with the bonnet that is parallel to the fore-aft vertical plane of the vehicle but is neither horizontal nor vertical, tests using cadavers on a wide variety of vehicle types show there is virtually no relationship between vehicle impact velocity and head impact angle at the time of impact (Figure B.2). Due to the absence of a relationship between head impact angle and vehicle impact velocity, the average of $65,4^\circ$ is chosen for this test method.

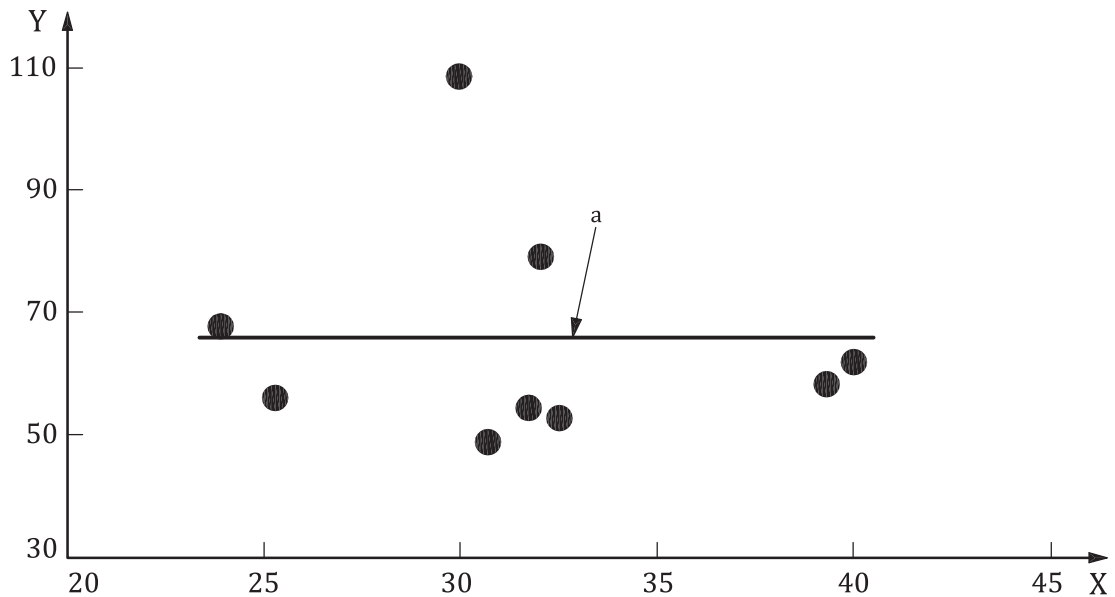

Key

- X vehicle impact velocity, v (km/h)
- Y head impact angle ($^\circ$)
- a The average angle for bonnet contact is $65,4^\circ$.

Figure B.2 — Characteristics between the vehicle impact velocity and the head impact angle

Bibliography

- [1] ISO 3833, *Road vehicles — Types — Terms and definitions*
- [2] ISHIKAWA H., KAJZER J., SCHROEDER G. *Computer Simulation of Impact Response of the Human Body in Vehicle-Pedestrian Accidents*, 37th Stapp Vehicle Crash Conference. November 1993, SAE Paper No. 933129
- [3] KALLIERIS D., & SCHMIDT G. *New Aspect of Pedestrian Loading and Injury Pattern in Simulated Pedestrian Accidents*, SAE Paper No. 881725

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

