

Gaseous fire-extinguishing systems — Physical properties and system design —

Part 5: FK-5-1-12 extinguishant

ICS 13.220.10

National foreword

This British Standard reproduces verbatim ISO 14520-5:2006 and implements it as the UK national standard.

The UK participation in its preparation was entrusted by Technical Committee FSH/18, Fixed firefighting equipment, to Subcommittee FSH/18/6, Gaseous extinguishing media and systems, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this subcommittee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international publications referred to in this document may be found in the *BSI Catalogue* under the section entitled “International Standards Correspondence Index”, or by using the “Search” facility of the *BSI Electronic Catalogue* or of British Standards Online.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii and iii, a blank page, pages 1 to 7 and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2006

© BSI 2006

ISBN 0 580 48316 9

INTERNATIONAL
STANDARD

ISO
14520-5

First edition
2006-02-15

**Gaseous fire-extinguishing systems —
Physical properties and system design —**

Part 5:
FK-5-1-12 extinguishant

*Systèmes d'extinction d'incendie utilisant des agents gazeux —
Propriétés physiques et conception des systèmes —*

Partie 5: Agent extincteur FK-5-1-12



Reference number
ISO 14520-5:2006(E)

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 14520-5 was prepared by Technical Committee ISO/TC 21, *Equipment for fire protection and fire fighting*, Subcommittee SC 8, *Gaseous media and firefighting systems using gas*.

ISO 14520 consists of the following parts, under the general title *Gaseous fire-extinguishing systems — Physical properties and system design*:

- *Part 1: General requirements*
- *Part 2: CF₃I extinguishant*
- *Part 5: FK-5-1-12 extinguishant*
- *Part 6: HCFC Blend A extinguishant*
- *Part 8: HFC 125 extinguishant*
- *Part 9: HFC 227ea extinguishant*
- *Part 10: HFC 23 extinguishant*
- *Part 11: HFC 236fa extinguishant*
- *Part 12: IG-01 extinguishant*
- *Part 13: IG-100 extinguishant*
- *Part 14: IG-55 extinguishant*
- *Part 15: IG-541 extinguishant*

Part 3, 4 and 7, which dealt with FC-2-1-8, FC-3-1-10 and HCFC 124 extinguishants, respectively, have been withdrawn, as these types are no longer manufactured.

Gaseous fire-extinguishing systems — Physical properties and system design —

Part 5: FK-5-1-12 extinguishant

1 Scope

This part of ISO 14520 gives specific requirements for gaseous fire-extinguishing systems, with respect to the FK-5-1-12 extinguishant. It includes details of physical properties, specification, usage and safety aspects and is applicable to systems operating at nominal pressures of 25 bar and 42 bar with nitrogen propellant. This does not preclude the use of other systems.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 14520-1:2006, *Gaseous fire-extinguishing systems — Physical properties and system design — Part 1: General requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 14520-1 apply.

4 Characteristics and uses

4.1 General

Extinguishant FK-5-1-12 shall comply with the specification according to Table 1.

FK-5-1-12 is a clear, colourless, almost odourless, electrically non-conductive gas with a density approximately 11 times that of air.

The physical properties are given in Table 2.

FK-5-1-12 extinguishes fires mainly by physical means, but also by some chemical means.

Table 1 — Specification for FK-5-1-12

Property	Requirement
Purity	99,9 % by mol/mol, min.
Acidity	3×10^{-6} by mass, max.
Water content	0,001 % by mass, max.
Non-volatile residue	0,03 % by mass, max.
Suspended matter or sediment	None visible

Table 2 — Physical properties of FK-5-1-12

Property	Unit	Value
Molecular mass	—	316,04
Boiling point at 1,013 bar (absolute) ^a	°C	49,2
Freezing point	°C	−108,0
Critical temperature	°C	168,66
Critical pressure	bar ^a	18,646
Critical volume	cc/mol	494,5
Critical density	kg/m ³	639,1
Vapour pressure 20 °C	bar abs ^a	0,3260
Liquid density 20 °C	g/ml	1,616
Saturated vapour density 20 °C	kg/m ³	4,3305
Specific volume of superheated vapour at 1,013 bar and 20 °C	m ³ /kg	0,0719
Heat of vaporization at boiling point	kJ/kg	88,0
Chemical formula	CF ₃ CF ₂ C(O)CF(CF ₃) ₂	
Chemical name	Dodecafluoro-2-methylpentan-3-one	

^a 1 bar = 0,1 MPa = 10⁵ Pa; 1 MPa = 1 N/mm².

4.2 Use of FK-5-1-12 systems

FK-5-1-12 total flooding systems may be used for extinguishing fires of all classes within the limits specified in ISO 14520-1:2006, Clause 4.

The extinguishant requirements per volume of protected space are given in Table 3 for various levels of concentration. These are based on methods given in ISO 14520-1:2006, 7.6.

The extinguishing concentrations and design concentrations for heptane and Surface class A hazards are given in Table 4, those for other fuels in Table 5 and inerting concentrations in Table 6.

Table 3 — FK-5-1-12 total flooding quantity

Temperature <i>T</i>	Specific vapour volume <i>S</i>	FK-5-1-12 mass requirements per unit volume of protected space, m/V (kg/m ³) This information refers only to FK-5-1-12, and may not represent any other products containing Dodecafluoromethylpentan-3-one as a component.							
		Design concentration (by volume)							
°C	m ³ /kg	3 %	4 %	5 %	6 %	7 %	8 %	9 %	10 %
−20	0,0609	0,5077	0,6840	0,8640	1,0407	1,2357	1,4275	1,6236	1,8241
−15	0,0623	0,4965	0,6690	0,8450	1,0248	1,2084	1,3961	1,5879	1,7839
−10	0,0637	0,4859	0,6545	0,8268	1,0027	1,1824	1,3660	1,5537	1,7455
−5	0,0650	0,4756	0,6407	0,8094	0,9816	1,1575	1,3372	1,5209	1,7087
0	0,0664	0,4658	0,6275	0,7926	0,9613	1,1336	1,3096	1,4895	1,6734
5	0,0678	0,4564	0,6148	0,7766	0,9418	1,1106	1,2831	1,4593	1,6395
10	0,0691	0,4473	0,6026	0,7612	0,9232	1,0886	1,2576	1,4304	1,6070
15	0,0705	0,4386	0,5909	0,7464	0,9052	1,0674	1,2332	1,4026	1,5757
20	0,0719	0,4302	0,5796	0,7322	0,8879	1,0471	1,2096	1,3758	1,5457
25	0,0733	0,4222	0,5688	0,7184	0,8713	1,0275	1,1870	1,3500	1,5167
30	0,0746	0,4144	0,5583	0,7052	0,8553	1,0086	1,1652	1,3252	1,4888
35	0,0760	0,4069	0,5482	0,6925	0,8399	0,9904	1,1442	1,3013	1,4620
40	0,0774	0,3997	0,5385	0,6802	0,8250	0,9728	1,1239	1,2783	1,4361
45	0,0787	0,3928	0,5291	0,6684	0,8106	0,9559	1,1043	1,2560	1,4111
50	0,0801	0,3860	0,5201	0,6570	0,7967	0,9395	1,0854	1,2345	1,3869
55	0,0815	0,3795	0,5113	0,6459	0,7833	0,9237	1,0671	1,2137	1,3636
60	0,0829	0,3733	0,5029	0,6352	0,7704	0,9084	1,0495	1,1936	1,3410
65	0,0842	0,3672	0,4947	0,6247	0,7578	0,8936	1,0324	1,1742	1,3191
70	0,0856	0,3613	0,4868	0,6148	0,7457	0,8793	1,0158	1,1554	1,2980
75	0,0870	0,3556	0,4791	0,6052	0,7339	0,8654	0,9998	1,1372	1,2775
80	0,0883	0,3501	0,4716	0,5958	0,7225	0,8520	0,9843	1,1195	1,2577
85	0,0897	0,3447	0,4644	0,5866	0,7115	0,8390	0,9692	1,1024	1,2385
90	0,0911	0,3395	0,4574	0,5778	0,7008	0,8263	0,9547	1,0858	1,2198
95	0,0925	0,3345	0,4507	0,5692	0,6904	0,8141	0,9405	1,0697	1,2014
100	0,0938	0,3296	0,4441	0,5609	0,6803	0,8022	0,9267	1,0540	1,1842

m/V is the agent mass requirement (in kilograms per cubic metre); i.e. mass, m , in kilograms of agent required per cubic metre of protected volume V to produce the indicated concentration at the temperature specified;

V is the net volume of hazard (in cubic metres); i.e. the enclosed volume minus the fixed structures impervious to extinguishant

$$m = \left(\frac{c}{100 - c} \right) \frac{V}{S}$$

T is the temperature (in degrees Celsius); i.e. the design temperature in the hazard area;

S is the specific volume (in cubic metres per kilogram); the specific volume of superheated FK-5-1-12 vapour at a pressure of 1,013 bar may be approximated by

$$S = k_1 + k_2 T$$

where $k_1 = 0,0664$; $k_2 = 0,000274$

c is the concentration (in percent); i.e. the volumetric concentration of FK-5-1-12 in air at the temperature indicated, and a pressure of 1,013 bar absolute.

Table 4 — FK-5-1-12 reference extinguishing and design concentrations

Fuel	Extinguishment % by volume	Minimum design % by volume
Class B		
Heptane (cup burner)	4,5	5,9
Heptane (room test)	4,4	
Surface Class A		
Wood crib	3,4	
PMMA	4,1	5,3
PP	4,0	
ABS	4,0	
Higher Hazard Class A	a	5,6
<p>The extinguishment values for the Class B and the Surface Class A fuels are determined by testing in accordance with ISO 14520-1:2006, Annexes B and C.</p> <p>The minimum design concentration for the Class B fuel is the higher value of the heptane cup burner or room test heptane extinguishment concentration multiplied by 1,3.</p> <p>The minimum design concentration for Surface Class A fuel is the highest value of the wood crib, PMMA, PP or ABS extinguishment concentrations multiplied by 1,3. In the absence of any of the 4 extinguishment values, the minimum design concentration for Surface Class A shall be that of Higher Hazard Class A.</p> <p>See ISO 14520-1:2006, 7.5.1.3, for guidance on Class A fuels.</p> <p>The extinguishing and design concentrations for room-scale test fires are for informational purposes only. Lower and higher extinguishing concentrations than those shown for room-scale test fires may be achieved and allowed when validated by test reports from internationally recognized laboratories.</p> <p>^a The minimum design concentration for Higher Hazard Class A fuels shall be the higher of the surface Class A or 95 % of the Class B minimum design concentration.</p>		

Table 5 — FK-5-1-12 concentrations for other fuels

Fuel	Extinguishment % by volume	Minimum design % by volume
Acetone	4,5	5,9
Ethyl alcohol	5,5	7,2
Marine diesel	4,5	5,9
Methyl alcohol	6,5	8,5
Methyl ethyl ketone		
<i>n</i> -heptane	4,5	5,9
Technical heptane		
<p>Extinguishing concentrations for Class B fuels derived in accordance with ISO 14520-1:2006, Annex B. Minimum design values have been increased to the minimum design concentration established for heptane in accordance with ISO 14520-1:2006, 7.5.1.</p>		

Table 6 — FK-5-1-12 inerting and design concentrations

Fuel	Inertion % by volume	Minimum design % by volume
Methane	8,8	9,7
Propane	8,1	8,9
Inerting concentrations determined in accordance with ISO 14520-1.		

5 Safety of personnel

Any hazard to personnel created by the discharge of FK-5-1-12 shall be considered in the design of the system.

Potential hazards can arise from the following:

- the extinguishant itself;
- the combustion products of the fire;
- breakdown products of the extinguishant resulting from exposure to fire.

For minimum safety requirements, see ISO 14520-1:2006, Clause 5.

Toxicological information for FK-5-1-12 is given in Table 7.

Table 7 — Toxicological information for FK-5-1-12

Property	Value % by volume
4 h LC ₅₀	> 10
No observed adverse effect level (NOAEL)	10
Lowest observed adverse effect level (LOAEL)	> 10
4 h LC ₅₀ is the concentration lethal to 50 % of a rat population during a 4 h exposure.	

6 System design

6.1 Fill density

The fill density of the container shall not exceed the values given in Tables 8 and 9 for 25 bar and 42 bar systems, respectively.

Exceeding the maximum fill density may result in the container becoming “liquid full”, with the effect that an extremely high rise in pressure occurs with small increases in temperature, which could adversely affect the integrity of the container assembly.

The relationships between pressure and temperature are shown in Figures 1 and 2 for various levels of fill density.


Table 8 — Storage container characteristics for FK-5-1-12 — 25 bar

Property	Unit	Value
Maximum fill density	kg/m ³	1 480
Maximum container working pressure at 50 °C	bar ^{a b}	29
Superpressurization at 20 °C	bar ^{a b}	25
Reference should be made to Figure 1 for further data on pressure/temperature relationships.		
^a Gauge.		
^b 1 bar = 0,1 MPa = 10 ⁵ Pa; 1 MPa = 1 N/mm ² .		

Table 9 — Storage container characteristics for FK-5-1-12 — 42 bar

Property	Unit	Value
Maximum fill density	kg/m ³	1 440
Maximum container working pressure at 50 °C	bar ^{a b}	48
Superpressurization at 20 °C	bar ^{a b}	42
Reference should be made to Figure 2 for further data on pressure/temperature relationships.		
^a Gauge.		
^b 1 bar = 0,1 MPa = 10 ⁵ Pa; 1 MPa = 1 N/mm ² .		


Values of density in kilograms per cubic metre

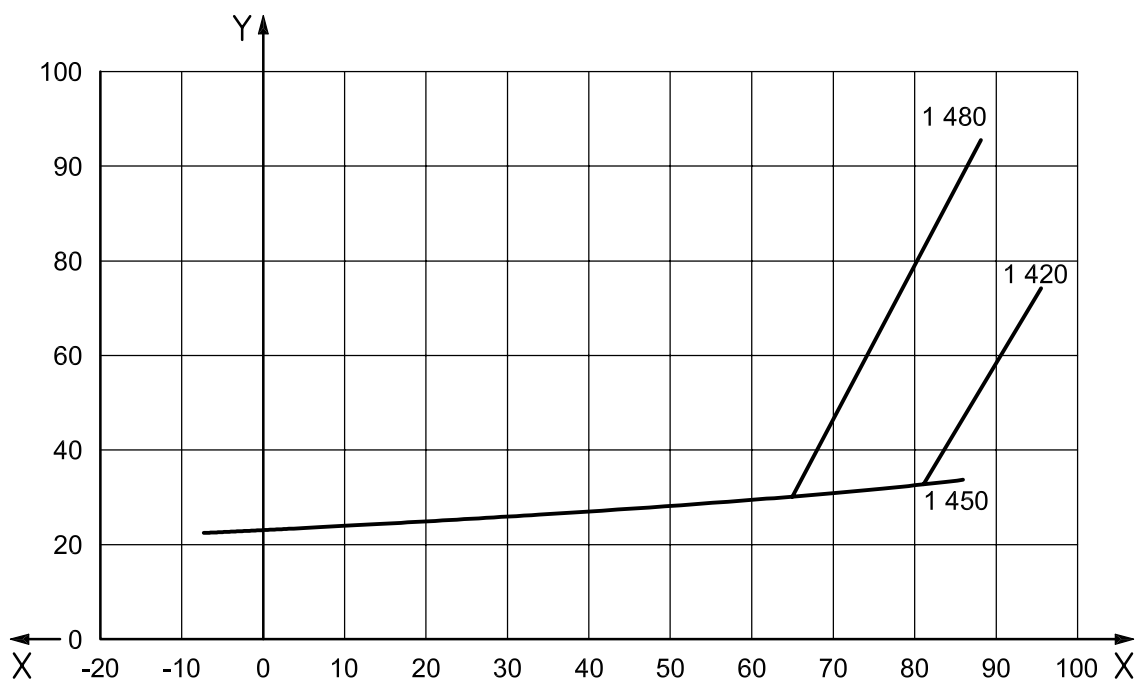

Key
 X temperature, °C
 Y pressure, bar

Figure 1 — Temperature/pressure graph for FK-5-1-12 — Superpressurized with nitrogen to 25 bar at 20 °C

Values of density in kilograms per cubic metre

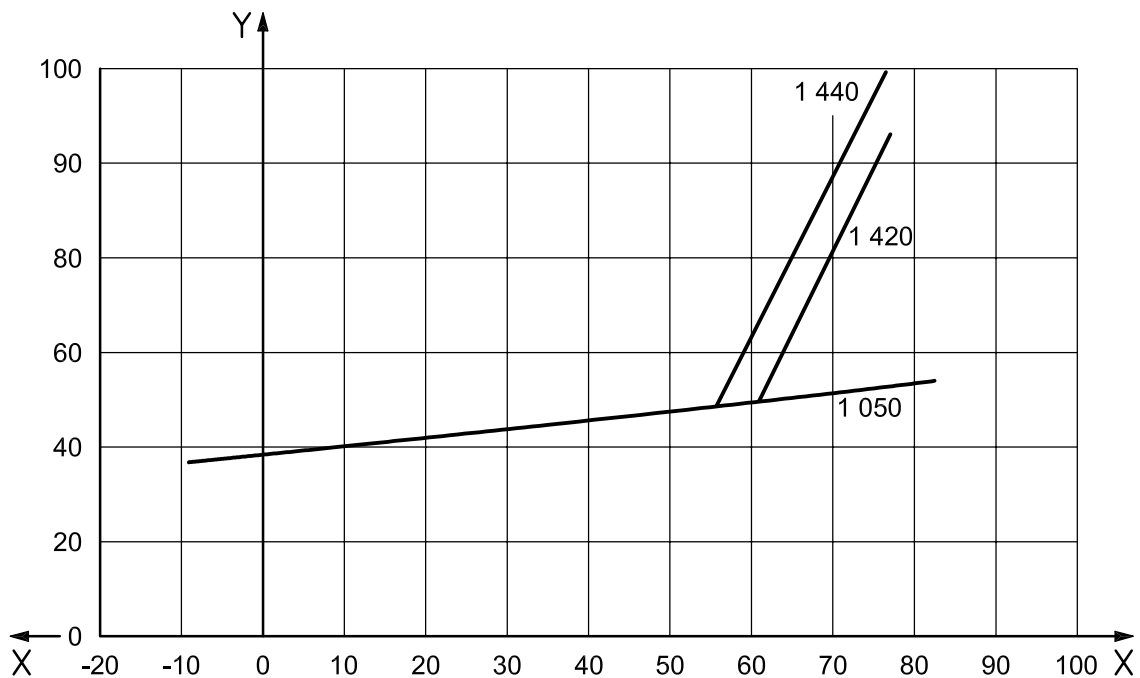**Key**

X temperature, °C

Y pressure, bar

Figure 2 — Temperature/pressure graph for FK-5-1-12 — Superpressurized with nitrogen to 42 bar at 20 °C

6.2 Superpressurization

Containers shall be superpressurized with nitrogen with a moisture content of not more than 60×10^{-6} % by mass to an equilibrium pressure of $(25^{+1,25}_0)$ bar and $(42^{+2,1}_0)$ bars at a temperature of 20 °C (see Clause 1 for exception).

6.3 Extinguishant quantity

The quantity of extinguishant shall be the minimum required to achieve the design concentration within the hazard volume at the minimum expected temperature, determined using Table 3 and the method according to ISO 14520-1:2006, 7.6.

The design concentrations shall be those specified for relevant hazards in Table 4, including a 1,3 safety factor on the extinguishing concentration. Consideration should be given to increasing this factor for particular hazards, while seeking advice from the relevant authority.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.