

**Fluid power systems and
components —
16mm square electrical
connector with earth
contact —
Characteristics and
requirements**

ICS 23.100.99; 29.120.30

National foreword

This British Standard reproduces verbatim ISO 15217:2000 and implements it as the UK national standard.

The UK participation in its preparation was entrusted to Technical Committee MCE/18, Fluid power systems and components, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, the ISO title page, pages ii to v, a blank page, pages 1 to 6, an inside back cover and a back cover.

The BSI copyright notice displayed in this document indicates when the document was last issued.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard, having been prepared under the direction of the Engineering Sector Committee, was published under the authority of the Standards Committee and comes into effect on 15 January 2001

© BSI 01-2001

INTERNATIONAL STANDARD

ISO 15217

First edition
2000-12-01

Fluid power systems and components — 16 mm square electrical connector with earth contact — Characteristics and requirements

*Transmissions hydrauliques et pneumatiques — Connecteur électrique
carré 16 mm avec contact de sécurité — Caractéristiques et exigences*



Reference number
ISO 15217:2000(E)

Contents

Page

Foreword.....	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	2
4 Connector components	2
5 Connector characteristics	2
6 Position of contacts and protective earth contact	3
7 Fixing the plug to the socket	3
8 Socket/plug tightness	3
9 Mechanical protection	5
10 Usage	5
11 Designation of the interface	5
12 Identification statement (Reference to this International Standard)	6

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this International Standard may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 15217 was prepared by Technical Committee ISO/TC 131, *Fluid power systems*, Subcommittee SC 5, *Control products and components*.

Introduction

In fluid power systems, power is transmitted and controlled through a fluid (liquid or gas) under pressure within a circuit. Typical components found in such systems are hydraulic and pneumatic controls. These devices are used to regulate the function of a component or system.

Some control components found in fluid power systems are electrically actuated. The electrical plug connectors described in this International Standard are used with control and regulation assemblies for use in hydraulic and pneumatic fluid power systems.

Fluid power systems and components — 16 mm square electrical connector with earth contact — Characteristics and requirements

1 Scope

This International Standard specifies the following characteristics and requirements for a general-purpose, electrical-plug connector with two or three contacts plus earth, for use with solenoids:

- the electrical characteristics of the connector;
- the dimensions of the contacts;
- the means of fixing the plug to the socket;
- the sealing procedure between the plug and the socket;
- usage requirements.

The electrical-plug connector specified in this International Standard is intended to be used under working conditions such that the connector cannot be damaged by external action (for example, shock or excessive loading).

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this International Standard. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 4413:1998, *Hydraulic fluid power — General rules relating to systems*.

ISO 4414:1998, *Pneumatic fluid power — General rules relating to systems*.

ISO 5598:1985, *Fluid power systems and components — Vocabulary*.

IEC 60417-2:1998, *Graphical symbols for use on equipment — Part 2: Symbol originals*.

IEC 60529:1989, *Degrees of protection provided by enclosures (IP Code)*.

IEC 60664-1:1992 *Insulation coordination for equipment within low-voltage systems — Part 1: Principles, requirements and tests*.

3 Terms and definitions

For the purposes of this International Standard, the terms and definitions given in ISO 5598 and the following apply.


3.1

electrical connector

assembly consisting of two-pieces (socket and plug) which, when joined, provide electrical continuity

4 Connector components

The components of the connector are illustrated and identified in Figure 1.

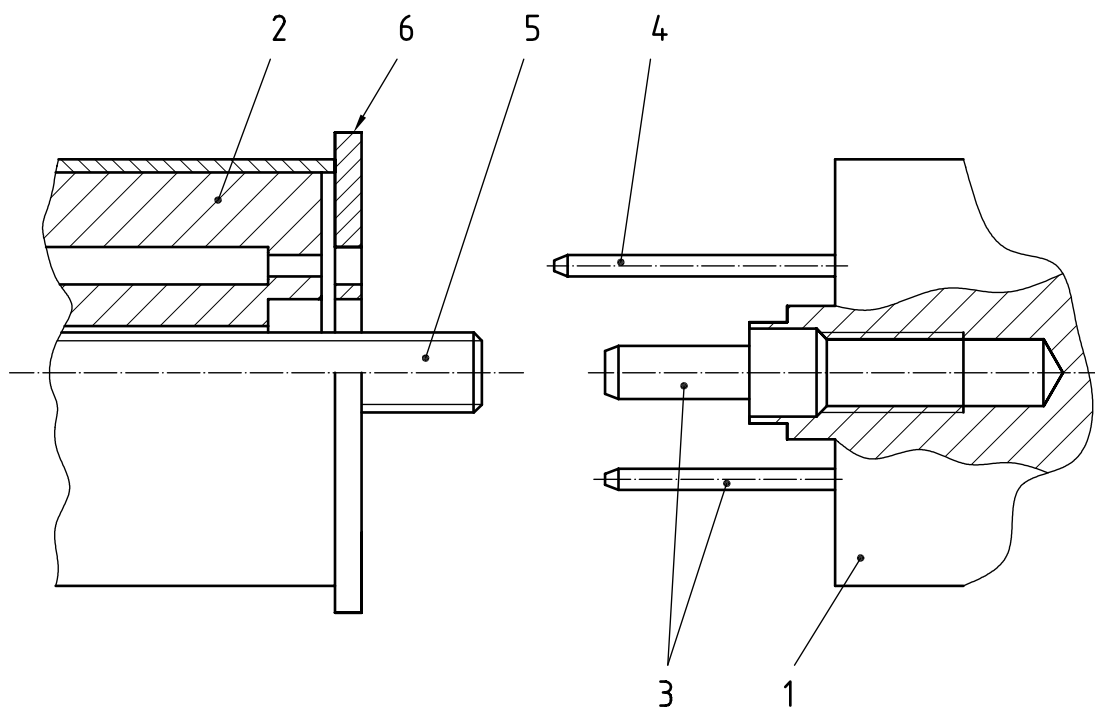

Key

- | | | | |
|---|---------|---|----------------------------|
| 1 | Plug | 4 | Earth contact (preleading) |
| 2 | Socket | 5 | Screw for fastening |
| 3 | Contact | 6 | Seal |

Figure 1 — Connector components

5 Connector characteristics

The connector shall be designed to meet the following requirements:

- voltage: 250 V;
- current: 6 A;
- pollution degree 2 and overvoltage category II according to IEC 60664-1;
- tracking index $175 \leq IRC \leq 400$ (minimum) according to IEC 60664-1;
- operating temperature: $-20\text{ }^{\circ}\text{C}$ to $+125\text{ }^{\circ}\text{C}$; at elevated temperatures, the variation of current with temperature is given in Figure 2;

- f) degree of protection after fixing the socket onto the plug: IP 65, in accordance with IEC 60529;
- g) clearance, creepage, rated impulse with standing voltage according to IEC 60664-1.

NOTE If it is necessary to specify the mechanical degree of protection, reference should be made to IEC 60529.

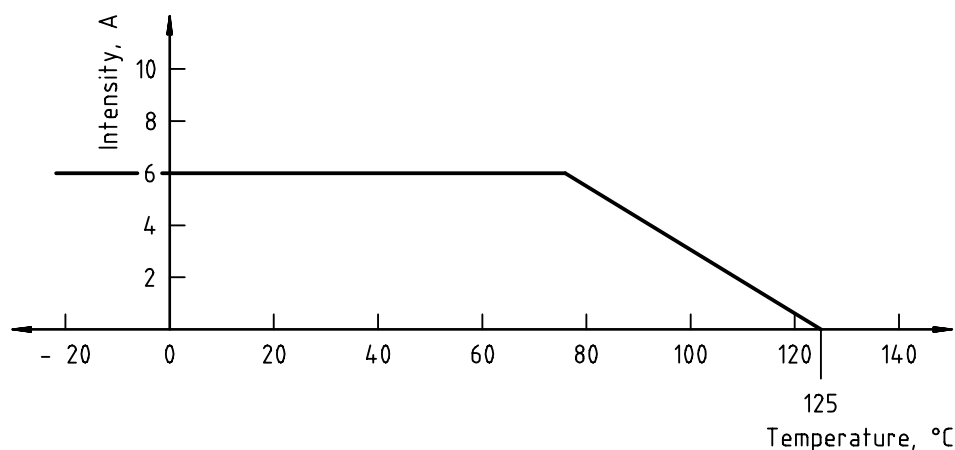


Figure 2 — Variation of the current's intensity with temperature

6 Position of contacts and protective earth contact

6.1 The contacts and protective earth contact shall be fitted on the plug.

6.2 The protective earth contact shall be fixed in such a way that earth connection is ensured before the current enters the contacts.

6.3 The position, dimensions and marking information of contacts and the protective earth contact shall comply with Figure 3.

7 Fixing the plug to the socket


An M2,5 screw shall be used to fix the plug to the socket in accordance with Figure 1.

8 Socket/plug tightness

8.1 A seal shall be provided with the plug to protect against dust and fluid (IP 65) in the socket/plug assembly.

8.2 The seal shall be fitted on the socket to conform with the overall dimensional requirements indicated in Figure 4.


8.3 Alternative seal profiles within the dimensions of Figure 4 are possible.

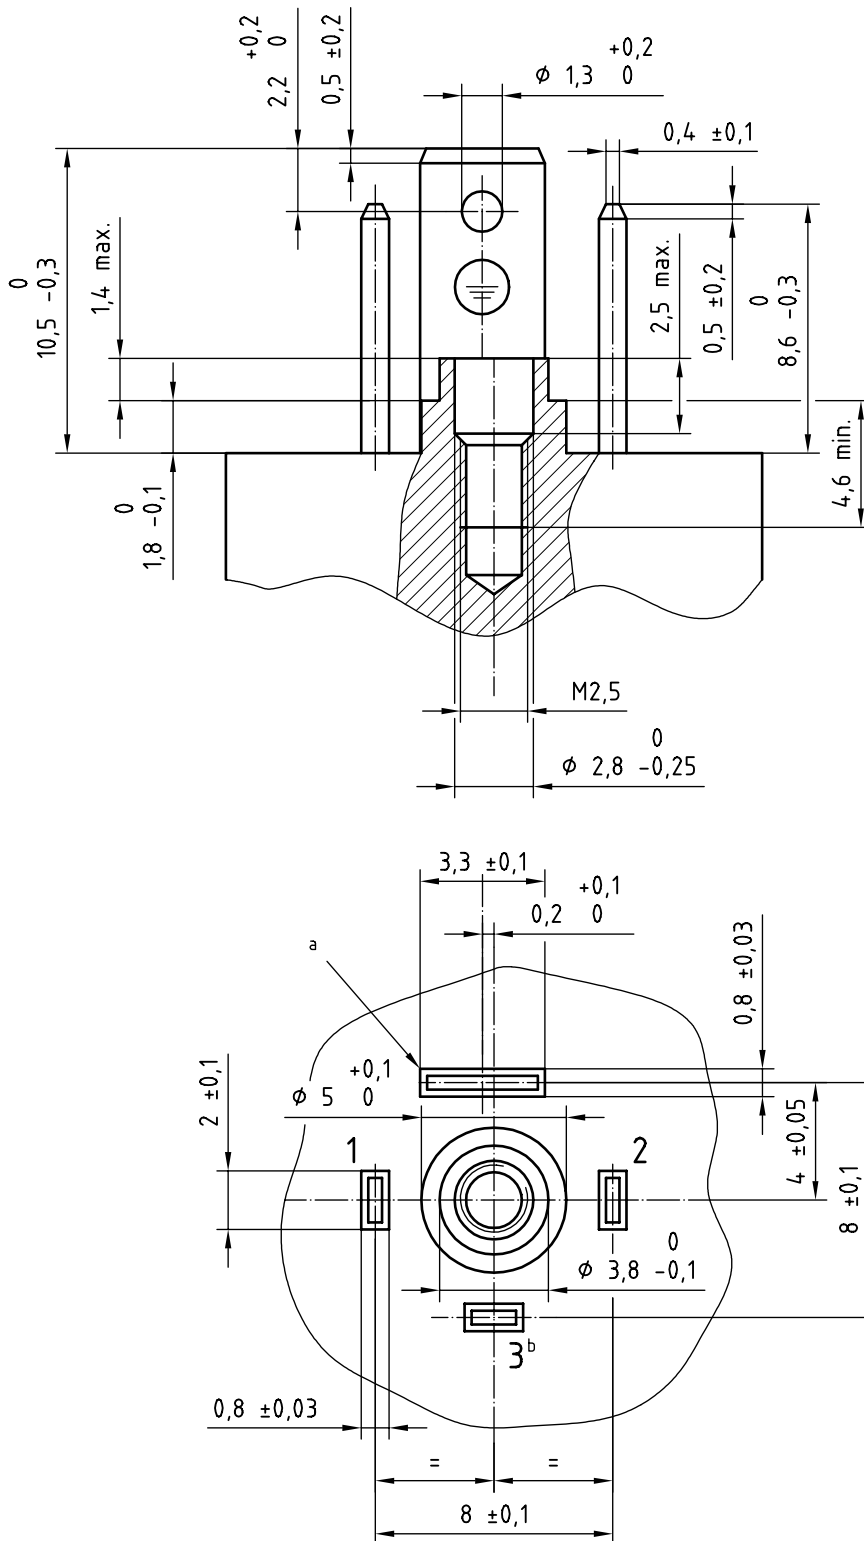

- a Protective earth contact symbol according to IEC 60417-2:1998 (symbol 5019) shall be marked on the earth contact.
- b Contact number 3 does not exist on the two-plus-earth-contact version.

Figure 3 — Connector details

Dimensions in millimetres

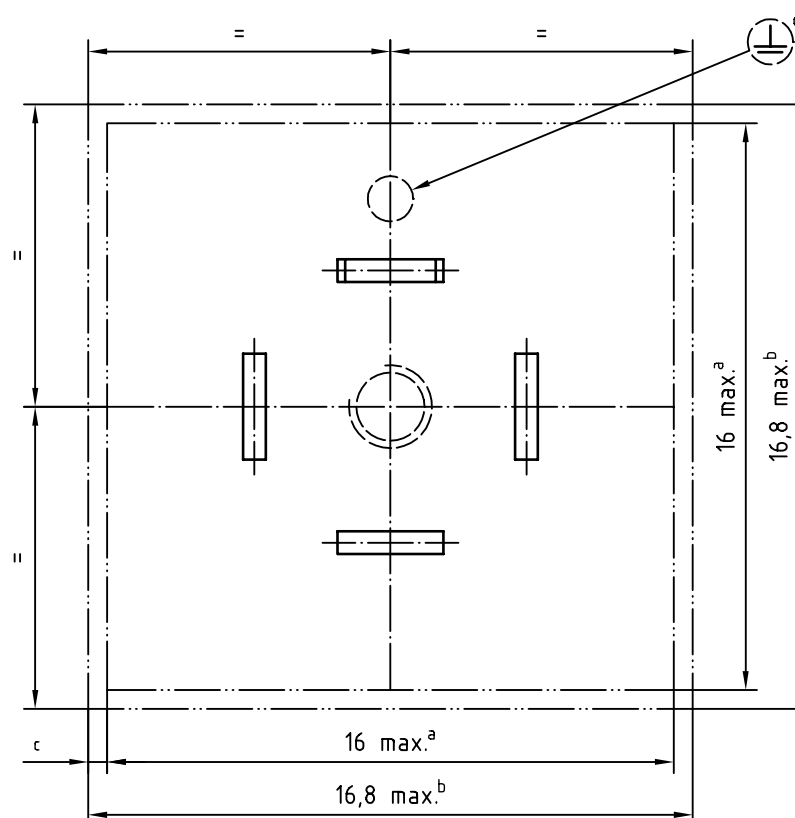

- a Maximum dimension of the socket
- b Maximum dimension of the seal
- c Seal overlap beyond the socket
- d Marking

Figure 4 — Overall dimensions

9 Mechanical protection

A cover plate shall be provided to protect the electrical plug specified in this International Standard when the plug has been removed from the socket. The cover plate may be made of plastic or a similar material.

10 Usage

10.1 The connector shall not be used to interrupt the current. It shall be connected or disconnected only after the electricity has been switched off.

10.2 Connectors or leads in installations for which incorrect connection is possible shall be permanently identified according to the actuator identification requirements given in ISO 4413 and ISO 4414.

11 Designation of the interface

Interfaces shall be designated by an alphanumeric code to facilitate ordering. They shall be designated by ISO 15217, followed by a hyphen, then the type of plug or socket, followed by the + sign and the letter symbol PE.

ISO 15217:2000(E)

EXAMPLE Nomenclature of a 16 mm square electrical connector interface:

Interface ISO 15217-plug 2 + PE

Interface ISO 15217-plug 3 + PE

Interface ISO 15217-socket 2 + PE

Interface ISO 15217-socket 3 + PE

12 Identification statement (Reference to this International Standard)

It is strongly recommended that manufacturers who have chosen to conform with this International Standard use the following identification statement in test reports, catalogues and sales literature:

“Electrical plug connector conforms to ISO 15217:2000, *Fluid power systems and components — 16 mm square electrical connector with earth contact — Characteristics and requirements.*”

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: 020 8996 7002. Fax: 020 8996 7001.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager. Tel: 020 8996 7070.