

BS ISO 17215-4:2014



BSI Standards Publication

# Road vehicles — Video communication interface for cameras (VCIC)

Part 4: Implementation of communication requirements

**bsi.**

...making excellence a habit.™

**National foreword**

This British Standard is the UK implementation of ISO 17215-4:2014.

The UK participation in its preparation was entrusted to Technical Committee AUE/16, Electrical and electronic equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014. Published by BSI Standards Limited 2014

ISBN 978 0 580 79964 8

ICS 43.040.15

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2014.

**Amendments issued since publication**

Date	Text affected
------	---------------

---

---

---

**Road vehicles — Video communication  
interface for cameras (VCIC) —**

Part 4:  
**Implementation of communication  
requirements**

*Véhicules routiers — Interface de communication vidéo pour caméras  
(ICVC) —*

*Partie 4: Mise en oeuvre d'exigences de communication*





**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms, definitions, symbols, and abbreviated terms</b> .....	<b>3</b>
3.1 Terms and definitions.....	3
3.2 Abbreviated terms.....	3
<b>4 Conventions</b> .....	<b>4</b>
<b>5 Overview</b> .....	<b>4</b>
5.1 General.....	4
5.2 Document overview and structure.....	4
5.3 Open Systems Interconnection (OSI) model.....	5
5.4 Document reference according to OSI model.....	5
<b>6 Physical layer</b> .....	<b>6</b>
<b>7 Data link layer</b> .....	<b>7</b>
7.1 General.....	7
7.2 Configuration.....	7
<b>8 Network layer</b> .....	<b>7</b>
8.1 General.....	7
8.2 Audio Video Transport Protocol (AVTP).....	7
8.3 IPv6.....	8
8.4 IPv4.....	10
8.5 Address allocation process.....	11
<b>9 Transport layer</b> .....	<b>11</b>
9.1 General.....	11
9.2 User Datagram Protocol (UDP).....	12
9.3 Transmission Control Protocol (TCP).....	12

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

ISO 17215 consists of the following parts, under the general title *Road Vehicles — Video communication interface for cameras (VCIC)*:

- *Part 1: General information and use case definition*
- *Part 2: Service discovery and control*
- *Part 3: Camera message dictionary*
- *Part 4: Implementation of communication requirements*

## Introduction

Driver assistance systems are more and more common in road vehicles. From the beginning, cameras were part of this trend. Analogue cameras were used in the beginning, because of lower complexity of the first systems. With increasing demand for more advanced functionality, digital image processing has been introduced. So-called one box design cameras (combining a digital image sensor and a processing unit) appeared in the vehicles.

Currently, the market demands such systems with multiple functions. Even different viewing directions are in use. It seems to be common sense that 6 up to 12 cameras in a single vehicle will be seen in the next future. Out of this and the limitation in size, power consumption, etc. it will lead to designs where the cameras are separated from the processing unit. Therefore, a high performance digital interface between camera and processing unit is necessary.

This International Standard has been established in order to define the use cases, the communication protocol, and the physical layer requirements of a video communication interface for cameras, which covers the needs of driver assistance applications.

The video communication interface for cameras

- incorporates the needs of the whole life cycle of an automotive grade digital camera,
- utilizes existing standards to define a long-term stable state-of-art video communication interface for cameras usable for operating and diagnosis purpose,
- can be easily adapted to new physical data link layers including wired and wireless connections by using existing adaption layers, and
- is compatible with AUTOSAR.

This part of ISO 17215 is related to the general information and use case definition. This is a general overview International Standard which is not related to the OSI model.

To achieve this, it is based on the Open Systems Interconnection (OSI) basic reference model specified in ISO/IEC 7498-1 and ISO/IEC 10731, which structures communication systems into seven layers. When mapped on this model, the protocol, and physical layer requirements specified by this International Standard, in accordance with [Table 1](#) are broken into:

- application (layer 7), specified in ISO 17215-3;
- presentation layer (layer 6), specified in ISO 17215-2;
- session layer (layer 5), specified in ISO 17215-2;
- transport protocol (layer 4), specified in ISO 17215-4, ISO 13400-2;
- network layer (layer 3), specified in ISO 17215-4, ISO 13400-2;
- data link layer (layer 2), specified in ISO 17215-4, ISO 13400-3;
- physical layer (layer 1), specified in ISO 17215-4, ISO 13400-3.

**Table 1 — Specifications applicable to the OSI layers**

Applicability	OSI 7 layers	Video communication interface for cameras		Camera diagnostics
Seven layers according to ISO 7498-1 and ISO/IEC 10731	Application (layer 7)	ISO 17215-3		
	Presentation (layer 6)	ISO 17215-2		
	Session (layer 5)	ISO 17215-2		
	Transport (layer 4)	ISO 17215-4	Other future interface standards	ISO 13400-2
	Network (layer 3)			
	Data link (layer 2)	ISO 17215-4		
	Physical (layer 1)			ISO 13400-3

ISO 17215-1 has been established in order to define the use cases for vehicle communication systems implemented on a video communication interface for cameras; it is an overall International Standard not related to the OSI model.

ISO 17215-3 covers the application layer implementation of the video communication interface for cameras; it includes the API.

ISO 17215-2 covers the session and presentation layer implementation of the video communication interface for cameras.

ISO 17215-4 is the common International Standard for the OSI layers 1 to 4 for the video communication interface for cameras. It complements ISO 13400-2 and ISO 13400-3 and adds the requirement for video transmission over Ethernet.

ISO 17215-2 and ISO 17215-3 (OSI layer 5 to 7) services have been defined to be independent of the ISO 17215-4 (OSI layer 1 to 4) implementation. Therefore, ISO 17215-4 could be replaced by other future communication standards.



# Road vehicles — Video communication interface for cameras (VCIC) —

## Part 4: Implementation of communication requirements

### 1 Scope

This part of ISO 17215 specifies the communication requirements for video camera interfaces. It is concerned mainly with layers 1 through 4 of the ISO/OSI basic reference model. These layers are the physical layer, the link layer, the network layer, and the transport layer. [Figure 1](#) presents the communication protocols specified in this part of ISO 17215 in relation to the ISO/OSI layers as well as the content of the other parts of ISO 17215.

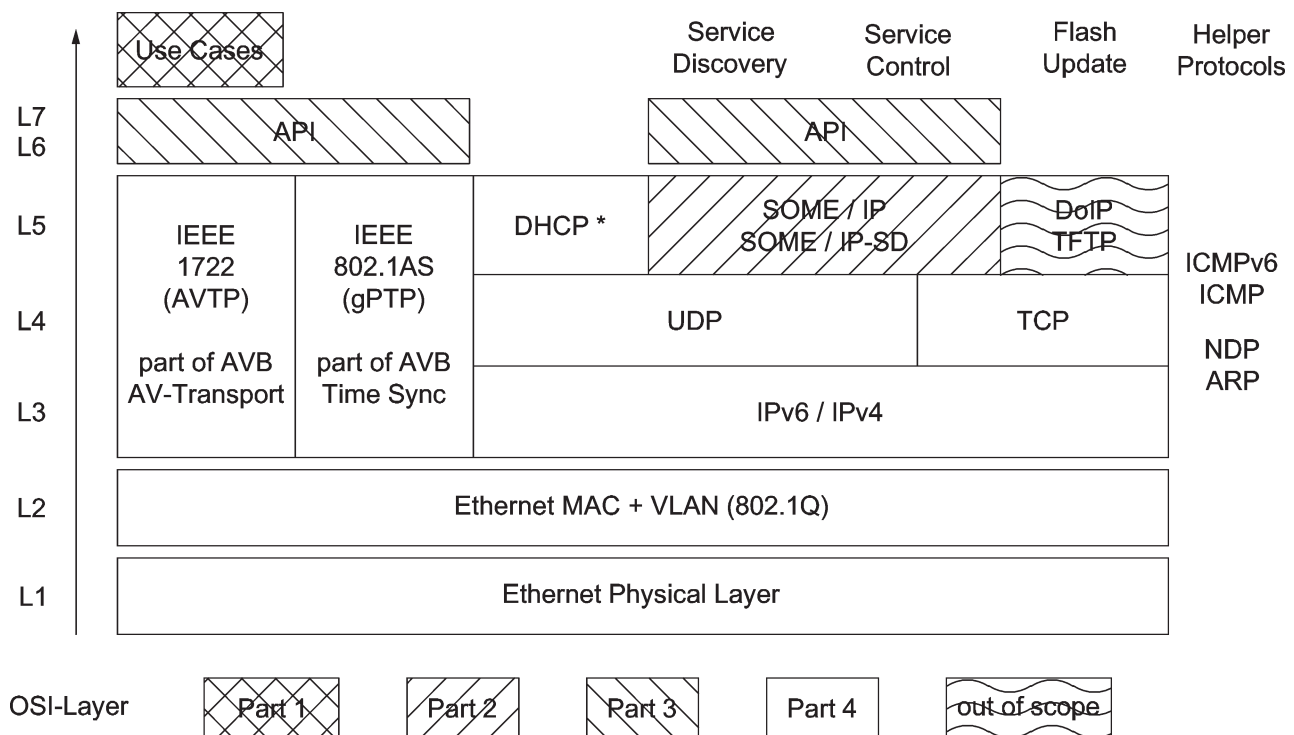


Figure 1 — Overview of ISO 17215

The general terminology defined in ISO 17215-1 is also used in this part of ISO 17215.

### 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7498-1, *Information processing systems — Open systems interconnection — Basic reference model*

ISO/IEC 10731, *Information technology — Open Systems Interconnection — Basic Reference Model — Conventions for the definition of OSI services*

ISO 17215 (all parts), *Road vehicles — Video communication interface for cameras (VCIC)*

IEEE 802.3-2012, *Standard for Ethernet*

IEEE 802.1Q, *IEEE Standard for Local and Metropolitan Area Networks — Media Access Control (MAC) Bridges and Virtual Bridged Local Area Networks*

IEEE 802.1AS, *Timing and Synchronization for Time-Sensitive Applications in Bridged Local Area Networks*

IEEE 1722, *Layer 2 Transport Protocol for Time-Sensitive Applications in a Bridged Local Area Network*IETF  
RFC 826, *Ethernet Address Resolution Protocol: Or Converting Network Protocol Addresses to 48-bit  
Ethernet Address for Transmission on Ethernet Hardware*

IETF RFC 768, *User Datagram Protocol*

IETF RFC 791, *Internet Protocol*

IETF RFC 792, *Internet Control Message Protocol*

IETF RFC 793, *Transmission Control Protocol*

IETF RFC 896, *Congestion Control in IP/TCP Internetworks*

IETF RFC 1122, *Requirements for Internet Hosts — Communication Layers*

IETF RFC 1323, *TCP Extensions for High Performance*

IETF RFC 1624, *Computation of the Internet Checksum via Incremental Update*

IETF RFC 1878, *Variable Length Subnet Table For IPv4*

IETF RFC 1981, *Path MTU Discovery for IP version 6*

IETF RFC 2018, *TCP Selective Acknowledgment Options*

IETF RFC 2131, *Dynamic Host Configuration Protocol*

IETF RFC 2132, *DHCP Options and BOOTP Vendor Extensions*

IETF RFC 2460, *Internet Protocol, Version 6 (IPv6) Specification*

IETF RFC 2464, *Transmission of IPv6 Packets over Ethernet Networks*

IETF RFC 2988, *Computing TCP's Retransmission Timer*

IETF RFC 3122, *Extensions to IPv6 Neighbor Discovery for Inverse Discovery Specification*

IETF RFC 3203, *DHCP reconfigure extension*

IETF RFC 3315, *Dynamic Host Configuration Protocol for IPv6 (DHCPv6)*

IETF RFC 3390, *Increasing TCP's Initial Window*

IETF RFC 3484, *Default Address Selection for Internet Protocol version 6 (IPv6)*

IETF RFC 3782, *The NewReno Modification to TCP's Fast Recovery Algorithm*

IETF RFC 4286, *Multicast routing discovery*

IETF RFC 4291, *IP Version 6 Addressing Architecture*

IETF RFC 4294, *IPv6 Node Requirements*

IETF RFC 4443, *Internet Control Message Protocol (ICMPv6) for the Internet Protocol Version 6 (IPv6)  
Specification*

IETF RFC 4861, *Neighbor Discovery for IP version 6 (IPv6)*

IETF RFC 4862, *IPv6 Stateless Address Autoconfiguration*

IETF RFC 4884, *Extended ICMP to Support Multi-Part Messages*

IETF RFC 5095, *Deprecation of Type 0 Routing Headers in IPv6*

IETF RFC 5220, *Problem Statement for Default Address Selection in Multi-Prefix Environments: Operational Issues of RFC 3484 Default Rules*

IETF RFC 5405, *Unicast UDP Usage Guidelines for Application Designers*

IETF RFC 5482, *TCP User Timeout Option*

IETF RFC 5681, *TCP Congestion Control*

IETF RFC 5722, *Handling of Overlapping IPv6 Fragments*

IETF RFC 5871, *IANA Allocation Guidelines for the IPv6 Routing Header*

IETF RFC 1042, *Standard for the transmission of IP datagrams over IEEE 802 networks*

NOTE The keywords *shall*, *should*, etc. as defined in IETF RFC 2119 are used in this part of ISO 17215 to indicate requirement levels. Capitalization of those keywords is not required.

If an RFC referenced by this part of ISO 17215 has been updated by one or several RFCs, the update is fully applicable for the purpose of implementing this part of ISO 17215. This presumes the additional document describes an implementation which is compatible with implementation described by document referred to herein.

If one or more errata for an RFC referenced by this part of ISO 17215 have been published, all of these errata documents are fully applicable for the purpose of implementing this part of ISO 17215.

It is assumed that future implementations of this part of ISO 17215 will use the most recent versions of the referenced RFCs but maintain backward compatibility to existing implementations.

### **3 Terms, definitions, symbols, and abbreviated terms**

#### **3.1 Terms and definitions**

For the purposes of this document, the terms and definitions given in ISO 17215-1 apply.

#### **3.2 Abbreviated terms**

<b>Term</b>	<b>Description</b>
API	Application Programming Interface
ARP	Address Resolution Protocol
AVB	Audio Video Broadcast
AVTP	Audio Video Transport Protocol
DHCP	Dynamic Host Configuration Protocol
DoIP	Diagnosis over IP
EMC	Electromagnetic Compatibility
gPTP	Generalized Precision Time Protocol

ICMP	Internet Control Message Protocol
LLC	Logical Link Control
MAC	Media Access Control
MII	Media Independent Interface
NDP	Neighbour Discovery Protocol
OSI	Open Systems Interconnection
PDU	Protocol Data Unit
PHY	Physical Layer
POE	Power over Ethernet
TCP	Transmission Control Protocol
TFTP	Trivial File Transfer Protocol
UDP	User Datagram Protocol
VLAN	Virtual Local Area Network

## 4 Conventions

This International Standard is based on the conventions specified in the OSI service conventions (ISO/IEC<sup>o</sup>10731) as they apply for physical layer, protocol, network and transport protocol, and diagnostic services.

## 5 Overview

### 5.1 General

This International Standard has been established in order to implement a standardized Video Communication Interface for Cameras in vehicles.

The focus of this International Standard is using existing protocols.

[Figure 1](#) specifies the relation to the other parts of this International Standard.

[Figure 2](#) specifies the relation of this International Standard to existing protocols.

### 5.2 Document overview and structure

This International Standard consists of a set of four sub-documents, which provide all references and requirements to support the implementation of a Video Communication Interface for Cameras according to the standard at hand.

- ISO 17215-1 provides an overview of the document set and structure along with the use case definitions and a common set of resources (definitions, references) for use by all subsequent parts.
- ISO 17215-2 specifies the discovery and control of services provided by a VCIC camera.
- ISO 17215-3 specifies the standardized camera messages and data types used by a VCIC camera (OSI Layer 7).

- ISO 17215-4 specifies standardized low-level communication requirements for the implementation of physical-, data link-, network-, and transport layer (OSI Layers 1 to 4).

### 5.3 Open Systems Interconnection (OSI) model

This International Standard is based on the Open Systems Interconnection (OSI) Basic Reference Model as specified in ISO/IEC 7498 which structures communication systems into seven layers.

All parts of this International Standard are guided by the OSI service conventions as specified in ISO/IEC 10731 to the extent that they are applicable to diagnostic services. These conventions define the interaction between the service user and the service provider through service primitives.

The aim of this subclause is to give an overview of the OSI model and show how it has been used as a guideline for this part of ISO 17215. It also shows how the OSI service conventions have been applied to this International Standard.

The OSI model structures data communication into seven layers called (top down) application layer (layer 7), presentation layer, session layer, transport layer, network layer, data link layer, and physical layer (layer 1). A subset of these layers is used in this International Standard.

The purpose of each layer is to provide services to the layer above. The active parts of each layer, implemented in software, hardware, or any combination of software and hardware, are called *entities*. In the OSI model, communication takes place between entities of the same layer in different nodes. Such communicating entities of the same layer are called peer entities.

The services provided by one layer are available at the Service Access Point (SAP) of that layer. The layer above can use them by exchanging data parameters.

This International Standard distinguishes between the services provided by a layer to the layer above it and the protocol used by the layer to send a message between the peer entities of that layer. The reason for this distinction is to make the services, especially the application layer services and the transport layer services, reusable for other types of networks other than the video communication interface for cameras. In this way, the protocol is hidden from the service user and it is possible to change the protocol if demanded by special system requirements.

### 5.4 Document reference according to OSI model

[Figure 2](#) illustrates the document references.

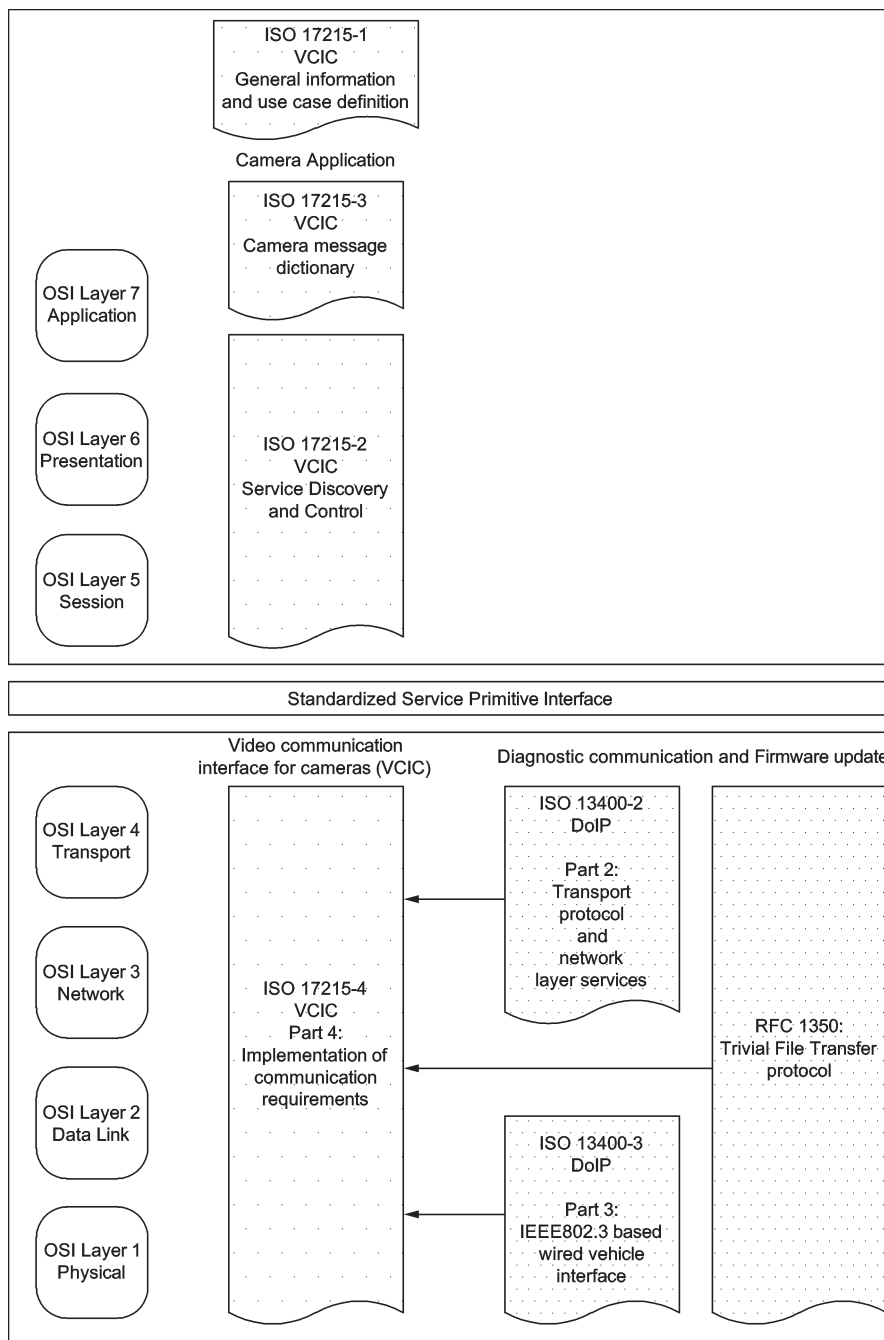


Figure 2 — Video communication interface for cameras document reference according to OSI model

## 6 Physical layer

The physical layer is the lowest layer in the OSI model. It is concerned with the hardware required to transmit raw bits through the link. This includes the specification of frequency spectrum, voltage levels, error correction mechanisms, link topology, and others. In the automotive environment, special emphasis is placed on the electromagnetic compatibility between different components. The BroadReach Technology ([www.opensig.org](http://www.opensig.org)) can be used as a reference implementation of the physical layer.

- The PHY layer shall provide a bandwidth of 100 Mbit/s or more.
- The PHY layer shall use full-duplex operation.

- The PHY layer shall fulfil automotive grade EMC requirements (CISPR 25, ISO 10605, ISO 11451).
- The PHY layer shall provide a standard media independent interface as defined in IEEE 802.3.
- The PHY layer can provide power-over-ethernet (IEEE 802.3af/at).
- The link start-up time shall be lower than 100 ms.

## 7 Data link layer

### 7.1 General

The data link layer is one level above the physical layer. The PDU on this layer is called a frame. The data link layer has two sub layers, known as the media access control layer and the logical link control layer.

- The data link layer shall be implemented according to IEEE 802.3.
- The data link layer shall provide support for the IEEE 802.1AS protocol according to IEEE 802.3 (2012).
- The MAC and PHY layers shall interact according to IEEE 802.3.
- The LLC layer shall support the mechanisms of IEEE 802.1Q.
- The LLC layer shall support the usage of multiple VLANs.
- The LLC layer shall support the usage of priorities within the VLAN tags.

### 7.2 Configuration

- The camera shall support the configuration of at least three VLANs with different VLAN-IDs.
- The camera shall support the configuration of a VLAN-ID for the video stream and the protocol used for this purpose (i.e. AVTP/IEEE 1722).
- The camera shall support the configuration of a VLAN-ID for IP-based protocols.
- The camera shall support the configuration of priorities inside the VLAN tag based on IEEE 802.1Q. The priority configuration shall at least support a fixed default priority per VLAN-ID and also a fixed priority per communication protocol used inside a VLAN. The priority of the protocol shall always overwrite the VLAN's default priority.

## 8 Network layer

### 8.1 General

The network layer is the third layer in the OSI model. It provides the means to transport data between two nodes over multiple hops. The protocol specified in this part of ISO 17215 is based on the internet protocol standard known as IPv6. Although the mandatory features of this part of ISO 17215 are based on IPv6 only, IPv4 can be used for applications in network scenarios where backward compatibility with IPv4 is required. IP-based communication is used for service discovery and control (see ISO 17215-2) while the actual video data are transmitted using AVTP.

### 8.2 Audio Video Transport Protocol (AVTP)

AVTP specifies methods to transport audio/video data and timing information with low latency so that audio/video content sent by a talker can be reproduced on listeners. Again, in the automotive environment, the network topologies are semi-static, so the stream reservation can be anticipated in

the design phase without the need for a dynamic protocol. The results can be stored as configuration data to enable faster startup times.

- AVTP shall be implemented according to IEEE 1722-2011. AVTP makes use of other standards for clock synchronization and quality of service.
- The generalized precision time protocol shall be supported according to IEEE 802.1AS.
- If necessary, stream reservation and traffic shaping parameters for cameras shall be set with the corresponding methods defined in IEEE 802.1Qat (SRP) and IEEE 802.1Qav (FQTSS).
- If the camera supports IEEE 802.1Qat (SRP), it shall be possible to reserve the full link bandwidth minus 10 Mbit/s for AVTP data.
- If the camera does not support IEEE 802.1Qat (SRP) and IEEE 802.1Qav (FQTSS), it shall be compatible with full AVB implementations.
- The Unique ID used for the AVTP Stream ID shall be set to the last octet of the camera's IP address.

### 8.3 IPv6

The following requirements for the usage of IPv6 apply.

- The IPv6 standard IETF RFC 2460 shall be supported.
- The IPv6 node requirements outlined in IETF RFC 4294 shall be fulfilled.
- Deprecation of type 0 routing headers in IPv6 IETF RFC 5095 shall be respected.
- The routing header allocation guidelines IETF RFC 5871 shall be followed.
- MTU path discovery shall be performed according to IETF RFC 1981.
- Overlapping IP fragments shall be discarded according to IETF RFC 5722.
- Multicast routing discovery shall be performed according to IETF RFC 4286.
- IPv6 multicast listener discovery shall be performed according to IETF RFC 3810.
- IPv6 packet transmission over ethernet shall be performed according to IETF RFC 2464.
- IPv6 does not need to support packet fragmentation.

#### 8.3.1 NDP

All hosts use IPv6 stateless address auto-configuration for generating addresses for their interfaces. All interfaces have a link-local address. To ensure unique addresses and to support global addresses, the Neighbour Discovery Protocol (NDP) is used.

- Neighbour discovery shall be performed according to IETF RFC 4861.
- Inverse neighbour discovery shall be performed according to IETF RFC 3122.

#### 8.3.2 ICMPv6

The Internet Control Message Protocol (ICMP) is part of the internet protocol suite and is used to send error messages, e.g. to indicate that a requested service is not available or that a host could not be reached. Consequently, ICMP is a mandatory part of an IP stack implementation and is located on the network layer according to the OSI layered architecture model. When using IPv6, the corresponding ICMPv6 shall be used.

- ICMPv6 shall be implemented according to IETF RFC 4443.



- Extended ICMP shall be implemented according to IETF RFC 4884.

**Table 2 — Mandatory ICMPv6 message types**

ICMPv6 message ID	ICMP message name	Reference
1	Destination Unreachable	IETF RFC 4443
2	Packet Too Big	IETF RFC 4443
3	Time Exceeded	IETF RFC 4443
4	Parameter Problem	IETF RFC 4443
128	Echo Request	IETF RFC 4443
129	Echo Reply	IETF RFC 4443
133	Router Solicitation	IETF RFC 4861
134	Router Advertisement	IETF RFC 4861
135	Neighbour Solicitation	IETF RFC 4861
136	Neighbour Advertisement	IETF RFC 4861
137	Redirect Message	IETF RFC 4861
141	Inverse Neighbour Discovery Solicitation Message	IETF RFC 3122
142	Inverse Neighbour Discovery Advertisement Message	IETF RFC 3122
151	Multicast Router Advertisement	IETF RFC 4286
152	Multicast Router Solicitation	IETF RFC 4286
153	Multicast Router Termination	IETF RFC 4286

### 8.3.3 Address configuration

This subclause specifies how a device retrieves a valid IP address to communicate over the IP-based network. Note that an IPv6 host usually has multiple IP addresses assigned to any one physical network interface.

- IPv6 default address selection shall be performed according to IETF RFC 3484.
- IPv6 default address selection in multi-prefix environments shall be performed according to IETF RFC 5220.

#### 8.3.3.1 Auto-configuration

This subclause specifies auto configuration requirements.

- IPv6 addresses shall conform to the rules laid out in IETF RFC 4291.
- Auto-configuration of link-local IPv6 addresses shall be performed according to IETF RFC 4862.

#### 8.3.3.2 DHCPv6

The Dynamic Host Configuration Protocol for IPv6 (DHCPv6) is a client-server networking protocol used to allocate IPv6 addresses in a local network. In an automotive environment, the network topology is semi-static, so some modifications can be applied to enable fast initialization in the regular use case. However, scenarios like repairs, upgrades, and diagnosis might still require reassignment of addresses.

- DHCPv6 shall be implemented according to IETF RFC 3315.
  - Cameras shall implement the DHCPv6 client functionality.

- ECUs shall implement the DHCPv6 server functionality.
- If a DHCPv6 server is present in a network, a connected devices supporting IPv6 shall acquire an IPv6 address from same server.
- The DHCP Reconfigure option shall be supported, even without DHCP Authentication.

## 8.4 IPv4

IPv4 can be used as an alternative solution when IPv6 support is not available.

- IPv4 shall be implemented according to IETF RFC 791.
- The transmission of IPv4 over Ethernet shall be implemented according to IETF RFC 1042.
- Classless subnets shall be supported based on IETF RFC 1878.
- IGMP shall be implemented according to IETF RFC 3376.
- IPv4 does not need to support packet fragmentation.

### 8.4.1 ARP

The Address Resolution Protocol (ARP) is used to map network layer (IPv4) addresses to link layer (MAC) addresses:

- The ARP shall be implemented according to IETF RFC 826.

### 8.4.2 ICMP

The Internet Control Message Protocol (ICMP) is part of the internet protocol suite and is used to send error messages, e.g. to indicate that a requested service is not available or that a host could not be reached. Consequently, ICMP is a mandatory part of an IP stack implementation and is located on the network layer according to the OSI layered architecture model.

- ICMP shall be implemented according to IETF RFC 792.
- The camera shall answer to unicast ICMP echo request messages.
- The camera shall answer to broadcast ICMP Echo Request message if the destination address equals the local subnet broadcast address and the source address is inside the local subnet.
- The camera shall implement ICMP type 3 with at least code 2 (protocol unreachable) and 3 (port unreachable).

**Table 3 — Mandatory ICMP message types**

Type	ICMP message name	Reference
0	Echo Request	IETF RFC 792
3	Destination Unreachable (at least code 2 and 3)	IETF RFC 792
8	Echo	IETF RFC 792

Since ARP is a separate protocol (as opposed to NDP for IPv6), the list in [Table 3](#) is relatively short.

### 8.4.3 DHCP

DHCP is used to assign IPv4 addresses in a local network. In the context of this part of ISO 17214, ECUs play the role of DHCP servers and cameras play the role of DHCP clients.

- DHCP shall be implemented according to IETF RFC 2131.

- DHCP options 0, 1, 51, and 53 shall be implemented according to IETF RFC 2132.
- DHCP options 12, 15, 50, 54, 55, 56, and 57 can be implemented according to IETF RFC 2132.
- DHCP force renew shall be implemented according to IETF RFC 3203, but without DHCP authentication.
- The DHCP client can directly go to INIT state after receiving a FORCERENEW message.

## 8.5 Address allocation process

The general process of address allocation does not depend on whether IPv6 or IPv4 is being used. It is however imperative that the startup time of the vehicle be as short as possible. Therefore, IP addresses, once assigned, are stored and used until they expire.

- Addresses shall be allocated in a reproducible way, according to the network topology.
- The address lease time shall be set to the maximum possible value (0xFFFFFFFF).
- When the client receives an address lease time of 0xFFFFFFFF, the address shall never expire.
- Assigned addresses shall be stored in non-volatile memory.
- If a stored IP address is available on power-up, it shall be used.
- If no stored IP address is available on power-up, a DHCP handshake sequence shall be initiated.
- If a stored IP address is in conflict with the topology-dependent IP address, the stored address shall be invalidated and a new address shall be assigned.

### 8.5.1 Example

NOTE Details of this example are implementation-dependent and not in the scope of this part of ISO 17215.

Topology-dependent address assignment implies that the ECU implementing the DHCP server shall take into account the port a camera is connected to when assigning IP addresses. This means that the microcontroller the DHCP server is running on shall query the switch over which port a given MAC address is communicating.

This does not require changes to the DHCP protocol, only to the server logic concerning the selection of addresses from the pool. Note that in the case where the DHCP server is running on an ECU different from the switch, an additional management component might be required on the switch.

On startup, the DHCP server checks for all assigned IP addresses whether they are connected at all and whether they are connected to the right port. This is to catch the case where a camera has been replaced or mixed up during repair. A new camera without a valid IP address will ask for an address. In case of an incorrect assignment, a DHCP FORCERENEW message is sent to the camera to overwrite the outdated IP address.

Note that in the case of wireless camera links (e.g. for a trailer) no topology is defined and a deterministic assignment of IP addresses has to be achieved by other means. However, wireless links are outside of the scope of this part of ISO 17215.

## 9 Transport layer

### 9.1 General

The transport layer is the fourth layer in the OSI model and the highest layer considered in this part of ISO 17215. It provides transparent data transfer between applications via a variety of protocols. This

part of ISO 17215 is concerned with User Datagram Protocol (UDP) and Transmission Control Protocol (TCP).

## 9.2 User Datagram Protocol (UDP)

The UDP is a simple, stateless, low-overhead protocol over which data can be exchanged between applications on networked hosts. UDP assumes that error checking is unnecessary or performed by the client. Thus, it does not guarantee reliable and in-order delivery of data. Time-sensitive applications often use UDP because dropping packets is preferable to waiting for delayed packets. UDP is located on the transport layer according to the OSI layered architecture model.

- UDP shall be implemented according to IETF RFC 768.
- The Unicast UDP Guidelines IETF RFC 5405 shall be observed.

## 9.3 Transmission Control Protocol (TCP)

The TCP is a connection-oriented protocol, where applications on networked hosts can establish connections to one another, over which data can be exchanged. The protocol guarantees reliable and in-order delivery of sender to receiver data. Additionally, TCP provides flow control and congestion control and also provides for various algorithms to handle congestion and influence flow control. The specific algorithm to be used is not specified here. TCP is located on the transport layer according to the OSI layered architecture model.

- TCP shall be implemented according to IETF RFC 793.
- The requirements for Internet hosts/communication layers according to IETF RFC 1122 shall be observed.
- The TCP retransmission timer shall be implemented according to IETF RFC 2988.
- TCP congestion control shall be implemented according to IETF RFC 5681.
- TCP shall support Nagle's algorithm IETF RFC 896, but shall allow for turning it off.
- TCP fast recovery shall be implemented according to IETF RFC 3782.
- The TCP high performance extensions shall be implemented according to IETF RFC 1323.
- The TCP initial window increase shall be implemented according to IETF RFC 3390.
- The TCP selective acknowledgement shall be implemented according to IETF RFC 2018.
- The TCP user timeout shall be implemented according to IETF RFC 5482.
- The TCP header checksums shall be implemented according to IETF RFC 1624.







# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™