

**Ships and marine
technology —
Drawings for
fire protection —
Indications of fire
rating by divisions for
ships and high-speed
craft**

ICS 01.080.30; 47.020.01

National foreword

This British Standard is the UK implementation of ISO 17338:2009.

The UK participation in its preparation was entrusted to Technical Committee SME/32/-/1, Lifesaving and fire protection.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2009

© BSI 2009

ISBN 978 0 580 54007 3

Amendments/corrigenda issued since publication

Date	Comments

INTERNATIONAL STANDARD

ISO
17338

First edition
2009-08-15

Ships and marine technology — Drawings for fire protection — Indications of fire rating by divisions for ships and high-speed craft

*Navires et technologie maritime — Dessins pour la protection contre
l'incendie — Indication des cotes au feu des cloisonnements*



Reference number
ISO 17338:2009(E)

PDF disclaimer

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



COPYRIGHT PROTECTED DOCUMENT

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 17338 was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 1, *Lifesaving and fire protection*.

Introduction

This International Standard provides standard illustrations and methods of preparation for drawings for fire protection of ships and high-speed craft provided by thermal and structural boundaries (divisions). It may be applied equally to drawings for existing ships and high-speed craft, and for ships and high-speed craft under construction. This International Standard is complementary to ISO 17631 ^[3], which specifies plans primarily for use by ship operators, and shipboard and shore-side fire-fighting personnel, in responding to shipboard emergencies. This International Standard specifies drawings primarily for use by shipbuilders and regulatory authorities to specify and audit the system of thermal and structural boundaries to provide fire protection on a ship or high-speed craft as required by applicable national and international regulations.

Ships and marine technology — Drawings for fire protection — Indications of fire rating by divisions for ships and high-speed craft

IMPORTANT — The electronic file of this document contains colours which are considered to be useful for the correct understanding of the document. Users should therefore consider printing this document using a colour printer.

1 Scope

This International Standard specifies the design and layout of drawings for indicating the fire rating of thermal and structural boundaries (divisions) for fire protection of ships.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

IMO International Convention for the Safety of Life at Sea, 1974 (SOLAS:1974), as amended in 2000

Torremolinos Protocol, 1993, updating, amending and absorbing the Torremolinos International Convention for the Safety of Fishing Vessels, 1977

IMO Code for the Construction and Equipment of Mobile Offshore Drilling Units, 2001 (MODU Code)

IMO International Code of Safety for High-speed Craft, 2000 (HSC Code), as amended in 2008

3 Terms and definitions

For the purposes of this International Standard, the following terms and definitions apply.

3.1

booklet

compilation of fire protection drawing(s) for use in maintenance and/or survey, which can be easily checked and maintained

3.2

competent authority

Administration whose flag the ship is entitled to fly, or an organization authorized by an Administration, to perform functions as specified in this International Standard

3.3

division

thermal and structural boundary (such as a bulkhead or deck), ensembles of which confine spaces and have fire protection properties as required by the applicable regulations

3.4

illustration

use of line drawings or colours for the description of the fire rating of divisions

4 General

4.1 Drawings prepared in accordance with this International Standard shall be made to a scale not smaller than 1:150 with a line thickness according to Table 1.

An example drawing is shown in Annex A illustrating some of the principles outlined in this International Standard.

Table 1 — Illustrations for indicating the fire rating of divisions






















Referent ^a	Illustration	Description	Comment on use
A-60 class division for main vertical zones		Continuous wide red line	The line may also be coloured black The line thickness shall be 2,5 mm
A-30 class division for main vertical zones		Dashed wide red line	The line may also be coloured black The line thickness shall be 2,5 mm
A-15 class division for main vertical zones		Long-dashed dotted wide red line	The line may also be coloured black The line thickness shall be 2,5 mm
A-0 class division for main vertical zones		Long-dashed double dotted wide red line	The line may also be coloured black The line thickness shall be 2,5 mm
1. A-60 class vertical division 2. Vertical fire resisting division with 60 min of structural fire protection time		Continuous medium red line	The line may also be coloured black The line thickness shall be 1,5 mm
1. A-30 class vertical division 2. Vertical fire resisting division with 30 min of structural fire protection time		Dashed medium red line	The line may also be coloured black The line thickness shall be 1,5 mm
A-15 class vertical division		Long-dashed dotted medium red line	The line may also be coloured black The line thickness shall be 1,5 mm
1. A-0 class vertical division 2. Vertical fire resisting division with 0 min of structural fire protection time		Long-dashed double dotted medium red line	The line may also be coloured black The line thickness shall be 1,5 mm
B-30 class vertical division		Dashed medium yellow line with black outline	Grey shading may be used instead of the yellow colour The yellow line thickness shall be 1,0 mm and the black outline thickness 0,1 mm

Table 1 (continued)

Referent ^a	Illustration	Description	Comment on use
B-15 class vertical division		Dashed dotted medium yellow line with black outline	Grey shading may be used instead of the yellow colour The yellow line thickness shall be 1,0 mm and the black outline thickness 0,1 mm
B-0 class vertical division		Dashed double dotted medium yellow line with black outline	Grey shading may be used instead of the yellow colour The yellow line thickness shall be 1,0 mm and the black outline thickness 0,1 mm
C class vertical fire resisting division		Continuous zigzagged narrow blue line	Black may be used instead of blue The line thickness shall be 0,5 mm
1. F class vertical fire resisting division 2. Vertical division made of fire resisting material		Continuous narrow purple line	Grey shading may be used instead of the purple colour The line thickness shall be 0,5 mm
1. A-60 class horizontal division 2. Horizontal fire resisting division with 60 min of structural fire protection time		Cross-hatched narrow red line	Black may be used instead of the red colour The line thickness shall be 0,5 mm
1. A-30 class horizontal division 2. Horizontal fire resisting division with 30 min of structural fire protection time		Continuous narrow red line	Black may be used instead of the red colour The line thickness shall be 0,5 mm
A-15 class horizontal division		Continuous narrow red line	Black may be used instead of the red colour The line thickness shall be 0,5 mm
1. A-0 class horizontal division 2. Horizontal fire resisting division with 0 min of structural fire protection time		Dashed narrow red lines	Black may be used instead of the red colour The line thickness shall be 0,5 mm
B-15 class horizontal division		Continuous narrow yellow lines	Grey shading may be used instead of the yellow colour The line thickness shall be 0,5 mm
B-0 class horizontal division		Continuous narrow yellow lines	Grey shading may be used instead of the yellow colour The line thickness shall be 0,5 mm
1. F class horizontal division 2. Horizontal division made of fire resisting material		Long-dashed dotted narrow purple line	Grey shading may be used instead of the purple colour The line thickness shall be 0,5 mm
Draught stop		Medium red crosses	Black may be used instead of the red colour

^a Where there are two options: 1 applies to drawings for ships; 2 applies to drawings for high-speed craft.

4.2 Large drawings may be subdivided for clarity.

4.3 The drawing shall show:

- a) type of ship and, in case of passenger ships, whether the number of passengers exceeds 36 passengers or not;
- b) names of internal spaces, and fire category as given in SOLAS:1974, Torremolinos Protocol:1993, MODU Code:2001, or HSC Code:2008 as appropriate, shall be indicated. These fire categories shall be placed in a circle for spaces protected by sprinkler or equivalent system(s), and in a square box for spaces not protected by these system(s);
- c) "A", "B", "C" and "F" class divisions, as appropriate;
- d) frame numbers, with a letter point size of 9;
- e) the indication of the various parts of the ship, where the indicated fire rating for A class divisions is obtained by a combination of divisions (e.g., an A class deck in combination with a B class ceiling);
- f) the use of structural core material other than steel, e.g., aluminium alloy;
- g) arrangements of draught stops;
- h) where B class bulkheads are extended from deck to deck, or from deck to a continuous B class ceiling;
- i) notes, if necessary, describing additional features of fire protection based on divisions;
- j) for passenger ships:
 - 1) a longitudinal section in way of the centreline, indicating the main vertical and horizontal zones and relevant numbering; and
 - 2) external view(s) indicating the fire rating of ship' sides in way of the survival craft stowage areas, survival craft embarkation areas, and areas below and adjacent to liferaft and evacuation slide embarkation areas;
- k) for tankers, external view indicating the fire rating of the ship's superstructure facing the cargo area.

Constructional details, such as erection of B class divisions and penetrations at A or B class divisions, may be included on the drawing.

4.4 The drawing shall be properly legible. Spacing between lines should be adjusted so as to maintain the legibility of basic drawing while clearly identifying divisions involved. Consideration may be given to preparation of separate drawings for high fire risk spaces, e.g. propulsion machinery spaces and boiler rooms.

4.5 A legend shall be a constituent part of the drawing and contain a list of the graphical symbols and/or illustrations used in the drawing, together with the appropriate explanations. The legend shall be placed at the right side of the drawing. At the discretion of the competent authority, a booklet can be prepared which includes, in some instances, additional special information such as the type of insulation material used. For clarity, preferably only one font type should be used for text in drawings developed in accordance with this International Standard. The letter size shall be appropriate for the drawing scale and shall preferably be 12 point.

4.6 For specific arrangements, e.g. lift machinery room, stairway flight, and fuel oil tank, additional details (including transverse or longitudinal sections) may be necessary.

4.7 The information required shall be shown deck by deck.

4.8 Illustrations shall be positioned in the drawing in such a manner as to clearly indicate the appropriate position on the ship.

4.9 Texts in drawings and booklets shall be in the language or languages required by the competent authority. Where more than one language is used on drawings, distinguish them by use of different font types.

NOTE Reference can be made to the requirements of the ISM Code^[4] with regard to working languages of the ship.

4.10 Drawings shall specify:

- a) the ship's construction date;
- b) the method of construction of fire protection, if applicable:
 - 1) for passenger ships: Method I, II, III with or without sprinklers, etc.,
 - 2) for cargo ships: Method IC, IIC, IIIC, etc.,
 - 3) for fishing vessels: Method IF, IIF, IIIF, etc.;
- c) dates and descriptions of any modifications to the ship which altered its fire safety.

Where more than one method or a combination of methods is used in different locations of the ship, this shall be specified.

4.11 Where practicable, all decks in drawings and booklets should be sequentially numbered starting with "1" at the lowest deck.

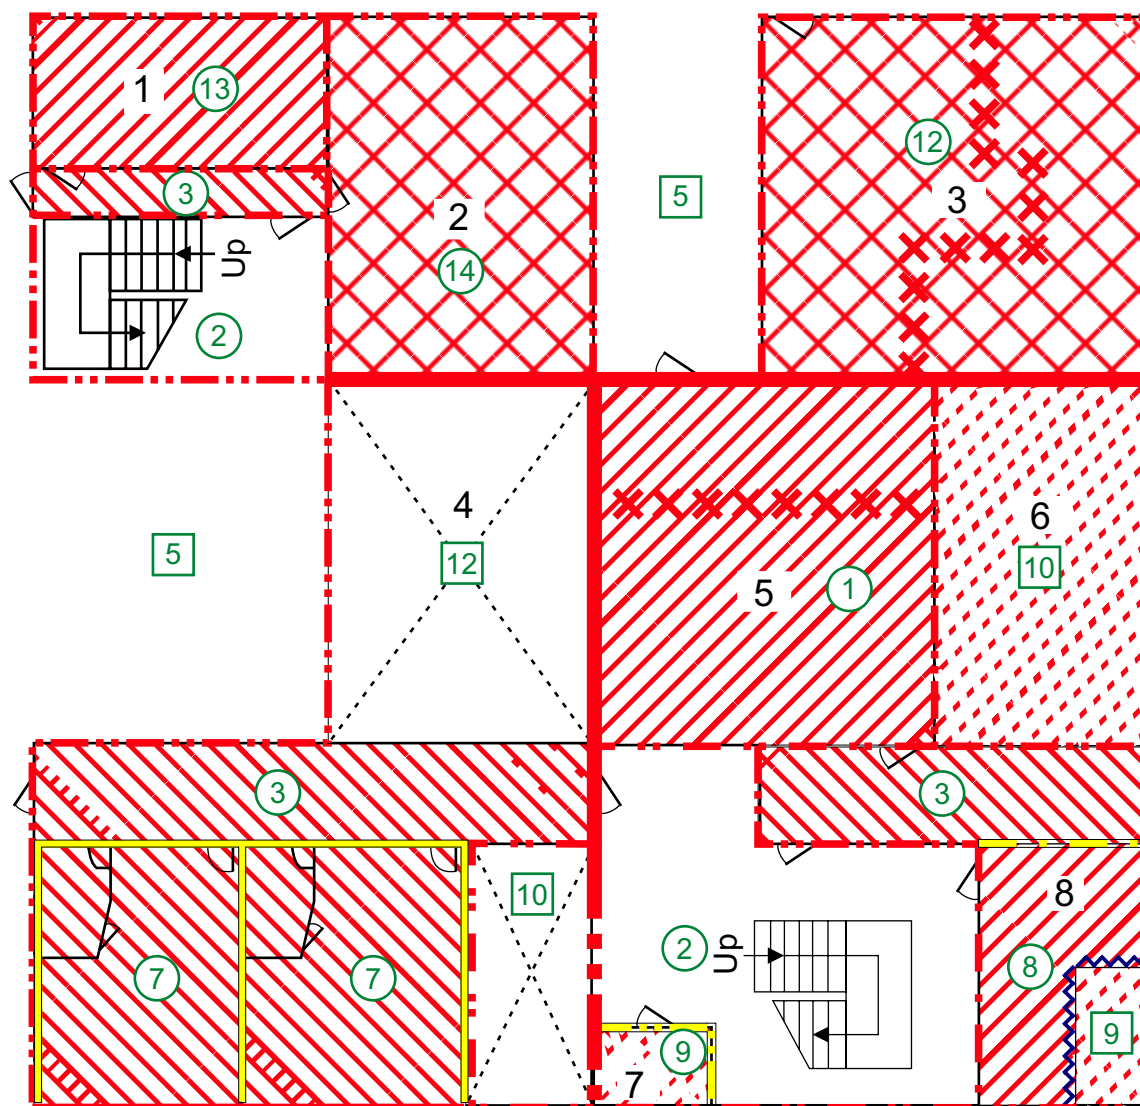
4.12 Fire rating of horizontal divisions between two spaces shall be indicated on the deck relevant to the lower space.

5 Computer-based systems

Computer-based systems shall comply, as a minimum, with the substantive contents of this International Standard. However, computer-based systems may not replace the drawings or booklets specified in this International Standard.

Annex A (informative)

Example drawing showing illustrations of fire rating by divisions for a SOLAS passenger ship carrying more than 36 passengers



Key

- | | |
|------------|----------------|
| 1 workshop | 5 control room |
| 2 store | 6 AC room |
| 3 galley | 7 toilet |
| 4 casing | 8 pub |

NOTE In sketching this example, it was assumed that all spaces located on the deck above this one are category 8 spaces (“accommodation spaces of greater fire risk”) as defined in regulation II-2/9.2.2.3.2.2 of SOLAS 1974 (Amended). Space categories in circles represent spaces protected by sprinkler or equivalent system(s), and space categories in squares represent spaces not protected by these system(s).

Figure A.1 — Illustration of fire rating by divisions for a SOLAS passenger ship

Bibliography

- [1] ISO 128-20, *Technical drawings — General principles of presentation — Part 20: Basic conventions for lines*
- [2] ISO 128-25, *Technical drawings — General principles of presentation — Part 25: Lines on shipbuilding drawings*
- [3] ISO 17631, *Ships and marine technology — Shipboard plans for fire protection, life-saving appliances and means of escape*
- [4] ISM Code 2002, *International Safety Management Code*

ICS 01.080.30; 47.020.01

Price based on 7 pages

BSI - British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: orders@bsigroup.com You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: copyright@bsigroup.com