

BS ISO 17572-2:2015



BSI Standards Publication

Intelligent transport systems (ITS) — Location referencing for geographic databases

Part 2: Pre-coded location references (pre-coded profile)

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 17572-2:2015. It supersedes BS ISO 17572-2:2008 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee EPL/278, Intelligent transport systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.
Published by BSI Standards Limited 2015

ISBN 978 0 580 82014 4

ICS 03.220.01; 35.240.60

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 January 2015.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

**Intelligent transport systems (ITS) —
Location referencing for geographic
databases —**

Part 2:
**Pre-coded location references (pre-
coded profile)**

*Systèmes intelligents de transport (SIT) — Localisation pour bases de
données géographiques —*

Partie 2: Localisations précodées (profil précodé)





COPYRIGHT PROTECTED DOCUMENT

© ISO 2015

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Abbreviated terms	2
5 Requirements for a location referencing standard	2
6 Conceptual data model for location referencing methods	2
7 Specification of pre-coded location references	3
7.1 General concept.....	3
7.2 Location database creation and updating.....	4
7.3 Location database provision.....	4
7.4 Location database usage.....	4
8 Implementations at present	4
8.1 General.....	4
8.2 Vehicle Information and Communication System (VICS).....	4
8.3 Traffic Message Channel (TMC)/ALERT-C Specification.....	5
8.4 Korean node link ID system.....	6
8.5 Road Section Identification Data set.....	6
Annex A (informative) Logical format for VICS link location	8
Annex B (informative) ALERT-C location reference, TPEG2 logical structure	28
Annex C (normative) ALERT-C location reference, TPEG2 binary representation	31
Annex D (normative) ALERT-C location reference, TPEG2 XML representation	33
Annex E (informative) Korean node-link location reference, TPEG2 logical structure	35
Annex F (normative) Korean node-link location reference, TPEG2 binary representation	37
Annex G (normative) Korean node-link location reference, TPEG2 XML representation	38
Annex H (informative) Road Section Identification Data set	40
Bibliography	46

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 204, *Intelligent transport systems*.

This second edition cancels and replaces the first edition (ISO 17572-2:2008), which has been technically revised.

ISO 17572 consists of the following parts, under the general title *Intelligent transport systems (ITS) — Location referencing for geographic databases*:

- *Part 1: General requirements and conceptual model*
- *Part 2: Pre-coded location references (pre-coded profile)*
- *Part 3: Dynamic location references (dynamic profile)*

Introduction

A location reference (LR) is a unique identification of a geographic object. In a digital world, a real-world geographic object can be represented by a feature in a geographic database. An example of a commonly known location reference is a postal address of a house. Examples of object instances include a particular exit ramp on a particular motorway, a road junction, or a hotel. For efficiency reasons, location references are often coded. This is especially significant if the location reference is used to define the location for information about various objects between different systems. For intelligent transport systems (ITS), many different types of real-world objects will be addressed. Amongst these, location referencing of the road network, or components thereof, is a particular focus.

Communication of a location reference for specific geographic phenomena, corresponding to objects in geographic databases, in a standard, unambiguous manner is a vital part of an integrated ITS system in which different applications and sources of geographic data will be used. Location referencing methods (LRMs, methods of referencing object instances) differ by applications, by the data model used to create the database, or by the enforced object referencing imposed by the specific mapping system used to create and store the database. A standard location referencing method allows for a common and unambiguous identification of object instances representing the same geographic phenomena in different geographic databases produced by different vendors, for varied applications, and operating on multiple hardware/software platforms. If ITS applications using digital map databases are to become widespread, data reference across various applications and systems has to be possible. Information prepared on one system, such as traffic messages, has to be interpretable by all receiving systems. A standard method to refer to specific object instances is essential to achieving such objectives.

Japan, Korea, Australia, Canada, the US, and European ITS bodies are all supporting activities of location referencing. Japan has developed a Link Specification for VICS. Japan has developed the Road Section Identification Data set which uses road sections and reference points after the publication of the first edition of this part of ISO 17572 in 2008. In Europe, the RDS-TMC traffic messaging system has been developed. In addition, methods have been developed and refined in the EVIDENCE and AGORA projects based on intersections identified by geographic coordinates and other intersection descriptors. In the US, standards for location referencing have been developed to accommodate several different location referencing methods.

This International Standard provides specifications for location referencing for ITS systems (although other committees or standardization bodies can subsequently consider extending it to a more generic context). In addition, this edition does not deal with public transport location referencing; this issue will be dealt with in a later edition.

Intelligent transport systems (ITS) — Location referencing for geographic databases —

Part 2: Pre-coded location references (pre-coded profile)

1 Scope

This International Standard specifies location referencing methods (LRMs) that describe locations in the context of geographic databases and will be used to locate transport-related phenomena in an encoder system as well as in the decoder side. This International Standard defines what is meant by such objects and describes the reference in detail, including whether or not components of the reference are mandatory or optional, and their characteristics.

This International Standard specifies two different LRMs:

- pre-coded location references (pre-coded profile);
- dynamic location references (dynamic profile).

This International Standard does not define a physical format for implementing the LRM. However, the requirements for physical formats are defined.

This part of ISO 17572 specifies the pre-coded location referencing method, comprising

- specification of pre-coded location references (pre-coded profile),
- logical format for VICS link location (see [Annex A](#)),
- TPEG physical format for ALERT-C-location references (see [Annex B](#), [Annex C](#), and [Annex D](#)),
- TPEG physical format for Korean node-link ID references (see [Annex E](#), [Annex F](#), and [Annex G](#)), and
- logical format for Road Section Identification Data set (see [Annex H](#)).

Logical formats of the implementations at present are described as informative; on the other hand, physical formats of the implementations at present are described as normative in the annexes.

It is consistent with other International Standards developed by ISO/TC 204 such as ISO 14825.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 17572-1, *Intelligent transport systems (ITS) — Location referencing for geographic databases — Part 1: General requirements and conceptual model*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 17572-1 and the following apply.

3.1

major link

directed link in a road network

4 Abbreviated terms

ALERT	Advice and Problem Location for European Road Traffic
DATEX	Data Exchange (protocol for exchange of traffic and travel information between traffic centres)
GCIId	generic component identifier
GDF	Geographic Data File
ID	identifier
ITRF	International Terrestrial Reference Frame
LDB	location database
LI	location information
LR	location referencing (or reference)
LRM	location referencing method
LRS	location referencing system
LRP	location referencing procedure
MOCT	Ministry of Construction and Transportation (Republic of Korea)
RDS	Radio Data System
SOEI	System Operating and Exchanging Information
TMC	Traffic Message Channel
TPEG	Transport Protocol Expert Group
TTI	Traffic and Traveller Information
UTM	Universal Transverse Mercator
VICS	Vehicle Information and Communication System
RSIDs	Road Section Identification Data set

5 Requirements for a location referencing standard

For details, see ISO 17572-1:2014, Clause 4.

For an inventory of location referencing methods, see ISO 17572-1:2014, Annex A.

6 Conceptual data model for location referencing methods

For details, see ISO 17572-1:2014, Clause 5.

For examples of conceptual data model use, see ISO 17572-1:2014, Annex B.

7 Specification of pre-coded location references

7.1 General concept

Pre-coded location referencing is a method which makes use of end-user client devices carrying a location database (LDB) that is exactly the same as the corresponding location database used by a service provider of a particular message being exchanged. All pre-coded location referencing methods shall share the concept of defining a commonly used database of IDs. This concept has been developed in the past for technologies such as RDS-TMC and VICS to allow an (over-the-air) interface to be designed that uses compact code values (IDs) in the corresponding databases to express particular pre-coded locations of various types.

The location referencing method here is divided into three steps performed to implement the location referencing system. The first step is a process of defining the database of location IDs for a given area and the corresponding road network. In this step, different service providers and systems provider agree on a defined database containing all locations to be codable (location database creation). In the second step, this database is provisioned *via* various means into the service providers database as well as into all receiving systems (location database provisioning). The third step is in real-time where a service provider can now make use of that database and reference to locations by using the newly introduced IDs (location database usage). See [Figure 1](#), which illustrates this concept.

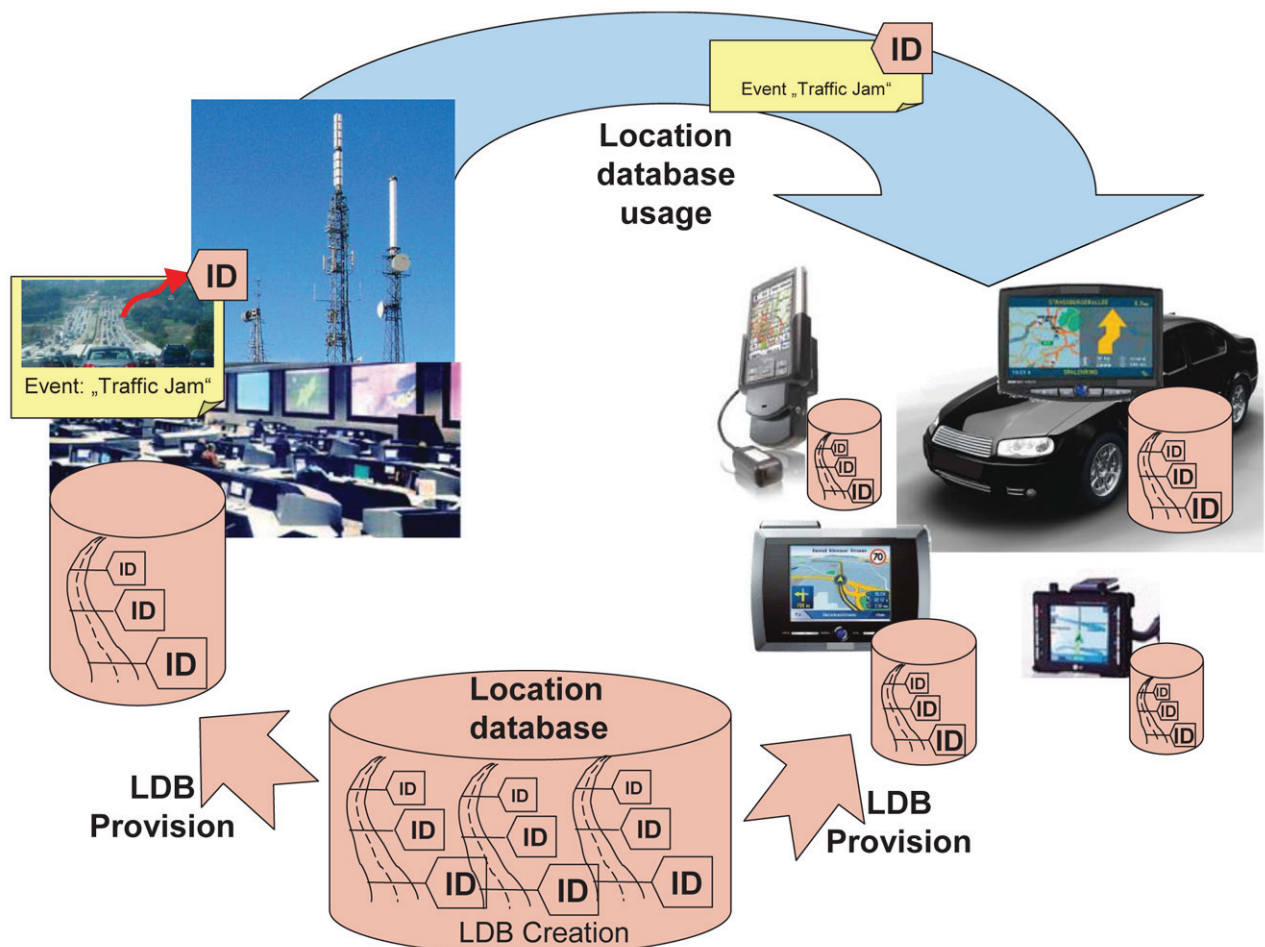


Figure 1 — General concept of pre-coded location referencing system

7.2 Location database creation and updating

The different location referencing systems more or less support standardized ways to create a new release of a location database. All of them share a conceptual model specifying how the different location categories specified in ISO 17572-1 are related to each other. This specification, together with some guiding literature, helps the community to create new releases of the location database.

7.3 Location database provision

After finalization of the creation process, the newly created location database is provisioned into the devices with maintenance service agreements. This is mostly done on a regular based map release update. The location referencing system has to ensure that the encoding and the decoding entities are able to distinguish which release (version) of the database is in use because no conclusion regarding the correctness of the location can be made based on the contents of the IDs alone.

7.4 Location database usage

A service provider, using the current release data set, then creates messages with location references according to specified rules a location reference out of the list of location IDs available and can put additional attributes to it, to define more precisely which part of the road network is referred to. The location reference sent to the receiving system then consists of a list of one or more location IDs and some additional attributes. Presuming that the receiving system has the actual database available, it seeks for the given location IDs and applies the additional attributes according to the location referencing specification. Doing so, the decoder provides the same location definition as requested by the service provider.

8 Implementations at present

8.1 General

Different implementations of pre-coded location referencing have already been specified for some time. Some of them are captured in another International Standard and some of them need some more specification here. This clause provides a list of presently known pre-coded location referencing methods and introduces them shortly. It also refers the reader to the different documents needed to fully apply to the different implementations.

8.2 Vehicle Information and Communication System (VICS)

8.2.1 Location database creation

Vehicle Information and Communication System specifies in Reference [2] a digital map database as the basis for other map provider to adopt the different map IDs into their own digital map. The digital base map consists of nodes and road elements which build up a complete street map on level zero. See [Figure 2](#), which defines the conceptual data model for this map.

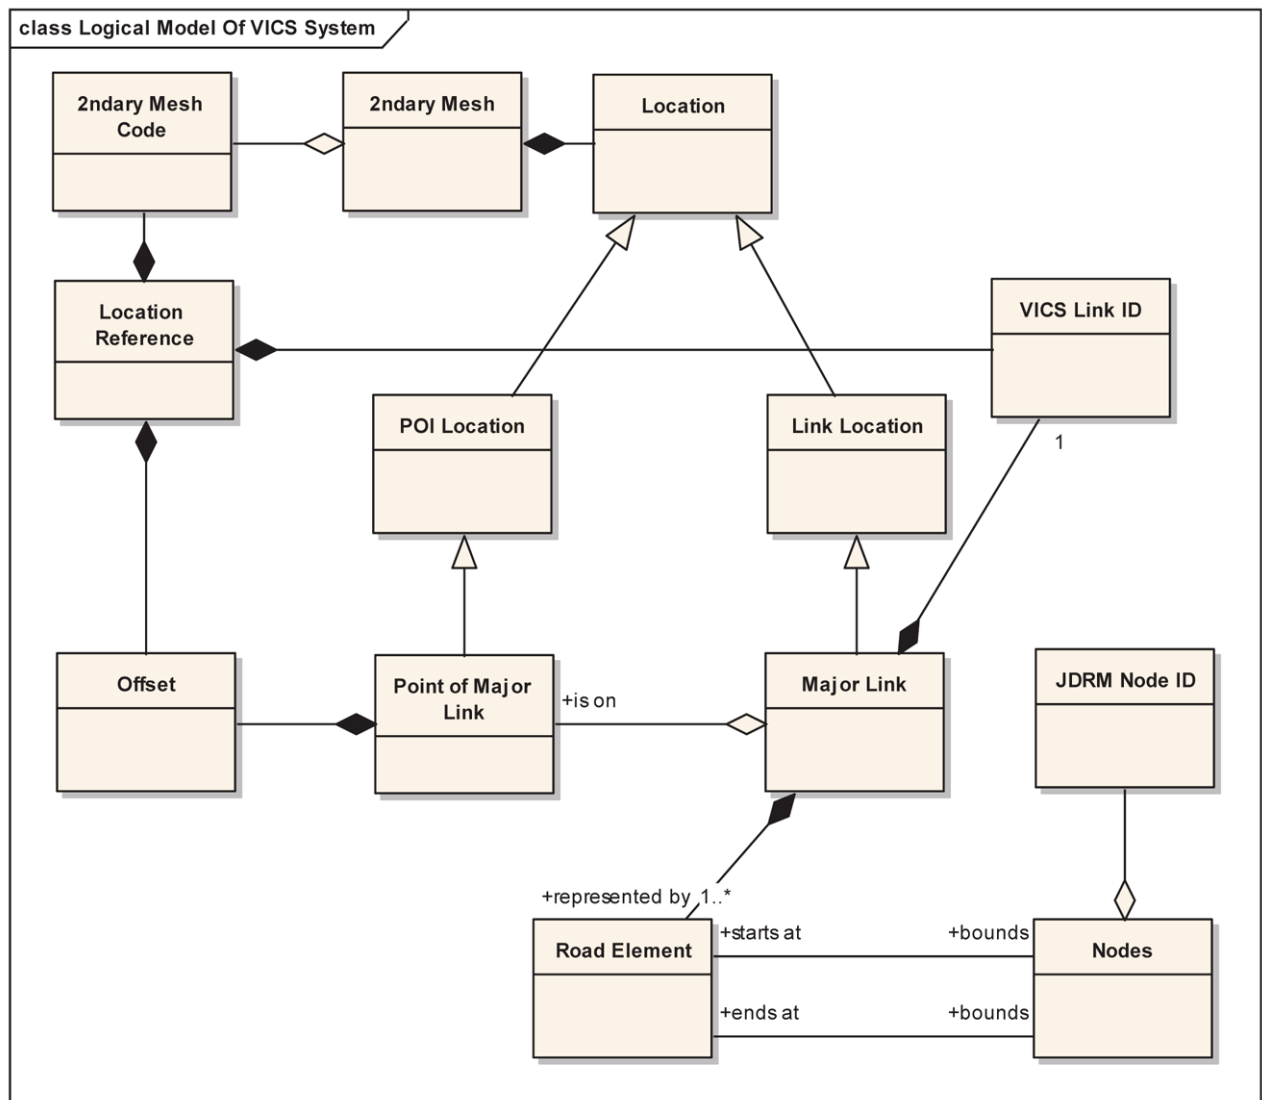


Figure 2 — Logical data model of VICS digital base map

8.2.2 Location database usage

All or any part of the specified digital map database can be referred to by a location reference consisting of VICS-Link-IDs, 2ndary-Mesh-Codes, and offsets. The specification in Reference [1] defines how the digitized location IDs have to be coded to build up a more sophisticated location.

8.3 Traffic Message Channel (TMC)/ALERT-C Specification

8.3.1 General

The location referencing rules defined in ISO 14819-3[11] address the specific requirements of Traffic Message Channel (TMC) systems, which use abbreviated coding formats to provide TTI messages over mobile bearers (e.g. GSM, DAB) or *via* exchange protocols like DATEXII. In particular, the rules address the Radio Data System Traffic Message Channel (RDS-TMC), a means of providing digitally-coded traffic and travel information to travellers using a silent data channel (RDS) on FM radio stations, based on the ALERT-C protocol.[10]

8.3.2 Location database creation

Location types and subtypes are required for language independence of the information given, and to tell the receiving system what data fields to expect.

At the highest level, locations fall into three categories:

- a) area locations;
- b) linear locations;
- c) point locations.

RDS-TMC location tables use a hierarchical structure of pre-defined locations. Locations are identified using a location ID. A system of pointers provides upward references to higher-level locations of which the specified location forms a part. As such, all point locations belong to linear locations and they refer to area locations. Point locations additionally refer to a succeeding and a preceding point location which builds up a connected network of point locations. Further information can be found in a coding handbook that has been written by the TMC forum.^[4]

8.3.3 Location database usage

A location ID in such a message refers and serves as a tabular “address” of the pre-stored location details in the location database used by the service. A real world location can have more than one point location within the same location table, which can be expressed by one point location code and an additional attribute extent which counts the steps of succeeding point location to be added to the location. Another additional attribute direction allows to extend from a point location into positive or into negative direction according to the point location direction defined in the location database.

8.4 Korean node link ID system

8.4.1 General

The Ministry of Construction and Transportation (MOCT) of Korea has developed a standard node-link system for ITS in 2004 for effective exchange of real-time traffic information. The node and link ID is made up of 10 digits. Korean standard node-link ID is the standard location ID for TPEG-Loc services in Korea.^[3]

8.4.2 Location database creation

In principle, road authorities create and manage standard node-link IDs and digital base map for those standard node/link according to Reference [6], which was published by MOCT. MOCT verifies the IDs and digital base map, then officially distributes them.

8.4.3 Location database usage

Any node or link ID can be served as location ID in location referencing system, but currently, only link ID is used in currently implemented systems.

8.5 Road Section Identification Data set

8.5.1 General

The Road Section Identification Data set was developed to enable exchanging various static/dynamic information on road network.

The location of the information is represented by an appropriate road section with a reference point and a distance from the reference point.

In this part of ISO 17572, a profile of road section identification and reference point identification required in the Road Section Identification Data set are provided. Definition of each link and node corresponding to respective road maps is out of scope.

As permanent ID set is specified in the system, Road Section Identification Data set is independent from avoidable change caused by road map revision.

8.5.2 Location database creation

Road Section Identification Data set creates an authority table for section IDs and reference point IDs.

8.5.3 Location database usage

Road Section Identification Data set is expected to use for exchanging various location information related road between different players. For example, road authorities use this method to provide road information to private sectors.

Annex A (informative)

Logical format for VICS link location

A.1 Description of the logical structure

A.1.1 General

The subsequent clauses define data elements used for building up the VICS link location reference (database usage). Different descriptions of the data structure help to understand the concept. It consists of a location information (LI) header and location content as shown in [Figure A.1](#), with the latter further subdivided functionally into coordinates, descriptors, and offset information. [Figure A.2](#) describes the structure of the LI main in the form of a UML diagram. [A.3](#) and [A.4](#) do define different views on a logical format.

All or any part of the LI can be omitted optionally if it is possible to refer to a location between databases without all or any part of LI content by defining unambiguous rules for a physical format and by establishing a management system.

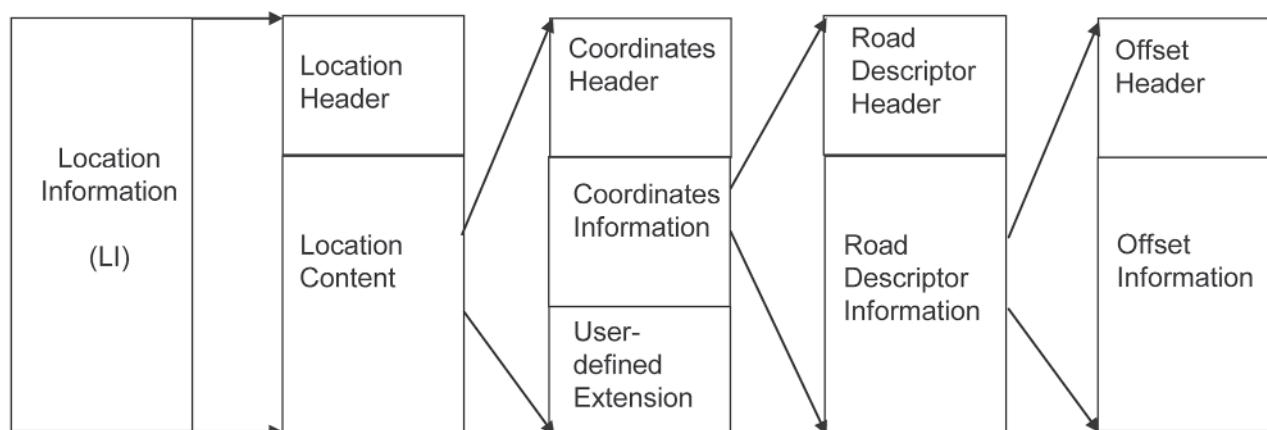


Figure A.1 — Outline diagram of the logical structure

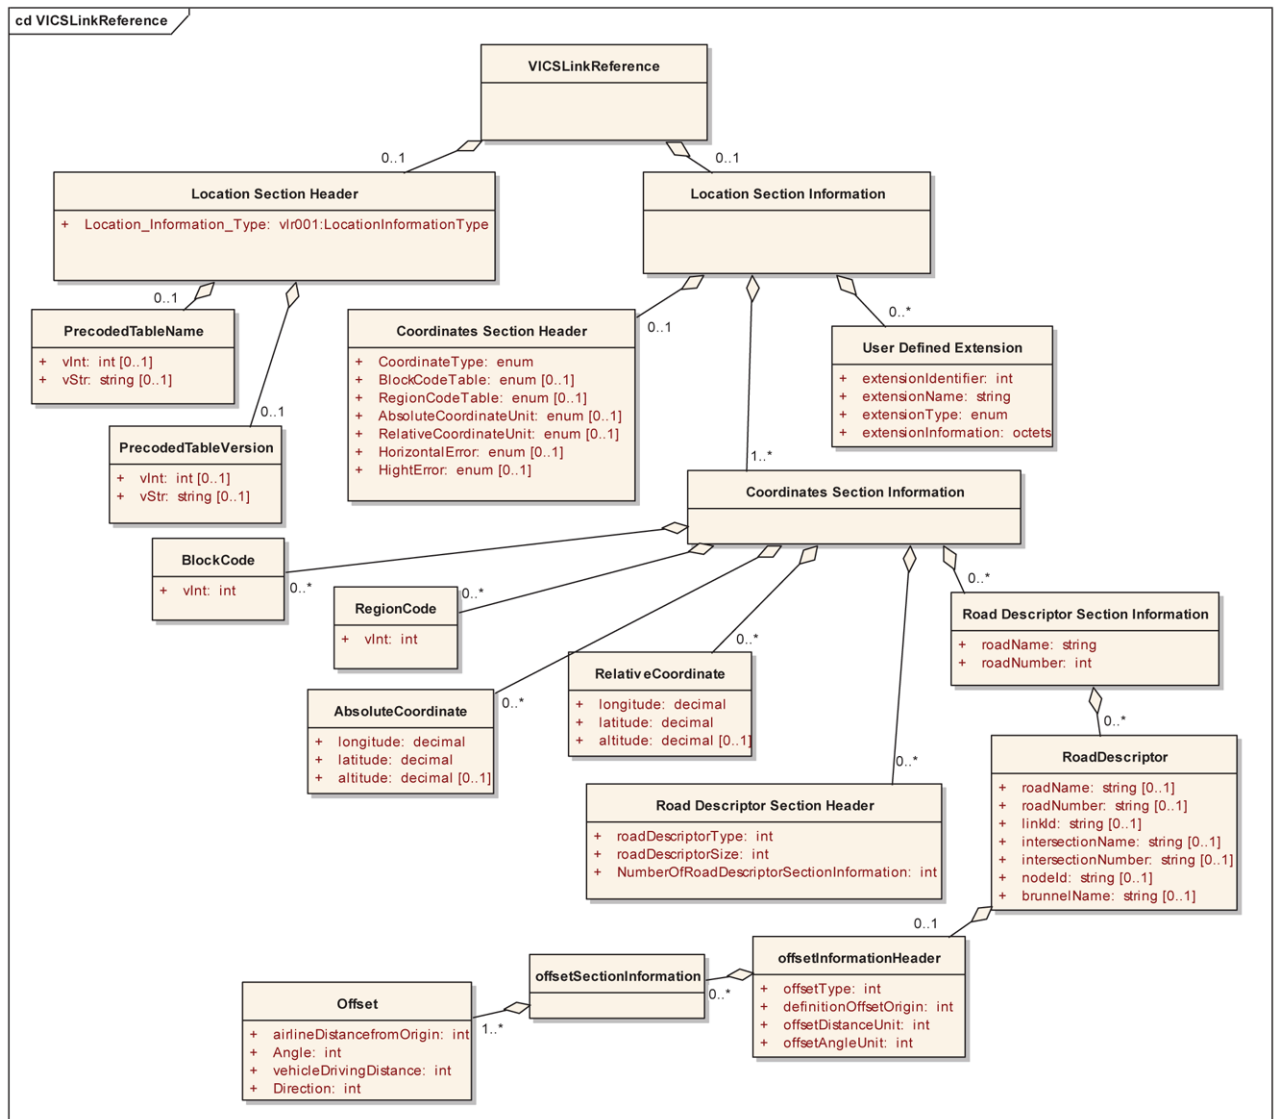


Figure A.2 — Outline diagram of the logical structure in UML

A.1.2 Data values

Table A.1 lists all specific values of enumerations used in the location reference format in this annex.

Table A.1 — Enumerations used in the location reference format in this annex

Data value name	Definition
basemap1	A parameter specifying that the location is digitized on a map of 1/2 500~1/10 000 scale
basemap2	A parameter specifying that the location is digitized on a map of 1/25 000~1/50 000 scale
basemap3	A parameter specifying that the location is digitized on a map of more than 1/100 000 scale
ddmss	A parameter specifying a coordinate is expressed using decimal integer value of degree, minute, and second
degree	A parameter specifying that a unit of coordinates is degree
error1	A parameter specifying that a height error is less than 1 m

Table A.1 (continued)

Data value name	Definition
error2	A parameter specifying that a height error is less than 10 m
extensiontype1 2 ... n	The type of user-defined extension of which <i>n</i> different enumerated values are specified in the User-Defined Extension Header data frame
absolute	A parameter specifying that a coordinate system is absolute
relative	A parameter specifying that a coordinate system is relative
grid	A parameter specifying that the coordinate has a grid code
Relative_X	The horizontal X value of relative coordinates of a point
Relative_Y	The horizontal Y value of relative coordinates of a point
Relative_Z	The value of height in relative coordinates of a point
pgrid1	A parameter specifying that a coordinate has a private grid
rct1	A parameter specifying that region code table 1 is used
rct2	A parameter specifying that region code table 2 is used
rectc	A parameter specifying that a coordinate system is rectangular
second	A parameter specifying that a unit of absolute coordinates is second
secondu1	A parameter specifying that a unit of relative coordinates is normalized
secondu2	A parameter specifying that a unit of relative coordinates is some value
utmp	A parameter specifying that the blocking is the UTM primary mesh dividing
utms	A parameter specifying that the blocking is the UTM secondary mesh dividing
x	The value of horizontal axis on relative coordinates
y	The value of vertical axis on relative coordinates
z	The value of height in relative coordinates

A.1.3 Data elements

In [Table A.2](#), the maximum value (labelled with MAX) in the column “Valid value rule”, is specified first when defining unambiguous rules for a physical format by establishing the system implementation.

A.1.4 Data frames

See [Table A.3](#).

Table A.2 — Data elements used in the location reference format in this annex

Data element name	Definition	Data type	Valid value rule
Absolute_Coordinate_Unit	A unit for an absolute coordinate	BIT STRING	ENUMERATED { degree, ddmmss, second}
Airline_Distance_from_Origin	The shortest distance from an origin to a point	Distance_type	CHOICE {INTEGER, REAL}
Altitude	The geographic altitude of a node	Altitude_type	CHOICE {INTEGER, REAL}
Angle	An integer angle from a starting point to a feature, in units defined by Offset_Angle_Unit	Angle_type	CHOICE {INTEGER, REAL}
Block_Code	A code given to an area such as one of UTM's meshes or some rectangles	INTEGER	SIZE (0..MAX)
Block_Code_Table	A table of block codes	BIT STRING	ENUMERATED { utms, utmp, rectc, pgrid1}
Brunnel_Name	Text name of a Brunnel	UTF8String	SIZE (0..255)
Coordinate_Type	A type of the coordinate such as the absolute, the relative, and the composite	BIT STRING	ENUMERATED { absolute, relative, grid}
Definition_Offset_Origin	A parameter specifying whether an origin of offset is starting node or end node	BIT STRING	ENUMERATED { Start point, End point}
Direction	A parameter specifying the direction from a starting point to a feature, in units defined by Offset_Distance_Unit either as integer value or as real value	Direction_type	CHOICE {INTEGER, REAL}

Table A.2 (continued)

Data element name	Definition	Data type	Valid value rule
Extension_Identifier	Identifier of a user-defined data element	Extension_Id_type	CHOICE {INTEGER, UTF8String}
Extension_Name	Name of a user-defined data element	UTF8String	SIZE (0..255)
Extension_Type	Type of a user-defined data element	BIT STRING	ENUMERATED { extensiontype1, extensiontype2, ... extensiontypen}
Height_Error	The height (vertical) error specifying an altitude accuracy of coordinates	BIT STRING	ENUMERATED { error1, error2}
Horizontal_Error	The horizontal error specifying a horizontal accuracy of coordinates	BIT STRING	ENUMERATED { basemap1, basemap2, basemap3}
Intersection_Name	Text name of an intersection	UTF8String	SIZE (0..255)
Intersection_Number	Integer number of an intersection	INTEGER	SIZE (0..MAX)
Latitude	ITRF geographic latitude of a node	Latitude_type	CHOICE {INTEGER, REAL}
Link_ID	Link identifier	INTEGER	SIZE (0..MAX)
Location_Information_Type	A parameter specifying whether the location information used for the location referencing is information of a point, lines, or area	BIT STRING	ENUMERATED { point, line, face}
Longitude	ITRF geographic longitude of a node	Longitude_type	CHOICE {INTEGER, REAL}
Node_ID	Node identifier	INTEGER	SIZE (0..MAX)

Table A.2 (continued)

Data element name	Definition	Data type	Valid value rule
Number_of_Absolute_Coordinates	The number of absolute coordinates in a Coordinate_Information data frame	INTEGER	SIZE (0..MAX)
Number_of_Coordinates_Information	The number of Coordinate_Information data frames	INTEGER	SIZE (0..MAX)
Number_of_Blocks	The number of blocks in a Coordinate_Information data frame	INTEGER	SIZE (0..MAX)
Number_of_Offsets	The number of offsets in an Offset_Information data frame	INTEGER	SIZE (0..MAX)
Number_of_Offset_Information	The number of Offset_Information data frames	INTEGER	SIZE (0..MAX)
Number_of_Regions	The number of regions in a Coordinate_Information data frame	INTEGER	SIZE (0..MAX)
Number_of_Relative_Coordinates	The number of relative coordinates in a Coordinate_Information data frame	INTEGER	SIZE (0..MAX)
Number_of_Road_Descriptors	The number of Road_Descriptors in a Road_Descriptor_Information data frame	INTEGER	SIZE (0..MAX)
Number_of_Road_Descriptor_Information	The number of Road_Descriptor_Information data frames	INTEGER	SIZE (0..MAX)
Offset_Angle_Unit	The unit of an angle defining the direction from a starting point to the feature, such as a degree or a radian	BIT STRING	ENUMERATED{ degree, radian}
Offset_Distance_Unit	The unit defining a distance from a starting point to the feature, such as a metre or 10 m	BIT STRING	ENUMERATED{ 1m, 10m, 100m}
Offset_Type	A type of the offset, on-road, or airline	BIT STRING	ENUMERATED{ on-route, airline}
Precoded_Table_Name	The text identifier of a pre-coded table containing location information	UTF8String	SIZE (0..255)
Precoded_Table_Version	Version of the pre-coded table	Precoded_Table_Version_type	CHOICE {INTEGER, UTF8String}
Region_Code	A code of a region such as a country, city, or state	INTEGER	SIZE (0..MAX)

Table A.2 (continued)

Data element name	Definition	Data type	Valid value rule
Region_Code_Table	A table of Region_Codes	BIT STRING	ENUMERATED { rct1, rct2}
Relative_Coordinate_Unit	A unit for a relative coordinate	BIT STRING	ENUMERATED { secondu1, secondu2}
Relative_X	The value of horizontal axis on relative coordinates	INTEGER	SIZE (0..MAX)
Relative_Y	The value of vertical axis on relative coordinates	INTEGER	SIZE (0..MAX)
Relative_Z	The value of height in relative coordinates	INTEGER	SIZE (0..MAX)
Road_Descriptor_Size	A number of characters of a road descriptor	INTEGER	SIZE (0..MAX)
Road_Descriptor_Type	Classification of a road descriptor such as express way, national road and others	INTEGER	SIZE (0..MAX)
Road_Name	Text name of a road	UTF8String	SIZE (0..255)
Road_Number	Integer number of a road	INTEGER	SIZE (0..MAX)
Vehicle_Driving_Distance	The distance a vehicle drives to an offset point	Distance_type	CHOICE {INTEGER, REAL}

Table A.3 — Data frame name used in the location reference format in this annex

Data frame name	Definition	Data elements/Nested frames
Location_Information	A data frame containing a Location_Section_Header and Location_Section_Information	Location_Section_Header
Location_Section_Header	A data frame containing header information for location information	Location_Section_Information Pre-coded_Table_Name Pre-coded_Table_Version Location_Information_Type
Location_Section_Information	A data frame containing coordinate, road descriptor, and offset information and headers	Coordinates_Section_Header Coordinates_Section_Information ^a User_Defined_Extension
Coordinates_Section_Header	A data frame containing header information for coordinate information	Coordinate_Type Block_Code_Table Region_Code_Table Absolute_Coordinate_Unit Relative_Coordinate_Unit Horizontal_Error Height_Error Number_of_Coordinates_Section_Information
Coordinates_Section_Information ^a	A data frame containing block, region, absolute, and relative coordinate information	Number_of_Blocks Number_of_Regions Number_of_Absolute_Coordinates Number_of_Relative_Coordinates Road_Descriptor_Section_Header Road_Descriptor_Section_Information ^a
Blocks ^a	A data frame containing Block_Codes	Block_Code
Regions ^a	A data frame containing Region_Codes	Region_Code

^a Indicates that a data frame is repeatable; data frame "X" occurs "Number_of_X" times.

Table A.3 (continued)

Data frame name	Definition	Data elements/Nested frames
Absolute_Coordinates ^a	A data frame of ITRF geographic coordinates	Latitude Longitude Altitude
Relative_Coordinates ^a	A data frame containing relative x, y, and z coordinate information	Relative_X Relative_Y Relative_Z
Road_Descriptor_Section_Header	A data frame containing road descriptors header information	Road_Descriptor_Type Road_Descriptor_Size
Road_Descriptor_Section_Information ^a	A data frame containing road descriptor section information	Number_of_Road_Descriptor_Section_Information Number_of_Road_Descriptors Road_Descriptor ^a
Road_Descriptor ^a	A data frame containing road descriptors	Road_Name Road_Number Link_ID Intersection_Name Intersection_Number Node_ID Brunnel_Name Offset_Section_Header Offset_Section_Information ^a
Offset_Section_Header	A data frame containing header information for offsets	Offset_Type Definition_Offset_Origin Offset_Distance_Unit Offset_Angle_Unit Number_of_Offset_Section_Information

^a Indicates that a data frame is repeatable; data frame "X" occurs "Number_of_X" times.

Table A.3 (continued)

Data frame name	Definition	Data elements/Nested frames
Offset_Section_Information ^a	A data frame containing offsets	Number_of_Offsets
Offsets ^a	A data frame containing offset information on a distance from a base point to the feature	Offsets ^a
		Airline_Distance_from_Origin
		Angle
		Vehicle_Driving_Distance
		Direction
User_Defined_Extension	A data frame containing user defined extension information	User_Defined_Extension_Header
User_Defined_Extension_Header	A data frame containing header information for user defined information	User_Defined_Extension_Information
		Extension_Identifier
		Extension_Name
		Extension_Type
User_Defined_Extension_Information	A data frame containing data elements and/or nested data frames are user-defined and not specified	<user defined>

^a Indicates that a data frame is repeatable; data frame "X" occurs "Number_of_X" times.

A.2 Detailed diagram of logical structure

Lrp1-linf : Location information of Location referencing procedure 1
lshdr : Location Section Header
ptname : Precoded Table Name
ptversion : Precoded Table Version
linft : Location Information Type
lsinf : Location Section Information
cshi : Coordinates Section Header
ct : Coordinate Type
bct : Block Code Table
rct : Region Code Table
acu : Absolute Coordinate Unit
rcu : Relative Coordinate Unit
horerr : Horizontal Error
hterr : Height Error
numcsi : Number of Coordinates Section Information
csi : Coordinates Section Information (numcsi occurrences)
numblocks : Number of Blocks
bcodes : Block Code (numblocks occurrences)
numregion : Number of Regions
rcodes : Region Code (numregions occurrences)
numac : Number of Absolute Coordinates
ac : Absolute Coordinate (numac occurrences)
lat : Latitude
lon : Longitude
alt : Altitude
numrc : Number of Relative Coordinates
rc : Relative Coordinate (numrc occurrences)
x : Relative X
y : Relative Y
z : Relative Z
rdsh : Road Descriptor Section Header
rdt : Road Descriptor Type
rdsize : Road Descriptor Size
numrdsinf : Number of Road Descriptor Section Information
rdsinf : Road Descriptor Section Information (numrdsinf occurrences)
numrd : Number of Road Descriptor
rds : Road Descriptor (numrd occurrences)
rname : Road Name
rnum : Road Number
linkid : Link ID
intersectname : Intersection Name
intersectid : Intersection Number
nodeid : Node ID
brunnelname : brunnel Name
offsecthdr : offset Information Header
offsett : Offset Type
defoffsetorg : Definition Offset Origin
offsetdu : Offset Distance Unit
offsetau : Offset Angle Unit
numoffinf : Number of Offset Section Information
offsectinf : Offset Section Information (numoffinf occurrences)
noffset : Number of Offsets
offsets : Offsets (noffset occurrences)
airlinedfo : Airline Distance from Origin
angle : Angle
vehicledrivingd : Vehicle Driving Distance
direction : Direction
UDExt : User-defined Extension
UDExtHeader : User-defined ExtensionHeader
extID : Extension Identifier
extName : Extension Name
extType : Extension Type
UDExtinf : User-defined ExtensionInformation
< user-defined data elements and/or nested data frames >

A.3 Structure in ASN.1

```

Lrp1-linf DEFINITIONS ::=
referencing procedure 1
BEGIN
EXPORTS
    Lrp1-linf;
IMPORTS
Precoded-Table, Blockcode-Table;

    Lrp1-linf ::= SEQUENCE {
        lsheader      Lsheader      OPTIONAL,      -Location_Section_Header
        lsinf         Lsinf          OPTIONAL,      -Location_Section_Information
    }

    Lisheader ::= SEQUENCE {
        ptname        UTF8String    OPTIONAL,      -Precoded_Table_Name
        ptversion     Ptversion     OPTIONAL,      -Precoded_Table_Version
        linft         Linft         OPTIONAL,      -Location_Information_Type
    }

    Ptversion ::= CHOICE {
        vint          INTEGER,
        vstr          UTF8String
    }

    Linft ::= ENUMERATED {
        point,
        line,
        area
    }

    Lsinf ::= SEQUENCE {
        cshi          Csih          OPTIONAL,      -Coordinates_Section_Header
        csi           Csi           OPTIONAL,      -Coordinates_Section_Informa-
tion
        udxext       UDXext        OPTIONAL,      -User-Defined Extension
    }

    Csih ::= SEQUENCE {
        ct            Ct            OPTIONAL,      -Coordinate_Type
        bct           Bct           OPTIONAL,      -Block_Code_Table
        rct           Rct           OPTIONAL,      -Region_Code_Table
        acu           Acu           OPTIONAL,      -Absolute_Coordinate_Unit
        rcu           Rcu           OPTIONAL,      -Relative_Coordinate_Unit
        horerr        Horerr        OPTIONAL,      -Horizontal_Error
        hterr         Hterr         OPTIONAL,      -Height_Error
        numcsi        INTEGER       OPTIONAL,      -Number_of_Coordinates_
Information
    }

    Ct ::= ENUMERATED {
        absolute,
        relative,
        grid
    }

    Bct ::= ENUMERATED {
        utms,
        utmp,
        rectc,
        pgrid1
    }

    Rct ::= ENUMERATED {
        rct1,
        rct2,
    }

```

```

Acu ::= ENUMERATED {
    degree,
    ddmms,
    second
}

Rcu ::= ENUMERATED {
    second1,
    second2
}

Horerr ::= ENUMERATED {
    basemap1,
    basemap2,
    basemap3
}

Hterr ::= ENUMERATED {
    error1,
    error2
}

Csi ::= SEQUENCE {
    numblock      INTEGER          OPTIONAL,
    bcodes        SEQUENCE (SIZE (0..MAX)) OF INTEGER,
    numregion     INTEGER          OPTIONAL,
    rcodes        SEQUENCE (SIZE (0..MAX)) OF INTEGER,
    numac         INTEGER          OPTIONAL,

    ac            SEQUENCE (SIZE (0..MAX)) OF Ac,
    numrc         INTEGER          OPTIONAL,

    rc            SEQUENCE (SIZE (0..MAX)) OF Rc,
    rdsh          Rdsh            OPTIONAL,

    rdsinf       Rdsinf          OPTIONAL
}
    -Number_of_Blocks
    -Block_Codes
    -Number_of_Regions
    -Region_Codes
    -Number_of_Absolute_Coordinates
    -Absolute_Coordinates
    -Number_of_Relative_Coordinates
    -Relative_Coordinates
    -Road_Descriptor_Section_Header
    -Road_Descriptor_Section_Information

Ac ::= SEQUENCE {
    lat           Latitude,
    lon           Longitude,
    alt           Altitude          OPTIONAL
}

Latitude ::= CHOICE {
    lat_int      INTEGER          (-90000000..90000000), -microdegrees
    lat_real     REAL             (-90..90)          -degrees
}

Longitude ::= CHOICE {
    lon_int      INTEGER          (-180000000..180000000), -microdegrees
    lon_real     REAL             (-180..180)         -degrees
}

Altitude ::= CHOICE {
    int          INTEGER          (-1000..10000),      -meters
    real         REAL             (-1..10)            -kilometers
}

Rc ::= SEQUENCE {
    x            INTEGER,
    y            INTEGER,
    z            INTEGER          OPTIONAL
}
    -Relative_X
    -Relative_Y
    -Relative_Z

Rdsh ::= SEQUENCE {
    rdt          INTEGER          OPTIONAL,
    rdsize       INTEGER          OPTIONAL,
    numrdsinf    INTEGER          OPTIONAL
}
    -Road_Descriptor_Type
    -Road_Descriptor_Size
    -Number_of_Road_Descriptor_Section_Information

```

```

    }

Rdsinf ::= SEQUENCE {
    numrd      INTEGER          OPTIONAL,          -Number_of_Road_Descriptors
    rds        SEQUENCE (SIZE (0..255)) OF Rd      -Road_Descriptors
}

Rd ::= SEQUENCE {
    rname      UTF8String       OPTIONAL,          -Road_Name
    rnum       INTEGER          OPTIONAL,          -Road_Number
    linkid     INTEGER          OPTIONAL,          -Link_ID
    intersectname UTF8String    OPTIONAL,          -Intersection_Name
    intersectid INTEGER          OPTIONAL,          -Intersection_Number
    nodeid     INTEGER          OPTIONAL,          -Node_ID
    brunnelname UTF8String      OPTIONAL,          -Brunnel_Name,
    offsecthdr Offsecthdr      OPTIONAL,          -Offset_Section_Header
    offsectinf SEQUENCE (SIZE (0..255)) OF Offsectinf -Offset_Section_Information
}

Offsecthdr ::= SEQUENCE {
    offsett    Offsett          OPTIONAL,          -Offset_Type
    defoffsetorg Defoffsetorg   OPTIONAL,          -Definition_Offset_Origin
    offsetdu   Offsetdu        OPTIONAL,          -Offset_Distance_Unit
    offsetau   Offsetau        OPTIONAL,          -Offset_Angle_Unit
    numoffinf  INTEGER          OPTIONAL,          -Number_of_Offset_Section_
    Information
}

Offsett ::= ENUMERATED {
    on-route,
    airline
}

Defoffsetorg ::= ENUMERATED {
    Start point,
    End point
}

Offsetdu ::= ENUMERATED {
    1m,
    10m,
    100m
}

Offsetau ::= ENUMERATED {
    degree,
    radian
}

Offsectinf ::= SEQUENCE {
    noffset   INTEGER          OPTIONAL,          -Number_of_Offsets
    offsets    SEQUENCE (SIZE (0..255)) OF Offsets
}

Offsets ::= SEQUENCE {
    airlinedfo INTEGER          OPTIONAL,          -Airline Distance_from_Origin
    angle      Angle_type      OPTIONAL,          -Angle
    vehicledrivingd INTEGER    OPTIONAL,          -Vehicle_Driving_Distance
    direction  Direction_type  OPTIONAL,          -Direction
}

Angle_type ::= CHOICE {
    ang_int   INTEGER,
    ang_real  REAL
}

Direction_type ::= CHOICE {
    direc_int INTEGER,
    direc_real REAL
}

```

```

UDExt ::= SEQUENCE {
    uDEExtHeader UDEExtHeader OPTIONAL,           -User-Defined Extension Header
    uDEExtinf    UDEExtinf    OPTIONAL,           -User-Defined Extension
                                                Information
}

UDEExtHeader ::= SEQUENCE {
    extID        ExtID        OPTIONAL,           -Extension_Identifier
    extName      UTF8String   OPTIONAL,           -Extension_Name
    extType      UTF8String   OPTIONAL,           -Extension_Type
}

ExtID ::= CHOICE {
    extIDint     INTEGER,
    extIDstr     UTF8String
}

UDEExtinf ::= SEQUENCE { -user-defined set of data elements and/or nested data frames
    byte        BYTE
}
END

```

A.4 Structure as XML schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xsd:schema xmlns:Lrp11inf="Lrp11inf" xmlns:xsd="http://www.w3.org/2001/XMLSchema"
    elementFormDefault="qualified">
    <xsd:simpleType name="UTF8String">
        <xsd:restriction base="xsd:string">
            <xsd:maxLength value="255"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType name="Linf">
        <xsd:restriction base="UTF8String">
            <xsd:enumeration value="point"/>
            <xsd:enumeration value="line"/>
            <xsd:enumeration value="area"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType name="Ct">
        <xsd:restriction base="UTF8String">
            <xsd:enumeration value="absolute"/>
            <xsd:enumeration value="relative"/>
            <xsd:enumeration value="grid"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType name="Bct">
        <xsd:restriction base="UTF8String">
            <xsd:enumeration value="utms"/>
            <xsd:enumeration value="utmp"/>
            <xsd:enumeration value="rectc"/>
            <xsd:enumeration value="pgrid1"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType name="Rct">
        <xsd:restriction base="UTF8String">
            <xsd:enumeration value="rct1"/>
            <xsd:enumeration value="rct2"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType name="Acu">
        <xsd:restriction base="UTF8String">
            <xsd:enumeration value="degree"/>
            <xsd:enumeration value="ddmmss"/>
            <xsd:enumeration value="second"/>
        </xsd:restriction>
    </xsd:simpleType>
    <xsd:simpleType name="Rcu">
        <xsd:restriction base="UTF8String">
            <xsd:enumeration value="secondu1"/>
            <xsd:enumeration value="secondu2"/>
        </xsd:restriction>
    </xsd:simpleType>

```

```

    </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="Horerr">
  <xsd:restriction base="UTF8String">
    <xsd:enumeration value="basemap1"/>
    <xsd:enumeration value="basemap2"/>
    <xsd:enumeration value="basemap3"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="Hterr">
  <xsd:restriction base="UTF8String">
    <xsd:enumeration value="error1"/>
    <xsd:enumeration value="error2"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="ExtType">
  <xsd:restriction base="UTF8String"/>
</xsd:simpleType>
<xsd:simpleType name="Offsett">
  <xsd:restriction base="UTF8String">
    <xsd:enumeration value="on-route"/>
    <xsd:enumeration value="airline"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="Defoffsetorg">
  <xsd:restriction base="UTF8String">
    <xsd:enumeration value="Start point"/>
    <xsd:enumeration value="End point"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="Offsetdu">
  <xsd:restriction base="UTF8String">
    <xsd:enumeration value="1m"/>
    <xsd:enumeration value="10m"/>
    <xsd:enumeration value="100m"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:simpleType name="Offsetau">
  <xsd:restriction base="UTF8String">
    <xsd:enumeration value="degree"/>
    <xsd:enumeration value="radian"/>
  </xsd:restriction>
</xsd:simpleType>
<xsd:complexType name="Lsheader">
  <xsd:sequence>
    <xsd:element name="ptname" type="UTF8String" minOccurs="0"/>
    <xsd:element name="ptversion" type="Ptversion" minOccurs="0"/>
    <xsd:element name="linft" type="Linft" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Lsinf">
  <xsd:sequence>
    <xsd:element name="cshi" type="Csih" minOccurs="0"/>
    <xsd:element name="csi" type="Csi" minOccurs="0"/>
    <xsd:element name="udext" type="UDExt" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Ptversion">
  <xsd:choice>
    <xsd:element name="vint" type="xsd:integer"/>
    <xsd:element name="vstr" type="UTF8String"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="Csih">
  <xsd:sequence>
    <xsd:element name="ct" type="Ct" minOccurs="0"/>
    <xsd:element name="bct" type="Bct" minOccurs="0"/>
    <xsd:element name="rct" type="Rct" minOccurs="0"/>
    <xsd:element name="acu" type="Acu" minOccurs="0"/>
    <xsd:element name="rcu" type="Rcu" minOccurs="0"/>
    <xsd:element name="horerr" type="Horerr" minOccurs="0"/>
  </xsd:sequence>

```

```

    <xsd:element name="hterr" type="Hterr" minOccurs="0"/>
    <xsd:element name="numcsi" type="xsd:integer" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Csi">
  <xsd:sequence>
    <xsd:element name="numblock" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="bcodes" type="xsd:integer" minOccurs="0"
      maxOccurs="unbounded"/>
    <xsd:element name="numregion" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="rcodes" type="xsd:integer" minOccurs="0"
      maxOccurs="unbounded"/>
    <xsd:element name="numac" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="ac" type="Ac" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="numrc" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="rc" type="Rc" minOccurs="0" maxOccurs="unbounded"/>
    <xsd:element name="rdsh" type="Rdsh" minOccurs="0"/>
    <xsd:element name="rdsinf" type="Rdsinf" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Ac">
  <xsd:sequence>
    <xsd:element name="lat" type="Latitude"/>
    <xsd:element name="lon" type="Longitude"/>
    <xsd:element name="alt" type="Altitude" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Rc">
  <xsd:sequence>
    <xsd:element name="x" type="xsd:integer">
      <xsd:annotation>
        <xsd:documentation>relative</xsd:documentation>
      </xsd:annotation>
    </xsd:element>
    <xsd:element name="y" type="xsd:integer">
      <xsd:annotation>
        <xsd:documentation>relative</xsd:documentation>
      </xsd:annotation>
    </xsd:element>
    <xsd:element name="z" type="xsd:integer" minOccurs="0">
      <xsd:annotation>
        <xsd:documentation>relative</xsd:documentation>
      </xsd:annotation>
    </xsd:element>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Rdsh">
  <xsd:sequence>
    <xsd:element name="rdt" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="rdsiz" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="numrdsinf" type="xsd:integer" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Rdsinf">
  <xsd:sequence>
    <xsd:element name="numrd" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="rds" type="Rd" minOccurs="0" maxOccurs="255"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Rd">
  <xsd:sequence>
    <xsd:element name="rname" type="UTF8String" minOccurs="0"/>
    <xsd:element name="rnum" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="linkid" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="intersectname" type="UTF8String" minOccurs="0"/>
    <xsd:element name="intersectid" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="nodeid" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="brunnelname" type="UTF8String" minOccurs="0"/>
    <xsd:element name="offsecthdr" type="Offsecthdr" minOccurs="0"/>
    <xsd:element name="offsectinf" type="Offsectinf" minOccurs="0"
      maxOccurs="unbounded"/>
  </xsd:sequence>

```



```

    </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Offsecthdr">
  <xsd:sequence>
    <xsd:element name="offsett" type="Offsett" minOccurs="0"/>
    <xsd:element name="defoffsetorg" type="Defoffsetorg" minOccurs="0"/>
    <xsd:element name="offsetdu" type="Offsetdu" minOccurs="0"/>
    <xsd:element name="offsetau" type="Offsetau" minOccurs="0"/>
    <xsd:element name="numoffinf" type="xsd:integer" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Offsectinf">
  <xsd:sequence>
    <xsd:element name="noffset" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="offsets" type="Offsets" minOccurs="0" maxOccurs="255"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Offsets">
  <xsd:sequence>
    <xsd:element name="airlinedfo" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="angle" type="Angletype" minOccurs="0"/>
    <xsd:element name="vehicledrivingd" type="xsd:integer" minOccurs="0"/>
    <xsd:element name="direction" type="Directiontype" minOccurs="0"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="Angletype">
  <xsd:choice>
    <xsd:element name="angint" type="xsd:integer"/>
    <xsd:element name="angreal" type="xsd:float"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="Directiontype">
  <xsd:choice>
    <xsd:element name="direcint" type="xsd:integer"/>
    <xsd:element name="direcreal" type="xsd:float"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="UDExt">
  <xsd:sequence>
    <xsd:element name="UDEExtHeader" type="UDEExtHeader" minOccurs="0"/>
    <xsd:element name="UDEExtinf" type="UDEExtinf"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="UDEExtHeader">
  <xsd:sequence>
    <xsd:element name="extID" type="ExtID" minOccurs="0"/>
    <xsd:element name="extName" type="UTF8String" minOccurs="0"/>
    <xsd:element name="extType" type="UTF8String" minOccurs="0">
      <xsd:annotation>
        <xsd:documentation>Extension_Type</xsd:documentation>
      </xsd:annotation>
    </xsd:element>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="UDEExtinf">
  <xsd:sequence>
    <xsd:element name="byte" type="xsd:byte"/>
  </xsd:sequence>
</xsd:complexType>
<xsd:complexType name="ExtID">
  <xsd:choice>
    <xsd:element name="extIDint" type="xsd:integer"/>
    <xsd:element name="extIDstr" type="UTF8String"/>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="Longitude">
  <xsd:choice>
    <xsd:element name="lonint">
      <xsd:annotation>
        <xsd:documentation>microdegrees</xsd:documentation>
      </xsd:annotation>

```

```

        <xsd:simpleType>
          <xsd:restriction base="xsd:integer">
            <xsd:minInclusive value="-180000000"/>
            <xsd:maxInclusive value="180000000"/>
          </xsd:restriction>
        </xsd:simpleType>
      </xsd:element>
    <xsd:element name="lonreal">
      <xsd:annotation>
        <xsd:documentation>degrees</xsd:documentation>
      </xsd:annotation>
      <xsd:simpleType>
        <xsd:restriction base="xsd:float">
          <xsd:maxInclusive value="180"/>
          <xsd:minInclusive value="-180"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:element>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="Latitude">
  <xsd:choice>
    <xsd:element name="latint">
      <xsd:annotation>
        <xsd:documentation>microdegrees</xsd:documentation>
      </xsd:annotation>
      <xsd:simpleType>
        <xsd:restriction base="xsd:integer">
          <xsd:maxInclusive value="90000000"/>
          <xsd:minInclusive value="-90000000"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:element>
    <xsd:element name="latreal">
      <xsd:annotation>
        <xsd:documentation>degrees</xsd:documentation>
      </xsd:annotation>
      <xsd:simpleType>
        <xsd:restriction base="xsd:float">
          <xsd:maxInclusive value="90"/>
          <xsd:minInclusive value="-90"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:element>
  </xsd:choice>
</xsd:complexType>
<xsd:complexType name="Altitude">
  <xsd:choice>
    <xsd:element name="altint">
      <xsd:annotation>
        <xsd:documentation>meters</xsd:documentation>
      </xsd:annotation>
      <xsd:simpleType>
        <xsd:restriction base="xsd:integer">
          <xsd:maxInclusive value="10000"/>
          <xsd:minInclusive value="-1000"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:element>
    <xsd:element name="altreal">
      <xsd:annotation>
        <xsd:documentation>kilometers</xsd:documentation>
      </xsd:annotation>
      <xsd:simpleType>
        <xsd:restriction base="xsd:float">
          <xsd:maxInclusive value="10"/>
          <xsd:minInclusive value="-1"/>
        </xsd:restriction>
      </xsd:simpleType>
    </xsd:element>
  </xsd:choice>
</xsd:complexType>

```

```
</xsd:complexType>
<xsd:element name="Lrp1linf">
  <xsd:complexType>
    <xsd:sequence>
      <xsd:element name="lsheader" type="Lsheader" minOccurs="0"/>
      <xsd:element name="lsinf" type="Lsinf"/>
    </xsd:sequence>
  </xsd:complexType>
</xsd:element>
</xsd:schema>
```

Annex B (informative)

ALERT-C location reference, TPEG2 logical structure

B.1 Description of logical structure

B.1.1 General

Although it is intended to replace RDS-TMC by new services like TPEG Automotive Profile (TAP), in the meantime, easy adoption and migration into existing systems is needed. In addition to that, reuse of potential functionality from existing solutions is intended to be made possible. Whereas, for example, TPEG Applications can replace the former ALERT-C (TLR) method with its inheriting event lists, in terms of location referencing, it seems also to be a great potential to allow continuation of using ALERT-C-Location tables already in place, in addition to the new dynamic LRM. This gives the opportunity to code, very efficiently, not only already-existing location codes but also to allow any location to be coded. The duality of requirements has been adhered to in such a way that this data format specification defines data elements for both methodologies including necessary selection means.

B.1.2 Pre-coded ALERT-C location referencing

This annex defines the data structure of ALERT-C location referencing to be used in pre-coded LRC container. The method of ALERT-C location referencing is defined in the ALERT-C International Standard, ISO 14819-3.^[11] ALERT-C defines a hierarchical structure of areas, lines, and points. The points are connected to predecessors and successors and belong to lines and areas. All elements in the structure are defined by one unique number which is used to refer to that particular part of the structure. In addition to the normal ALERT-C location referencing method, a precise location referencing method is also foreseen here.

The proposed method defined in the precise location referencing specification^[5] defines attributes to code an arbitrary position in between two points being successors in the structure defined in Part 3 of the ALERT-C Standard.^[11] These attributes are made optional because not every location will want to make use of it. In B.2 "TLR message components", the sub-elements defined for ALERT-C location are specified.

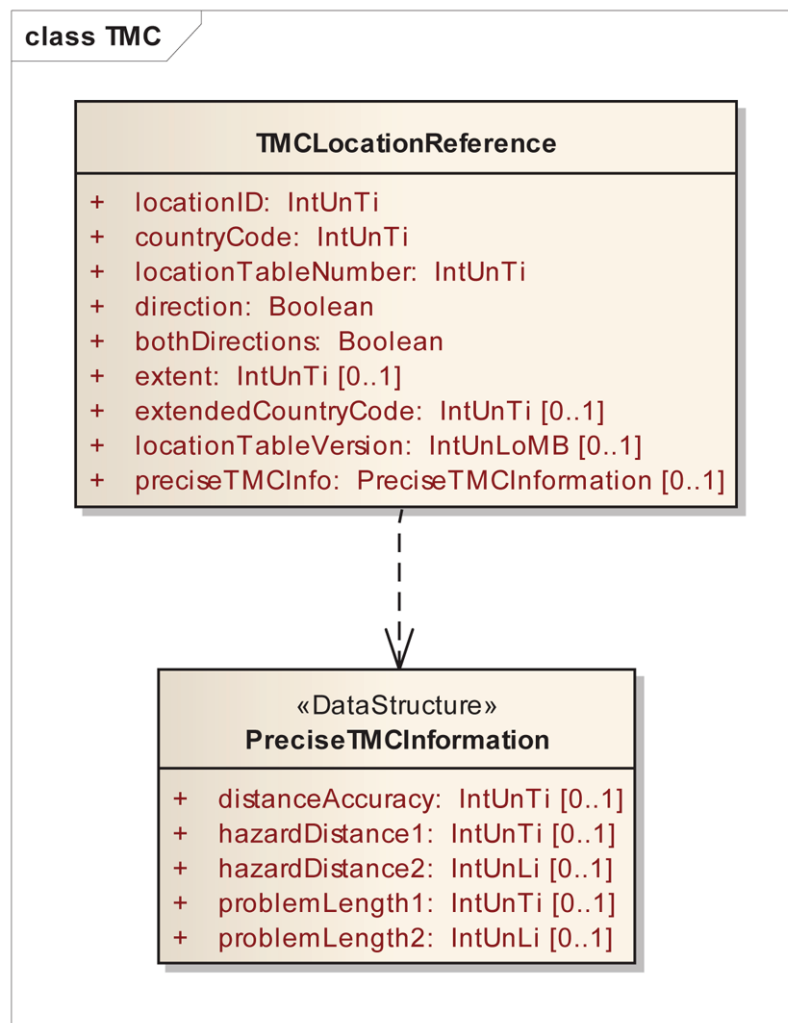


Figure B.1 — TPEG2 UML structure^[15] of TMCLocationReference (ALERT-C)

B.2 TLR message components

B.2.1 TMCLocationReference

The TMC location stores a pre-coded location description including the possibility to code precisely a part of a road section in-between TMC locations.

Name	Type	Multiplicity	Description
locationID	IntUnTi	1	The actual location number (primary location)
countryCode	IntUnTi	1	Defines the different countries being responsible for the database creation. The table of country codes is specified in ISO 14819-3.
locationTableNumber	IntUnTi	1	The value is specified per country and can differ over time.
direction	Boolean	1	If the direction flag is true, it means positive direction, i.e. following to the successor in the location list.

Name	Type	Multiplicity	Description
bothDirections	Boolean	1	If set to true, the location shall be treated as being applicable for both directions. NOTE Be aware that ISO 18234 defines this information in two pieces (1: implicitly per event code and 2: as inversion bit in the control code).
extent	IntUnTi	0..1	Number of hops in the linked list of location codes. The direction is defined by the direction attribute. Absent value is defined 0 and means inside the current location.
extendedCountryCode	IntUnTi	0..1	In non-European countries, the full range of location tables per country code can be used provided that the Extended Country Code (ECC) is in use and transmitted (see IEC 62106:2000).
locationTableVersion	IntUnLoMB	0..1	If 1 byte, 4 bits for major and 3 bits for minor. If 2 bytes, 7 bits for major and 7 bits for minor. 3 bytes, not possible because TMC restricts to 0–99 for both.
preciseTMCInfo	PreciseTMCInformation	0..1	n.a.

B.3 TLR datatypes

B.3.1 PreciseTMCInformation

Defines the collection of optional precise TMC location coding.

Name	Type	Multiplicity	Description
distanceAccuracy	IntUnTi	0..1	0 = 100 m, 1 = 500 m, 2 = 1 km, 3 = more than 1 km 100m, if attribute is absent
hazardDistance1	IntUnTi	0..1	Upstream distance from primary location (against the direction of traffic), also known as D1. Range up to 25 km calculated in steps of 100 m.
hazardDistance2	IntUnLi	0..1	Same as hazardDistance1, but range up to 6 553 km.
problemLength1	IntUnTi	0..1	Distance: start of the problem to the end of the problem, which is not necessarily the primary location. Length up to 25km.
problemLength2	IntUnLi	0..1	Same as problemLength1, but length up to 6 553 km.

Annex C (normative)

ALERT-C location reference, TPEG2 binary representation

C.1 General

This annex defines the TPEG2 binary representation^[16] of TLR container.

C.2 TMC message components

C.2.1 List of generic component IDs

The GCId of root element is defined by the Location Referencing Container specification.^[18]

Name	ID
TMCLocationReference	defined by LRC

C.2.2 TMCLocationReference

<TMCLocationReference(x)>:=	
<IntUnTi>(x),	: ID of this component
<IntUnLoMB>(lengthComp),	: Number of bytes in component
<IntUnLoMB>(lengthAttr),	: Number of bytes in attributes
<IntUnTi>(locationID),	: The actual location number (primary location)
<IntUnTi>(countryCode),	: Defines the different countries being responsible for the database creation. The table of country codes is specified in ISO 14819-3.
<IntUnTi>(locationTableNumber),	: The value is specified per country and can differ over time.
BitArray(selector),	
if (bit 0 of selector is set)	
<Boolean>(direction),	: If the direction flag is true, it means positive direction, i.e. following to the successor in the location list.
if (bit 1 of selector is set)	
<Boolean>(bothDirections),	: If set to true, the location shall be treated as being applicable for both directions. NOTE: Be aware that ISO 18234 defines this information in two pieces (1: implicitly per event code and 2: as inversion bit in the control code).
if (bit 2 of selector is set)	
<IntUnTi>(extent),	: Number of hops in the linked list of location codes. The direction is defined by the direction attribute. Absent value is defined 0 and means inside the current location.
if (bit 3 of selector is set)	

<IntUnTi>(extendedCountryCode),	: In non-European countries, the full range of location tables per country code can be used provided that the Extended Country Code (ECC) is in use and transmitted (see IEC 62106:2000).
if (bit 4 of selector is set)	
<IntUnLoMB>(locationTableVersion),	: If 1 byte, 4 bits for major and 3 bits for minor. If 2 bytes, 7 bits for major and 7 bits for minor. 3 bytes not possible because TMC restricts to 0–99 for both.
if (bit 5 of selector is set)	
<PreciseTMCInformation>(preciseTMCInfo);	

C.3 TLR datatypes

<PreciseTMCInformation>:=	
BitArray(selector),	
if (bit 0 of selector is set)	
<IntUnTi>(distanceAccuracy),	: 0 = 100 m, 1 = 500 m, 2 = 1 km, 3 = more than 1 km 100 m if attribute is absent
if (bit 1 of selector is set)	
<IntUnTi>(hazardDistance1),	: Upstream distance from primary location (against the direction of traffic), also known as D1. Range up to 25 km calculated in steps of 100 m.
if (bit 2 of selector is set)	
<IntUnLi>(hazardDistance2),	: Same as hazardDistance1, but range up to 6 553 km.
if (bit 3 of selector is set)	
<IntUnTi>(problemLength1),	: Distance: the start of the problem to the end of the problem, which is not necessarily the primary location. Length up to 25 km.
if (bit 4 of selector is set)	
<IntUnLi>(problemLength2);	: Same as problemLength1, but length up to 6 553 km.

Annex D (normative)

ALERT-C location reference, TPEG2 XML representation

D.1 General

This annex defines the TPEG2 XML representation^[17] of TLR container.

D.2 TLR message components

```
<xs:element name="TMCLocationReference" type="TMCLocationReference"/>
<xs:complexType name="TMCLocationReference">
  <xs:complexContent>
    <xs:extension base="tsf:ApplicationRootMessageML">
      <xs:sequence>
        <xs:element name="locationID" type="tdt:IntUnTi"/>
        <xs:element name="countryCode" type="tdt:IntUnTi"/>
        <xs:element name="locationTableNumber" type="tdt:IntUnTi"/>
        <xs:element name="direction" type="tdt:Boolean"/>
        <xs:element name="bothDirections" type="tdt:Boolean"/>
        <xs:element name="extent" type="tdt:IntUnTi" minOccurs="0"/>
        <xs:element name="extendedCountryCode" type="tdt:IntUnTi" minOccurs="0"/>
        <xs:element name="locationTableVersion" type="tdt:IntUnLoMB" minOccurs="0"/>
        <xs:element name="preciseTMCInfo" type="PreciseTMCInformation" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

D.3 TLR datatypes

```
<xs:complexType name="PreciseTMCInformation">
  <xs:sequence>
    <xs:element name="distanceAccuracy" type="tdt:IntUnTi" minOccurs="0"/>
    <xs:element name="hazardDistance1" type="tdt:IntUnTi" minOccurs="0"/>
    <xs:element name="hazardDistance2" type="tdt:IntUnLi" minOccurs="0"/>
    <xs:element name="problemLength1" type="tdt:IntUnTi" minOccurs="0"/>
    <xs:element name="problemLength2" type="tdt:IntUnLi" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
```

D.4 Full TLR schema definition

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- This XML schema is generated with tpegUMLconverter V2.3 -->
<xs:schema xmlns="http://www.tisa.org/TPEG/TLR_2_0"
  targetNamespace="http://www.tisa.org/TPEG/TLR_2_0"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:tsf="http://www.tisa.org/TPEG/SFW_1_1"
  xmlns:tdt="http://www.tisa.org/TPEG/TPEGDataTypes_2_0"
  elementFormDefault="qualified"
  attributeFormDefault="qualified">
  <xs:import namespace="http://www.tisa.org/TPEG/SFW_1_1" schemaLocation="SFW_1_1.xsd"/>
  <xs:import namespace="http://www.tisa.org/TPEG/TPEGData-
Types_2_0" schemaLocation="TDT_2_0.xsd"/>
  <xs:element name="TMCLocationReference" type="TMCLocationReference"/>
  <xs:complexType name="TMCLocationReference">
    <xs:complexContent>
      <xs:extension base="tsf:ApplicationRootMessageML">
        <xs:sequence>
```

```
<xs:element name="locationID" type="tdt:IntUnTi"/>
<xs:element name="countryCode" type="tdt:IntUnTi"/>
<xs:element name="locationTableNumber" type="tdt:IntUnTi"/>
<xs:element name="direction" type="tdt:Boolean"/>
<xs:element name="bothDirections" type="tdt:Boolean"/>
<xs:element name="extent" type="tdt:IntUnTi" minOccurs="0"/>
<xs:element name="extendedCountryCode" type="tdt:IntUnTi" minOccurs="0"/>
<xs:element name="locationTableVersion" type="tdt:IntUnLoMB" minOccurs="0"/>
<xs:element name="preciseTMCInfo" type="PreciseTMCInformation" minOccurs="0"/>
</xs:sequence>
</xs:extension>
</xs:complexContent>
</xs:complexType>
<xs:complexType name="PreciseTMCInformation">
  <xs:sequence>
    <xs:element name="distanceAccuracy" type="tdt:IntUnTi" minOccurs="0"/>
    <xs:element name="hazardDistance1" type="tdt:IntUnTi" minOccurs="0"/>
    <xs:element name="hazardDistance2" type="tdt:IntUnLi" minOccurs="0"/>
    <xs:element name="problemLength1" type="tdt:IntUnTi" minOccurs="0"/>
    <xs:element name="problemLength2" type="tdt:IntUnLi" minOccurs="0"/>
  </xs:sequence>
</xs:complexType>
</xs:schema>
```

Annex E (informative)

Korean node-link location reference, TPEG2 logical structure

E.1 Description of the logical structure

This annex defines the data structure of KoreanNodeLinkLocationReference (see [Figure E.1](#)) to be used in pre-coded LRC container. The method of Korean node-link location referencing is described in [8.4](#).

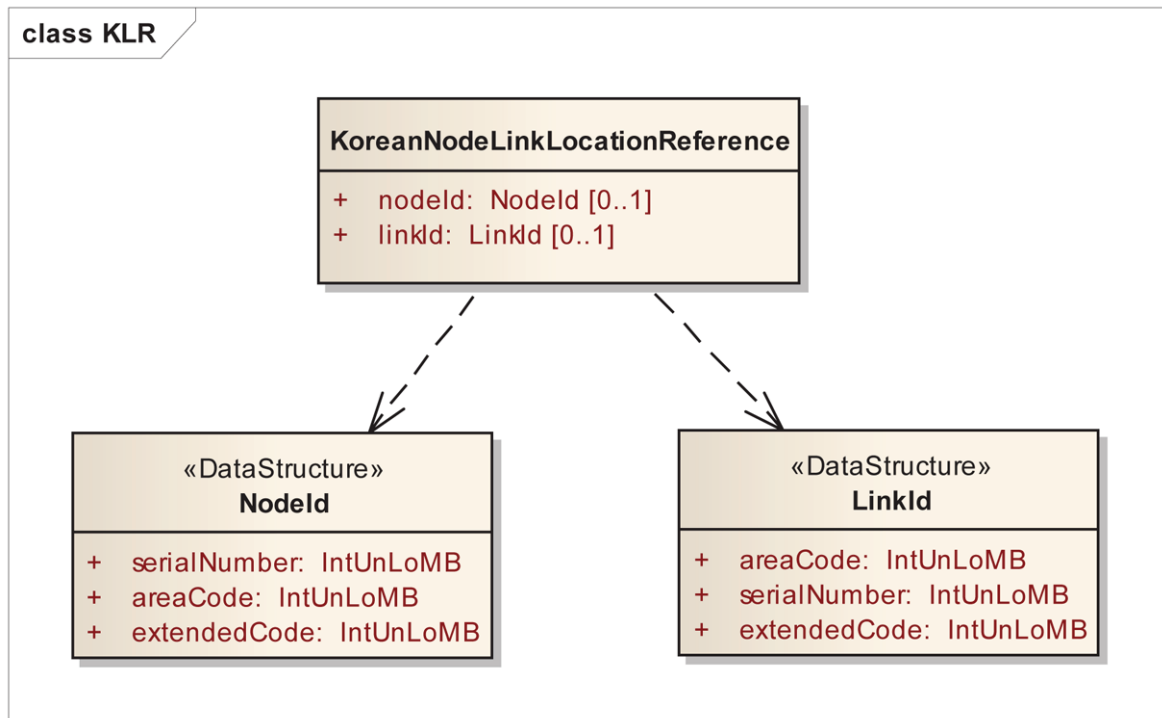


Figure E.1 — TPEG2 UML structure^[15] of KoreanNodeLinkLocationReference

E.2 KLR message components

E.2.1 KoreanNodeLinkLocationReference

Name	Type	Multiplicity	Description
nodeId	NodeId	0..1	n.a.
linkId	LinkId	0..1	n.a.

E.3 KLR datatypes

E.3.1 LinkId

Name	Type	Multiplicity	Description
areaCode	IntUnLoMB	1	n.a.
serialNumber	IntUnLoMB	1	n.a.
extendedCode	IntUnLoMB	1	n.a.

E.3.2 NodeId

Name	Type	Multiplicity	Description
serialNumber	IntUnLoMB	1	n.a.
areaCode	IntUnLoMB	1	n.a.
extendedCode	IntUnLoMB	1	n.a.

Annex F (normative)

Korean node-link location reference, TPEG2 binary representation

F.1 General

This annex defines the TPEG2 binary representation^[16] of Korean node-link location reference container.

F.2 KLR message components

F.2.1 List of generic component IDs

The GCId of the root element is defined by Location Referencing Container specification.^[18]

Name	ID
KoreanNodeLinkLocationReference	x

F.2.2 KoreanNodeLinkLocationReference

<KoreanNodeLinkLocationReference(x)>:=	
<IntUnTi>(x),	: ID of this component
<IntUnLoMB>(lengthComp),	: Number of bytes in component
<IntUnLoMB>(lengthAttr),	: Number of bytes in attributes
BitArray(selector),	
if (bit 0 of selector is set)	
<NodeId>(nodeId),	
if (bit 1 of selector is set)	
<LinkId>(linkId);	

F.3 KLR datatypes

F.3.1 LinkId

<LinkId>:=	
<IntUnLoMB>(areaCode),	
<IntUnLoMB>(serialNumber),	
<IntUnLoMB>(extendedCode);	

F.3.2 NodeId

<NodeId>:=	
<IntUnLoMB>(serialNumber),	
<IntUnLoMB>(areaCode),	
<IntUnLoMB>(extendedCode);	

Annex G (normative)

Korean node-link location reference, TPEG2 XML representation

G.1 General

This annex defines the TPEG2 XML representation^[17] of the Korean node-link location reference container.

G.2 KLR message components

```
<xs:element name="KoreanNodeLinkLocationReference" type="KoreanNodeLinkLocationReference"/>
<xs:complexType name="KoreanNodeLinkLocationReference">
  <xs:complexContent>
    <xs:extension base="tsf:ApplicationRootMessageML">
      <xs:sequence>
        <xs:element name="nodeId" type="NodeId" minOccurs="0"/>
        <xs:element name="linkId" type="LinkId" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
```

G.3 KLR datatypes

G.3.1 LinkId

```
<xs:complexType name="LinkId">
  <xs:sequence>
    <xs:element name="areaCode" type="tdt:IntUnLoMB"/>
    <xs:element name="serialNumber" type="tdt:IntUnLoMB"/>
    <xs:element name="extendedCode" type="tdt:IntUnLoMB"/>
  </xs:sequence>
</xs:complexType>
```

G.3.2 NodeId

```
<xs:complexType name="NodeId">
  <xs:sequence>
    <xs:element name="serialNumber" type="tdt:IntUnLoMB"/>
    <xs:element name="areaCode" type="tdt:IntUnLoMB"/>
    <xs:element name="extendedCode" type="tdt:IntUnLoMB"/>
  </xs:sequence>
</xs:complexType>
```

G.4 Full KLR schema definition

```
<?xml version="1.0" encoding="UTF-8"?>
<!-- This XML schema is generated with tpegUMLconverter V2.3 -->
<xs:schema xmlns="http://www.tisa.org/TPEG/KLR_2_0"
  targetNamespace="http://www.tisa.org/TPEG/KLR_2_0"
  xmlns:xs="http://www.w3.org/2001/XMLSchema"
  xmlns:tsf="http://www.tisa.org/TPEG/SFW_1_1"
  xmlns:tdt="http://www.tisa.org/TPEG/TPEGDataTypes_2_0"
  elementFormDefault="qualified"
  attributeFormDefault="qualified">
  <xs:import namespace="http://www.tisa.org/TPEG/SFW_1_1" schemaLocation="SFW_1_1.xsd"/>
  <xs:import namespace="http://www.tisa.org/TPEG/TPEGDataTypes_2_0" schemaLocation="TDT_2_0.xsd"/>
```

```

<xs:element name="KoreanNodeLinkLocationReference" type="KoreanNodeLinkLocationReference" />
<xs:complexType name="KoreanNodeLinkLocationReference">
  <xs:complexContent>
    <xs:extension base="tsf:ApplicationRootMessageML">
      <xs:sequence>
        <xs:element name="nodeId" type="NodeId" minOccurs="0"/>
        <xs:element name="linkId" type="LinkId" minOccurs="0"/>
      </xs:sequence>
    </xs:extension>
  </xs:complexContent>
</xs:complexType>
<xs:complexType name="LinkId">
  <xs:sequence>
    <xs:element name="areaCode" type="tdt:IntUnLoMB"/>
    <xs:element name="serialNumber" type="tdt:IntUnLoMB"/>
    <xs:element name="extendedCode" type="tdt:IntUnLoMB"/>
  </xs:sequence>
</xs:complexType>
<xs:complexType name="NodeId">
  <xs:sequence>
    <xs:element name="serialNumber" type="tdt:IntUnLoMB"/>
    <xs:element name="areaCode" type="tdt:IntUnLoMB"/>
    <xs:element name="extendedCode" type="tdt:IntUnLoMB"/>
  </xs:sequence>
</xs:complexType>
</xs:schema>

```

Annex H (informative)

Road Section Identification Data set

H.1 General

This annex defines data elements used for the Road Section Identification Data set.

The Road Section Identification Data set was developed to enable exchanging various static/dynamic information on road network.

The location of the information is represented by an appropriate road section with a reference point and a distance from the reference point.

In this part of ISO 17572, a profile of road section identification and reference point identification required in the Road Section Identification Data set are provided. Definition of each link and node corresponding to respective road maps is out of scope.

As permanent ID set is specified in the system, Road Section Identification Data set is independent from avoidable change caused by road map revision.

H.2 Description of the logical structure

H.2.1 Logical structure

[Figure H.1](#) describes the logical structure of Road Section Identification Data set.

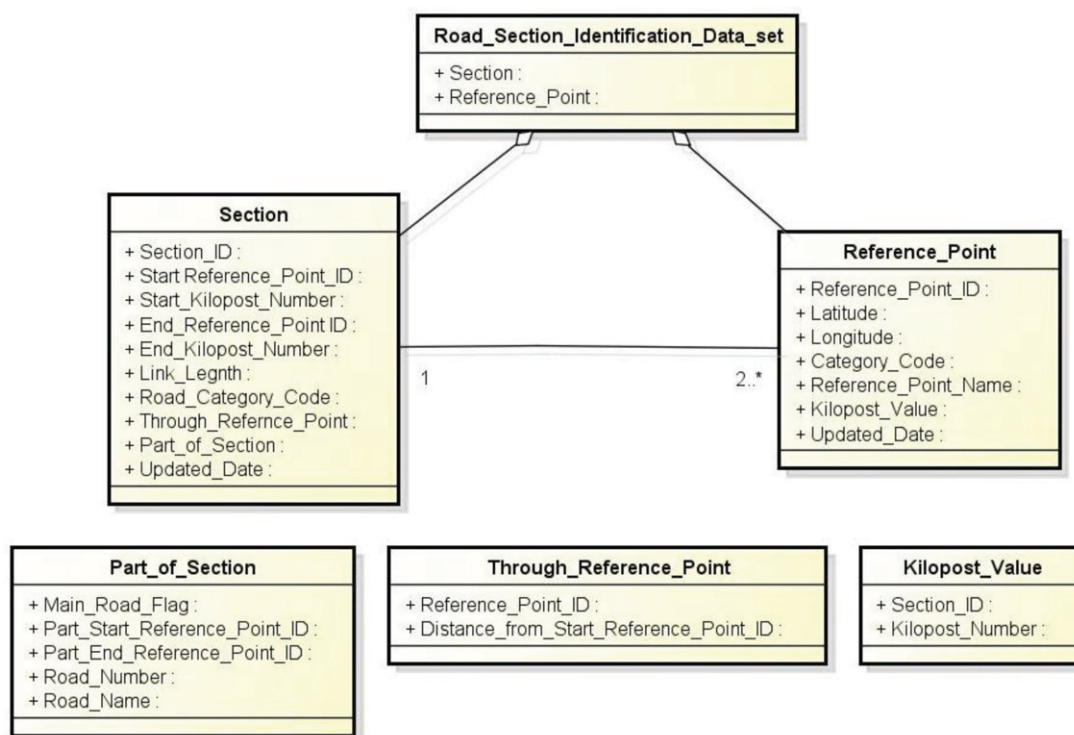


Figure H.1 — Structure of road section referencing

H.2.2 Data elements

[Table H.2](#) describes data elements of Road Section Identification Data set.

Table H.2 — Data elements used in the location reference format in this annex

Data element name	Definition
Section	Sections between intersections or prefecture's borders
Section_ID	Identifier of section
Start_Reference_Point_ID	Identifier of the section's start reference point
Start_Kilopost_Number	Kilopost value of start reference point (option)
End_Reference_Point_ID	Identifier of the section's end reference point
End_Kilopost_Number	Kilopost value of end reference point (option)
Link_Length	Length of links
Road_Category_Code	Type of road category
Through_Reference_Point	A number of reference points in the section
Part_of_Section	Total parts of the section
Updated_Date	Updated date of attributes
Main_Road_Flag	Judge of main road
Part_Start_Reference_Point_ID	Identifier of the part's start reference point
Part_End_Reference_Point_ID	Identifier of the part's end reference point
Road_Number	Value of road number
Road_Name	Text of name of a road
Reference_Point_ID	Identifier of reference point (option)
Distance_from_Start_Reference_Point_ID	Distance from a section's start point to a reference point in the section (option)
Reference_Point	Intersections, mile posts, kilometre posts, prefecture's borders
Reference_Point_ID	Identifier of reference point
Latitude	Latitude value
Longitude	Longitude value
Category_code	Classification of reference point categories
Reference_Point_Name	Text of reference point (option)
Kilopost_Value	A number of kiloposts in the reference point (option)
Updated_date	Updated date of attribute
Section ID	Identifier of section (option)
Kilopost_Number	Value of a kilopost (option)

H.2.3 Data frames

Table H.3 indicates that a data frame is repeatable; data frame “X” occurs “number_of_X” times.

Table H.3 — Data frames used in the location reference format in this annex

Data frame name	Definition	Data elements/ Nested frames
Road_Section_Identification_Data_set	A data frame containing sections and reference points	Section Reference_Point
Section	A data frame containing sections	Section_ID Start_Reference_Point_ID Start_Kilopost_Number End_Reference_Point_ID End_Kilopost_Number Link_Length Road_Category_Code Through_Reference_Point Part_of_Section Updated_Date
Reference_Point	A data frame containing reference points	Reference_Point_ID Latitude Longitude Category_code Reference_Point_Name Kilopost_Value Updated_date
Total_Part_of_Section	A data frame containing parts of the section	Main_Road_Flag Part_Start_Reference_Point_ID Part_End_Reference_Point_ID Road_Number Road_Name
Through_Reference_Point	A data frame containing reference points of the section	Reference_Point_ID Distance_from_Start_Reference_Point_ID
Kilopost_Value	A data frame containing kilopost value of the reference point	Section_ID Kilopost_Number

H.2.4 Detailed diagram of the logical structure

rsids: Road_Section_Identification_Data_set	
	sec: Section
	secid: Section_ID
	srefpid: Start_Reference_Point_ID
	sknum: Start_Kilopost_Number
	erefpid: End_Reference_Point_ID
	eknum: End_Kilopost_Number
	linklength: Link_Length
	rcode: Road_Category_Code
	trefp: Through_Reference_Point
	refpid: Reference_Point_ID
	desrefp: Distance_from_Start_Reference_Point_ID
	parsec: Part_of_Section
	mrflag: Main_Road_Flag
	psrefpid: Part_Start_Reference_Point_ID
	perefpid: Part_End_Reference_Point_ID
	rnum: Road_Number
	rname: Road_Name
	update: Updated_Date
	refp: Reference_Point
	refpid: Reference_Point_ID
	lat: Latitude
	lon: Longitude
	ccode: Category_code
	refpname: Reference_Point_Name
	valkilo: Kilopost Value
	secid: Section_ID
	kilonum: Kilopost_Number
	update: Updated_date

H.3 Structure in ASN.1

```

rsids DEFINITIONS ::=
BEGIN
EXPORTS
rsids;
IMPORTS
Precoded-Table, Blockcode-Table;

rsids ::= SEQUENCE {
sec
refp
}
sec ::= SEQUENCE {
secid
srefpid
sknum OPTIONAL
erefpid

```

```
eknum          OPTIONAL
linklength
rccode
trefp          OPTIONAL
parsec
update
}
trefp ::= SEQUENCE {
  refpid        OPTIONAL
  desrefp       OPTIONAL
}
parsec ::= SEQUENCE {
  mrflag
  psrefpid
  perefpid
  rnum
  rname         OPTIONAL
}
refp ::= SEQUENCE {
  refpid
  lat
  lon
  ccone
  refpname     OPTIONAL
  valkilo      OPTIONAL
  update
}
valkilo ::= SEQUENCE {
  secid        OPTIONAL
  kilonum      OPTIONAL
}
END
```

H.4 Structure as XML schema

```

<?xml version="1.0" encoding="UTF-8"?>
<xs:schema xmlns:xs="http://www.w3.org/2001/XMLSchema">
<xs:element name="rsids" type="rseccr"/>
<xs:attribute name="sec" use="required"/>
<xs:attribute name="refp" use="required"/>
<xs:complexType name="sec">
<xs:attribute name="seccid" use="required"/>
<xs:attribute name="srefpid" use="required"/>
<xs:attribute name="sknum" use="required"/>
<xs:attribute name="erefpid" use="required"/>
<xs:attribute name="eknum" use="required"/>
<xs:attribute name="linklength" use="required"/>
<xs:attribute name="rccode" use="required"/>
<xs:attribute name="trefp" use="required"/>
<xs:attribute name="parsec" use="required"/>
<xs:attribute name="update" use="required"/>
</xs:complexType>
<xs:complexType name="trefp">
<xs:attribute name="refpid" use="required"/>
<xs:attribute name="desrefp" use="required"/>
</xs:complexType>
<xs:complexType name="parsec">
<xs:attribute name="mrflag" use="required"/>
<xs:attribute name="psrefpid" use="required"/>
<xs:attribute name="perefpid" use="required"/>
<xs:attribute name="rnum" use="required"/>
<xs:attribute name="rname" use="required"/>
</xs:complexType>
<xs:complexType name="refp">
<xs:attribute name="refpid" use="required"/>
<xs:attribute name="lat" use="required"/>
<xs:attribute name="lon" use="required"/>
<xs:attribute name="ccode" use="required"/>
<xs:attribute name="refpname" use="required"/>
<xs:attribute name="valkilo" use="required"/>
<xs:attribute name="update" use="required"/>
</xs:complexType>
<xs:complexType name="valkilo">
<xs:attribute name="seccid" use="required"/>
<xs:attribute name="kilonum" use="required"/>
</xs:complexType>
<xs:complexType name="rsids">
<xs:sequence>
<xs:element name="sec" minOccurs="0"/>
<xs:element name="refp" minOccurs="0"/>
</xs:sequence>
</xs:complexType>
</xs:schema>

```

Bibliography

- [1] VICS Center, VICS Link specification, Version 1.2, Tokyo, 1999/08/23
- [2] VICS Center, Technical description for VICS system, Version 1.4, Tokyo, 1997/01/17
- [3] ISO/TS 18234-6, *Traffic and Travel Information (TTI) — TTI via Transport Protocol Expert Group (TPEG) data-streams — Part 6: Location referencing applications*
- [4] SCHAEFER et al. *TMC Compendium Alert-C Coding Handbook, ECORTIS Project*. Ertico, Brussels, 1999
- [5] HENDRIKS T., & WEVERS K. *TMC Precise Location Referencing*, TMCFS-2003-02PLR-V05, TMC-Forum, Sept. 2004
- [6] MOCT, *A Guide for Creation and Management of Standard Node-Link for ITS*, Gwacheon City, 2004-12-31
- [7] TPEG Forum, *Message Management Container Specification*, unpublished, EBU, Grand-Saconnex, Switzerland, 2006
- [8] IEC 62106:2000, *Specification of the radio data system (RDS) for VHF/FM sound broadcasting in the frequency range from 87,5 to 108,0 MHz*
- [9] ISO 14825, *Intelligent transport systems — Geographic Data Files (GDF) — GDF5.0*
- [10] ISO 14819-1, *Intelligent transport systems — Traffic and travel information messages via traffic message coding — Part 1: Coding protocol for Radio Data System — Traffic Message Channel (RDS-TMC) using ALERT-C*
- [11] ISO 14819-3, *Intelligent transport systems — Traffic and travel information messages via traffic message coding — Part 3: Location referencing for Radio Data System — Traffic Message Channel (RDS-TMC) using ALERT-C*
- [12] ISO/TS 24530-2, *Traffic and Travel Information (TTI) — TTI via Transport Protocol Experts Group (TPEG) Extensible Markup Language (XML) — Part 2: tpeg-locML*
- [13] ISO/TS 18234-6, *Traffic and Travel Information (TTI) — TTI via Transport Protocol Expert Group (TPEG) data-streams — Part 6: Location referencing applications*
- [14] ISO/TS 18234-2, *Intelligent transport systems — Traffic and travel information via transport protocol experts group, generation 1 (TPEG1) binary data format — Part 2: Syntax, semantics and framing structure (TPEG1-SSF)*
- [15] *Intelligent transport systems (ITS) — Traffic and Travel Information (TTI) via Transport Protocol Experts Group, Generation 2 (TPEG2) — Part 2: UML modeling rules (TPEG2-UMR_1.1/001)*, Version 1.1, TISA Specification SP10031
- [16] *Intelligent transport systems (ITS) — Traffic and Travel Information (TTI) via Transport Protocol Experts Group, Generation 2 (TPEG2) — Part 3: UML to binary conversion rules (TPEG2-UBCR_1.1/001)*, Version 1.1, TISA Specification SP10032
- [17] *Intelligent transport systems (ITS) — Traffic and Travel Information (TTI) via Transport Protocol Experts Group, Generation 2 (TPEG2) — Part 4: UML to XML conversion rules (TPEG2-UXCR_2.0/001)*, Version 2.0, TISA Specification SP10033
- [18] *Intelligent transport systems — Traffic and Travel Information (TTI) via Transport Protocol Experts Group, Generation 2 (TPEG2) — Part 7: Location Referencing Container (TPEG2-LRC_2.0/001)*

- [19] Japan Digital Road Map Association, *The standard of Road Section Identification Data set* Version1.0, 2011.3
- [20] National Institute for Land and Infrastructure Management, *The basic concepts of Road Section Identification Data set*, Version2.0, 2011.3

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™