

BS ISO 17745:2016



BSI Standards Publication

Steel wire ring net panels — Definitions and specifications

National foreword

This British Standard is the UK implementation of ISO 17745:2016.

The UK participation in its preparation was entrusted to Technical Committee ISE/106, Wire Rod and Wire.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 78010 3

ICS 77.140.65

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 June 2016.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

BS ISO 17745:2016

ISO
17745

First edition
2016-05-01

**Steel wire ring net panels —
Definitions and specifications**

*Panneaux de filet en anneaux de fil d'acier — Définitions et
spécifications*



Reference number
ISO 17745:2016(E)

© ISO 2016



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

	Page
Foreword	iv
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Description of use and applications	2
5 Wire ring net panels	2
6 Properties of wire	3
6.1 Ageing and corrosion resistance	3
6.1.1 Zn class A	3
6.1.2 Zn95Al5 class B	4
6.1.3 Zn95Al5 class A	4
6.1.4 Advanced metallic coatings (as Zn90Al10) class B	4
6.1.5 Advanced metallic coatings (as Zn90Al10) class A	4
7 Wire net properties	4
8 Wire ring net properties (longitudinal tensile test with no lateral contraction and load bearing capacity test)	4
9 Sampling and testing	4
10 Inspection and documentation	5
Annex A (informative) Possible metallic coating options	6
Annex B (informative) Load bearing capacity tests	8
Annex C (informative) Net tensile strength (longitudinal tensile test with no lateral contraction)	13
Annex D (informative) Methods for measuring the dimensions of a ring net panel	15
Bibliography	16

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 17, *Steel*, Subcommittee SC 17, *Steel wire rod and wire products*.

Steel wire ring net panels — Definitions and specifications

1 Scope

This International Standard specifies the characteristics of steel wire ring net panel for retaining of unstable slopes controlling and preventing rockfalls and loose debris flow along roads, highways and railway, urban areas, mines and quarries, and for snow avalanche protection produced from metallic-coated steel wire or advanced metallic coating.

It is not applicable to anchors or soil nails for fixing of steel mesh to an unstable slope.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7500-1, *Metallic materials — Calibration and verification of static uniaxial testing machines — Part 1: Tension/compression testing machines — Calibration and verification of the force-measuring system*

ISO 7989-2:2007, *Steel wire and wire products — Non-ferrous metallic coatings on steel wire — Part 2: Zinc or zinc-alloy coating*

ISO 10474, *Steel and steel products — Inspection documents*

ISO 22034-1, *Steel wire and wire products — Part 1: General test methods*

ISO 22034-2:2007, *Steel wire and wire products — Part 2: Tolerances on wire dimensions*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

wire ring

steel ring obtained by looping a single steel wire with ends inserted into the thread or secured by one or more than one ferrules

3.2

nominal wire diameter

diameter used to designate the wire

Note 1 to entry: It is expressed in millimetres (mm).

3.3

real wire diameter

average value of the minimal and the maximal diameter, measured in the same section of a straight piece of wire, by means of a micrometer to 0,01 mm

3.4

wire ring size

average value of the diameter of the single ring

Note 1 to entry: See [Figure 1](#).

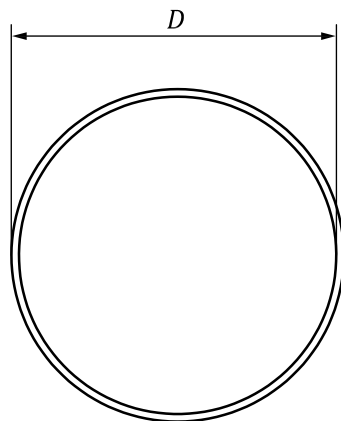


Figure 1 — Ring size

3.5
wire ring net panel

structure of the panel net, made by rings connected with the contiguous rings

3.6
advanced metallic coating

metallic coating with a non-specified composition and having a superior corrosion resistance

3.7
dimensions of a panel

length and width expressed in metres or in number of rings

Note 1 to entry: See [Annex D](#).

3.8
ring structure

way that the ring is manufactured and constituted

4 Description of use and applications

The typical use for the considered products is retaining of unstable slopes, controlling and preventing rockfalls and loose debris flow along roads, highways and railway, urban areas, mines and quarries, and for snow avalanche protection.

5 Wire ring net panels

Wire ring net panels are ring panels where each ring is made by several loop bindings, each one obtained by looping a single steel wire. Each ring is connected with four or six contiguous rings in order to create a net as shown in [Figure 2](#).

For the connection of the panels, shackles or wire rope shall be used. The strength of the connection formed shall be equal to or greater than the tensile strength of the ring net panel.

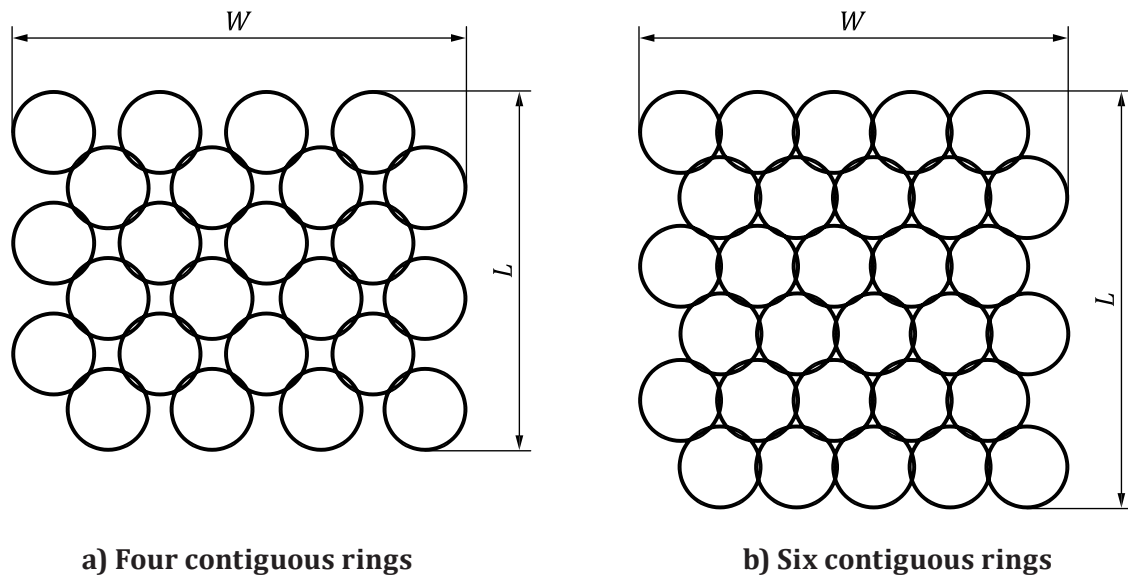


Figure 2 — Example of ring wire net panel layout

The wire ring net panels shall comply with the specifications given in [Table 1](#).

Table 1 — Properties and possible combinations of wire ring net panels

Standard ring diameter ^a mm	Standard windings ^b n	Wire diameter ^{c,d} mm
	7	
300	9	3
350	12	4
420	16	
	19	
^a Other ring diameters and wire diameters are possible, in accordance with project design requirements. ^b Other number of windings are possible, in accordance with project design requirements. ^c By agreement, other values should be provided. ^d Tolerances of metallic coated wire diameter are in accordance with class T1 in ISO 22034-2:2007, Table 1.		

6 Properties of wire

The wires shall comply with the diameter and tolerances as specified in [Table 1](#), with the coating as specified in [Table A.1](#), and with the coating weight as specified in ISO 7989-2.

Method of assessment and acceptance criteria for zinc and zinc alloy coating weight are described in ISO 7989-2:2007, Clause 5.

The tensile strength of the wire used for rings shall be minimum 1 380 MPa. The tensile strength of the wire used for rings shall be tested in accordance with ISO 22034-1.

6.1 Ageing and corrosion resistance

6.1.1 Zn class A

When subjected to the neutral salt spray test according to the procedures given in ISO 9227, after a period of 500 h of exposure, the ring samples shall not show more than 5 % of DBR.

6.1.2 Zn95Al5 class B

When subjected to the neutral salt spray test according to the procedures given in ISO 9227, after a period of 500 h of exposure, the ring samples shall not show more than 5 % of DBR.

6.1.3 Zn95Al5 class A

When subjected to the neutral salt spray test according to the procedures given in ISO 9227, after a period of 1 000 h of exposure, the ring samples shall not show more than 5 % of DBR.

6.1.4 Advanced metallic coatings (as Zn90Al10) class B

When subjected to the neutral salt spray test according to the procedures given in ISO 9227, after a period of 1 000 h of exposure, the ring samples shall not show more than 5 % of DBR.

6.1.5 Advanced metallic coatings (as Zn90Al10) class A

When subjected to the neutral salt spray test according to the procedures given in ISO 9227, after a period of 2 000 h of exposure, the ring samples shall not show more than 5 % of DBR.

7 Wire net properties

The chain of three rings is mounted in a calibrated test traction rig and it is connected to the machine with two circular elements of 50 mm diameter, not less than four times the diameter of the strand.

Before the test, a slight tension is given to stabilize the system, then the force is reduced again to zero before the test starts.

The chain of three rings is tensioned by the test machine with a recommended displacement speed of 2 mm/s, until breaking (see [Figure 2](#)).

The chain of three rings breaking load is reached when the chain is no longer able to support any increase of the applied force. Tests shall be performed on a minimum number of three samples.

The tensile test machine shall be of class 1 according to ISO 7500-1.

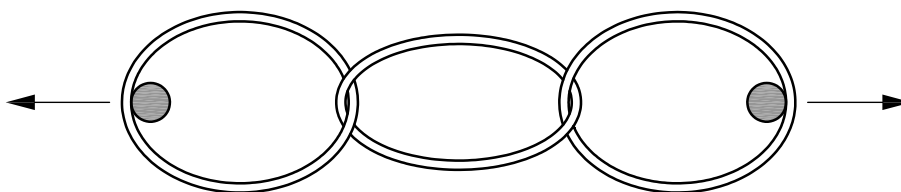


Figure 3 — Scheme of the test on net rings

8 Wire ring net properties (longitudinal tensile test with no lateral contraction and load bearing capacity test)

Tensile strength and load bearing capacity tests are described in [Annex B](#) and [Annex C](#).

Tensile strength and load bearing capacity tests are indications of product performance and quality. The use of the results for design purposes shall be based on an engineering judgement in accordance with the experience and the current practice and site conditions.

9 Sampling and testing

The manufacturer is responsible for the control of product quality.

10 Inspection and documentation

If agreed at the time of ordering, a certificate according to ISO 10474 shall be supplied containing the following data:

- product description;
- manufacturer's name and address;
- quantity of products supplied;
- wire coating (type and class);
- maximum breaking load of chain of three rings;
- length and width of ring panels in m and number of rings;
- number of hours of exposure without showing not more than 5 % of DBR.

In addition, if requested, the following data shall also be supplied:

- a) client name;
- b) ring net load bearing capacity;
- c) ring net tensile strength.

Annex A (informative)

Possible metallic coating options

The wire of the ring net panel is protected with a metallic coating. Depending on the corrosivity of the environment for which the wire ring mesh is installed (see ISO 9223), possible options for metallic coating are presented in [Table A.1](#).

Table A.1 — Description of the environment of the installation site, coating wire ring requirement

Site environment level (in accordance with ISO 9223:2012, Table 4)	Coating	Class (ISO 7989-2)	Estimated working life of the product (year)
Low aggressive: (C2) Dry conditions Temperate zone, atmospheric environment with low pollution, e.g. rural areas, small towns (over 100 m above sea level). Dry or cold zone, atmospheric environment with short time of wetness, e.g. deserts, sub-arctic areas.	Zinc	A	25
	Zn95 %/Al5 % alloy	A	50
		B	25
Advanced metallic coating	A	120	
	B	50	
Medium aggressive: (C3) Dry conditions Temperate zone, atmospheric environment with medium pollution or some effect of chlorides, e.g. urban areas, coastal areas with low deposition of chlorides, e.g. subtropical and tropical zone, atmosphere with low pollution	Zinc	A	10
	Zn95 %/Al5 % alloy	A	25
		B	10
Advanced metallic coating	A	50	
	B	25	
High aggressive: (C4) Wet conditions Temperate zone, atmospheric environment with high pollution or substantial effect of chlorides, e.g. polluted urban areas, industrial areas, coastal areas, without spray of salt water, exposure to strong effect of de-icing salts, e.g. subtropical and tropical zone, atmosphere with medium pollution, industrial areas, coastal areas, shelter positions at coastline.	Zn95 %/Al5 % alloy	A	10
	Advanced metallic coating	A	25
B		10	

NOTE Working life (product) — the period of time during which the performance of a product will be maintained at a level that enables a properly designed and executed works to fulfil the essential requirements (i.e. the essential characteristics of a product meet or exceed minimum acceptable values, without incurring major costs for repair or replacement). The working life of a product depends upon its inherent durability and normal installation and maintenance.

A clear distinction has to be made between the assumed economically reasonable working life for a product (also called: design working life), which underlies the assessment of durability in Technical Specifications, and the actual working life of a product in a works. The latter depends on many factors beyond the control of the producer, such as design, location of use (exposure), installation, use and maintenance.

The estimated working life can thus not be interpreted as being a guarantee given by the producer.

Technical Specification writers will have to take a view about the “normal” working life of the products that they deal with. The assumed working life of a product should take account of the assumed working life of the works, the ease and cost of repair or replacement of the product, maintenance requirements and exposure conditions.

Dark brown rust appearance on surface cannot be considered as the end of the working life.

For specific use, the ring wire net panels can also be produced with polymeric coated steel wire or polymeric coated steel wire rings.

Annex B (informative)

Load bearing capacity tests

B.1 Net load bearing capacity test procedures

The load bearing capacity of ring net panels should be evaluated according to the following test procedures.

The test consists in loading a sample of net perpendicularly to its plane by means of a hemispherical-shaped load sharing device (press). The press shall be located in the central point of the panel.

The hemisphere of the press is formed by a durable material, such as concrete or steel.

The surface of the press must be smooth, without any corners. Any attachment devices fitted on the surface of the press must not interfere in any way with the test piece during the test.

The geometrical characteristics of the press are the following (see [Figure B.1](#)):

- radius of curvature 1,200 mm;
- maximum diameter of the sample projected on a plane 1,000 mm;
- radius of curvature at the side 50 mm.

The test piece is loaded at the intersection of its diagonals (centre of test piece), moving the press with a speed not greater than 10 mm/s.

The test may be interrupted to allow the stroke of the thrust device to be restarted.

The sample tested has a rectangular shape, with a 3,0 m side (average value – tolerance ± 20 %). To allow installation of the system, the test applicant must supply the sample to the laboratory with the dimensions planned for the test or larger, and the laboratory will then carry out the sampling. It must be representative of the product in terms of materials and construction method.

The tests must be performed in the laboratory at ambient temperature, and always in compliance with standards which regulate the testing procedures for the various materials.

The puncturing test is carried out after fixing the test piece to a rigid frame and it is aimed at measuring the force-movement curve of the central point of the press measured perpendicularly to the plane of the test piece. The test must allow failure of the specimen to be reached. The panel is considered to have failed when it is no longer able to support any increase to the applied force. The puncturing strength of a test piece is therefore defined as the maximum force imparted by the test piece during the test.

Dimensions in millimetres

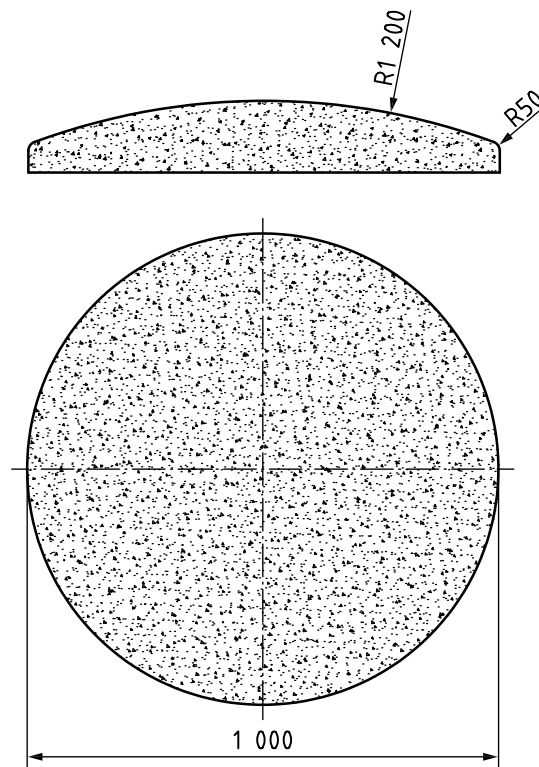


Figure B.1 — Geometrical characteristics of the press

The test may also be performed without reaching failure of the panel. In this case, the limit strength, which may be certified, is equal to the maximum value of the force reached during the test.


The contrast frame is made from a rigid rectangular or square structure, the size of which fully holds the net test piece and the constraint devices (see [Figure B.2](#)). The distance between the rigid frame and the net test piece, that is, the space holding the constraint devices, must not be greater than 15 % of the average side length of the test piece.

The test piece must be centred in the test frame; the width, a , of the constraining area must be measured along the centreline of each side of the frame.

All the perimeter nets of the test piece are fixed to the frame by means of the constraining devices (e.g. shackles, connecting links, steel ropes or other methods agreed between the testing laboratory and the party requesting the test, and in line with the structural characteristics of the piece to be tested; however, the means of constraint must not interfere with the structural behaviour of the test piece of a size suitable to obtain the planarity of the test piece before starting the test) by using either specific devices (e.g. screw tensioners) or frames with variable shapes.

The reference plane is defined by the four sides of the frame.

Before starting the test, the test piece must be tensioned until it reaches a condition of “planarity”, which is considered to have been reached when the maximum sag at the centre is less than 20 % of the smallest side length of the test piece.

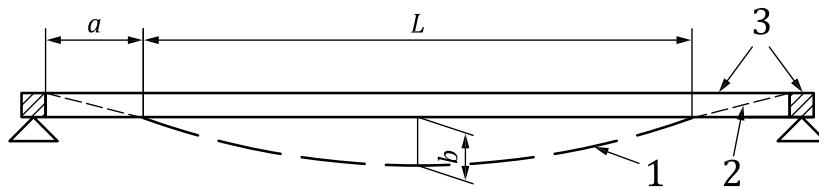

Key

- a* constraining area $< 0,15 \times L$
- b* $< 0,2 \times L$ [m]
- L* $3,0 \pm 0,2 \times 3,0$ [m]
- 1 net test piece
- 2 tensioning devices
- 3 rigid frame

Figure B.2 — Section of the frame containing the net test piece and definition of the level conditions

B.2 Measurements and observations

The origin of the load-movement diagram is measured from the plane holding the panel constraining devices.

The following measurements must be taken continuously during the test:


- force exercised by the press;
- movement of the press relative to the reference plane.

The force must be measured by class 1 load cells, in accordance with ISO 376.

These measurements must allow the curve characterized by the following parameters to be obtained:

- PBR maximum value of the force reached at failure of the test piece. If failure is not reached, this must be declared;
- BR movement corresponding to actual failure load reached.

The load-movement curve measured at the centre of the press must be provided for each product, example of graph shown in [Figure B.3](#).

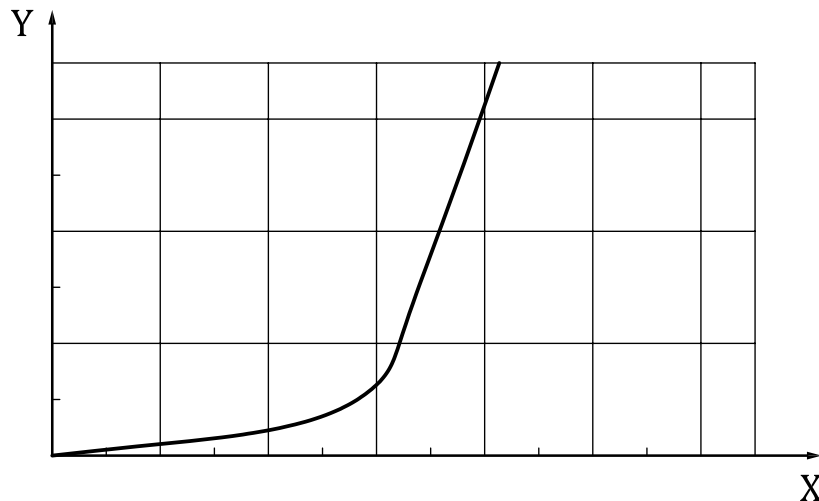

Key


- X deformation at the centre, measured perpendicularly to the test piece
- Y load

Figure B.3 — Example of load-movement curve

B.3 Test report

The test report must provide the following information: accurate description of test piece (construction materials and relative strengths, construction characteristics, geometrical characteristics of net, technological details, etc.), supplied by the party requesting the test:

- a) nominal dimensions of test piece and actual dimensions under test conditions;
- b) description of instrumentation used and temperature during test;
- c) detailed description of the test piece constraining condition, complete with photographic documentation;
- d) maximum sag b reached at the start of the test in those cases in which it may be measured;
- e) average dimension a of the constraining area on the four sides;
- f) general description of the failure mode;
- g) actual failure load and relative stoke;
- h) load-movement diagram;
- i) photographic documentation of the test piece before and after the test.

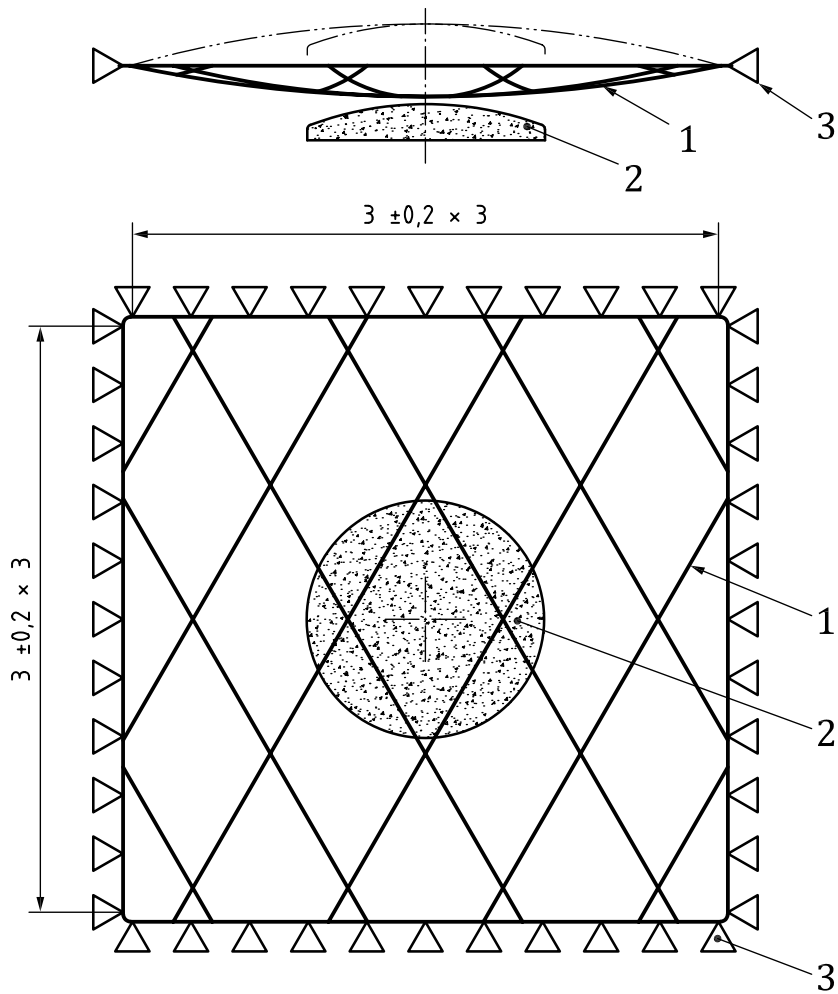

Key

- 1 mesh
- 2 press
- 3 perimeter constraining device

Figure B.4 — Example of set up for puncturing test

Annex C (informative)

Net tensile strength (longitudinal tensile test with no lateral contraction)

C.1 Net tensile strength — Test procedures

The wire ring net tensile strength shall be determined according to the following test procedures.

The test determines the actual longitudinal tensile strength and transversal tensile strength and the relative elongation of ring net panel.

For this purpose, a frame made of four steel beams, one of which is free to slide in the direction of the load (longitudinal direction) (see [Figure C.1](#)), shall be used.

The specimen shall have a width not less than 1 000 mm and a minimum area of 1,0 m². The specimen shall be fixed to the frame by means of lateral coupling devices, such as crickets or turnbuckles. The side coupling device shall be free to slide along the longitudinal beams.


The test frame must be equipped with load cells in order to acquire the load applied and the overall side reaction (longitudinal and transversal reactions).

The net specimen is brought under conditions of flatness by means of coupling devices without altering the geometry of the net in unload conditions.

The rate of longitudinal elongation during the test shall be between 6 mm/min and 10 mm/min.

The test end when the specimen broken load or the maximum applicable load is reached.

The specimen broken load is reached when the specimen is no longer able to support any increase of the applied force. It is also allowed to perform the test without reaching the rupture of the test, in which case, the tensile strength corresponds to the maximum load reached during the test.

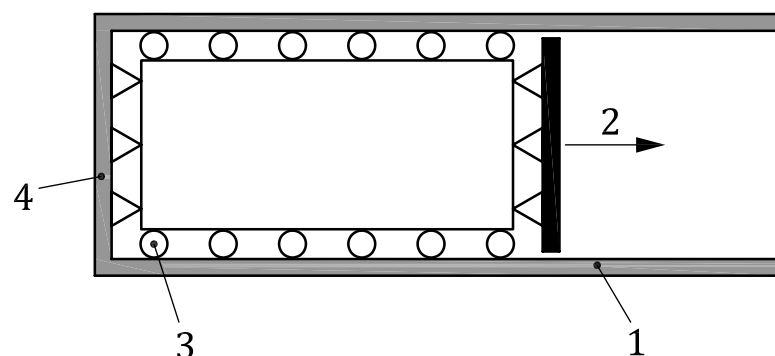

Key

- 1 fixed frame
- 2 movable beam
- 3 lateral constraint
- 4 side connection device

Figure C.1 — Example of frame configuration

C.2 Measurements and observations

During the test, the following shall be recorded in a continuous way:

- longitudinal load applied the side reaction (transversal);
- displacement of the movable beam.

C.3 Test report

The test report must contain a full description of the specimen (the base materials and their strengths, construction details, geometric characteristics of the mesh, technological details, etc.) by the applicant for the test and report the following information for each direction of test:

- a) description of the failure modes;
- b) longitudinal strength vs. displacement of movable beam diagram and side reaction vs. displacement of movable beam diagram;
- c) breaking load, side reaction at breaking load, displacement of movable beam at breaking load;
- d) photographic documentation of the specimen before and after the test, in which shall be shown the connections to the frame.

Annex D (informative)

Methods for measuring the dimensions of a ring net panel

Several methods exist for measuring the dimensions of a panel.

One example is described below:

- Put the panel on a horizontal surface;
- stretch the panel manually;
- move the rings so as to have, as much as possible, a regular alignment of the contact points between rings;
- measure the length several (at least three) times in metres and calculate the mean value;
- measure the width several (at least three) times in metres and calculate the mean value;
- the mean length and the mean width are considered as the dimensions of the panel.

See [Figure D.1](#)

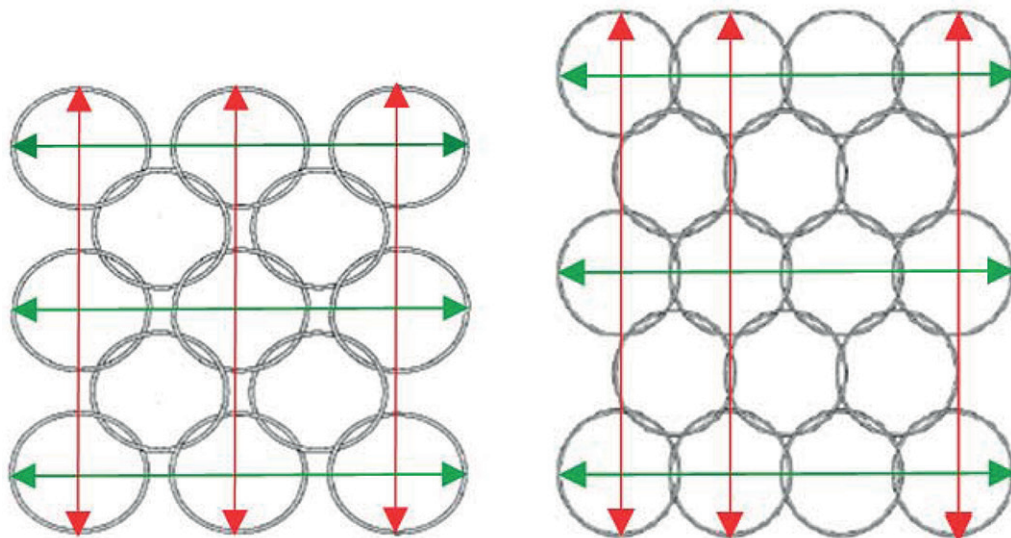


Figure D.1 — Measurement of length and width

Example:

Length = 1,50 m or 5 rings

Width = 1,50 m or 5 rings

Example:

Length = 1,60 m or 4 rings

Width = 1,80 m or 5 rings

Bibliography

- [1] ISO 376, *Metallic materials — Calibration of force-proving instruments used for the verification of uniaxial testing machines*
- [2] ISO 2408, *Steel wire ropes for general purposes — Minimum requirements*
- [3] ISO 6988, *Metallic and other non organic coatings — Sulfur dioxide test with general condensation of moisture*
- [4] ISO 9223:2012, *Corrosion of metals and alloys — Corrosivity of atmospheres — Classification, determination and estimation*
- [5] ISO 9227, *Corrosion tests in artificial atmospheres — Salt spray tests*
- [6] EN 10204, *Metallic products — Types of inspection documents*
- [7] DIN 50018, *Testing in a saturated atmosphere in the presence of sulfur dioxide*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK