

BS ISO 18154:2017



BSI Standards Publication

Ships and marine technology — Safety valve for cargo tanks of LNG carriers — Design and testing requirements

National foreword

This British Standard is the UK implementation of ISO 18154:2017.

The UK participation in its preparation was entrusted to Technical Committee SME/32, Ships and marine technology - Steering committee.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2017.
Published by BSI Standards Limited 2017

ISBN 978 0 580 88215 9

ICS 47.020.30

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2017.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

BS ISO 18154:2017

ISO
18154

First edition
2017-03

**Ships and marine technology — Safety
valve for cargo tanks of LNG carriers
— Design and testing requirements**

*Navires et technologie maritime — Soupape de sûreté pour les
réservoirs de cargaison des méthaniers — Exigences de conception
et d'essai*



Reference number
ISO 18154:2017(E)

© ISO 2017



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Main valve components	2
4.1 Body.....	2
4.2 Nozzle.....	2
4.3 Disk.....	2
4.4 Cover.....	2
4.5 Diaphragm.....	2
5 Design	3
6 Materials	4
7 Production testing and inspection	4
7.1 Purpose.....	4
7.2 Impact test.....	4
7.3 Non-destructive inspection.....	4
7.4 Pressure test.....	5
7.4.1 General requirement.....	5
7.4.2 Fluid.....	5
7.4.3 Duration.....	5
7.4.4 Test equipment.....	5
7.5 Surface inspection.....	5
7.6 Visual inspection.....	5
8 Performance test	6
8.1 Performance test in ambient temperature.....	6
8.1.1 Purpose.....	6
8.1.2 Number of test times.....	6
8.1.3 Fluid.....	6
8.1.4 Acceptance criteria.....	6
8.2 Leakage test in ambient temperature.....	6
8.2.1 Purpose.....	6
8.2.2 Fluid.....	6
8.2.3 Test pressure.....	6
8.2.4 Duration.....	6
8.2.5 Acceptance leakage rate.....	6
8.2.6 Test equipment.....	7
8.3 Performance test in low temperature.....	7
8.3.1 Purpose.....	7
8.3.2 Number of test times.....	7
8.3.3 Fluid.....	7
8.3.4 Acceptance criteria.....	7
8.4 Preparation for the performance test in low temperature.....	7
8.4.1 Start temperature for the test.....	7
8.4.2 Safety requirement.....	7
8.4.3 Test system.....	7
8.5 Leakage test in low temperature.....	8
8.5.1 Purpose.....	8
8.5.2 Fluid.....	8
8.5.3 Test pressure.....	8
8.5.4 Duration.....	8
8.5.5 Acceptance tolerance.....	9
8.5.6 Test equipment.....	9

9	Vacuum test	9
9.1	Purpose.....	9
9.2	Vacuum condition.....	9
9.2.1	Test temperature.....	9
9.2.2	Vacuum set test.....	9
9.2.3	Number of test times.....	9
9.2.4	Fluid.....	9
10	Type test	9
11	Determination of pilot operated safety valve performance	9
12	Sizing of pilot operated safety valves	10
13	Marking and sealing	10
	Bibliography	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by ISO Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 3, *Piping and machinery*.

Ships and marine technology — Safety valve for cargo tanks of LNG carriers — Design and testing requirements

1 Scope

This document specifies the requirements of design, test and inspection methods for diaphragm-type pilot operated safety valves, which are used in cargo tanks of LNG carriers in order to keep the pressure inside the tank below maximum allowable working pressure.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 4126-4, *Safety devices for protection against excessive pressure — Part 4: Pilot operated safety valves*

IMO, *The International Code for the Construction and Equipment of Ships Carrying Liquefied Gases in Bulk (IGC Code)*

API STD 527, *Seat Tightness of Pressure Relief Valves*

ASME B16.34, *Valves-Flanged, Threaded and Welding End*

3 Terms and definitions

For the purpose of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

blowdown

difference between the set and reseating pressures

Note 1 to entry: Blowdown is normally stated as a percentage of set pressure, except for pressures of less than 3 bar, when the blowdown is expressed in bar.

3.2

flow area

cross-sectional area (but not the curtain area) between inlet and seat that is used to calculate the theoretical flow capacity of the main valve, with no deduction for any obstruction

3.3

lift

actual travel of the main valve disk away from the closed position

3.4

pilot operated safety valve

automatic, self-actuated device comprising a main valve and an attached pilot valve

Note 1 to entry: The pilot responds to the pressure of the fluid without any other energy source than the fluid itself, and controls the operation of the main valve. The valve opens when the fluid pressure increases to the pilot valve set point. The valve re-closes when the fluid pressure is reduced to reseating pressure. See [Figure 1](#).

3.5

reseating pressure

value of the inlet static pressure at which the disk re-establishes contact with the seat or at which the lift becomes zero

3.6

set pressure

tank pressure at which the main valve of a pilot operated safety valve under operating conditions begins to open

3.7

theoretical discharge capacity

calculated capacity expressed in mass or volumetric units of a theoretically perfect nozzle having a cross-sectional flow area equal to the flow area of a main valve

3.8

vacuum set

negative tank pressure value at which the valve starts to open under working conditions

4 Main valve components

4.1 Body

The body inlet is connected directly to the tank, and the exit is connected to a discharge pipe. It keeps the pressure contained and endures the reaction of pressurized fluid discharged from the system.

4.2 Nozzle

It jets out pressurized fluid to the discharge pipe.

4.3 Disk


It works with the seat to provide sealing function to prevent leakage when it is closed. It is in direct contact with the working fluid, and may be damaged part if the fluid contains solids or foreign material.

4.4 Cover

It is connected to the body and makes a pressure space where flow can occur.

4.5 Diaphragm

It is a main component assembled between the main valve body and the cover. It delivers the fluid pressure to the disk.

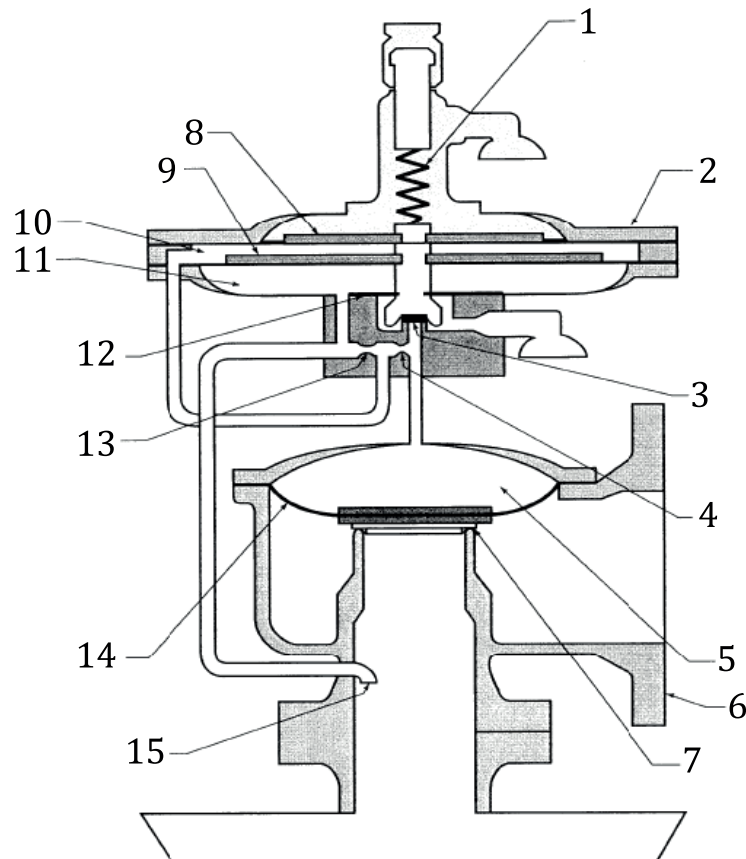

Key

- | | |
|-------------------|---|
| 1 pilot spring | 9 boost diaphragm |
| 2 pilot valve | 10 sense cavity |
| 3 pilot seat | 11 boost cavity |
| 4 fixed orifice | 12 spindle seal diaphragm |
| 5 dome | 13 blowdown adjustment orifice (variable) |
| 6 main valve | 14 main valve diaphragm |
| 7 main valve seat | 15 pilot pickup |
| 8 sense diaphragm | |

Figure 1 — Main components of pilot operated safety valve (Diaphragm type)

5 Design

5.1 The design shall incorporate guiding arrangements necessary to ensure consistent operation and seat tightness.

5.2 The nozzle of the main valve, other than when it is an integral part of the valve body, shall be fastened securely to prevent the seat from becoming loose in service.

5.3 Valve operation shall be designed to provide consistent, proper function in very low pressure and cryogenic services.

5.4 Means shall be provided to lock and/or to seal all external adjustments to prevent unauthorized adjustments of the pilot operated safety valve.

5.5 In the case of main valves with restricted lift, the lift restricting device shall limit the main valve lift but shall not otherwise interfere with the operation of the main valve. The lift restricting device shall be designed, installed and sealed by the valve manufacturer.

5.6 Pilot operated safety valves for flammable fluids shall discharge to a non-hazardous location.

5.7 Valves shall be designed so that tear or damage to the diaphragm can be checked without disassembly.

5.8 It shall be designed that fluid can be fully released under 1,1 times of the maximum allowable pressure of the protection system.

5.9 The fitting of any additional device to a pilot and valve combination shall not prevent the pressurized system from being protected under any circumstances.

6 Materials

6.1 Materials of the valve used near slippery surfaces, such as disk, disk guide and holder/spindle, shall be corrosion resistant and wear resistant. These materials shall also have durability in very low temperature environments.

6.2 Gaskets that have sealing functions shall be constructed of materials having durability in $-163\text{ }^{\circ}\text{C}$ environment.

6.3 Materials of the body and nozzle that are directly exposed to very low temperature environments shall be equal to CF3M.

6.4 The spring materials shall be equal to CF3M for durability in very low temperatures.

6.5 The materials of all other components shall have durability in very low temperatures.

7 Production testing and inspection

7.1 Purpose

The purpose of these tests is to ensure that pressure retaining components, especially castings, meet the requirements for which they have been designed and manufactured without exhibiting any form of quality defect.

7.2 Impact test

Castings, such as body and nozzle etc., shall satisfy the V-notch criteria of Charpy impact testing in accordance with IGC code 6.1.4.

7.3 Non-destructive inspection

If the material is casting, the inside or outside of the material shall be tested by non-destructive inspection. Normally, a radiographic test (RT) is conducted, but alternative non-destructive inspection can be conducted by requirement of the purchasers.

7.4 Pressure test

7.4.1 General requirement

It is conducted on castings such as the nozzle, body and cover. These components shall not have deformation, leakage or any other unusual condition when 1,5 times of set pressure is applied according to ASME B16.34.

7.4.2 Fluid


Pressure test shall be conducted by water or air pressure. The working fluid shall be fresh water and conducted in ambient temperature.

7.4.3 Duration

It shall be for 15 min after applying test pressure.

7.4.4 Test equipment

An example of the equipment is shown in [Figure 2](#).

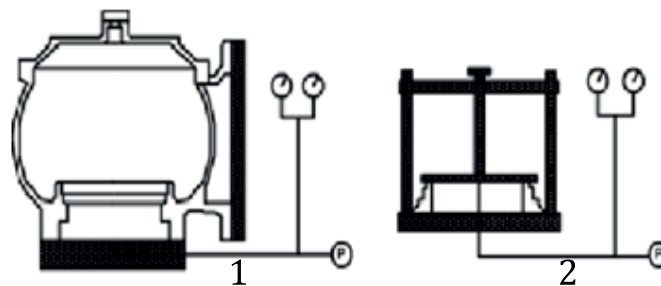

Key

- 1 body and cover
- 2 nozzle

Figure 2 — Water pressure test equipment

7.5 Surface inspection

It shall be checked and verified that there are no shrinkage cavities, burrs, sand inclusions or cracks on the inside and outside of the casting surface. If there are cracks, the decision shall satisfy ISO 4126-4.

7.6 Visual inspection

7.6.1 Forgings shall be checked for evidence of cracks.

7.6.2 There shall not be any defects on machined surfaces directly contacting the gasket. Corners or edges shall be rounded out and chamfered.

8 Performance test

8.1 Performance test in ambient temperature

8.1.1 Purpose

The purpose is to check that the valve is working well under set pressure and tolerance in ambient temperature.

The set pressure and tolerance shall satisfy [Table 1](#).

Table 1 — Tolerance of set pressure

Service	Set pressure		Tolerance
Cargo tank	Set pressure	25 kPa ^{ab}	±10 % of set pressure
^a Actual set pressure shall satisfy purchasers' specification.			
^b Tolerance for negative pressure is ±25 %.			

8.1.2 Number of test times

The manufacturers and the purchasers may reach an agreement for the number of performance test times, but the test shall be conducted at least 50 times for performance consistency.

8.1.3 Fluid

Inert gas and air shall be used.

8.1.4 Acceptance criteria

The valve shall be open under the tolerance of set pressure.

8.2 Leakage test in ambient temperature

8.2.1 Purpose

The purpose of this test is to verify the air tightness on the seat when the valve is closed in ambient temperature.

8.2.2 Fluid

Air or N₂ shall be used.

8.2.3 Test pressure

It shall be started at 90 % of the set pressure.

8.2.4 Duration

It shall be retained for at least 5 min.

8.2.5 Acceptance leakage rate

Leakage rate of the safety valve between the disk and seat shall be less than 0,06 ml/min/mm (1,5 cm³/min/inch diameter).

8.2.6 Test equipment

Inspection method is shown in [Figure 3](#). Leakage measurement shall be conducted using 1,0 mm wall thickness and 8,0 mm outer diameter pipe according to API STD 527.

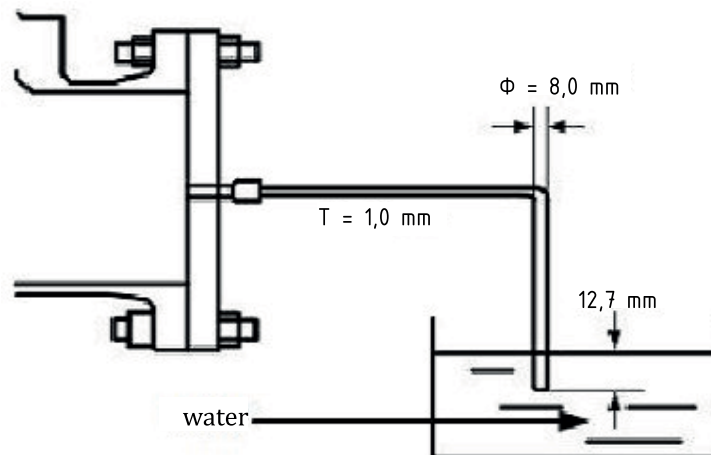


Figure 3 — Leakage inspection method

8.3 Performance test in low temperature

8.3.1 Purpose

The purpose of this test is to check that the valve is working accurately under the set pressure and the tolerance. The set pressure and tolerance shall satisfy [Table 1](#).

8.3.2 Number of test times

The manufacturers and the purchasers may reach an agreement for the number of performance test times, but the test shall be conducted at least three times.

8.3.3 Fluid

Helium gas shall be used.

8.3.4 Acceptance criteria

The valve shall open under the tolerance of set pressure.

8.4 Preparation for the performance test in low temperature

8.4.1 Start temperature for the test


The test shall be started after the inside of the nozzle temperature reaches $-163 \text{ }^\circ\text{C}$; the temperature shall be measured by a thermocouple. Also, the temperature shall be dropped by LN_2 or similar liquid to LN_2 .

8.4.2 Safety requirement

Protective gear must be used during the test.

8.4.3 Test system

The test system may be constructed as shown in [Figure 4](#). Other suitable test systems may be applied.

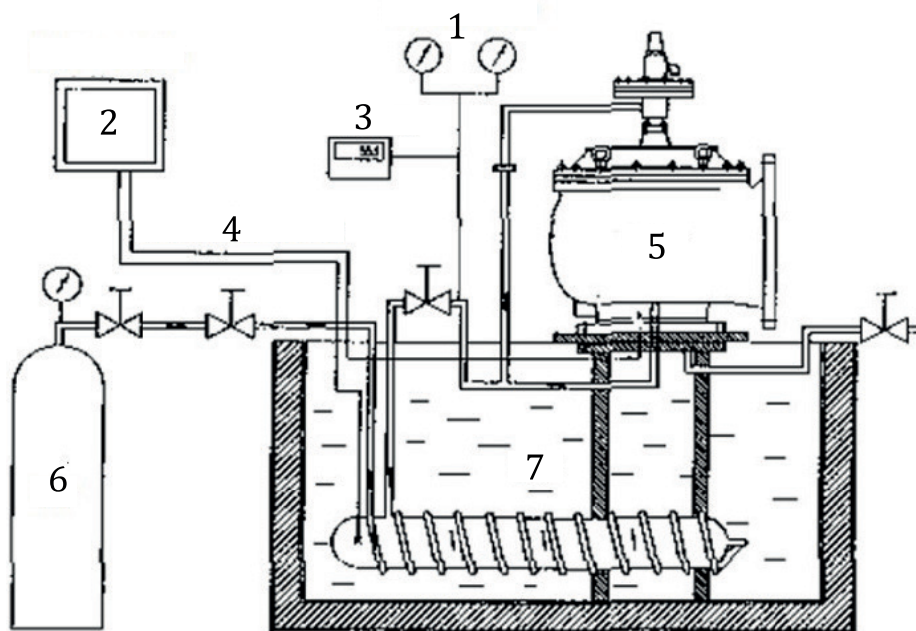

Key

- 1 pressure gauge
- 2 thermocouple
- 3 digital manometer
- 4 temperature sensor
- 5 POV
- 6 He
- 7 LN2

Figure 4 — System for performance test in low temperature (example)

8.5 Leakage test in low temperature

8.5.1 Purpose

The purpose of this test is to verify the air tightness on the seat when the valve is closed in low temperatures.

8.5.2 Fluid

Helium gas, which is below $-163\text{ }^{\circ}\text{C}$, shall be used.

8.5.3 Test pressure

It shall be started at 90 % of the set pressure.

8.5.4 Duration

It shall be retained for at least 5 min.

8.5.5 Acceptance tolerance

Leakage tolerance of the safety valve between the disk and seat shall be less than 0,06 ml/min/mm (1,5 cm³/min/inch diameter).

8.5.6 Test equipment

Inspection method is as shown in [Figure 3](#). Leakage measurement shall be conducted using 1,0 mm wall thickness and 8,0 mm outer diameter pipe according to API STD 527.

9 Vacuum test

9.1 Purpose

In the case of safety valve for cargo tank of LNG carriers, the function shall be satisfied in a vacuum environment. The purpose of this test is to check the relief function of the valve under the given vacuum condition.

In the case of safety valve for cargo tank of LNG carriers, it is possible to check the result when the vacuum set is satisfied in a vacuum environment.

9.2 Vacuum condition

The degree of vacuum and tolerance shall satisfy [Table 2](#).

Table 2 — Degree of vacuum and tolerance

Service	Degree of vacuum		Tolerance
Cargo tank	Vacuum set	1 kPa, Gauge ^a	±25 % of Vacuum set
^a Actual set pressure shall satisfy purchasers' specification.			

9.2.1 Test temperature

The test shall be conducted in ambient temperature.

9.2.2 Vacuum set test

The vacuum test shall be conducted at vacuum set pressure.

9.2.3 Number of test times

The manufacturers and the purchasers may reach an agreement for the number of performance test times, but the test shall be conducted at least three times.

9.2.4 Fluid

Air or inert gas shall be used.

10 Type test

It shall satisfy ISO 4126-4.

11 Determination of pilot operated safety valve performance

It shall satisfy ISO 4126-4.

12 Sizing of pilot operated safety valves

It shall satisfy ISO 4126-4.

13 Marking and sealing

It shall satisfy ISO 4126-4.

Bibliography

- [1] ISO 4126-1:2013, *Safety devices for protection against excessive pressure — Part 1: Safety valves*
- [2] ISO 4126-7:2013, *Safety devices for protection against excessive pressure — Part 7: Common data*
- [3] ISO 21028-1, *Cryogenic vessels — Toughness requirements for materials at cryogenic temperature — Part 1: Temperatures below $-80\text{ }^{\circ}\text{C}$*
- [4] ISO 21028-2, *Cryogenic vessels - Toughness requirements for materials at cryogenic temperature - Part 2: Temperatures between $-80\text{ }^{\circ}\text{C}$ and $-20\text{ }^{\circ}\text{C}$*
- [5] API RP 520, *Sizing, Selection, and Installation of Pressure-relieving Devices*
- [6] API STD 526, *Flanged Steel Pressure Relief Valves*
- [7] API STD 2000, *Venting Atmospheric and Low-pressure Storage Tanks*
- [8] ASME B16.5, *Pipe Flanges and Flanged Fittings: NPS 1/2 through NPS 24*
- [9] ASTM A351/A351M, *Standard Specification for Castings, Austenitic, for Pressure-Containing Parts*
- [10] ASTM E2248, *Standard Test Method for Impact Testing of Miniaturized Charpy V-Notch Specimens*
- [11] MSS SP-55, *Quality Standard for Steel Castings for Valves, Flanges and Fittings and Other Piping Components - Visual Method for Evaluation of Surface Irregularities*
- [12] SIGTTO, *Sizing, Selection, and Installation of Pressure-Relieving Devices*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK