

BS ISO 18300:2016



BSI Standards Publication

**Electrically propelled vehicles  
— Test specifications for  
lithium-ion battery systems  
combined with lead acid  
battery or capacitor**

**National foreword**

This British Standard is the UK implementation of ISO 18300:2016.

The UK participation in its preparation was entrusted to Technical Committee PEL/69, Electric vehicles.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.  
Published by BSI Standards Limited 2016

ISBN 978 0 580 85215 2

ICS 43.120

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 November 2016.

**Amendments/corrigenda issued since publication**

Date	Text affected
------	---------------

---

---

---

**Electrically propelled vehicles — Test specifications for lithium-ion battery systems combined with lead acid battery or capacitor**

*Véhicules routiers à propulsion électrique — Spécifications d'essai pour les systèmes de batteries aux ions lithium couplées à d'autres types de batterie ou condensateur*





**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Abbreviated terms</b> .....	<b>3</b>
<b>5 Type of connection with lithium-ion battery system</b> .....	<b>3</b>
5.1 Lithium-ion battery pack or system combined with lead acid battery (LIPB).....	3
5.2 Lithium-ion battery pack or system combined with electric double layer capacitor energy storage system (LICA).....	3
<b>6 General requirements</b> .....	<b>4</b>
<b>7 Test for LIPB</b> .....	<b>5</b>
7.1 Pre-conditioning.....	5
7.1.1 Purpose.....	5
7.1.2 Procedure.....	5
7.2 Rated capacity.....	5
7.2.1 Purpose.....	5
7.2.2 Procedure.....	5
7.3 Micro-cycle test.....	6
7.3.1 Purpose.....	6
7.3.2 Micro-cycle without regenerative charging.....	6
7.3.3 Micro-cycle with regenerative charging.....	7
7.4 Cycle life test.....	9
7.4.1 Purpose.....	9
7.4.2 Procedure.....	9
7.4.3 Requirement.....	9
<b>8 Tests for LICA</b> .....	<b>9</b>
8.1 Pre-conditioning.....	9
8.1.1 Purpose.....	9
8.1.2 Procedure.....	9
8.2 Micro-cycle with regenerative test.....	10
8.2.1 Purpose.....	10
8.2.2 Procedure.....	10
8.3 Cold cranking power.....	10
8.3.1 Purpose.....	10
8.3.2 Procedure.....	10
8.3.3 Requirement.....	11
<b>Annex A (informative) LICA and LIPB</b> .....	<b>12</b>
<b>Bibliography</b> .....	<b>15</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: [www.iso.org/iso/foreword.html](http://www.iso.org/iso/foreword.html).

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 37, *Electrically propelled vehicles*.

## Introduction

High-performance on-board electric energy storage is the main obstacle in developing electric vehicles available at more affordable prices. In order to ensure high efficiency and good motion properties, there are many requirements imposed on electrical energy storage sources, such as high power and energy density, long cycle and calendar life, reliability, wide temperature range and no emission of pollutants. The most common energy storages/sources in electric vehicles are electrochemical batteries and electric double layer capacitor. However, installing only one type of energy storage/source could be insufficient to complement each single type drawbacks. Hybridization of the source enables to solve some key problems encountered in electric vehicles such as regenerative braking, while the main source of energy is lithium-ion battery.

Today's hybrid electrical vehicles (HEVs), for example, use rechargeable batteries with gasoline-powered engines to provide power to a vehicle. This system uses the battery as a power buffer to support the engine in order to achieve greater gas mileage. While using a battery in an HEV by itself, the battery is subjected to changes in the amount of power it generates and receives from the load. Since most rechargeable batteries have low-power densities, their life spans are reduced by constant erratic oscillation in demand. A solution to this problem can be dual battery system or two batteries system or combined system with electric double layer capacitor. By using additional energy storage systems, battery performance improvement can be achieved.

The hybrid lithium-ion battery system can supplement the traditional 12V electrical network with a 48V electrical system and components, bridging the gap between low-end hybridization based on present-day 12V start-stop systems. Many hybrids sold will be expected microhybrids, those using start-stop and brake regeneration technologies that operate either with the existing 12V vehicle electric system or with a combined 12V and 48V dual battery/dual voltage electric system. These relatively inexpensive start-stops can provide limited hybrid power assist on launching and also for energy regeneration during braking.

The purpose of this document is the description of such a voltage class A electric system.





# Electrically propelled vehicles — Test specifications for lithium-ion battery systems combined with lead acid battery or capacitor

## 1 Scope

This document specifies the lithium-ion battery systems combined with lead acid battery or electric double layer capacitor to be used for automotive applications in voltage class A systems. document applies only to combinations of such electric energy storages that are integrated in a common housing.

It specifies configurations, test procedures, and requirements for such combinations.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

There are no normative references in this document.

## 3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO/TR 8713 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

— IEC Electropedia: available at <http://www.electropedia.org/>

— ISO Online browsing platform: available at <http://www.iso.org/obp>

### 3.1

#### **assistance battery**

battery that temporarily supports the main battery

### 3.2

#### **assistance capacitor**

electric double layer capacitor energy storage system that temporarily supports the role of the main battery

### 3.3

#### **battery**

one or more cells fitted with devices necessary for use, for example, case, terminals, marking and protective devices

### 3.4

#### **battery control unit**

#### **BCU**

electronic device that controls or manages or measures or calculates electric and thermal functions of the battery system and that provides communication between the battery system and other vehicle controllers

**3.5**  
**capacity**  
**C**

total number of ampere-hours that can be withdrawn from a fully charged battery under specified conditions of main battery

**3.6**  
**customer**

party which is interested to use the battery pack or system and therefore order or perform the test

**3.7**  
**device under test**  
**DUT**

lithium-ion battery pack or system combined with lead acid battery and capacitor

**3.8**  
**electric double layer capacitor**  
**EDLC**

device for electrostatic storage of electrical energy achieved by separation of charge in a double layer

**3.9**  
**electric double layer capacitor energy storage system**

energy storage devices that include capacitors or capacitor assemblies or capacitor packs as well as electrical circuits and electronics

**3.10**  
**lithium-ion cell**

secondary single cell whose electrical energy is derived from the insertion/extraction reactions of lithium ions between the anode and the cathode

Note 1 to entry: The secondary cell is a basic manufactured unit providing a source of electrical energy by direct conversion of chemical energy. The cell consists of electrodes, separators, electrolyte, container and terminals, and is designed to be charged electrically.

Note 2 to entry: In this document, cell or secondary cell means the secondary lithium-ion cell to be used for the propulsion of electric road vehicles.

**3.11**  
**lithium-ion battery pack**  
**battery pack**

energy storage device that includes cells or cell assemblies normally connected with cell electronics and overcurrent shut-off device including electrical interconnections and interfaces for external systems

Note 1 to entry: Examples for interfaces are cooling, high voltage, auxiliary low voltage and communication.

**3.12**  
**lithium-ion battery system**  
**battery system**

energy storage device that includes cells or cell assemblies or battery pack(s) as well as electrical circuits and electronics

EXAMPLE BCU, contactors.

**3.13**  
**main battery**

lithium-ion battery pack or system that mainly supplies electrical energy continuously

**3.14**  
**room temperature**  
**RT**

temperature of  $(25 \pm 2)$  °C

### 3.15

#### micro-cycle

charge and discharge cycle within 60 s

## 4 Abbreviated terms


LICA Lithium-ion battery pack or system combined with electric double layer capacitor

LIPB Lithium-ion battery pack or system combined with lead acid battery

## 5 Type of connection with lithium-ion battery system

### 5.1 Lithium-ion battery pack or system combined with lead acid battery (LIPB)

The lithium-ion battery pack or system combined with lead acid battery (LIPB) is composed of the lithium-ion battery pack or system as main battery and the lead acid battery as assistance battery. The main battery and the assistance battery are connected by mechanical and electrical connecting bars as shown in [Figure 1](#). See also [Annex A](#) including [Figures A.2, A.3, and A.4](#) for more detailed information.

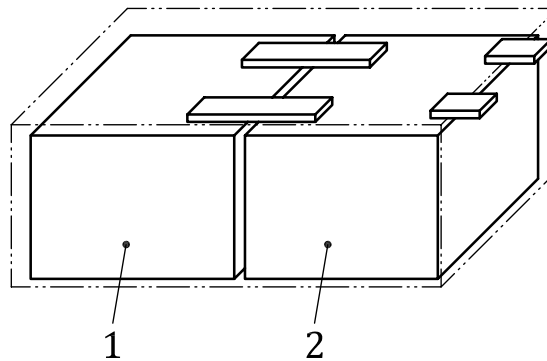

#### Key


- 1 main battery (lithium-ion battery system)
- 2 assistance battery (lead acid battery)

NOTE There are several connection methods possible; the display in this Figure is only schematically.

**Figure 1 — Type of configuration of LIPB**

### 5.2 Lithium-ion battery pack or system combined with electric double layer capacitor energy storage system (LICA)

The lithium-ion battery pack or system combined with electric double layer capacitor energy storage system (LICA) is composed of the lithium-ion battery pack or system as main battery and the electric double layer capacitor energy storage system as assistance capacitor. The main battery and the assistance capacitor are connected by mechanical and electrical connecting bars as shown in [Figure 2](#). See also [Annex A](#) for more information.

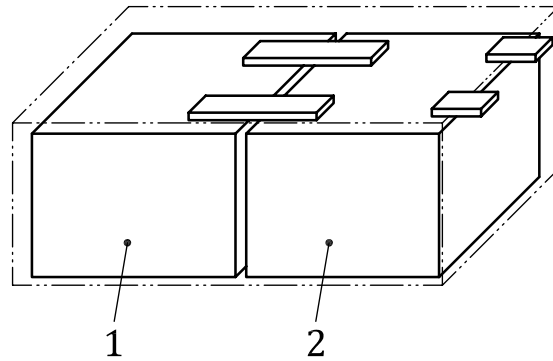

**Key**

- 1 main battery (lithium-ion battery system)
- 2 assistance battery (assistance capacitor)

NOTE There are several connection methods possible; the display in this Figure is only schematically.

**Figure 2 — Type of configuration of LICA**

## 6 General requirements

DUT shall fulfil the following requirements:

- Necessary documentation for operation and needed interface parts for connection to the test equipment (i.e. connectors, plugs including cooling) shall be delivered together with the DUT.

DUT shall enable the specified tests, i.e. via specified test modes implemented in the BCU and shall be able to communicate with the test bench via common communication buses.

If not otherwise specified, before each test, the DUT shall be stabilized at the test temperature for a minimum of 12 h and the BCU, if any, shall be switched off. This period may be reduced if the thermal stabilization of the DUT is reached. Thermal stabilization is fulfilled when after a period of 1 h, the temperature difference among all available cell temperature measuring points is within 4 K.

If not otherwise specified, each charge and each SOC change shall be followed by a rest period of 30 min.

The accuracy of external measurement equipment shall be at least within the following tolerances:

- voltage  $\pm 0,5$  %;
- current  $\pm 0,5$  %;
- temperature  $\pm 1$  K.

The overall accuracy of externally controlled or measured values, relative to the specified or actual values, shall be at least within the following tolerances:

- voltage  $\pm 1$  %;
- current  $\pm 1$  %;
- temperature  $\pm 2$  K;
- time  $\pm 0,1$  %;
- mass  $\pm 0,1$  %;
- dimensions  $\pm 0,1$  %.

All values (time, temperature, current and voltage) shall be noted at least every 5 % of the estimated discharge and charge time, except if it is noted otherwise in the individual test procedure.

## 7 Test for LIPB

### 7.1 Pre-conditioning

#### 7.1.1 Purpose

The DUT shall be conditioned by performing charge and discharge three times, before starting the real testing sequence, in order to ensure an adequate stabilization of the complete system. The pre-conditioning cycles shall be defined by the manufacturer.

#### 7.1.2 Procedure

##### 7.1.2.1 General

The standard cycle (SC) shall be performed at RT. The SC shall comprise a standard discharge, in [7.1.2.2](#), followed by a charge (see [7.1.2.3](#)). If, for any reason, the time interval between the end of the SC and the start of a new test is longer than 3 h, the SC shall be repeated.

##### 7.1.2.2 Standard discharge

- The device energy capability of the DUT is given in watt-hours at a constant power discharge rate as agreed between supplier and customer.
- Discharge is terminated at a discharge voltage limit as specified by the manufacturer.

##### 7.1.2.3 Standard charge

Charge procedure and end-of-charge criteria:

- According to the specifications given by the supplier, the specifications shall cover end-of-charge criteria and time limits for the overall charging procedure.
- Rest period after charge to reach the stable condition is 30 min.

### 7.2 Rated capacity

#### 7.2.1 Purpose

This test is intended to measure the capacity expressed in Ah of system. The rated capacity shall be the 1 h capacity at a temperature of 25 °C declared by the manufacturer.

#### 7.2.2 Procedure

The test shall be performed at RT.

Discharge phase:

- Constant current with the following discharge rate: 1C and 1/3C rate as permitted by the supplier (the maximum C rate corresponds with  $I_{\max}$ ).

Charge phase:

- Before starting the charge phase, the DUT shall rest at least for 30 min or shall reach RT.

- The charge phase shall not be started until the temperature of the pack or system is fully equilibrated to the proper charge temperature, or a fixed equilibration time period shall be used to allow for full equilibration of the DUT.

After a discharge phase, the DUT shall rest at least for 30 min or shall reach RT before starting the charge phase. See [Table 1](#).

**Table 1 — Rated capacity test procedure**

Step	Procedure	Ambient temperature
1.1	Discharge at 1C	RT
1.2	Charge	RT
1.3	Standard cycle (SC)	RT
1.4	Discharge at 1/3C	RT
1.5	Charge	RT
2.1	Standard cycle (SC)	RT

The battery conditioning shall be discontinued at the first cycle where the rated capacity is achieved. If the battery fails to meet the rated value within 10 cycles, the testing is discontinued.

### 7.3 Micro-cycle test

#### 7.3.1 Purpose

In electrified vehicle systems, propulsion battery system shall be capable of supplying widely varying current rates. The driving profiles can be simplified to high-rate current for acceleration, low-rate current for constant speed driving and zero current for rest periods.

The objective of this test is to determine the number of micro-cycles of LIPB by using the simplified driving profile.

#### 7.3.2 Micro-cycle without regenerative charging

The micro-cycle without regenerative charging shall be represented by a 60 s repeated three current levels.

- $I_{dh}$  (A) high-rate current discharging pulse
- $I_{dl}$  (A) low-rate charging pulse
- $I_0$  (A) zero current

NOTE The discharge current of high rate or low rate is agreed between supplier and customer.

##### 7.3.2.1 Procedure

The procedure shall be the following.


- The test shall be performed at RT.
- The energy capability of the DUT is given in watt-hours at a constant power discharge rate as agreed between supplier and customer.
- Discharge is terminated at a discharge voltage limit as specified by the manufacturer.

See [Table 2](#).

**Table 2 — Micro-cycle without regenerative charging test procedure**

Step	Procedure	Time s	Accumulated time s	Current (A)	Ambient temperature
1.1	Thermal equilibrium				RT
1.2	Discharge	10 s	10	$I_{dh}$	RT
1.3	Discharge	20 s	30	$I_{dl}$	RT
1.4	Rest	30 s	60	$I_0$	RT
2.1	Discharge	10 s	70	$I_{dh}$	RT
2.2	Discharge	20 s	90	$I_{dl}$	RT
2.3	Rest	30 s	120	$I_0$	RT

The micro-cycle procedure shall be determined by three subsequent micro-cycles (see [Figure 3](#)) repeated after 60 s.

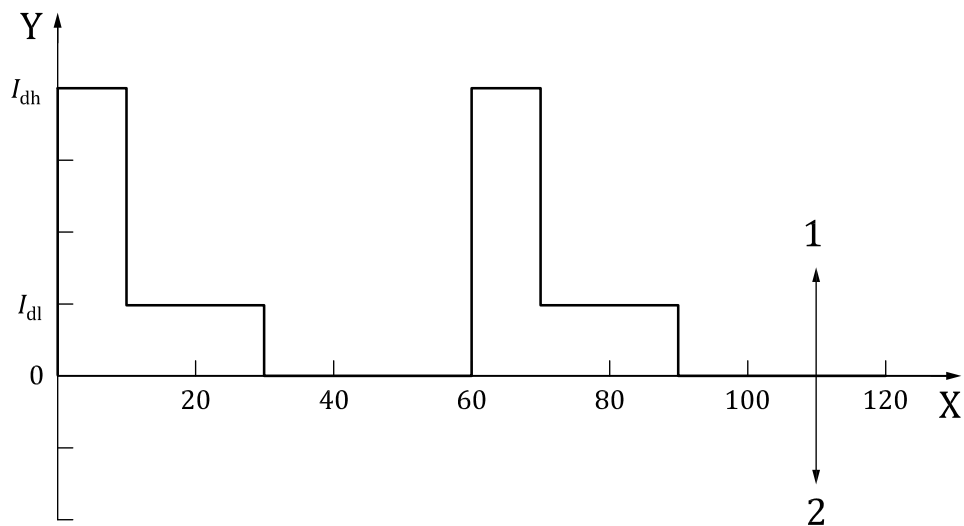

**Key**

- 1 discharge
- 2 charge
- Y current (A)
- X time (s)

**Figure 3 — Test profile without regenerative charging**

**7.3.3 Micro-cycle with regenerative charging**

The micro-cycle with regenerative charging shall be represented by a 65 s repeated four current levels.

- $I_{dh}$  (A) discharge
- $I_{dl}$  (A) discharge
- $I_{rc}$  (A) recharge
- $I_0$  (A) zero current

NOTE The discharge current of high rate or low rate is agreed between supplier and customer.

7.3.3.1 Procedure


The procedure shall be the following.

- The test shall be performed at RT.
- The energy capability of the DUT is given in watt-hours at a constant power discharge rate as agreed between supplier and customer.
- Discharge is terminated at a discharge voltage limit as specified by the manufacturer.

See [Table 3](#) and [Figure 4](#).

**Table 3 — Micro-cycle with regenerative charging test procedure**

Step	Procedure	Time s	Accumulated time s	Current (A)	Ambient temperature
1.1	Thermal equilibrium				RT
1.2	Discharge	10 s	10	$I_{dh}$	RT
1.3	Discharge	20 s	30	$I_{dl}$	RT
1.4	Recharge	5 s	35	$I_{rc}$	RT
1.5	Rest	30 s	65	$I_0$	RT
2.1	Discharge	10 s	75	$I_{dh}$	RT
2.2	Discharge	20 s	95	$I_{dl}$	RT
2.3	Recharge	5 s	100	$I_{rc}$	RT
2.4	Rest	30 s	130	$I_0$	RT

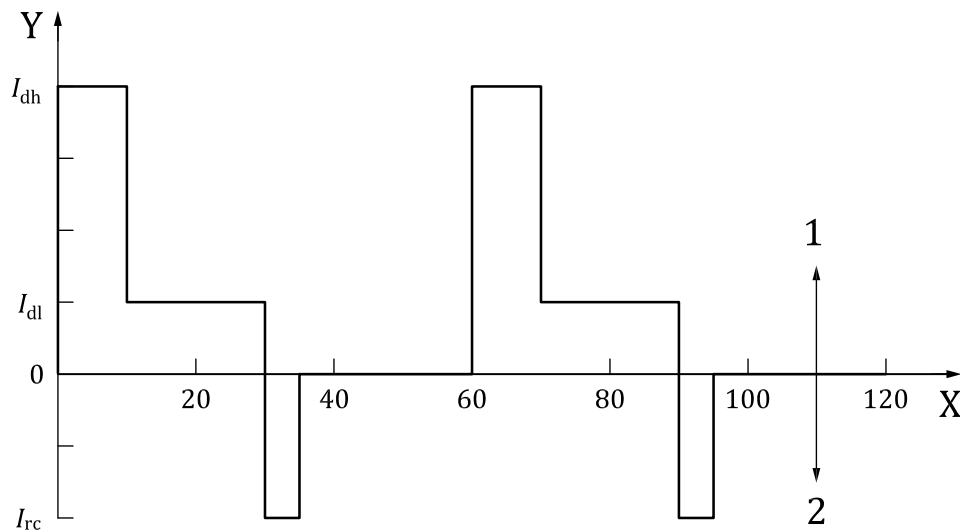

**Key**

- 1 discharge
- 2 charge
- Y current (A)
- X time (s)

**Figure 4 — Test profile with regenerative charging**



## 7.4 Cycle life test

### 7.4.1 Purpose

The cycle life test shall be performed to determine the charge and discharge life of LIPB.

### 7.4.2 Procedure

- The test shall be performed at RT.
- After a discharge phase, the DUT shall rest at least for 30 min or shall reach RT before starting the charge phase.
- The cycle life test shall be terminated when the energy delivered falls to below 80 % of the reference energy content.

See [Table 4](#).

**Table 4 — Cycle life test procedure**

Step	Procedure	Ambient temperature
1.1	Thermal equilibrium	RT
1.2	Charge	RT
1.3	Standard cycle (SC)	RT
1.4	Discharge at 1C	RT
2.1	Charge	RT
2.2	Standard cycle (SC)	RT
2.3	Discharge at 1C	RT

### 7.4.3 Requirement

The number of reference test cycles shall be recorded and declared as the battery life.

## 8 Tests for LICA

### 8.1 Pre-conditioning

#### 8.1.1 Purpose

The DUT shall be conditioned by performing charge and discharge three times, before starting the real testing sequence, in order to ensure an adequate stabilization of the complete system. The pre-conditioning cycles shall be defined by the manufacturer.

#### 8.1.2 Procedure

##### 8.1.2.1 General

The standard cycle (SC) shall be performed at RT. The SC shall comprise a standard discharge, in [8.1.2.2](#), followed by a charge (see [8.1.2.3](#)). If, for any reason, the time interval between the end of the SC and the start of a new test is longer than 3 h, the SC shall be repeated.

##### 8.1.2.2 Standard discharge

- The device energy capability of the DUT is given in watt-hours at a constant power discharge rate as agreed between supplier and customer.

- Discharge is terminated at a discharge voltage limit as specified by the manufacturer.

### 8.1.2.3 Standard charge

- According to the specifications given by the supplier, the specifications shall cover end-of-charge criteria and time limits for the overall charging procedure.
- Rest period after charge to reach the stable condition is 30 min.

## 8.2 Micro-cycle with regenerative test

### 8.2.1 Purpose

In electrified vehicle systems, propulsion battery system shall be capable of supplying widely varying current rates. The driving profiles can be simplified to high-rate current for acceleration, low-rate current for constant speed driving and zero current for rest period.

The objective of this test is to determine the number of micro-cycles of LICA by using the simplified driving profile.

### 8.2.2 Procedure

The procedure shall be the following.

- The test shall be performed at RT.
- The energy capability of the DUT is given in watt-hours at a constant power discharge rate as agreed between supplier and customer.
- Discharge is terminated at a discharge voltage limit as specified by the manufacturer.

The micro-cycle with regenerative charging shall be represented by 65 s repeated four current levels.

- $I_{dh}$  (A) discharge
- $I_{dl}$  (A) discharge
- $I_{rc}$  (A) recharge
- $I_0$  (A) zero current

NOTE The discharge current of high rate or low rate is agreed between supplier and customer.

## 8.3 Cold cranking power

### 8.3.1 Purpose

The cold cranking power test is intended to measure power capability at low temperature. The aim is to generate a data basis for time-dependent power output at low temperatures.

### 8.3.2 Procedure

This test for cranking power at  $-18\text{ °C}$  shall be performed at the permitted SOC level as specified by the supplier according to the test sequence in [Table 5](#).

**Table 5 — Test sequence cold cranking power at –18 °C**

Step	Procedure	Ambient temperature
1.1	Thermal equilibrium	RT
1.2	Standard charge	RT
1.3	Standard cycle	RT
1.4	Discharge the fully charged DUT at a 1C discharge rate to 20 % SOC or the minimum SOC specified by the supplier	–18 °C
1.5	Thermal equilibrium	–18 °C
1.6	Set constant voltage of the bench to the lowest permitted system discharge voltage level according to the supplier recommendation for 2 s and monitor the power versus time profile. The maximum current shall not exceed the supplier specification.	–18 °C
1.7	Rest period with open circuit for 10 s	–18 °C
1.8	Repeat step 1.6 to 1.7 twice	–18 °C
1.9	Thermal equilibrium	RT
1.10	Standard charge	RT

The sampling rate for test data during the test shall be ≤50 ms. If agreed between supplier and customer, the test for cranking power shall also be performed at –30 °C at the lowest SOC level permitted as specified by the supplier according to the test sequence in [Table 6](#).

**Table 6 — Test sequence cold cranking power at –30 °C**

Step	Procedure	Ambient temperature
1.1	Thermal equilibrium	RT
1.2	Standard charge	RT
1.3	Standard cycle	RT
1.4	Discharge the fully charged DUT rate at a 1C discharge rate to 20 % SOC or the lowest SOC level allowable as specified by the supplier (minimum state of charge)	–30 °C
1.5	Thermal equilibration	–30 °C
1.6	Set constant voltage of the bench to the lowest permitted system discharge voltage level according to the supplier recommendation for 2 s and monitor the power versus time profile. The maximum current shall not exceed the supplier specification.	–30 °C
1.7	Rest period with open circuit for 10 s	–30 °C
1.8	Repeat step 1.6 to 1.7 twice	–30 °C
1.9	Thermal equilibrium	RT
1.10	Standard charge	RT

### 8.3.3 Requirement

The test result shall be delivered as graphic present of power versus time profiles including current, voltage and temperature values.

## Annex A (informative)


### LICA and LIPB

#### A.1 General

This Annex provides information on the configuration of lithium-ion battery system combined with lead acid battery (LIPB) or electric double layer capacitor (LICA).

#### A.2 Lithium-ion battery system combined with electric double layer capacitor


In [Figure A.1](#), the electric double layer capacitors model connects via a half-bridge converter (e.g. buck-boost stage consisting of line reactor and a phase leg module) to the lithium-ion cell model. [Figure A.2](#) shows the active parallel combination case and the capacitor pack/system connected via a half-bridge converter (e.g. buck-boost stage consisting of line reactor  $L_{bb}$  and a phase leg module) to the lithium-ion battery system.

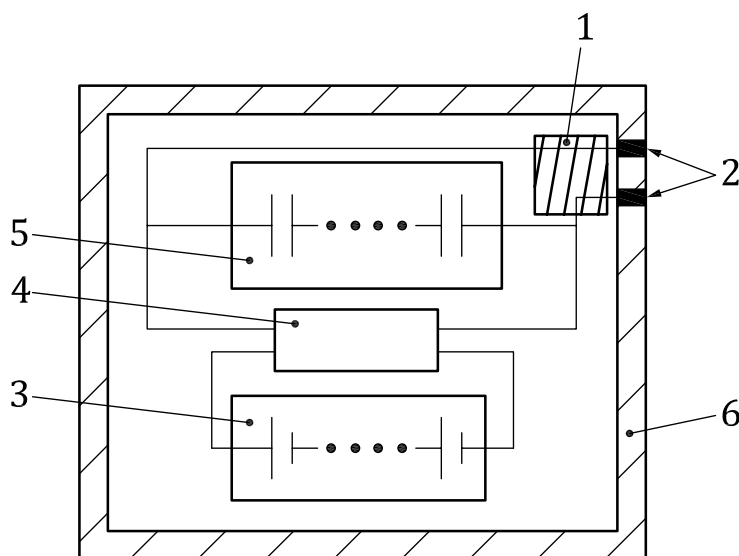

#### Key

- 1 electric circuit (fuse, wiring)
- 2 connections
- 3 lithium-ion battery
- 4 converter
- 5 electric double layer capacitor storage systems
- 6 case


Figure A.1 — Example of parallel connection of lithium-ion battery and capacitor

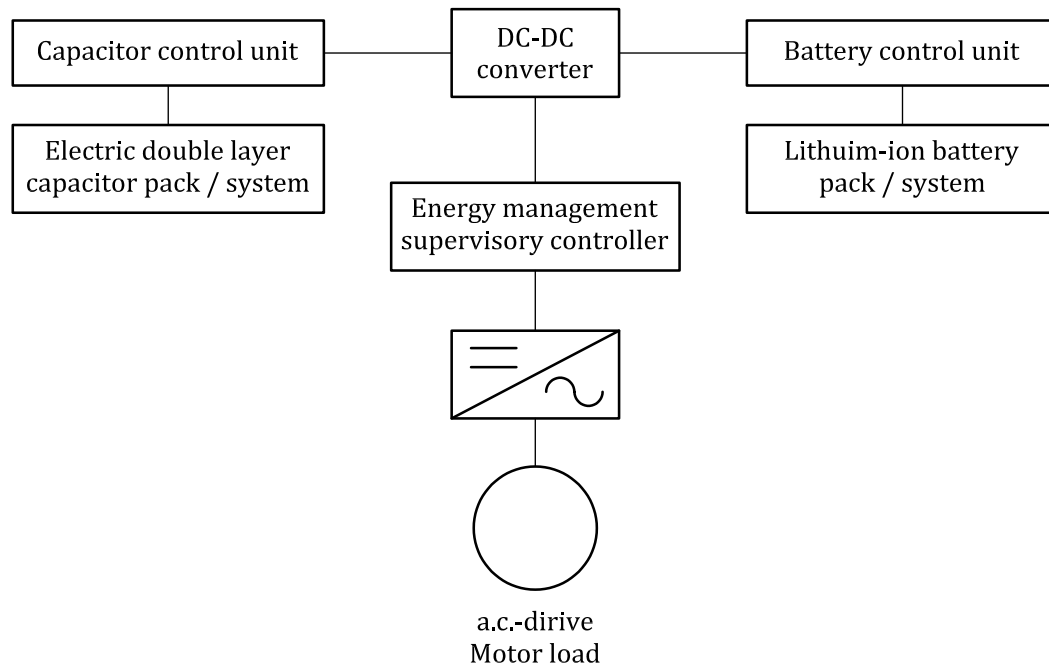

**Figure A.2 — Power electronic interface for an electric double layer capacitor as the power buffer in a hybrid electric energy storage system**

### **A.3 Lithium-ion battery system combined with lead acid battery**


Examples of LIPB are shown in [Figure A.3](#) and [Figure A.4](#). LIPB as shown in [Figure A.4](#) supplements the traditional 12V electrical network with a 48V electrical system and components.

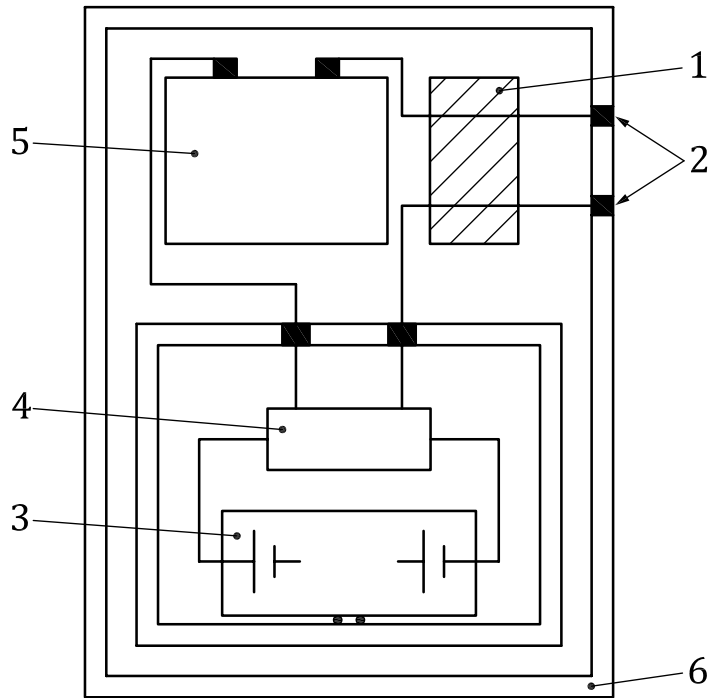

**Key**

- 1 electric circuits (fuse, wiring)
- 2 connections
- 3 lithium-ion battery
- 4 battery control unit
- 5 lead acid battery
- 6 case

**Figure A.3 — Example of parallel connection of lithium-ion battery and lead acid battery**

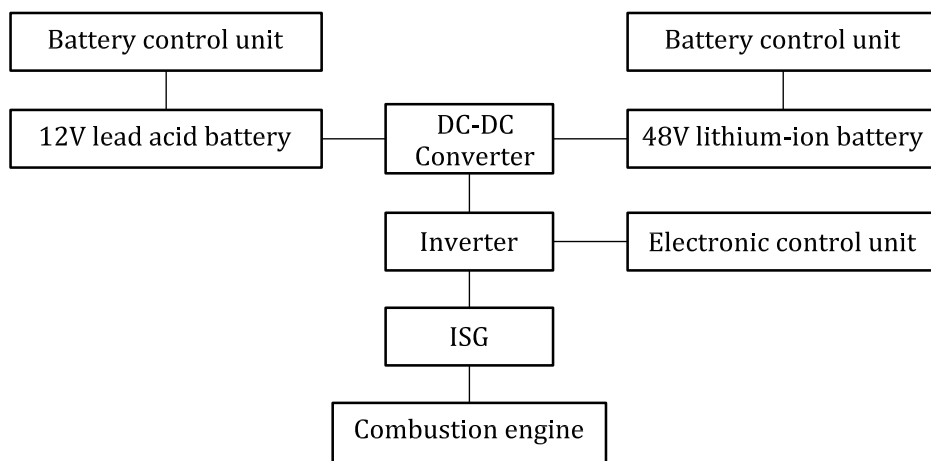

**Figure A.4 — 48V drive system**

## Bibliography

- [1] ISO 6469-1, *Electrically propelled road vehicles — Safety specifications — Part 1: On-board rechargeable energy storage system (RESS)*
- [2] ISO 6469-3, *Electrically propelled road vehicles — Safety specifications — Part 3: Protection of persons against electric shock*
- [3] ISO 12405-1, *Electrically propelled road vehicles — Test specification for lithium-ion traction battery packs and systems — Part 1: High-power applications*
- [4] ISO 12405-2, *Electrically propelled road vehicles — Test specification for lithium-ion traction battery packs and systems — Part 2: High-energy applications*
- [5] IEC 61982, *Secondary batteries (except lithium) for the propulsion of electric road vehicles — Performance and endurance tests*
- [6] IEC 62660-1, *Secondary lithium-ion cells for the propulsion of electric road vehicles — Part 1: Performance testing*
- [7] IEC 62660-2, *Secondary lithium-ion cells for the propulsion of electric road vehicles — Part 2: Reliability and abuse testing*
- [8] FreedomCar, Battery Test Manual for Power-Assist Hybrid Electric Vehicles, October 2003
- [9] FreedomCar, 42V Battery Test Manual, April 2003
- [10] FreedomCar, Ultracapacitor Test Manual
- [11] U.S Department of Energy Vehicle Technology Program, Battery Technology Life Verification Test Manual
- [12] White paper of Maxwell Technology, Power electronic interface for an ultracapacitor as the power buffer in a hybrid electric energy storage system
- [13] ISO/TR 8713, *Electrically propelled road vehicles — Vocabulary*







# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

## Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

## Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com).

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Useful Contacts

### Customer Services

**Tel:** +44 345 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 345 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)

### BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK