

BS ISO 18427:2013



BSI Standards Publication

Space data and information transfer systems — Spacecraft Onboard Interface Services — Subnetwork Synchronization Service

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

raising standards worldwide™



National foreword

This British Standard is the UK implementation of ISO 18427:2013.

The UK participation in its preparation was entrusted to Technical Committee ACE/68/-/7, Space systems and operations - Space data and information transfer systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2013. Published by BSI Standards Limited 2013

ISBN 978 0 580 80292 8

ICS 49.140

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 June 2013.

Amendments issued since publication

Date	Text affected
------	---------------

**Space data and information transfer
systems — Spacecraft Onboard Interface
Services — Subnetwork Synchronization
Service**

*Systèmes de transfert des informations et données spatiales —
Services d'interfaces à bord des véhicules spatiaux — Service de
synchronisation par sous-réseau*





COPYRIGHT PROTECTED DOCUMENT

© ISO 2013

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2. www.iso.org/directives

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received. www.iso.org/patents

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

ISO 18427 was prepared by the Consultative Committee for Space Data Systems (CCSDS) (as CCSDS 853.0-M-1, December 2009) and was adopted (without modifications except those stated in Clause 2 of this International Standard) by Technical Committee ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 13, *Space data and information transfer systems*.

Space data and information transfer systems — Spacecraft Onboard Interface Services — Subnetwork Synchronization Service

1 Scope

This International Standard is one of a family of documents specifying the SOIS-compliant services to be provided by onboard subnetworks.

The purpose of this International Standard is to define services and service interfaces provided by the SOIS Subnetwork Synchronisation Service. Its scope is to specify the service only and not to specify methods of providing the service over a variety of onboard data links.

This International Standard conforms to the principles set out in the Spacecraft Onboard Interface Services Green Book and is intended to be applied together with it. The protocols which provide this service are to be documented for individual links, and this can be in the purview of individual missions, agencies, or CCSDS, depending on future circumstances.

The scope and field of application are furthermore detailed in subclause 1.2 of the enclosed CCSDS publication.

2 Requirements

Requirements are the technical recommendations made in the following publication (reproduced on the following pages), which is adopted as an International Standard:

CCSDS 853.0-M-1, December 2009, Spacecraft Onboard Interface Services — Subnetwork Synchronization Service.

For the purposes of international standardization, the modifications outlined below shall apply to the specific clauses and paragraphs of publication CCSDS 853.0-M-1.

Pages i to v

This part is information which is relevant to the CCSDS publication only.

3 Revision of publication CCSDS 853.0-M-1

It has been agreed with the Consultative Committee for Space Data Systems that Subcommittee ISO/TC 20/SC 13 will be consulted in the event of any revision or amendment of publication CCSDS 853.0-M-1. To this end, NASA will act as a liaison body between CCSDS and ISO.

(Blank page)

Recommendation for Space Data System Practices

**SPACECRAFT ONBOARD
INTERFACE SERVICES—
SUBNETWORK
SYNCHRONISATION SERVICE**

RECOMMENDED PRACTICE

CCSDS 853.0-M-1

MAGENTA BOOK

December 2009

AUTHORITY

Issue:	Recommended Practice, Issue 1
Date:	December 2009
Location:	Washington, DC, USA

This document has been approved for publication by the Management Council of the Consultative Committee for Space Data Systems (CCSDS) and represents the consensus technical agreement of the participating CCSDS Member Agencies. The procedure for review and authorization of CCSDS documents is detailed in the *Procedures Manual for the Consultative Committee for Space Data Systems*, and the record of Agency participation in the authorization of this document can be obtained from the CCSDS Secretariat at the address below.

This document is published and maintained by:

CCSDS Secretariat
Space Communications and Navigation Office, 7L70
Space Operations Mission Directorate
NASA Headquarters
Washington, DC 20546-0001, USA

STATEMENT OF INTENT

The Consultative Committee for Space Data Systems (CCSDS) is an organization officially established by the management of its members. The Committee meets periodically to address data systems problems that are common to all participants, and to formulate sound technical solutions to these problems. Inasmuch as participation in the CCSDS is completely voluntary, the results of Committee actions are termed **Recommendations** and are not in themselves considered binding on any Agency.

CCSDS Recommendations take two forms: **Recommended Standards** that are prescriptive and are the formal vehicles by which CCSDS Agencies create the standards that specify how elements of their space mission support infrastructure shall operate and interoperate with others; and **Recommended Practices** that are more descriptive in nature and are intended to provide general guidance about how to approach a particular problem associated with space mission support. This **Recommended Practice** is issued by, and represents the consensus of, the CCSDS members. Endorsement of this **Recommended Practice** is entirely voluntary and does not imply a commitment by any Agency or organization to implement its recommendations in a prescriptive sense.

No later than five years from its date of issuance, this **Recommended Practice** will be reviewed by the CCSDS to determine whether it should: (1) remain in effect without change; (2) be changed to reflect the impact of new technologies, new requirements, or new directions; or (3) be retired or cancelled.

In those instances when a new version of a **Recommended Practice** is issued, existing CCSDS-related member Practices and implementations are not negated or deemed to be non-CCSDS compatible. It is the responsibility of each member to determine when such Practices or implementations are to be modified. Each member is, however, strongly encouraged to direct planning for its new Practices and implementations towards the later version of the Recommended Practice.

FOREWORD

This document is a technical **Recommended Practice** for use in developing flight and ground systems for space missions and has been prepared by the **Consultative Committee for Space Data Systems** (CCSDS). The *Subnetwork Synchronisation Service* described herein is intended for missions that are cross-supported between Agencies of the CCSDS, in the framework of the Spacecraft Onboard Interface Services (SOIS) CCSDS area.

This **Recommended Practice** specifies a service to be used by space missions to synchronise subnetwork users to subnetwork-maintained time or asynchronous subnetwork events. The SOIS Synchronisation Service is provided by data link-specific mechanisms within the subnetwork layers. The service interface is present only in the data system invoking the service. The SOIS Subnetwork Synchronisation Service provides a common service interface regardless of the particular type of data link being used for communication.

Through the process of normal evolution, it is expected that expansion, deletion, or modification of this document may occur. This Recommended Practice is therefore subject to CCSDS document management and change control procedures, which are defined in the *Procedures Manual for the Consultative Committee for Space Data Systems*. Current versions of CCSDS documents are maintained at the CCSDS Web site:

<http://www.ccsds.org/>

Questions relating to the contents or status of this document should be addressed to the CCSDS Secretariat at the address indicated on page i.

At time of publication, the active Member and Observer Agencies of the CCSDS were:

Member Agencies

- Agenzia Spaziale Italiana (ASI)/Italy.
- British National Space Centre (BNSC)/United Kingdom.
- Canadian Space Agency (CSA)/Canada.
- Centre National d'Etudes Spatiales (CNES)/France.
- China National Space Administration (CNSA)/People's Republic of China.
- Deutsches Zentrum für Luft- und Raumfahrt e.V. (DLR)/Germany.
- European Space Agency (ESA)/Europe.
- Russian Federal Space Agency (RFSA)/Russian Federation.
- Instituto Nacional de Pesquisas Espaciais (INPE)/Brazil.
- Japan Aerospace Exploration Agency (JAXA)/Japan.
- National Aeronautics and Space Administration (NASA)/USA.

Observer Agencies

- Austrian Space Agency (ASA)/Austria.
- Belgian Federal Science Policy Office (BFSPPO)/Belgium.
- Central Research Institute of Machine Building (TsNIIMash)/Russian Federation.
- Centro Tecnico Aeroespacial (CTA)/Brazil.
- Chinese Academy of Sciences (CAS)/China.
- Chinese Academy of Space Technology (CAST)/China.
- Commonwealth Scientific and Industrial Research Organization (CSIRO)/Australia.
- CSIR Satellite Applications Centre (CSIR)/Republic of South Africa.
- Danish National Space Center (DNSC)/Denmark.
- European Organization for the Exploitation of Meteorological Satellites (EUMETSAT)/Europe.
- European Telecommunications Satellite Organization (EUTELSAT)/Europe.
- Geo-Informatics and Space Technology Development Agency (GISTDA)/Thailand.
- Hellenic National Space Committee (HNSC)/Greece.
- Indian Space Research Organization (ISRO)/India.
- Institute of Space Research (IKI)/Russian Federation.
- KFKI Research Institute for Particle & Nuclear Physics (KFKI)/Hungary.
- Korea Aerospace Research Institute (KARI)/Korea.
- Ministry of Communications (MOC)/Israel.
- National Institute of Information and Communications Technology (NICT)/Japan.
- National Oceanic and Atmospheric Administration (NOAA)/USA.
- National Space Organization (NSPO)/Chinese Taipei.
- Naval Center for Space Technology (NCST)/USA.
- Scientific and Technological Research Council of Turkey (TUBITAK)/Turkey.
- Space and Upper Atmosphere Research Commission (SUPARCO)/Pakistan.
- Swedish Space Corporation (SSC)/Sweden.
- United States Geological Survey (USGS)/USA.

DOCUMENT CONTROL

Document	Title	Date	Status
CCSDS 853.0-M-1	Spacecraft Onboard Interface Services—Subnetwork Synchronisation Service, Recommended Practice, Issue 1	December 2009	Original issue

CONTENTS

<u>Section</u>	<u>Page</u>
1 INTRODUCTION.....	1-1
1.1 PURPOSE AND SCOPE OF THIS DOCUMENT	1-1
1.2 APPLICABILITY	1-1
1.3 RATIONALE.....	1-1
1.4 DOCUMENT STRUCTURE	1-1
1.5 CONVENTIONS AND DEFINITIONS.....	1-2
1.6 DOCUMENT NOMENCLATURE.....	1-4
1.7 REFERENCES	1-4
2 OVERVIEW	2-1
2.1 FUNCTION	2-1
2.2 CONTEXT.....	2-1
2.3 ASSUMPTIONS.....	2-2
2.4 QUALITY OF SERVICE.....	2-2
2.5 SECURITY	2-2
3 SUBNETWORK SYNCHRONISATION SERVICE.....	3-1
3.1 SERVICE PARAMETERS	3-1
3.2 SYNCHRONISATION SERVICE PRIMITIVES	3-1
4 MANAGEMENT INFORMATION BASE	4-1
4.1 OVERVIEW	4-1
4.2 SPECIFICATIONS.....	4-1
5 SERVICE CONFORMANCE STATEMENT PROFORMA.....	5-1
ANNEX A INFORMATIVE REFERENCES	A-1

Figure

1-1 Bit Numbering Convention.....	1-2
2-1 Subnetwork Synchronisation Service Context	2-1

1 INTRODUCTION

1.1 PURPOSE AND SCOPE OF THIS DOCUMENT

This document is one of a family of documents specifying the SOIS-compliant services to be provided by onboard subnetworks.

The purpose of this document is to define services and service interfaces provided by the SOIS Subnetwork Synchronisation Service. Its scope is to specify the service only and not to specify methods of providing the service over a variety of onboard data links.

This document conforms to the principles set out in the Spacecraft Onboard Interface Services Green Book (reference [A1]) and is intended to be applied together with it. The protocols which provide this service are to be documented for individual links, and this can be in the purview of individual missions, agencies, or CCSDS, depending on future circumstance.

1.2 APPLICABILITY

This document applies to any mission or equipment claiming to provide a CCSDS SOIS-compliant Subnetwork Synchronisation Service.

1.3 RATIONALE

SOIS provide service interface specifications in order to promote interoperability and development reuse via peer-to-peer and vertical standardisation.

1.4 DOCUMENT STRUCTURE

The document has five major sections:

- this section, containing administrative information, definitions and references;
- section 2, describing general concepts and assumptions;
- section 3, containing the Subnetwork Synchronisation Service specification;
- section 4, containing the Management Information Base (MIB) for the service;
- section 5, comprising a Service Conformance Statement Proforma.

In addition, annex A contains informative references.

1.5 CONVENTIONS AND DEFINITIONS

1.5.1 BIT NUMBERING CONVENTION AND NOMENCLATURE

In this document, the following convention is used to identify each bit in an N -bit field. The first bit in the field to be transmitted (i.e., the most left justified when drawing a figure) is defined to be 'Bit 0'; the following bit is defined to be 'Bit 1' and so on up to 'Bit $N-1$ '. When the field is used to express a binary value (such as a counter), the Most Significant Bit (MSB) shall be the first transmitted bit of the field, i.e., 'Bit 0' (see figure 1-1).

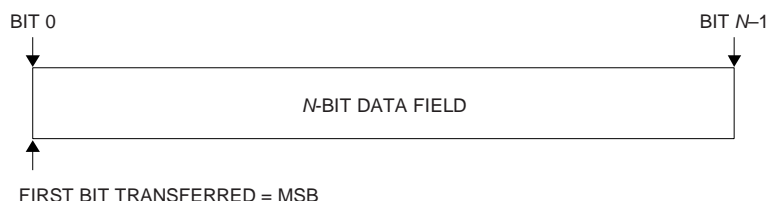


Figure 1-1: Bit Numbering Convention

In accordance with modern data communications practice, spacecraft data fields are often grouped into eight-bit 'words' widely known as bytes. Throughout this Recommended Practice, such an eight-bit word is called an 'octet'.

The numbering for octets within a data structure starts with zero. By CCSDS convention, any 'spare' bits are permanently set to '0'.

1.5.2 DEFINITIONS

1.5.2.1 General

For the purpose of this document the following definitions apply.

1.5.2.2 Definitions from the Open Systems Interconnection (OSI) Basic Reference Model

This document is defined using the style established by the Open Systems Interconnection (OSI) Basic Reference Model (reference [A3]). This model provides a common framework for the development of standards in the field of systems interconnection.

The following terms, used in this Recommended Practice, are adapted from definitions given in reference [A3]:

layer: subdivision of the architecture, constituted by subsystems of the same rank.

protocol data unit (PDU): unit of data specified in a protocol and consisting of Protocol Control Information (PCI) and possibly user data.

protocol ID: identifier which uniquely identifies a SOIS Subnetwork user within a data system.

service: capability of a layer (service provider) together with the layers beneath it, which is provided to the service users.

subnetwork: an abstraction of a collection of equipment and physical media, such as a local area network or a data bus, which forms an autonomous whole and can be used to interconnect real systems for the purpose of data transfer.

synchronisation service access point (SYNCSAP): the point at which SOIS Synchronisation service is provided by a Synchronisation entity to a Synchronisation service user entity.

synchronisation service access point address (SYNCSAP Address): a service address that is used to identify a single SYNCSAP.

1.5.2.3 Terms Defined in this Recommended Practice

For the purposes of this Recommended Practice, the following definitions also apply. Many other terms that pertain to specific items are defined in the appropriate sections.

channel: identifier for subnetwork resources associated with a resource reservation.

NOTE – A channel can be a list of time slots in a time division multiplexed system or a bandwidth limit in a bandwidth division multiplexed system. The subnetwork resources required for the communication can also be defined to allow simultaneous use of non-conflicting resources on subnetworks that support this feature.

data system: addressable entity, situated in a subnet, which hosts an instance of the subnetwork protocols, subnetwork services, and subnetwork users.

NOTE – The subnetwork users are uniquely identifiable in a subnetwork by a combination of data system address and a protocol ID. A data system is typically a computer or a device.

data system address: identifier which uniquely identifies a data system in a subnetwork.

NOTE – The data system address can be referred to as a destination address or a source address depending on the context of its invocation at the subnetwork service interface.

octet: eight-bit word.

NOTE – An eight-bit word is commonly referred to as a byte.

priority: transmit precedence of an SDU relative to other SDUs.

quality of service (QoS): ability of a communication system to provide predictable and differentiated services.

NOTE – Quality of service for a communication service can be characterised in terms of important features relevant to that communications service, for example: reliability, transmission rate, effective bandwidth and latency, error rate.

1.6 DOCUMENT NOMENCLATURE

The following conventions apply throughout this Recommended Practice:

- a) The words ‘shall’ and ‘must’ imply a binding and verifiable specification;
- b) The word ‘should’ implies an optional, but desirable, specification;
- c) The word ‘may’ implies an optional specification;
- d) The words ‘is’, ‘are’, and ‘will’ imply statements of fact.

1.7 REFERENCES

The following documents contain provisions which, through reference in this text, constitute provisions of this Recommended Practice. At the time of publication, the editions indicated were valid. All documents are subject to revision, and users of this Recommended Practice are encouraged to investigate the possibility of applying the most recent editions of the documents indicated below. The CCSDS Secretariat maintains a register of currently valid CCSDS Documents.

None.

NOTE – Informative references are contained in annex A.

2 OVERVIEW

2.1 FUNCTION

The SOIS Subnetwork Synchronisation Service provides a means for a user entity to maintain knowledge of time which is common to all data systems on the subnetwork.

2.2 CONTEXT

The SOIS Subnetwork Layer provides the Synchronisation Service to user applications. The service can be provided over a variety of data links, and the method of such provision is not in the scope of this document.

As shown in figure 2-1, the service is one of a number of services which can be provided by the SOIS Subnetwork.

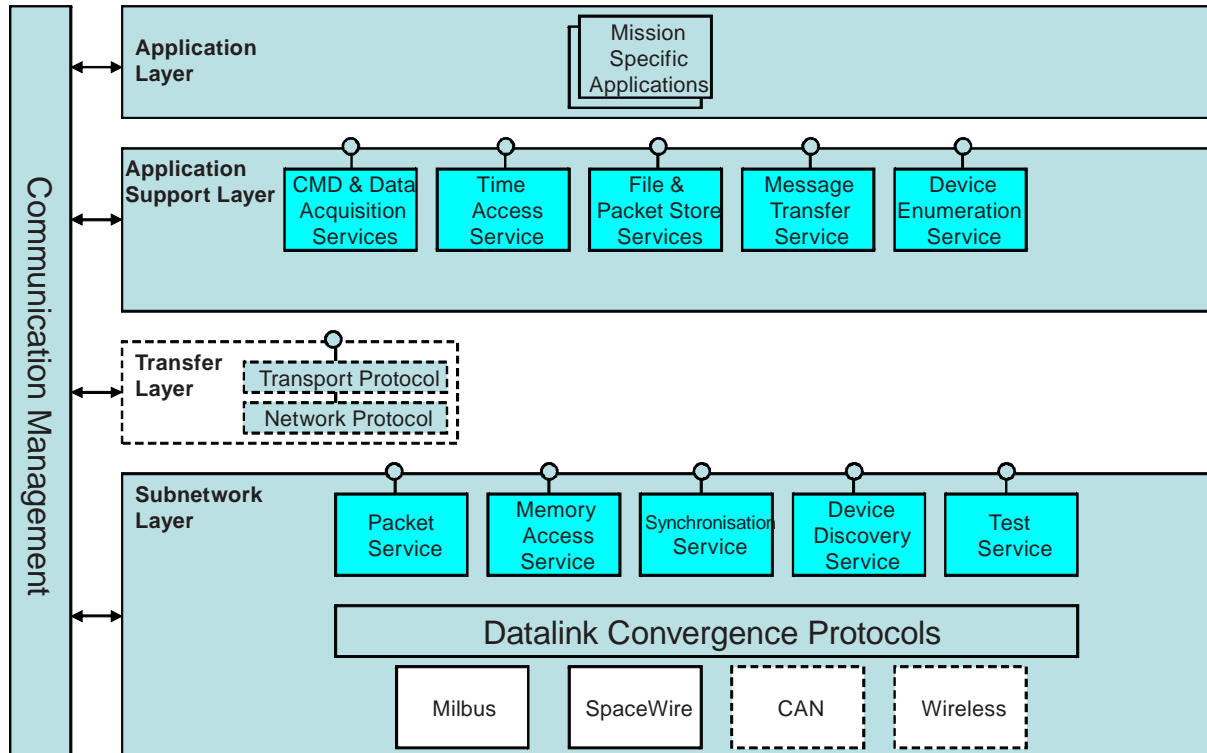


Figure 2-1: Subnetwork Synchronisation Service Context

The Subnetwork Synchronisation Service makes use of the data link to transfer data and control information. A variety of data links can be suited to provision of the service and the strategy for such service provision is outlined in reference [A1].

A Subnetwork Management function is also provided for configuring, managing, and collecting status information from the Subnetwork Synchronisation Services.

2.3 ASSUMPTIONS

The following assumptions have been made in designing the SOIS Subnetwork Synchronisation Service:

- The SOIS Subnetwork Synchronisation Service is provided across single subnetworks.
- The SOIS Subnetwork Synchronisation Service is made available to protocol entities in the Transfer, Application Support, and User Application Layers.

2.4 QUALITY OF SERVICE

The Synchronisation Service operates with a single, Best-effort quality of service. This service makes a single attempt to provide the requested service but cannot ensure that it will be completed successfully.

Channel and Priority parameters are not provided in the Synchronisation Service. Were a subnetwork to provide channelisation or prioritisation to users of other subnetwork services, it would fall to the subnetwork Management Information Base (MIB) to set default channel and priority levels to ensure that the Synchronisation Service adhere to an overall subnetwork prioritisation and resource reservation scheme.

2.5 SECURITY

2.5.1 SECURITY BACKGROUND

The SOIS services are intended for use with protocols that operate solely within the confines of an onboard subnet. It is therefore assumed that SOIS services operate in an isolated environment which is protected from external threats. Any external communication is assumed to be protected by services associated with the relevant space-link protocols. The specification of such security services is outside the scope of this document.

2.5.2 SECURITY CONCERNS

At the time of writing there are no identified security concerns. If confidentiality of data is required within a spacecraft it is assumed it is applied at the Application layer. More information regarding the choice of service and where it can be implemented can be found in reference [A2].

2.5.3 POTENTIAL THREATS AND ATTACK SCENARIOS

Potential threats and attack scenario typically derive from external communication and are therefore not the direct concern of the SOIS services which make the assumption that the services operate within a safe and secure environment. It is assumed that all applications

executing within the spacecraft have been thoroughly tested and cleared for use by the mission implementer. Confidentiality of applications can be provided by Application layer mechanisms or by specific implementation methods such as time and space partitioning. Such methods are outside the scope of SOIS.

2.5.4 CONSEQUENCES OF NOT APPLYING SECURITY

The security services are outside the scope of this document and are expected to be applied at layers above or below those specified in this document. If confidentiality is not implemented, science data or other parameters transmitted within the spacecraft might be visible to other applications resident within the spacecraft, resulting in disclosure of sensitive or private information.

3 SUBNETWORK SYNCHRONISATION SERVICE

3.1 SERVICE PARAMETERS

3.1.1 GENERAL

The Subnetwork Synchronisation Service shall use the parameters specified in 3.1.2 to 3.1.7.

3.1.2 SYNCHRONISATION SERVICE ACCESS POINT (SYNCSAP) ADDRESS

The SYNCSAP Address shall identify the SAP that identifies the user entity that will receive synchronisation data.

3.1.3 TIME

The Time parameter shall provide an estimate of the time at the instance of the TIME.indication primitive.

3.1.4 EVENT ID

The Event ID parameter shall identify the event being notified.

3.1.5 EVENT TIME

The Event Time parameter shall provide an indication of the time at which an event occurred.

3.1.6 EVENT DATA

The Event Data parameter shall carry data pertaining to an event and is unspecified.

3.1.7 START/STOP

The Start/Stop parameter shall indicate commencement or cessation of event notification.

3.2 SYNCHRONISATION SERVICE PRIMITIVES

3.2.1 GENERAL

The SOIS Subnetwork Synchronisation Service shall use the following primitives:

- a) TIME.request (by which time is requested), as specified in 3.2.2;

- b) TIME.indication (by which time is delivered), as specified in 3.2.3;
- c) EVENT.request (by which notification of a subnetwork event is requested), as specified in 3.2.4;
- d) EVENT.indication (by which a subnetwork event is notified), as specified in 3.2.5.

3.2.2 TIME.REQUEST

3.2.2.1 Function

The **TIME.request** primitive shall be used to request the service to retrieve time data from the SOIS Subnetwork Synchronisation Service provider.

3.2.2.2 Semantics

The **TIME.request** primitive shall use the following semantics, with the meaning of the parameter specified in 3.2.2.5:

TIME.request (SYNCSAP Address)

3.2.2.3 When Generated

The **TIME.request** primitive shall be passed to the SOIS Subnetwork Synchronisation Service provider to request that time be retrieved.

3.2.2.4 Effect on Receipt

Receipt of the **TIME.request** primitive shall cause the SOIS Subnetwork Synchronisation Service provider to retrieve the time.

3.2.2.5 Additional Comments

The SYNCSAP Address parameter shall identify the invoking user entity.

3.2.3 TIME.INDICATION

3.2.3.1 Function

The **TIME.indication** shall be used to pass time data to the subnetwork user entity.

3.2.3.2 Semantics

The **TIME.indication** primitive shall use the following semantics, with the meaning of the parameters specified in 3.2.3.5:

TIME.indication (SYNCSAP Address, Time)

3.2.3.3 When Generated

- a) The **TIME.indication** primitive shall be issued by the SOIS Subnetwork Synchronisation Service provider to the subnetwork user entity in response to a **TIME.request**.
- b) The **TIME.indication** primitive may be issued unsolicited.

3.2.3.4 Effect on Receipt

The response of the user entity to a **TIME.indication** primitive is unspecified.

3.2.3.5 Additional Comments

- a) The SYNCSAP Address parameter shall identify the user entity to which time data is delivered.
- b) The Time parameter shall provide the time data.
- c) The **TIME.indication** primitive may be issued unsolicited in, for example, a time broadcast system.

3.2.4 EVENT.REQUEST

3.2.4.1 Function

The **EVENT.request** shall be used by a user entity to request notification or cessation of notification of a subnetwork event.

3.2.4.2 Semantics

The **EVENT.request** primitive shall use the following semantics, with the meaning of the parameters specified in 3.2.4.5:

EVENT.request (SYNCSAP Address, Event ID, Start/Stop)

3.2.4.3 When Generated

The **EVENT.request** primitive shall be passed to the subnetwork service provider in advance of an event to request notification via **EVENT.indication** primitives or cessation of notification of future occurrences of that event.

3.2.4.4 Effect on Receipt

Receipt of the **EVENT.request** primitive shall cause the SOIS Subnetwork Synchronisation Service provider to notify or cease to notify the user entity of the specified event.

3.2.4.5 Additional comments

- a) The SYNCSAP Address parameter shall identify the user entity to which event data is delivered.
- b) The Event ID parameter shall identify the event for which notification is requested.
- c) The Start/Stop parameter shall indicate whether the request is for commencement or cessation of event notifications.

3.2.5 EVENT.INDICATION

3.2.5.1 Function

The **EVENT.indication** shall be used to notify a subnetwork event to the user entity.

3.2.5.2 Semantics

The **EVENT.indication** primitive shall use the following semantics, with the meaning of the parameters specified in 3.2.5.5:

EVENT.indication (SYNCSAPAddress, Event ID, Event Time, Event Data)

3.2.5.3 When Generated

The **EVENT.indication** primitive shall be issued by the SOIS Subnetwork Synchronisation Service provider to the subnetwork user entity in response to a subnetwork event.

NOTE – Therefore, this primitive is issued unsolicited.

3.2.5.4 Effect on Receipt

The response of the user entity to an **EVENT.indication** primitive is unspecified.

3.2.5.5 Additional Comments

- a) The SYNCSAP Address parameter shall identify the user entity to which event data is delivered.
- b) The Event ID parameter shall identify the event that has occurred.
- c) The Event Time parameter shall provide an indication of the time at which an event occurred.
- d) The Event Data parameter shall contain any data associated with the event.

4 MANAGEMENT INFORMATION BASE

4.1 OVERVIEW

There is currently no Management Information Base (MIB) associated with this service. All management items are associated with the protocol providing the service. However, guidance is provided as to MIB contents in 4.3.

4.2 SPECIFICATIONS

Any protocol claiming to provide this service in a SOIS-compliant manner shall publish its MIB as part of the protocol specification.

4.3 MIB GUIDANCE

The MIB of the protocol providing the Synchronisation service should consider the following aspects:

- resource allocation per channel;
- Time semantics;
- Event Time semantics;
- Event ID semantics;
- Event Data semantics;
- managed allocation of Synchronisation PDUs to:
 - priority,
 - channel;
- periodicity or causality of unsolicited TIME.Indication primitives.

NOTE – These aspects are not in any way an indication of the complete contents of a MIB for a protocol providing the Synchronisation service but are offered as guidance as to those aspects of the MIB which may relate to the Synchronisation service interface.

5 SERVICE CONFORMANCE STATEMENT PROFORMA

For any protocol specification claiming to provide this service, this proforma shall be completed, giving details of the capabilities of the specification, and made available to any party evaluating the use of the specification to which the completed proforma refers.

Service Conformance Statement SOIS Subnetwork Synchronisation Service
--

Implementation Information

Protocol Specification Identification	
Version	
Underlying Data Link	

Optional Features

TIME.request primitive	
TIME.indication primitive	
EVENT.request primitive	
EVENT.indication primitive	

Time format and accuracy
Event ids
Event data

ANNEX A

INFORMATIVE REFERENCES

- [A1] *Spacecraft Onboard Interface Services*. Report Concerning Space Data System Standards, CCSDS 850.0-G-1. Green Book. Issue 1. Washington, D.C.: CCSDS, June 2007.
- [A2] *The Application of CCSDS Protocols to Secure Systems*. Report Concerning Space Data System Standards, CCSDS 350.0-G-2. Green Book. Issue 2. Washington, D.C.: CCSDS, January 2006.
- [A3] *Information Technology—Open Systems Interconnection—Basic Reference Model: The Basic Model*. International Standard, ISO/IEC 7498-1:1994. 2nd ed. Geneva: ISO, 1994.

NOTE – Normative references are listed in 1.7.

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards and other standards-related publications, information and services. It presents the UK view on standards in Europe and at the international level.

BSI is incorporated by Royal Charter. British Standards and other standardisation products are published by BSI Standards Limited.

Revisions

British Standards and PASs are periodically updated by amendment or revision. Users of British Standards and PASs should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using British Standards would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Similar for PASs, please notify BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

BSI offers BSI Subscribing Members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of British Standards and PASs.

Tel: +44 (0)20 8996 7669 Fax: +44 (0)20 8996 7001

Email: plus@bsigroup.com

Buying standards

You may buy PDF and hard copy versions of standards directly using a credit card from the BSI Shop on the website www.bsigroup.com/shop. In addition all orders for BSI, international and foreign standards publications can be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001

Email: orders@bsigroup.com

In response to orders for international standards, BSI will supply the British Standard implementation of the relevant international standard, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Knowledge Centre.

Tel: +44 (0)20 8996 7004 Fax: +44 (0)20 8996 7005

Email: knowledgecentre@bsigroup.com

BSI Subscribing Members are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001

Email: membership@bsigroup.com

Information regarding online access to British Standards and PASs via British Standards Online can be found at www.bsigroup.com/BSOL

Further information about British Standards is available on the BSI website at www.bsi-group.com/standards

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that own copyright in the information used (such as the international standardisation bodies) has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained. Details and advice can be obtained from the Copyright & Licensing Department.

Tel: +44 (0)20 8996 7070

Email: copyright@bsigroup.com

BSI

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001

Fax +44 (0)20 8996 7001

www.bsigroup.com/standards