

BS ISO 18431-3:2014



BSI Standards Publication

Mechanical vibration and shock — Signal processing

Part 3: Methods of time-frequency analysis

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 18431-3:2014.

The UK participation in its preparation was entrusted to Technical Committee GME/21/2, Mechanical vibration, shock and condition monitoring - Vibration and shock measuring instruments and testing equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014.
Published by BSI Standards Limited 2014

ISBN 978 0 580 77279 5
ICS 17.160

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 May 2014.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
18431-3

First edition
2014-03-15

**Mechanical vibration and shock —
Signal processing —**

Part 3:
Methods of time-frequency analysis

Vibrations et chocs mécaniques — Traitement du signal —

Partie 3: Méthodes d'analyses en temps et fréquence et par échelle de temps



Reference number
ISO 18431-3:2014(E)

© ISO 2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Symbols	2
5 Time-frequency transforms	2
5.1 Short-time Fourier transform.....	2
5.2 Generalized Wigner-Ville transform.....	3
5.3 Wavelet transform.....	4
Annex A (informative) Analysis of gear tooth fault using Wigner distribution	5
Bibliography	7

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 108, *Mechanical vibration, shock and condition monitoring*.

ISO 18431 consists of the following parts, under the general title *Mechanical vibration and shock — Signal processing*:

- *Part 1: General introduction*
- *Part 2: Time domain windows for Fourier Transform analysis*
- *Part 3: Methods of time-frequency analysis*
- *Part 4: Shock-response spectrum analysis*

Introduction

Time-frequency analysis is used to quantitatively display a vibration or shock in terms of time and frequency. This is useful for analysing vibrations in a machine at varying speeds, e.g. in an automobile at varying engine rotational frequencies. Time-frequency analysis is also used to quantitatively display impulsive responses from machinery, e.g. the response of an impact. The duration of the impact as well as the frequency response is displayed. The frequency response can be displayed in terms of frequency, RPM, or octaves. The four methods included in this part of ISO 18431 are the short-time Fourier transform, the Wigner-Ville transform, the Choi-Williams transform, and the wavelet transform. When any of these methods is used with the correctly specified parameters, time and frequency components of shocks and vibrations are displayed quantitatively. Quantitative display enables quantitative specification of the machinery.

Mechanical vibration and shock — Signal processing —

Part 3: Methods of time-frequency analysis

1 Scope

This part of ISO 18431 specifies methods for the digital calculation of a time-frequency analysis of a given sampled measurement of a physical or engineering quantity, such as acceleration, force, or displacement, over an interval of time. Several mathematical formulations of time-frequency transformations are given with requirements for recording of parameters and recommendations.

The data can be obtained experimentally from measurements of a mechanical structure or obtained from numerical simulation of a mechanical structure. This category of data is very broad because there is a wide variety of mechanical structures, e.g. microscopic instruments, musical instruments, automobiles, manufacturing machines, buildings, and civil structures. The data can determine the response of machines or of humans to mechanical vibration and shock.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 2041, *Mechanical vibration, shock and condition monitoring — Vocabulary*

ISO 18431-1, *Mechanical vibration and shock — Signal processing — Part 1: General introduction*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 2041, ISO 18431-1, and the following apply.

3.1

short-time Fourier transform

Fourier-related transform used to determine the time dependence of the sinusoidal frequency and phase content of a time-varying vibration

3.2

Wigner-Ville distribution

quadratic time-frequency description of a vibration based on the autocorrelation of a signal

3.3

generalized Wigner-Ville distribution

time-frequency description of a vibration based on a filtered autocorrelation of a signal

3.4

Choi-Williams transform

generalized Wigner-Ville distribution of a vibration using a specific kernel

3.5

wavelet transform

time-frequency description of a vibration based on the scaled frequency transformation of a signal

4 Symbols

f_s	= $1/\Delta t$, sampling frequency; the inverse of the sampling period
K	number of samples in window $w(k)$
m	index of scaled frequency
N	data block length; the number of sampled points that are transformed
n	index of time
$S_x(m,n)$	short-time Fourier transform of sampled data $x(n)$
T	= $N\Delta t$, total time of a block of sampled data
t	= $n\Delta t$, time
u	units of the sampled signal, e.g. displacement or velocity
$V(n,m)$	Cohen class filter for smoothing the Wigner distribution
$X(m)$	discrete Fourier transform of $x(n)$
$\tilde{X}(m)$	namely $\tilde{X}(m) = 0$ for $N/2 \leq m$
$x(n)$	sampled physical data in the time domain
$\tilde{x}(n)$	analytic sampled signal
Δf	frequency resolution
Δn	increment of index of time
Δt	sample period
$\mathcal{E}_x(m,n)$	Choi-Williams distribution
σ	filter parameter of Choi-Williams distribution
$\Omega_x(m,n)$	Wigner distribution of signal $x(n)$
$O_x(k,m)$	wavelet transform of $x(n)$

5 Time-frequency transforms

5.1 Short-time Fourier transform

The short-time Fourier transform of a signal is the Fourier transform of segments shorter than a given data block. It shows how the spectrum changes with time. It is defined by Formula (1) and detailed in Reference [3].

$$S_x(m,n) = \frac{1}{f_s} \sum_{k=0}^{K-1} x(n+k)w(k) \exp\left(-i2\pi \frac{mk}{K}\right) \quad (1)$$

for

$$0 \leq m < K/2 \text{ and } 0 \leq n < N - K$$

The following parameters shall be specified: the short-time integration window, K , window function $w(k)$, $0 \leq k \leq K - 1$, and the increment of the index of time, Δn .

The quantity $|S_x(m,n)|^2$ is plotted for quantitative analysis. The units are u^2/Hz^2 .

NOTE 1 The increment of the index of time is often 1, $K/2$, or K .

NOTE 2 The value of K depends on the time and frequency dependence of the signal to be analysed. Larger values of K show finer frequency details and smaller values of K show finer time details.

5.2 Generalized Wigner-Ville transform

5.2.1 Wigner-Ville transform

The Wigner-Ville time-frequency transform of a signal is defined by Formula (2).

$$\Omega_x(m,n) = \frac{f_s}{N} \sum_{k=0}^r \tilde{X}(m+k) \tilde{X}^*(m-k) \exp\left(+i \frac{2\pi}{N} 2nk\right) \quad (2)$$

for

$$0 \leq m \leq (N/2) - 1, 0 \leq n \leq N, r = \min[(N/2) - 1 - m, n]$$

The absolute value of $\Omega_x(m,n)$ is plotted for quantitative analysis. The units are u^2 s.

NOTE 1 The Wigner-Ville transform is also expressed in terms of the autocorrelation with Formula (3).

$$\Omega_x(m,n) = \begin{cases} \frac{2}{f_s} \text{Re} \left[\sum_{k=0}^{2n} x^* \left(n - \frac{k}{2} \right) x \left(n + \frac{k}{2} \right) \exp \left(-i 2\pi \frac{mk}{n} \right) \right] & \text{for } m < n, 0 \leq n < \frac{N}{2} \\ \frac{2}{f_s} \text{Re} \left[\sum_{k=0}^{2(N-n)} x^* \left(n - \frac{k}{2} \right) x \left(n + \frac{k}{2} \right) \exp \left(-i 2\pi \frac{mk}{N-n} \right) \right] & \text{for } m < (N-n), \frac{N}{2} \leq n < N \end{cases} \quad (3)$$

NOTE 2 The Wigner distribution is derived from the autocorrelation of the complete data block. This allows greater accuracy in the resolution of time and frequency components, but also generates spurious components in the distribution.

NOTE 3 The sample period of time in the Wigner distribution is twice that of the sample period of the original data $x(n)$ because the time increments of the autocorrelation have twice the period. Therefore, the time corresponding to sample n is $t = n2\Delta t$.

NOTE 4 An example of the resolution and spurious components are shown in [Annex A](#).

5.2.2 Choi-Williams transform

The Choi-Williams transform is defined by Formulae (4) and (5).

$$\Xi_x(m,n) = \frac{2}{f_s} \sum_{k=0}^{N-1} \exp\left(-i 4\pi \frac{mk}{N}\right) \sum_{l=k}^{N-k-1} V(k,l,n;\sigma) \tilde{x}(l+k) \tilde{x}^*(l-k) \quad (4)$$

where

$$V(k,l,n;\sigma) = \frac{1}{\sqrt{4\pi k^2/\sigma}} \exp\left[-\frac{(l-n)^2}{4k^2/\sigma}\right] \quad \text{and} \quad V(0,l,n;\sigma) = 0 \quad (5)$$

The value of parameter σ is specified. This parameter is dimensionless.

The absolute values of $\mathcal{E}_x(m,n)$ are plotted for quantitative analysis. The units of $|\mathcal{E}_x(m,n)|$ are u^2 s.

NOTE This transform decreases the specific types of spurious components.

5.3 Wavelet transform

5.3.1 Definition of continuous wavelet transform

The continuous wavelet transform is defined by Formula (6).

$$O_x(k,m) = \frac{1}{f_s} 2^{m/2} \sum_{n=0}^r \tilde{x}(n) \Psi(2^m n - k) \quad (6)$$

for

$$r \leq 2^{-m}(N - 1)$$

where

$\Psi(n)$ is the mother wavelet used in the analysis.

The specific mother wavelet shall be stated. The absolute value squared $|O_x(k,m)|^2$ is plotted. The units are u^2/Hz^2 .

NOTE The wavelet transform is based on performing analysis over scaled frequencies. Therefore, the frequency resolution is coarser at lower frequencies and finer at higher frequencies. The time resolution is less at lower frequencies and greater at higher frequencies.

5.3.2 Definition of mother wavelet

The mother wavelet, $\Psi(n)$, determines the appearance of the transform. The choice of the proper mother wavelet is based on the time and frequency characteristics of the signal to be analysed. The definition of the Gaussian enveloped sinusoid is defined by Formula (7).


$$\Psi(n) = c \exp(-\sigma^2 n^2) \exp\left(-i2\pi \frac{f_0}{f_s} n\right) \quad (7)$$

where the constant c is imaginary so that the real part of Ψ is real with a magnitude that normalizes Ψ over the range of the summation.

Annex A (informative)

Analysis of gear tooth fault using Wigner distribution

For the example of a pinion gear in Reference [6], we consider an input gear with 24 teeth and a pinion gear with 16 teeth. The rotation frequency of the pinion gear is 37,5 Hz, resulting in a mesh frequency of 600 Hz. A gear signal is numerically simulated with 2 048 samples with a sampling frequency of 6 600 Hz. The upper time half of the signal is set to zero to prevent aliasing in the time domain. The analytic signal representation of the signal is used in Formula (2) to prevent aliasing the frequency domain. The case of perfect gear teeth is modeled as a periodic series of unit impulses with period 1/600 s or 11 samples. Therefore, $x(n) = [1000000000010\dots]^\tau$. The absolute value of the Wigner-Ville transform of the perfect case is shown in Figure A.1. The horizontal axis of the plot is frequency and the vertical axis is pinion rotation angle. The harmonics of the mesh frequency are seen at multiples of 600 Hz. The positions of the gear meshes occur at multiples of 22,5°. The greyscale is chosen so that large values are darker and the differences between the perfect and defective pinion gears are apparent.

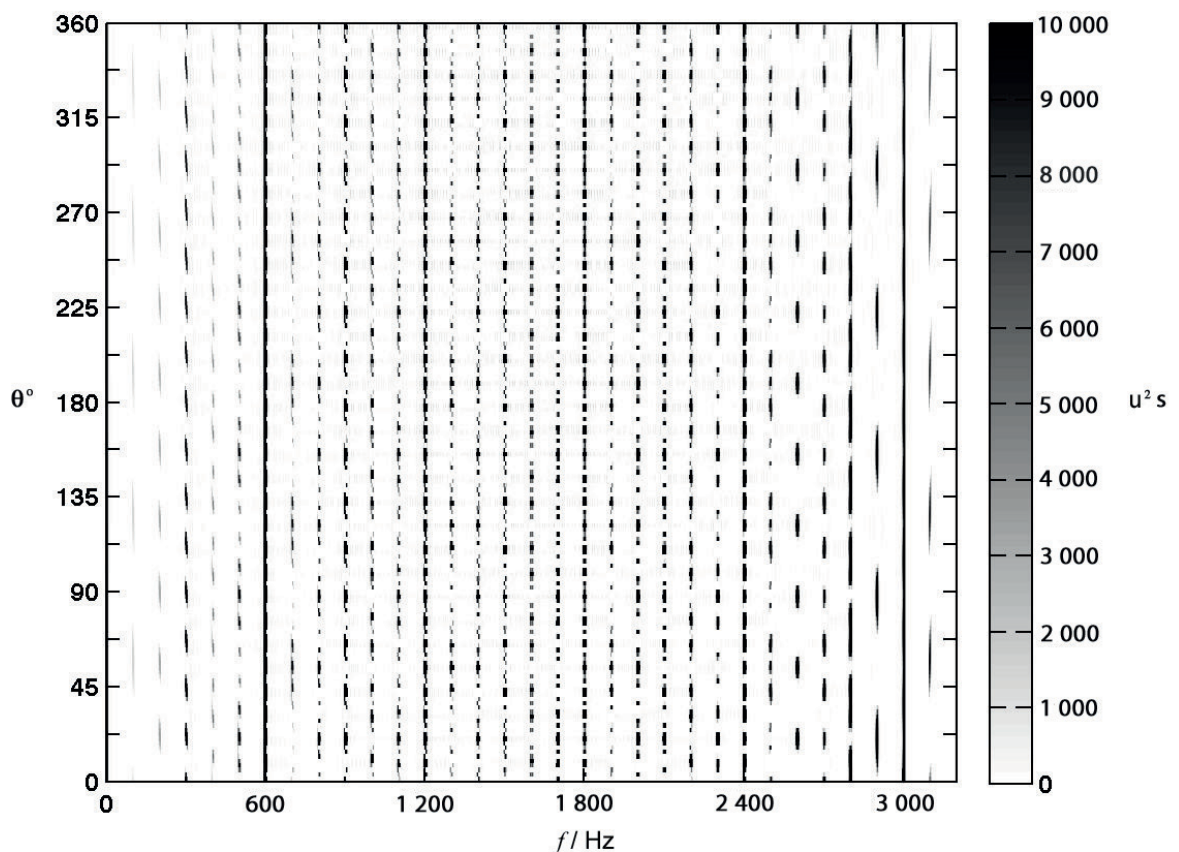


Key

θ pinion angle

f frequency

Figure A.1 — The Wigner transform of an impulse sequence simulating the vibration of gears meshing — Perfect pinion

The fourth tooth of the pinion gear is modeled to be defective with a vibration by replacing the fourth impulse and two adjoining zeros in $x(n) = [\dots 010 \dots]^T$ with three data samples so that $x_{\text{defective}}(n) = [\dots 0.5 - 2,0 0,5 \dots]^T$. The absolute value of the Wigner-Ville transform is shown in [Figure A.2](#) with the same axes and greyscale. Note that there is a modification in the image at the angular position of the fourth tooth, namely 90° . The detection of the defective tooth can then be measured using image processing techniques.

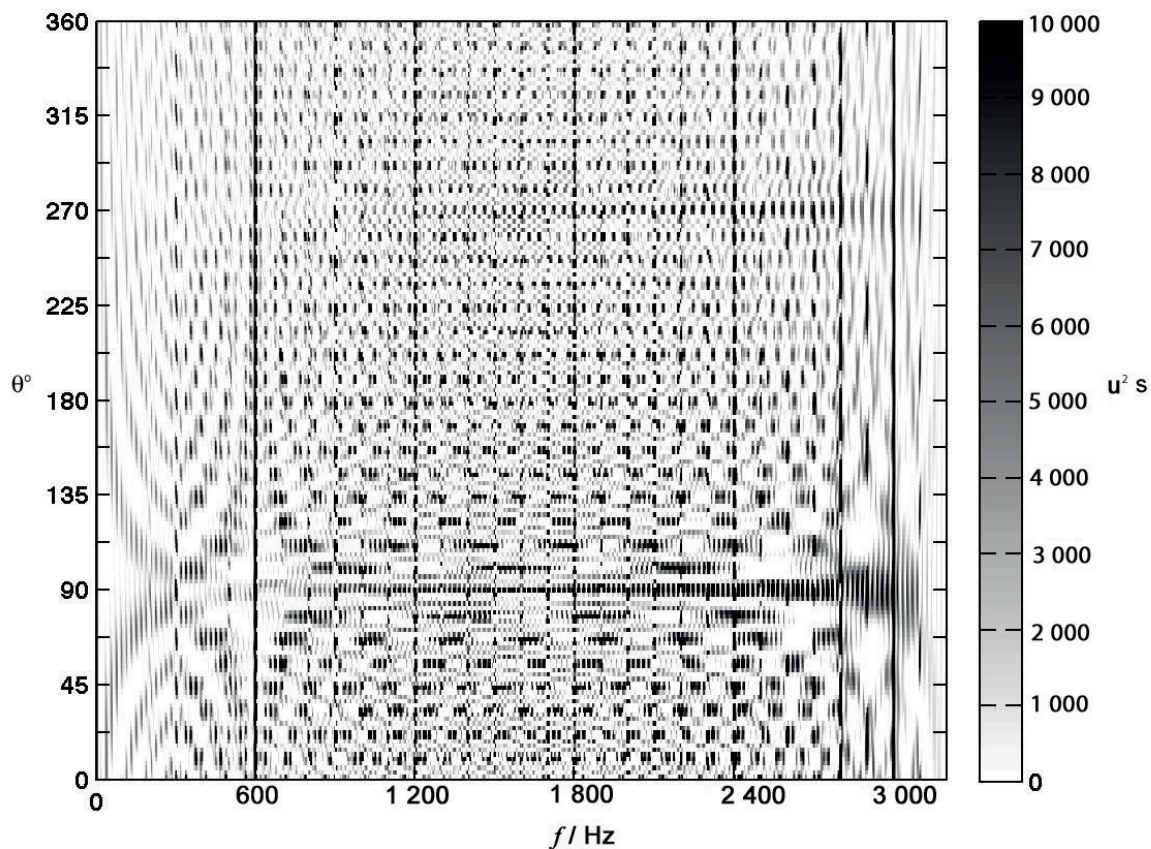

Key
 θ pinion angle
 f frequency

Figure A.2 — The absolute value of the Wigner transform of a pinion gear with a defective tooth

Bibliography

- [1] MALLAT S. *A wavelet tour of signal processing*. Academic Press, Burlington, MA, Third Edition, 2009
- [2] WALKER J.S. *A primer on wavelets and their scientific application*. Chapman & Hall/CRC Press LLC, Boca Raton, FL, 2008
- [3] COHEN L. *Time-frequency analysis*. Prentice Hall, Saddle River, NJ, 1995
- [4] FLANDRIN P. *Time-frequency/time-scale analysis*. (STOCKLER J. trans.). Academic Press, San Diego, CA, 1999
- [5] STARK H., CLARKSON P.M., GREEN R.C., GRAY D. *Signal processing methods for audio, images and telecommunications*. Academic Press, London, 1995
- [6] STASZEWSKI W.J., WORDEN K., TOMLINSON G.R. Time-frequency analysis in gearbox fault detection using the Wigner–Ville distribution and pattern recognition. *Mech. Syst. Signal Process.* 1997, **11** pp. 673–692
- [7] BOASHASH B., MATHEW J., MESBAH M. Time-frequency based machine condition monitoring and fault diagnosis. In: *Time frequency signal analysis and processing: A comprehensive reference*, (BOASHASH B. ed.). Elsevier, Oxford, 2003, pp. 671–82.

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™