

BS ISO 18646-1:2016



BSI Standards Publication

Robotics — Performance criteria and related test methods for service robots

Part 1: Locomotion for wheeled robots

National foreword

This British Standard is the UK implementation of ISO 18646-1:2016.

The UK participation in its preparation was entrusted to Technical Committee AMT/-/2, Robots and robotic devices.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.
Published by BSI Standards Limited 2016

ISBN 978 0 580 83024 2

ICS 25.040.30

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2016.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

**Robotics — Performance criteria
and related test methods for service
robots —**

Part 1:
Locomotion for wheeled robots

*Robotique — Critères de performance et méthodes d'essai
correspondantes pour robots de service —*

Partie 1: Locomotion des robots à roues



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Test conditions	4
4.1 General.....	4
4.2 Environmental conditions.....	4
4.3 Travel surface conditions.....	4
4.4 Operating conditions.....	4
5 Rated speed	4
5.1 Purpose.....	4
5.2 Test facility.....	4
5.3 Test procedure.....	5
5.4 Test result.....	5
6 Stopping characteristics	5
6.1 Purpose.....	5
6.2 Test facility.....	6
6.3 Test procedure.....	6
6.4 Test result.....	6
7 Maximum slope angle	6
7.1 Purpose.....	6
7.2 Test facility.....	7
7.3 Test procedure.....	7
7.4 Test result.....	7
8 Maximum speed on the slope	7
8.1 Purpose.....	7
8.2 Test facility.....	7
8.3 Test procedure.....	8
8.4 Test result.....	8
9 Mobility over the sill	8
9.1 Purpose.....	8
9.2 Test facility.....	9
9.3 Test procedure.....	9
9.4 Test result.....	10
10 Turning width	10
10.1 Purpose.....	10
10.2 Test facility.....	10
10.3 Test procedure.....	10
10.4 Test result.....	11
Annex A (informative) Examples of test configurations for turning widths	12
Bibliography	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

The committee responsible for this document is Technical Committee ISO/TC 299, *Robotics*.

A list of all the parts in the ISO 18646 series can be found on the ISO website.

Introduction

This document is intended to facilitate understanding of performance of wheeled robots between users and manufacturers. It defines the important performance characteristics, describes how they are specified and recommends how to test them.

The characteristics for which test methods are given in this document are those considered to affect robot performance significantly. Users of this document are intended to select the performance characteristics to be tested, in accordance with the specific requirements.

The performance criteria specified in this document are not intended to be interpreted as the verification or validation of safety requirements. This document deals with indoor environments only.

Robotics — Performance criteria and related test methods for service robots —

Part 1: Locomotion for wheeled robots

1 Scope

This document describes methods for specifying and evaluating the locomotion performance of wheeled robots in indoor environments.

2 Normative references

There are no normative references in this document.

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- ISO Online browsing platform: available at <http://www.iso.org/obp>
- IEC Electropedia: available at <http://www.electropedia.org/>

3.1

robot

programmed actuated mechanism with a degree of autonomy, moving within its environment, to perform intended tasks

Note 1 to entry: A robot includes the control system and interface of the control system.

Note 2 to entry: The classification of robot into industrial robot or *service robot* (3.2) is done according to its intended application.

[SOURCE: ISO 8373:2012, 2.6, modified]

3.2

service robot

robot (3.1) that performs useful tasks for humans or equipment excluding industrial automation applications

Note 1 to entry: Industrial automation applications include, but are not limited to, manufacturing, inspection, packaging, and assembly.

Note 2 to entry: While articulated robots used in production lines are industrial robots, similar articulated robots used for serving food are service robots.

[SOURCE: ISO 8373:2012, 2.10]

3.3 mobile robot

robot (3.1) able to travel under its own control

Note 1 to entry: A mobile robot can be a *mobile platform* (3.5) with or without manipulators.

[SOURCE: ISO 8373:2012, 2.13]

3.4 wheeled robot

mobile robot (3.3) that travels using wheels

[SOURCE: ISO 8373:2012, 3.16.1, modified]

3.5 mobile platform

assembly of all components of the *mobile robot* (3.3) which enables locomotion

Note 1 to entry: A mobile platform can include chassis which can be used to support a *load* (3.7).

Note 2 to entry: Because of possible confusion with the term “base”, it is advisable not to use the term “mobile base” to describe a mobile platform.

[SOURCE: ISO 8373:2012, 3.18]

3.6 travel surface

terrain on which the *mobile robot* (3.3) travels

[SOURCE: ISO 8373:2012, 7.7]

3.7 load

force and/or torque at the mechanical interface or *mobile platform* (3.5) which can be exerted along the various directions of motion under specified conditions of velocity and acceleration

Note 1 to entry: The load is a function of mass, moment of inertia, and static and dynamic forces supported by the *robot* (3.1).

[SOURCE: ISO 8373:2012, 6.2.1]

3.8 rated load

maximum *load* (3.7) that can be applied to the mechanical interface or *mobile platform* (3.5) in *normal operating conditions* (3.9) without degradation of any performance specification

Note 1 to entry: The rated load includes the inertial effects of the end effector, accessories and workpiece, where applicable.

[SOURCE: ISO 8373:2012, 6.2.2]

3.9 normal operating conditions

range of environmental conditions and other parameters which can influence *robot* (3.1) performance (such as electrical supply instability, electromagnetic fields) within which the performance of the robot specified by the manufacturer is valid

Note 1 to entry: Environmental conditions include, for example, temperature and humidity.

[SOURCE: ISO 8373:2012, 6.1]

3.10

stopping distance

maximum distance travelled by the *mobile platform* (3.5) origin between the initiation of the stop and the full stop of the mobile platform

3.11

rated speed

maximum speed of the *mobile platform* (3.5) equipped with the *rated load* (3.8) in *normal operating conditions* (3.9)

3.12

turning

turn

movement of the *mobile platform* (3.5) causing a change of orientation of the mobile platform coordinate system

Note 1 to entry: Turning is typically accompanied by a change in direction of travel of the mobile platform.

3.13

spin turn

spinning

in-place rotation, or rotation about the *mobile platform* (3.5) origin without translation

3.14

turning width

minimum width of the rectangular passage within which the *mobile platform* (3.5) can complete a specific type of *turning* (3.12)

3.15

reverse turning width

turning width (3.14) for the *mobile platform* (3.5) with a 180° turn

3.16

U-turn width

U-shaped reverse turning width

reverse turning width (3.15) for the *mobile platform* (3.5) with a U-shaped turning path

Note 1 to entry: See [Figure A.1](#).

3.17

three-point-turn width

three-point reverse turning width

reverse turning width (3.15) for the *mobile platform* (3.5) using one initial forward travel, one backward travel and one final forward travel

Note 1 to entry: See [Figure A.2](#).

3.18

L-turn width

right angle turning width

turning width (3.14) for the *mobile platform* (3.5) with a 90° turn to pass through the L-shaped passage

Note 1 to entry: See [Figure A.3](#).

4 Test conditions

4.1 General

The robot shall be completely assembled and sufficiently charged and operational. All self-diagnostic tests shall be satisfactorily completed. It should also be ensured that the robot operates in a safe manner throughout the tests.

The tests shall be preceded by the preparations for operation as specified by the manufacturer.

All conditions specified in [Clause 4](#) should be satisfied for the tests described in this document, unless it is stated otherwise in the specific clauses.

Each test described in each clause of this document may have different test configurations which require separate test procedures. For each test configuration, multiple trials can be conducted, if specified in the test procedure.

4.2 Environmental conditions

The following environmental conditions shall be maintained during all tests:

- ambient temperature: 10 °C to 30 °C
- relative humidity: 0 % to 80 %

If the environmental conditions specified by the manufacturer are outside the given conditions, then this shall be declared within the test report.

4.3 Travel surface conditions

A hard and even surface with a coefficient of friction between 0,75 and 1,0 (measured according to ISO 7176-13) shall be used.

4.4 Operating conditions

All performance shall be measured under normal operating conditions. When the performance is measured in other conditions, this shall be declared within the test report.

For all tests, the robot shall be tested at the rated speed equipped with the rated load, unless otherwise specified.

5 Rated speed

5.1 Purpose

The purpose of this test is to determine how fast a robot can travel to its destination. Rated speed is an indication of how fast the robot can generally perform tasks that are related to travelling. In the test described in [5.2](#) to [5.4](#), the rated speed is determined from a series of measurements on horizontal travel surface.

5.2 Test facility

The setup for this test is shown in [Figure 1](#). The speed measurement test area shall be at least 1 000 mm in length and of sufficient width. Enough space shall be provided at each end of the test area for acceleration and deceleration. Sensors should be allocated at each end of the speed measurement test area to measure the start time and finish time of the wheeled robot.

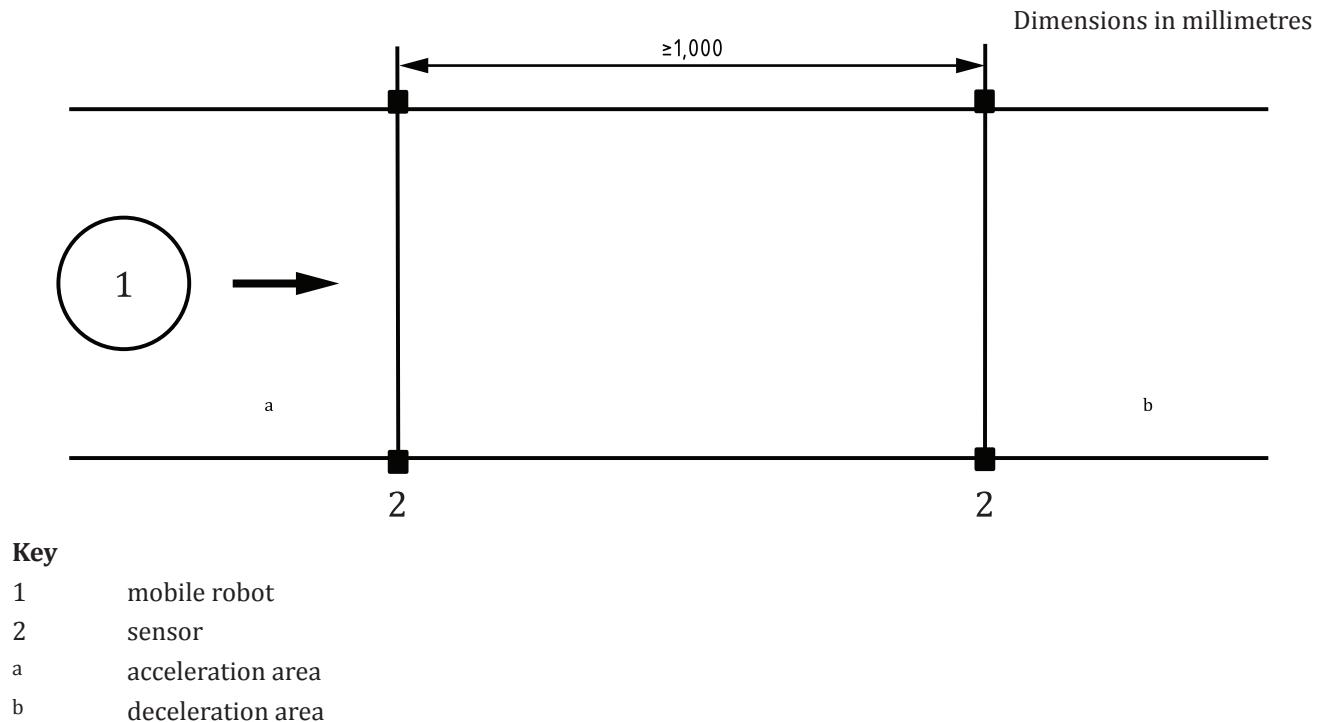


Figure 1 — Test area for rated speed

5.3 Test procedure

This test consists of one test configuration. Each trial shall follow the procedure below.

- a) The wheeled robot equipped with the rated load is placed at the initial position.
- b) The robot starts from its initial position and accelerates so that it reaches the final attained speed before the start line.
- c) While the robot moves in a straight line through the speed measurement test area, the speed of the robot is determined with the measurement system.
- d) After the robot reaches the finish line, it decelerates until it stops.

A trial shall be considered to fail if the robot does not reach the finish line of the test area or if it deviates from the designated travel direction by more than 10 % of the length of the speed measurement test area. The rated speed, specified in metres per second, shall be selected as the minimum speed value from three consecutive successful trials.

5.4 Test result

Rated speed along with the specific test conditions, including friction conditions, shall be declared in the test report.

6 Stopping characteristics

6.1 Purpose

The purpose of this test is to determine stopping distance and stopping time that indicate the ability of the robot to navigate in a reliable way in its environment. A high stopping performance generally supports the manoeuvrability of the robot as it allows fast cessation of motion and turning manoeuvres.

In the test described in 6.2 to 6.4, the stopping distance and stopping time are determined from a series of measurements on horizontal travel surface.

6.2 Test facility

A sufficiently large test area with horizontal travel surface shall be available.

The length of the test area should be sufficient for the robot to reach the rated speed and to stop safely. The test facility shall be equipped with means to determine the motions of the robot in time. They shall be able to measure the position of the robot with an accuracy of 2 % of a typical stopping distance. For example, the following apparatuses can be used:

- the wall behind can be painted with wide stripes perpendicular to the direction of travel at every 100 mm and narrow stripes at every 10 mm;
- the test can be recorded by a video camera, preferably of digital type, placed as far as possible to minimize the positional errors in measuring the stopping characteristics;
- an advanced positioning device such as 3D motion tracking systems can be used.

6.3 Test procedure

This test consists of one test configuration. Each trial shall follow the procedure below.

- a) The robot equipped with the rated load is placed at the initial position.
- b) The robot moves in a straight line from its initial position until it reaches the rated speed.
- c) A stop command is initiated either manually (e.g. by emergency stop) or automatically (e.g. by detecting obstacles), as specified by manufacturer. Stop category of 1 or 2 according to IEC 60204-1 should be used in order to guarantee stable stoppage.

NOTE The initiation of the stop signal needs to be measured with the measuring apparatus. For example, pushing the emergency stop button can be recorded by the video camera, or an electrical output signal can be used to synchronize with the motion tracking device.

- d) The stopping distance and the stopping time are recorded by measuring the distance travelled and the time elapsed between the initiation of the stop and the full stop of the mobile platform. The full stop means the complete cessation of motion of the whole body of the mobile robot. For mobile platforms requiring stability control (e.g. inverted pendulum type robots), the motion needed for stability control is still allowed after the full stop is completed.

The stopping distance and stopping time shall be selected as the maximum values from the first three trials.

6.4 Test result

Stopping distance and stopping time along with specific test conditions, including the rated speed, the accuracy of measurement device, stop category and friction conditions, shall be declared within the test report.

7 Maximum slope angle

7.1 Purpose

The purpose of this test is to determine the maximum slope angle on which the mobile robot can travel in specified directions.

7.2 Test facility

Test shall be performed on a slope of specific angle with a precision of $\pm 0,5^\circ$.

7.3 Test procedure

The test consists of five test configurations, as listed in [Table 1](#).

Table 1 — Test configurations

Test configuration	Path of the robot relative to the slope	Driving direction of the robot
1	upward	forward
2	upward	backward
3	downward	forward
4	downward	backward
5	lateral (perpendicular)	forward

Each trial of the test shall follow the procedure below.

- a) The slope is set to the specific angle.
- b) The robot equipped with rated load is placed at the initial position on the slope.
- c) The robot moves in a straight line for at least 1 000 mm at its speed declared by the manufacturer.
- d) The robot shall stop on the slope after it reaches the goal position.

A trial shall be considered to fail if the robot does not reach the finish line of the test area or if it deviates from the designated travel direction by more than 20 % of the length of the speed measurement test area. The slope angle used in the test procedure shall be declared as the maximum slope angle for the test configuration after three consecutive successful trials from the first three trials.

7.4 Test result

The maximum slope angles along with the specific test conditions, including friction conditions and commanded speeds, shall be declared within the test report using [Table 2](#).

Table 2 — Maximum slope angles

Travel direction	upward/ forward	upward/ backward	downward/ forward	downward/ backward	lateral/ forward
Maximum slope angle					

8 Maximum speed on the slope

8.1 Purpose

The purpose of this test is to determine the maximum speed of the mobile robot on slopes with a fixed set of angles in specified directions.

8.2 Test facility

Tests shall be performed on slopes with angles of 3° , 6° and 10° , as appropriate. The angles shall be set within $\pm 0,5^\circ$.

NOTE The angles of 3° , 6° and 10° are typical in wheelchair test, as specified in ISO 7176-2.

The test facility shall be equipped with a measurement system able to measure the speed of the robot. The speed measurement test area shall be at least 1 000 mm in length and of sufficient width. Enough space shall be provided at each end of the test area for acceleration and deceleration.

8.3 Test procedure

The test consists of five travel patterns, as listed in [Table 3](#), each for three slope angles of 3°, 6° and 10°. Therefore, a maximum of 15 test configurations shall be tested.

Table 3 — Travel patterns

Travel pattern	Path of the robot relative to the slope	Driving direction of the robot
1	upward	forward
2	upward	backward
3	downward	forward
4	downward	backward
5	lateral (perpendicular)	forward

For each test configuration, each trial shall follow the procedure below.

- a) The robot equipped with the rated load is placed at the initial position on the slope of 3°, 6°, or 10°.
- b) The robot moves in a straight line while it is accelerating, moving with maximum speed and decelerating.
- c) The speed of the robot is determined with the measurement system in the maximum speed area.
- d) The robot shall stop on the slope after it reaches the goal position.

A trial shall be considered to fail if the robot does not reach the finish line of the test area or if it deviates from the designated travel direction by more than 20 % of the length of the speed measurement test area. The maximum speed on the slope angle for each test configuration shall be selected as the minimum speed value from three consecutive successful trials.

8.4 Test result

For each test configuration, the maximum speeds on each slope along with the specific test conditions, including friction conditions, shall be declared within the test report using [Table 4](#).

Table 4 — Maximum speed

Travel direction	upward/ forward	upward/ backward	downward/ forward	downward/ backward	lateral/ forward
Maximum speed at 3° slope angle					
Maximum speed at 6° slope angle					
Maximum speed at 10° slope angle					

9 Mobility over the sill

9.1 Purpose

The purpose of this test is to determine the maximum sill heights that the robot can pass over. In order to pass over a long sill, the robot needs to be able to climb up and down the sill without any damage. For


short sills, the robot should also have a sufficient ground clearance so that the body of the mobile robot (other than the wheels) does not touch the sill while passing over it.

9.2 Test facility

The test facility shall have two sills:

- a short sill;
- a long sill.

The diagram of a sill is shown in [Figure 2](#). The height of the sill, H , shall be set to a specific value. The width of the sill, W , should be greater than the width of the robot. The length of the sill, L , shall be determined considering the robot size and its application environment. Typical lengths are 100 mm for a short sill and at least 1 000 mm for a long sill, in order to be able to accommodate all wheels over the top of the long sill. The front edge of the sill shall be smooth and its radius, r , shall be a maximum of 3 mm.

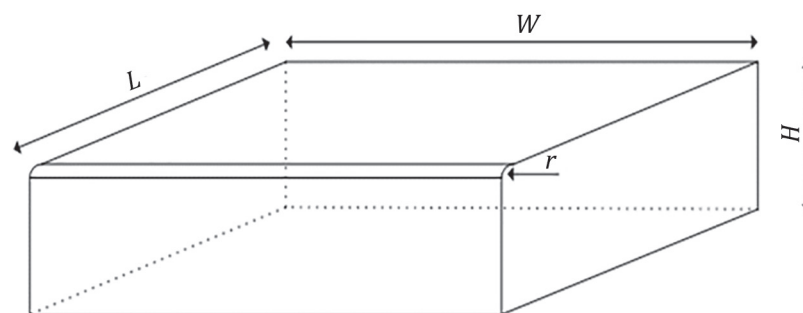

Key

H	height of sill
L	length of sill
r	radius of sill
W	width of sill

Figure 2 — Dimensions of the sill

9.3 Test procedure

The test consists of two test configurations:

- a short sill;
- a long sill.

For both test configurations, each trial shall follow the procedure below.

- a) The height of the sill is set to the specific value.
- b) The wheeled robot equipped with the rated load is placed at the initial position where the robot can achieve the designated speed before reaching the sill.
- c) The robot moves in a straight line perpendicular to the front edge of the sill, unless otherwise required by its manufacturer, at its designated speed
- d) The robot shall pass completely over the sill.

A trial shall be considered to fail if the robot does not pass completely over the sill or the body of the mobile platform other than the wheels touch the travel surface during the trial. The height of sills used

in the test procedure shall be declared as the maximum sill heights for the test configuration after three consecutive successful trials from the first three trials.

9.4 Test result

The maximum sill heights for each sill, along with specific test conditions, including dimensions of sills, approach angle to the front edge, friction conditions and commanded speeds, shall be declared within the test report.

10 Turning width

10.1 Purpose

The purpose of this test is to determine the turning width for the specific type of turning of the mobile platform.

Turning width is determined not only by mechanical characteristics (e.g. steer angle of the wheels) but also by the ability of the control system to execute the turn.

In this test, three types of turns are used:

- U-turn;
- three-point-turn;
- L-turn.

U-turn and three-point-turn are not applicable to mobile platforms that are able to perform a spin turn. Instead, for such platforms, the reverse turning width for spin turn shall be determined.

10.2 Test facility

The boundaries of the passage for each type of turning shall be physical walls with heights higher than the robot. The collision avoidance functionality of the mobile robot shall be activated.

10.3 Test procedure

The test consists of three test configurations (U-turn, three-point-turn and L-turn) as illustrated in [Figures A.1 to A.3](#). Each trial shall follow the procedure below.

- a) The width between the walls is set to the specific value.
- b) The wheeled robot equipped with the rated load is placed at the initial position.
- c) The robot starts from its initial position until it reaches the speed designated by the manufacturer for the specific type of turning.
- d) The robot initiates the turn.
- e) After the robot has completed the turn, it decelerates until it stops. Turning is considered completed when the robot reaches the designated orientation.

A trial shall be considered to fail if the robot touches the wall of test area during turning or the robot does not reach the designated orientation. The width between walls used in the test procedure shall be declared as the turning width for the test configuration after three consecutive successful trials from the first three trials. The turning time shall be selected as the maximum value from the first three successful trials.

10.4 Test result

The turning width for each type of turning, along with specific test conditions, including friction conditions, commanded speeds and turning time, shall be declared within the test report.

Annex A (informative)

Examples of test configurations for turning widths

The three test configurations (U-turn, three-point-turn and L-turn) for the test for turning width are illustrated in [Figures A.1](#) to [A.3](#), where w indicates the width of the physical wall.

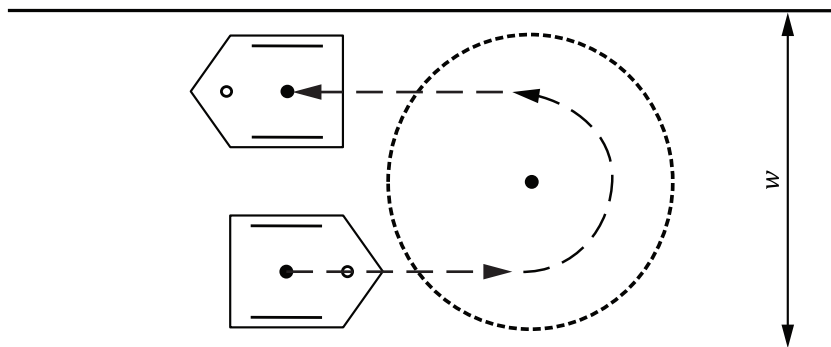


Figure A.1 — U-turn width for mobile platform

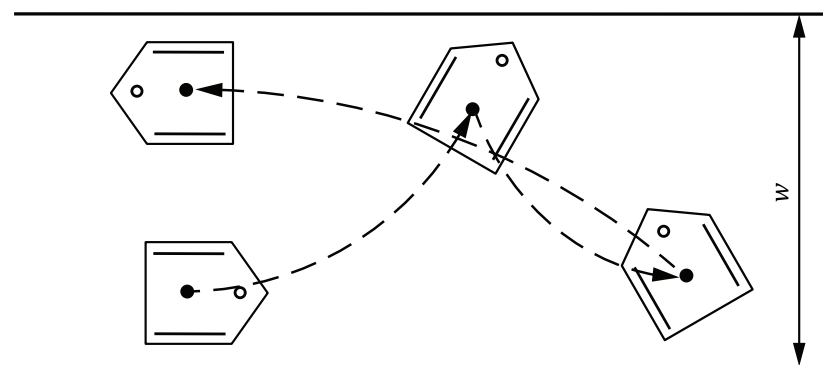


Figure A.2 — Three-point-turn width for mobile platform

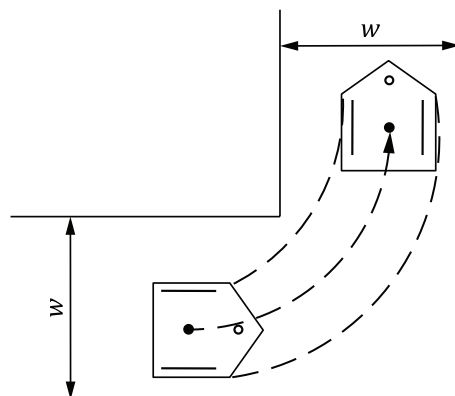


Figure A.3 — L-turn width for mobile platform

Bibliography

- [1] ISO 7176-2, *Wheelchairs — Part 2: Determination of dynamic stability of electric wheelchairs*
- [2] ISO 7176-13, *Wheelchairs — Part 13: Determination of coefficient of friction of test surfaces*
- [3] ISO 8373:2012, *Robots and robotic devices — Vocabulary*
- [4] ISO 9283, *Manipulating industrial robots — Performance criteria and related test methods*
- [5] ISO 13482, *Robots and robotic devices — Safety requirements for personal care robots*
- [6] IEC 60204-1, *Safety of machinery – Electrical equipment of machines – Part 1: General requirements*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK