

BS ISO 19029:2016



BSI Standards Publication

# Accessible design — Auditory guiding signals in public facilities

**bsi.**

...making excellence a habit.™

**National foreword**

This British Standard is the UK implementation of ISO 19029:2016.

The UK participation in its preparation was entrusted to Technical Committee CH/173, Assistive products for persons with disability.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.  
Published by BSI Standards Limited 2016

ISBN 978 0 580 86773 6

ICS 11.180.15; 13.180

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 January 2016.

**Amendments/corrigenda issued since publication**

Date	Text affected
------	---------------

---

INTERNATIONAL  
STANDARD

**ISO**  
**19029**

First edition  
2016-02-01

---

---

**Accessible design — Auditory guiding  
signals in public facilities**

*Produits assistive pour des personnes avec l'incapacité — Conception  
accessible — Signaux de guidage auditifs dans les équipements publics*



Reference number  
ISO 19029:2016(E)

© ISO 2016



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Ch. de Blandonnet 8 • CP 401  
CH-1214 Vernier, Geneva, Switzerland  
Tel. +41 22 749 01 11  
Fax +41 22 749 09 47  
copyright@iso.org  
www.iso.org

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Terms and definitions</b> .....	<b>1</b>
<b>3 Requirements and recommendations</b> .....	<b>2</b>
3.1 Sound characteristics.....	2
3.1.1 Envelope.....	2
3.1.2 Frequency component.....	2
3.2 Equipment.....	3
3.2.1 Sound signal generator.....	3
3.2.2 Loudspeaker.....	4
3.2.3 Arrangement of loudspeakers.....	4
3.3 Ambient sound environment.....	5
3.3.1 Signal-to-noise ratio.....	5
3.3.2 Auditory guiding signals for different goals.....	5
3.3.3 Sound reflection and reverberation.....	5
3.3.4 Operation of auditory guiding signals.....	5
<b>Bibliography</b> .....	<b>6</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#).

The committee responsible for this document is ISO/TC 173, *Assistive products for persons with disability*, Subcommittee SC 7, *Accessible design*.

## Introduction

When the persons with seeing impairment and blindness walk and travel independently, the auditory guiding signals in public facilities for mobility assistance are very beneficial for them to know the location (i.e. direction and distance).

This International Standard provides the guidelines of sound characteristics and specifications of sound equipment of the auditory guiding signals in public facilities for mobility assistance of mainly the persons with seeing impairment and blindness. The provided sound characteristics and specifications of sound equipment enable the user to detect the sound location correctly even in the noisy environment.

This International Standard is useful for the sound designers who design the auditory guiding signals in public facilities, and the designers who plan the public facilities.





# Accessible design — Auditory guiding signals in public facilities

## 1 Scope

This International Standard specifies the sound characteristics of auditory guiding signals for persons with seeing impairment and blindness to provide the location and direction information of particular public facilities. The public facilities include facilities such as railway stations, airports, ports, bus terminals, government offices, libraries, community centres, parks, schools, hospitals, theatres, large supermarkets, and its toilets, stairs, etc.

**EXAMPLE** As an auditory guiding signal, a chime sound is emitted from the ticket gate of a railway station. Pedestrians, including persons with seeing impairment and blindness, are able to know the location of the ticket gate by detecting the location of the chime sound.

**NOTE 1** The auditory guiding signals are also helpful for sighted persons.

This International Standard also specifies the design or usage of the equipment that provides auditory guiding signals.

This International Standard does not specify the characteristics of the alerts, such as alarm sounds or emergency signals.

**NOTE 2** The auditory danger signals are covered by ISO 7731.

This International Standard does not specify the characteristics of auditory guiding signals coming from the personal mobile equipment that is worn by persons with seeing impairment and blindness.

## 2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 2.1

#### **auditory guiding signal**

sound signal that provides the location and direction information of particular public facilities

### 2.2

#### **harmonic tone**

sound that consists of the fundamental frequency component and its multiple frequency components

**EXAMPLE** Sounds that have a periodical waveform such as musical tone, triangle wave sound, rectangle wave sound, and saw-teeth wave sound.

### 2.3

#### **sound signal generator**

equipment that generates the electric analogue signal to be provided to the loudspeaker

### 2.4

#### **goal**

point that *auditory guiding signal* (2.1) intends to guide

**EXAMPLE** Entrance of the facility, ticket gate of the railway station, restroom, beginning point of stairs, etc.

### 2.5

#### **emission angle**

angle in where sound attenuation is less than 10 dB from that of emission axis

### 3 Requirements and recommendations

#### 3.1 Sound characteristics


##### 3.1.1 Envelope

The duration of attack part of auditory guiding signals shall be longer than 0 ms and shall not be longer than 5 ms.

NOTE 1 The attack part that is not longer than 5 ms enables the listener to detect the direction of sound easily.

NOTE 2 The decay part does not have an influence upon the sound localization.

The interval between auditory guiding signals should be no longer than 2 s.

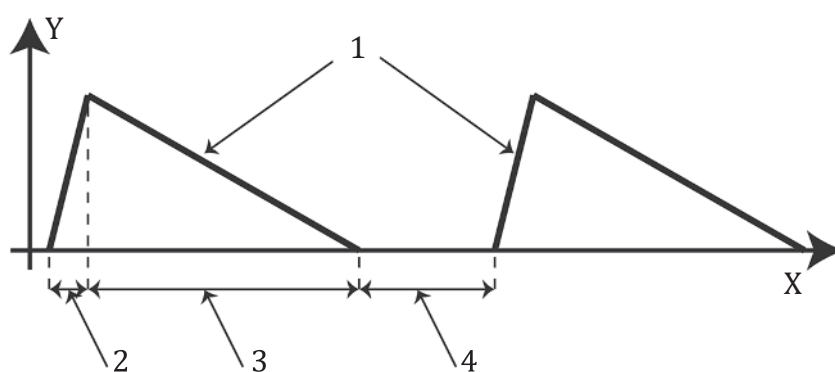

##### Key

- 1 signal
- 2 attack
- 3 decay
- 4 interval
- X time
- Y amplitude

Figure 1 — Envelope of signal

##### 3.1.2 Frequency component

The lowest frequency component shall not be higher than 1 kHz.

NOTE 1 If the sound is harmonic tone, the lowest frequency is equal to the fundamental frequency.

The highest frequency component shall not be lower than 8 kHz.

NOTE 2 The highest frequency component that is not lower than 8 kHz enables listener to detect the direction of sound easily.

If the sound is harmonic tone, it should have all order of harmonics in its frequency band.


The sound that has only one frequency component shall not be used as auditory guiding signals.

NOTE 3 If the sound has narrow or poor frequency components, it does not satisfy the requirements.

EXAMPLE 1 A saw-teeth wave sound has all harmonics in its frequency band.

If the sound is not harmonic tone, it should have frequency components as many as possible in its frequency band, and it should have the spectrum that the user can distinguish it from ambient noise.

EXAMPLE 2 The non-harmonic sound for auditory guiding signals include combination of harmonic tones, impulse sound, etc.

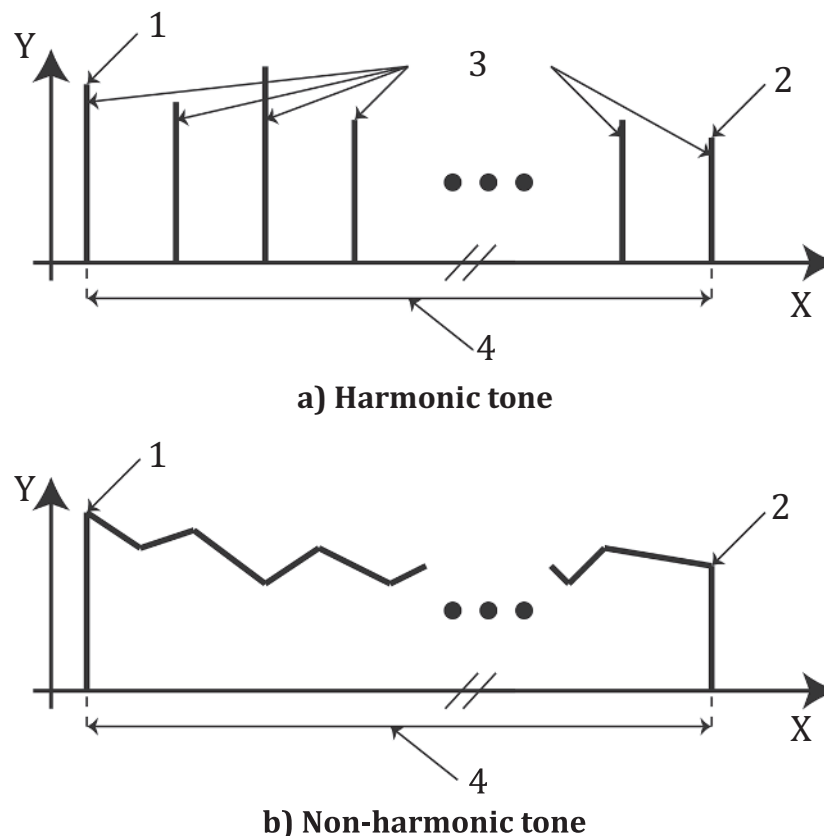

**Key**

- 1 lowest frequency component
- 2 highest frequency component
- 3 harmonics
- 4 frequency band width
- X frequency
- Y power

**Figure 2 — Frequency components**

## 3.2 Equipment

### 3.2.1 Sound signal generator

The sound signal generator shall be able to generate the auditory guiding signal that have the frequency component provided in [3.1.2](#).

If the auditory guiding signal is recorded, reproduced, and/or transferred digitally, the sampling resolution shall not be less than eight bits, and should not be less than 16 bits.

If the auditory guiding signal is recorded as compressed data, the compression ratio should not be so high as to degrade sound quality.

### 3.2.2 Loudspeaker

The loudspeaker shall be able to emit the auditory guiding signal that have the frequency component provided in 3.1.2.

EXAMPLE The general full-range loudspeaker that has about 10 cm diameter and is installed in an appropriate box has nearly flat frequency characteristics in the range of 100 Hz to 10 kHz.

### 3.2.3 Arrangement of loudspeakers

The loudspeaker and the goal should be located on the same vertical line, with the loudspeaker facing the main stream of pedestrians.


EXAMPLE 1 The loudspeaker faces the crossing point of the main stream of pedestrians and the path to the goal.

EXAMPLE 2 The loudspeaker is suspended from the ceiling and is located above the goal at 3 m height from the floor.

EXAMPLE 3 The loudspeaker is installed in the short vertical pole on the floor and is located on the goal at 0,8 m height from the floor.

The obstacles that disturb the sound propagation shall not be on the emission axis of the loudspeaker, and should not be in the range within 3 m in the emission angle of the loudspeaker.

EXAMPLE 4 The obstacles that disturb the sound propagation include signboards, walls, poles, etc.

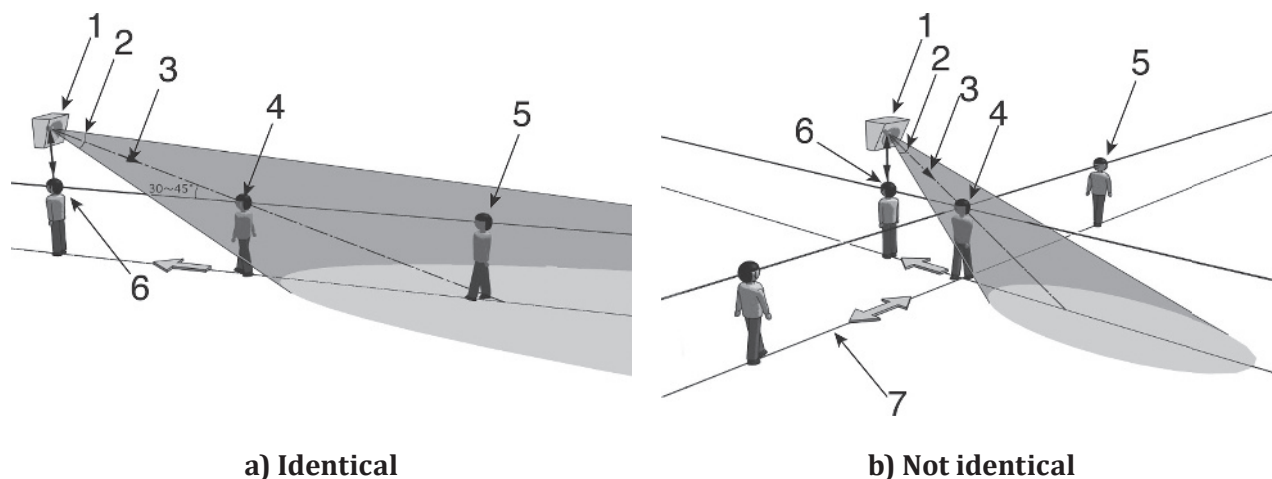

#### Key

- 1 loudspeaker
- 2 emission angle
- 3 emission axis
- 4 listening point
- 5 user
- 6 goal
- 7 main stream of users

Figure 3 — Arrangement of loudspeaker in the cases that main stream of users and course of goal is identical (a) and not identical (b)

### **3.3 Ambient sound environment**

#### **3.3.1 Signal-to-noise ratio**

The signal-to-noise ratio shall not be less than 10 dB at the listening point.

In order to measure the signal-to-noise ratio, sound pressure level of signal and sound pressure level of ambient noise shall be measured.

Maximum sound pressure level with a standard frequency weighting “A” and a standard exponential time weighting “FAST (F)” shall be used for signal.

Time-average sound pressure level with a standard frequency weighting “A” should be used for ambient noise.

#### **3.3.2 Auditory guiding signals for different goals**

If the auditory guiding signals for different goals can be heard at one place, they should not sound each other simultaneously to avoid overlap.

#### **3.3.3 Sound reflection and reverberation**

The sound reflection and reverberation should be reduced as much as possible.

NOTE 1 If the sound reflection and/or reverberation disturb the listening of auditory guiding signals, the sound absorbents can be put on the ceiling and/or wall.

NOTE 2 It is desirable to design the space by taking the ambient sound environment into consideration.

#### **3.3.4 Operation of auditory guiding signals**

The auditory guiding signals shall work constantly.

NOTE If there is the specific time range when no user is in the public facilities, the auditory guiding signals can be controlled.

The loudspeaker and/or its container should have the appearance that indicates that it is the equipment of the auditory guiding signals for mobility assist.

## Bibliography

- [1] ISO 7240-16, *Fire detection and alarm systems — Part 16: Sound system control and indicating equipment*
- [2] ISO 11429, *Ergonomics — System of auditory and visual danger and information signals*
- [3] ISO 15006, *Road vehicles — Ergonomic aspects of transport information and control systems-Specifications and compliance procedures for in-vehicle auditory presentation*
- [4] ISO/TR 16352, *Road vehicles — Ergonomic aspects of in-vehicle presentation for transport information and control systems-Warning system*
- [5] ISO 11064-6, *Ergonomic design of control centres — Part 6: Environmental requirements for control centres.*
- [6] ISO 23600, *Assistive products for persons with vision impairments and persons with vision and hearing impairments — Acoustic and tactile signals for pedestrian traffic lights*
- [7] IEC 60073Ed. 6.0:2002, (b) *Basic and safety principles for man-machine interface, marking and identification — Coding principles for indication devices and actuators*
- [8] IEC 60268-5, *Sound system equipment — Part 5:Loudspeakers*
- [9] MLIT/Addendum to the “Guidelines to Improve Barrier-Free Access for Public Transport Passenger Facilities”:2002
- [10] BLAUERT J. *Spatial Hearing*. The MIT Press, Cambridge, revised edition, 1997









# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

