

BS ISO 19072-1:2014



BSI Standards Publication

Road vehicles — Connection interface for pyrotechnic devices, two-way and three-way connections

Part 1: Pocket interface definition

bsi.

...making excellence a habit.™

National foreword

This British Standard is the UK implementation of ISO 19072-1:2014. It supersedes BS ISO 19072-1:2007 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee AUE/16, Electrical and electronic equipment.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014. Published by BSI Standards Limited 2014

ISBN 978 0 580 79264 9

ICS 43.040.10

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 September 2014.

Amendments issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

ISO
19072-1

Second edition
2014-06-15

**Road vehicles — Connection interface
for pyrotechnic devices, two-way and
three-way connections —**

Part 1:
Pocket interface definition

*Véhicules routiers — Interface de raccordement pour dispositifs
pyrotechniques, deux voies et trois voies —*

Partie 1: Définition de l'interface du support allumeur



Reference number
ISO 19072-1:2014(E)

© ISO 2014



COPYRIGHT PROTECTED DOCUMENT

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Case postale 56 • CH-1211 Geneva 20
Tel. + 41 22 749 01 11
Fax + 41 22 749 09 47
E-mail copyright@iso.org
Web www.iso.org

Published in Switzerland

Contents

	Page
Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 Dimensional features — Squib holder interface including male contacts	2
5 Material characteristics	4
5.1 Material specifications for male contacts.....	4
5.2 Contacts and short circuit areas of the male contacts specifications.....	4
Annex A (normative) Sealed variant	5
Annex B (normative) Variant without retainer of the pyrotechnic device/initiator harness connector assembly	6
Bibliography	7

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 3, *Electrical and electronic equipment*.

This second edition cancels and replaces the first edition (ISO 19072-1:2007), which has been technically revised.

ISO 19072 consists of the following parts, under the general title *Road vehicles — Connection interface for pyrotechnic devices, two way and three way connections*:

- *Part 1: Pocket interface definition*
- *Part 2: Test methods and general performance requirements*
- *Part 3: Pyrotechnic device and harness connector assembly - type 1*
- *Part 4: Pyrotechnic device and harness connector assembly - type 2*

Introduction

Road vehicles integrate an increasing number of pyrotechnic devices contributing to occupant safety in vehicles (for example, frontal and side air bag, safety belt pretensioner, etc.).

Various pocket definitions currently exist all over the world. This situation appears difficult to manage for the different equipment makers. The goal of this International Standard is to define a common specification.

A sealed option of the pyrotechnic device/initiator harness connector assembly is also defined. See [Annex A](#).

A variant without retainer of the pyrotechnic device/initiator harness connector assembly is also defined. See [Annex B](#).

The International Organization for Standardization (ISO) draws attention to the fact that it is claimed that compliance with this document may involve the use of a patents DE19939407, EP-B-1079474 and US-A-6,402,640.

ISO takes no position concerning the evidence, validity and scope of this patent right.

The holder of this patent right has assured ISO that he/she is willing to negotiate licences either free of charge or under reasonable and non-discriminatory terms and conditions with applicants throughout the world. In this respect, the statement of the holder of this patent right is registered with ISO. Information may be obtained from:

FCI

145, rue Yves Le-Coz

78000 Versailles

France

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights other than those identified above. ISO shall not be held responsible for identifying any or all such patent rights.

ISO (www.iso.org/patents) maintains an on-line database of patents relevant to its standards. Users are encouraged to consult the database for the most up to date information concerning patents.

Road vehicles — Connection interface for pyrotechnic devices, two-way and three-way connections —

Part 1: Pocket interface definition

1 Scope

The purpose of this part of ISO 19072 is to define the minimum specification of the pyrotechnic device pocket interface.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ASTM B488: *Standard Specification for Electrodeposited Coatings of Gold for Engineering Uses*

ASTM B735: *Standard Test Method for Porosity in Gold Coatings on Metal Substrates by Nitric Acid Vapor*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

connector

assembly used to connect several conductors together or a single conductor to an appliance

Note 1 to entry: A male (female) connector is a housing containing male (female) contacts and accessory items. A male connector may be permanently fixed to a wiring harness or to an appliance [an electronic control unit (ECU) for example]. A female connector is generally permanently fixed to a wiring harness.

3.2

female contact

contact (including means for cable attachment) designed for electrical engagement on its inner surface, and to accept entry of a male contact, thus forming an electrical connection

[SOURCE: ISO 8092-2:2005, 3.6]

3.3

housing

connector without its contacts

3.4

initiator

part of the pyrotechnical device with two male contacts

3.5
male contact

contact (including means for cable attachment) designed for electrical engagement on its outer surface and to enter a female contact, thus forming an electrical connection

[SOURCE: ISO 8092-2:2005, 3.5]

3.6
pocket

squib holder inner interface including male contacts

3.7
retainer

ring holding an optional shorting clip (shunt) and providing coding and electrical insulation, generally made of plastic

Note 1 to entry: The shorting clip (shunt) may be omitted by decision between manufacturer and supplier.

3.8
shorting clip (shunt)

metallic bar of the retainer providing the electrical connection between two male contacts


3.9
squib holder

part of the pyrotechnic device, holding the initiator and the retainer

4 Dimensional features — Squib holder interface including male contacts

The contact and short-circuit areas when male and female connectors are mated shall comply with [Figure 1](#).

Dimensions in millimetres

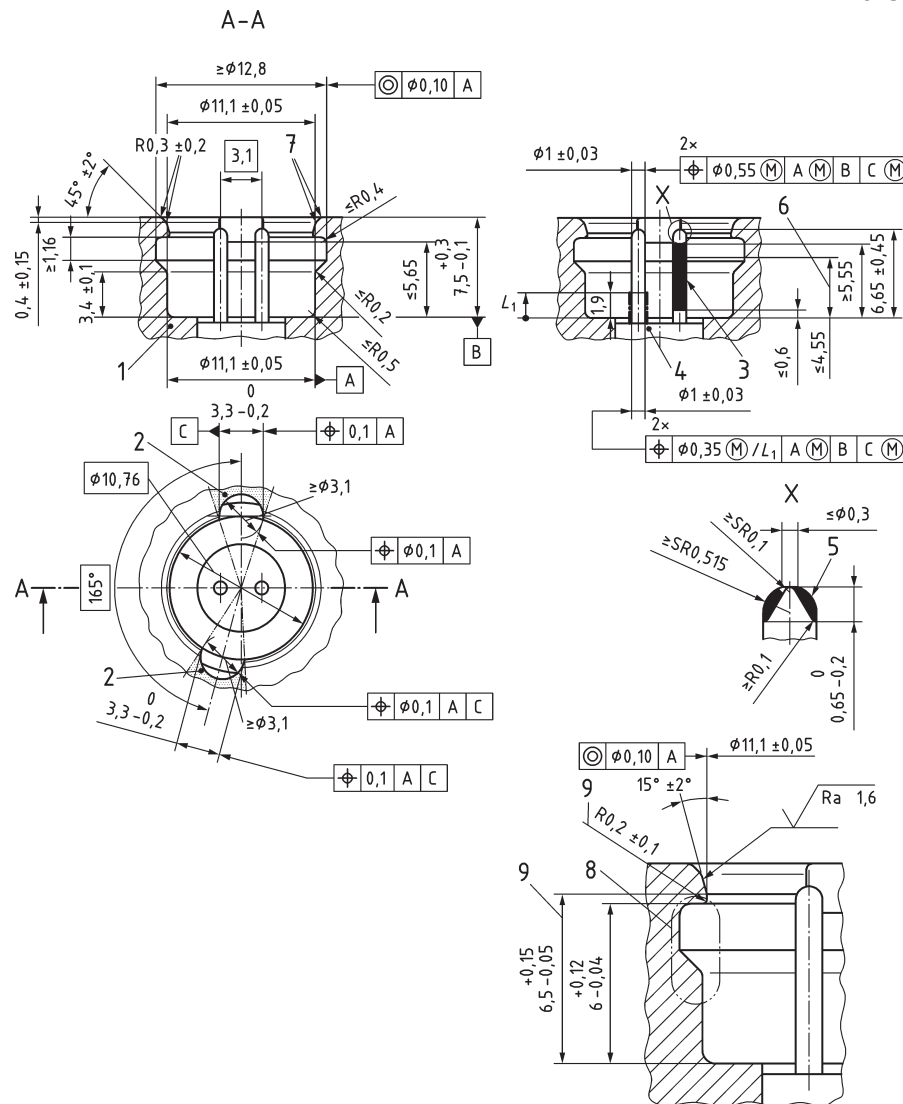

Key

- 1 squib holder
- 2 area in which any shape is acceptable
- 3 minimum plating contact and short-circuit areas according to 5.2; plating shall extend to the tip of the pin
- 4 any shape accepted; surface of initiator shall be flush with or below datum B but shall meet the connector / retainer function requirement
- 5 any convex or straight shape inside shaded area accepted at top of pin shall be smooth and burr free
- 6 maximum contact point; the female contact shall guarantee a minimum overlap of 1 mm in the contact area
- 7 rounded and burr free
- 8 undercut geometry required to hold the connector and retainer inside the squib holder; the undercut surface does not need to be a continuous 360° surface and shall meet the specified connector and retainer retention requirements and dimensions regardless of material
- 9 for existing tools to produce plastic pockets, the following values are also allowed: R $0,15 \begin{smallmatrix} 0 \\ -0,1 \end{smallmatrix}$ - H $6,35 \begin{smallmatrix} 0,15 \\ -0,05 \end{smallmatrix}$

NOTE Datum C depending on the style of the polarization area (hole or slot).

Figure 1 — Squib holder interface with male contacts

5 Material characteristics

5.1 Material specifications for male contacts

The male contacts shall be manufactured of solid material (not folded or hollow).

5.2 Contacts and short circuit areas of the male contacts specifications

Male contact plating shall comply with the following characteristics:


- ASTM B488, type (coating purity) and class (coating thickness) to be agreed between the customer and the supplier but not less than class 0,5;
- ASTM B735, porosity max. 2 pores/mm²;
- under layer material : nickel $\geq 1 \mu\text{m}$.

Annex A (normative)

Sealed variant

All contents of the main document are applicable for the sealed design, except key 2 of [Figure 1](#) (see also [Figure A.1](#)).

For sealed connectors, a seal is inserted between the squib holder and the connector. The space to be left free for the seal shall comply with [Figure A.1](#).

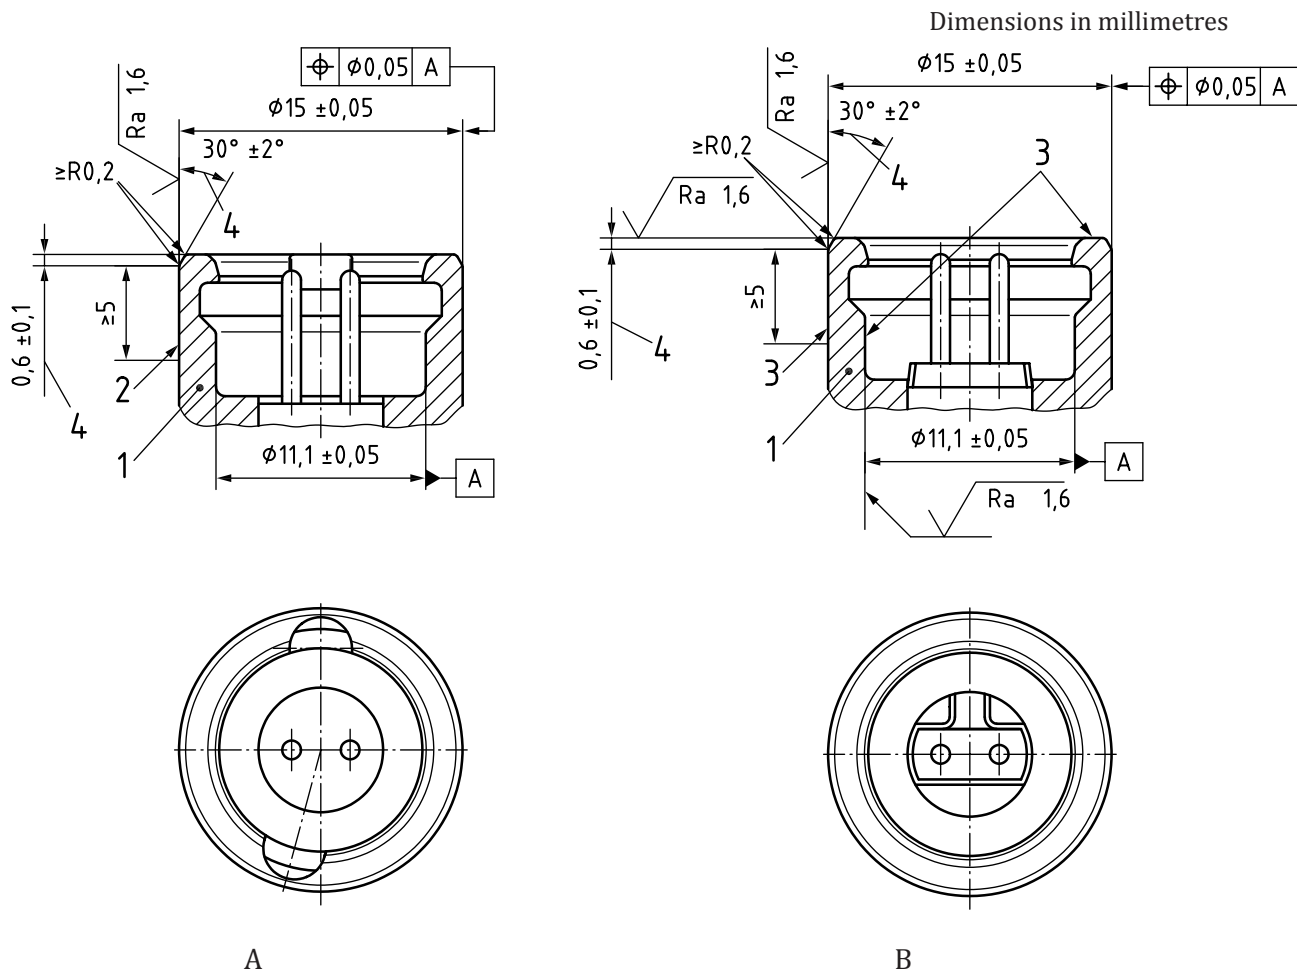

Key

- A with retainer
- B without retainer (see [Annex B](#))
- 1 all shapes accepted
- 2 surface reserved for sealing as option
- 3 possible sealing surfaces, selection has to be agreed between customer and supplier
- 4 alternative $45^\circ \pm 2^\circ$ and $0,5 \pm 0,1$

Figure A.1 — Sealing


Annex B (normative)

Variant without retainer of the pyrotechnic device/initiator harness connector assembly

All contents of the main document are applicable for the design without retainer.

Without retainer, only the anti-rotational feature can exceed the squib holder bottom. Initiator and connector shall comply with [Figure B.1](#).

Dimensions in millimetres

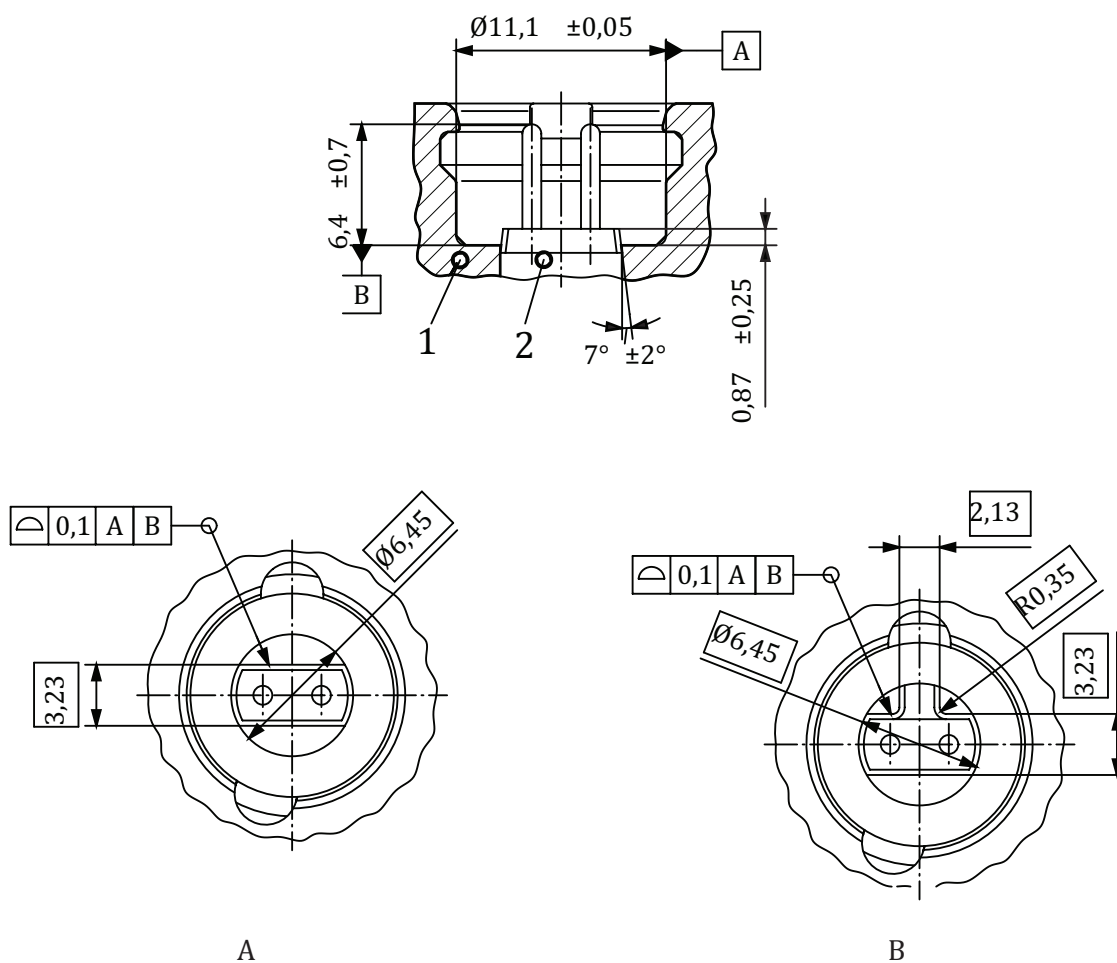

Key

- A symmetrical option
- B asymmetrical option
- 1 squib holder as defined in [Figure 1](#)
- 2 anti-rotational feature for symmetrical and asymmetrical option

Figure B.1 — Pocket interface with male contacts

Bibliography

- [1] ISO 8092-2, *Road vehicles — Connections for on-board electrical wiring harnesses — Part 2: Definitions, test methods and general performance requirements*
- [2] ISO 19072-2, *Road vehicles — Connection interface for pyrotechnic devices, two-way and three-way connections — Part 2: Test methods and general performance requirements*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™