

BS ISO 19826:2017



BSI Standards Publication

Space systems — Programme management — Management of product characteristics

National foreword

This British Standard is the UK implementation of ISO 19826:2017.

The UK participation in its preparation was entrusted to Technical Committee ACE/68, Space systems and operations.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2017.
Published by BSI Standards Limited 2017

ISBN 978 0 580 87187 0

ICS 49.140

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2017.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

INTERNATIONAL
STANDARD

BS ISO 19826:2017

ISO
19826

First edition
2017-02

**Space systems — Programme
management — Management of
product characteristics**

*Systèmes spatiaux — Management de programme — Management
des caractéristiques des produits*



Reference number
ISO 19826:2017(E)

© ISO 2017



COPYRIGHT PROTECTED DOCUMENT

© ISO 2017, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Normative references	1
3 Terms and definitions	1
4 General requirements	2
5 Management process	2
6 Identification and classification	3
6.1 General.....	3
6.2 Product characteristic identification.....	3
6.2.1 General.....	3
6.2.2 Requirements analysis.....	3
6.2.3 Design analysis.....	4
6.2.4 Selection of units of inspection.....	4
6.3 Product characteristics classification.....	5
7 Management implementation	5
7.1 Establishment of control plans to critical and major characteristics.....	5
7.2 Annotation.....	6
7.2.1 General.....	6
7.2.2 Product characteristic classification codes.....	6
7.2.3 Annotation principles.....	7
7.3 Process control and data management.....	7
8 Management close-out	8
Annex A (informative) Examples of product characteristics annotation	9
Bibliography	13

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the World Trade Organization (WTO) principles in the Technical Barriers to Trade (TBT) see the following URL: www.iso.org/iso/foreword.html.

This document was prepared by ISO/TC 20, *Aircraft and space vehicles*, Subcommittee SC 14, *Space systems and operations*.

Introduction

During the development of space products, it is important to identify critical and major characteristics, and to annotate them in drawings and technical specifications. In design, proper product characteristic classification helps to improve the design quality. In production, proper product characteristic classification helps manufacturing activities successfully implement design requirements, and also helps producers control the characteristics which are critical to keeping the stability and traceability of product quality. In inspection, characteristic classification facilitates effective allocation of inspection effort. Meanwhile, it ensures realization of critical and major characteristics, quality of end product and the preset mission by performing management requirements through all of the development stages.

This document mainly defines the critical, major and minor characteristics of space products, describes the whole management process of product characteristics and specifies related management requirements.

This document focuses on management requirements for identification and control of space product characteristics, especially for critical and major characteristics, which are closely connected with end product quality and mission success, and enhances cost-effective applications in the life cycle of a space product.

In addition, this document will help to clarify and enhance current practices to improve quality assurance, and promote international cooperation.

Space systems — Programme management — Management of product characteristics

1 Scope

This document defines management requirements of product characteristics, including their classification, in order to highlight those areas of the product to which specific attention, control or inspections are applied.

This document is applicable to direct implementation of space product characteristic management, especially for mechanical parts and fluidic equipment.

2 Normative references

The following documents are referred to in the text in such a way that some or all of their content constitutes requirements of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 27025, *Space systems — Programme management — Quality assurance requirements*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in ISO 9000 and ISO 10795 and the following apply.

ISO and IEC maintain terminological databases for use in standardization at the following addresses:

- IEC Electropedia: available at <http://www.electropedia.org/>
- ISO Online browsing platform: available at <http://www.iso.org/obp>

3.1

critical characteristic

kind of characteristic whose fault would cause failure of the whole system or major subsystem to perform a required mission or create serious harm to the safety of humans

3.2

end product

product in the assembled and completed state at which acceptance will take place

3.3

inspection unit

unit on which characteristic inspection is performed

3.4

major characteristic

kind of characteristic whose fault would cause the end product fails to perform a required mission

Note 1 to entry: It would not cause failure of the whole system or major subsystems which perform a required mission.

3.5

minor characteristic

kind of characteristic significant to product quality, but whose fault could not affect realization of mission performance of product

3.6 product characteristic distinguishing feature of a product

Note 1 to entry: Product characteristics can be classified variously, including physical, sensory, functional and so on. In this document, according to the severity of consequences caused by characteristic faults and non-conformance with design requirements, product characteristics are mainly divided into three categories: critical, major and minor.

4 General requirements

4.1 In support of product quality and mission functions, management of product characteristic shall be implemented. As part of management process of product characteristics, the suppliers shall identify and classify product characteristics which shall conform to the requirements submitted by their customer, and implement control measures according to classification in order to highlight those areas of the product to which specific attention, control or inspections shall be applied.

4.2 The suppliers shall especially identify critical and major product characteristics during design phase, focus on their control during the process generating critical and major characteristics, and inspect their conformance with the design requirements.

4.3 According to the severity of the consequences caused by failure and non-conformance with the design requirements, product characteristics are classified into critical characteristics, major characteristics and minor characteristics. The suppliers shall strengthen control of critical and major characteristics with proper measures during the production and inspection process.

4.4 Product designers are mainly responsible of product characteristic identification and classification, and product assurance and process personnel participate. Processes, manufacturing, inspection and other factors shall be taken into consideration during product characteristic identification and classification. The analysis procedure and results of identification and classification shall be documented and reviewed. If necessary, the customer shall take part in the review.

4.5 Identification and classification of product characteristics are implemented over the project phases. The suppliers shall begin to identify and classify product characteristics during the preliminary definition phase in which results of product characteristics analysis including product characteristic category and their control measures shall be preliminarily defined. The suppliers shall continue to make further identification of critical and major characteristics referring to product design and verification, and to update the results of classification during the detail definition phase in which characteristic categories are determined finally.

4.6 Product characteristic management should be supervised by the department with responsibility for quality assurance/configuration and data management.

5 Management process

Management of product characteristic generally includes product characteristic identification and classification, management implementation and management close-out. [Figure 1](#) gives the management process of product characteristics.

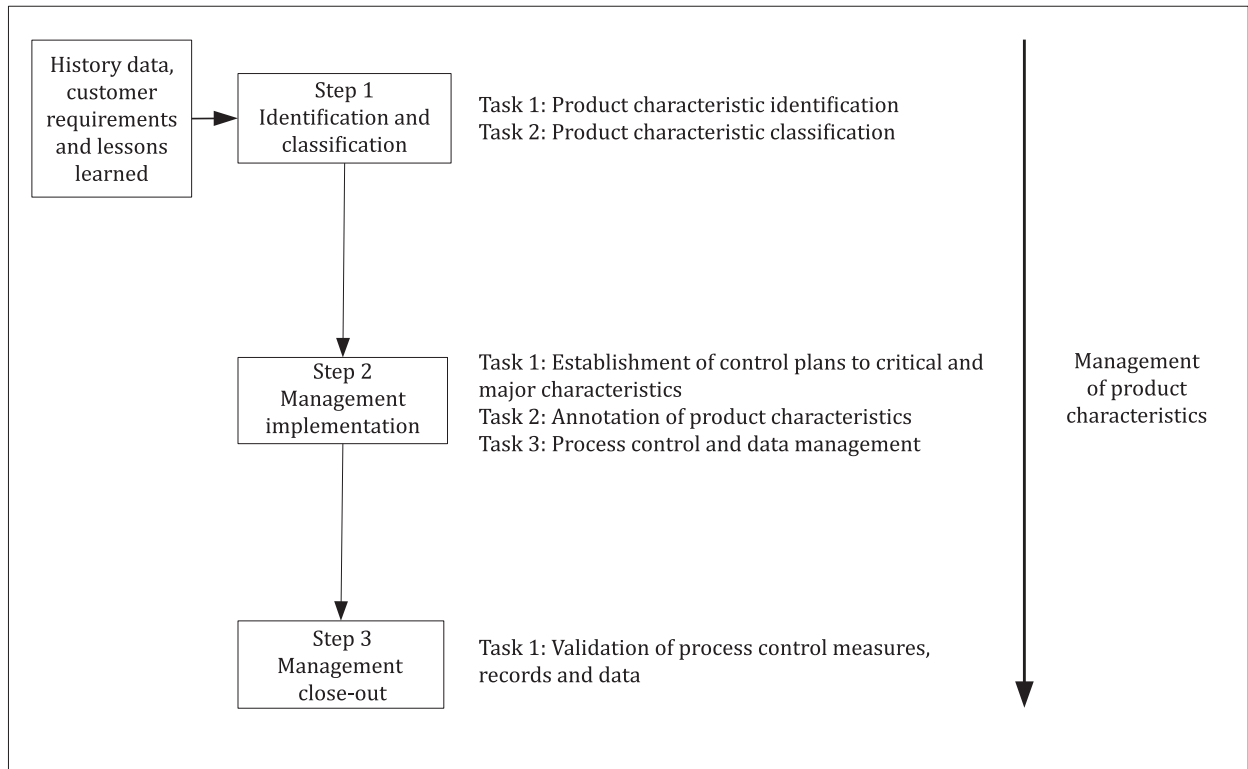


Figure 1 — Management process of product characteristics

6 Identification and classification

6.1 General

Product characteristics identification and classification is a part of design activity. Integrated engineering, dependability, quality assurance disciplines, product characteristics identification and classification is a complicated process with the effort of comprehensive analysis. Engineering experience is needed in accomplishment of identifying and classifying product characteristics.

History data, lessons learned and customer requirements which contain technical requirements, acceptance requirements and project management requirements are the inputs of product characteristics identification and classification. Identified critical, major and minor characteristics are the outputs of product characteristics identification and classification.

6.2 Product characteristic identification

6.2.1 General

Product characteristics identification which includes activities of requirements analysis, design analysis and selection of units of inspection is the basis for product characteristics classification. Through product characteristic identification, the characteristics related to product quality and acceptance of product can be identified, and levels of inspection can be determined.

6.2.2 Requirements analysis

Requirements analysis is a systematic procedure for determining the demands made on product by its intended mission. Requirements analysis shall be performed by the analysis of mission functions of

hardware elements, duration of required performance, environmental limits of the mission, availability of maintenance and effects of failures on the mission. Contents of each analysis are generally as follows.

- a) Functions analysis: all functions of the product shall perform during its mission.
- b) Duration of performance analysis: the duration of performance required of each function.
When the performance times are random variables, their maximum values should be used.
- c) Environmental limits analysis: environmental extremes applicable to the mission.
- d) Availability of maintenance analysis: if the product can be maintained in use, consider what maintenance is feasible in the worst case of conditions.
- e) Effects of failures analysis: whether partial or complete failure of product can be accepted, and the effects of failure to the mission.

6.2.3 Design analysis

Design analysis is a procedure for identifying and understanding in detail the means by which a product is able to respond to the requirements of its mission. Complete design analysis is required for a new design. Design analysis of existing design is to evaluate history data of similar items. Design analysis is to analyse the design features of hardware elements relative to the requirements of coordination, life, interchangeability, function and safety, and to study material properties, fabrication, assembly and testing processes, tolerances, design life, failure modes, effects of failure on performance and safety. Contents of design analysis are generally as follows:

- a) material properties which are significant in determining the quality;
- b) means of the item to be processed, fabricated, assembled and tested;
- c) interface;
- d) interchangeability;
- e) design life and characteristics determining the life;
- f) product failure modes and failure effects;
- g) safety hazard to humans caused by failure; and
- h) ways of handling, shipping and storing the product.

6.2.4 Selection of units of inspection

Selection of inspection units shall also take possibility and economical efficiency of inspection into consideration. A product should generally be selected as an inspection unit if it meets one of the following criteria:

- a) the end product;
- b) the spare part which is needed for maintaining or repairing the end product;
- c) the product which is required to be interchangeable for use and safety;
- d) the product which is required to be very safe and reliable in using;
- e) the product whose characteristics can be determined only in actual service condition (e.g. the product which must be tested destructively); and
- f) the product which cannot be inspected, repaired or replaced after installation or whose inspection, repair or replacement costs too much.

NOTE Generally, it is more effective to find the defective product at lower assembly level, and quality control effect is maximized. However, it is more economic to inspect at higher assembly level.

6.3 Product characteristics classification

Based on the results of product characteristics identification, classification is implemented with mainly assessing the seriousness of the relevant defects of the product contributing to the mission. The results of classification are critical, major and minor. Categories shall properly reflect the seriousness of the product defects. It shall not be over-classified or under-classified.

Take solar array drive assembly (SADA) as an example.

Based on the effort of technical requirement analysis, design analysis and selection of inspection unit, examples of SADA's critical, major and minor characteristics are in [Table 1](#).

Table 1 — Examples of SADA's critical, major and minor characteristics

Characteristic	Classification	Reason description
Power transmission and driving functions	critical	If any of these two characteristics is lost, abnormality and malfunction of satellite would happen because of energy lost.
Supporting and load bearing of major structural components	major	It influences load-carrying capability and operation stability of SADA. It may cause SADA to fail to perform required mission, but this may not cause the consequence as serious as critical characteristics.
Weight	minor	It may not affect the realization of mission performance of SADA.

7 Management implementation

7.1 Establishment of control plans to critical and major characteristics

After classification of product characteristics, proper control plans to critical and major characteristics are required and documented to assure these characteristics are effectively controlled during development and ongoing production. As a minimum, a control plan shall contain the following:

- a) product name (name of system, subsystem or equipment);
- b) characteristic and its classification code;
- c) inspection unit;
- d) inspection methods;
- e) control measures adopted;
- f) criteria for judgment of conformity with requirements;
- g) time of completion of implementing control measures; and
- h) resource support.

7.2 Annotation

7.2.1 General

7.2.1.1 After final determination of product characteristic classification, critical, major and minor characteristics shall be marked on the drawings or technical specifications with proper codes in order to be transitioned from design to production. Production and inspection departments know what to specially focus on, control and inspect through those annotated documents.

7.2.1.2 All of the documents related with the processes of generating critical and major product characteristics shall be marked.

7.2.2 Product characteristic classification codes

7.2.2.1 After the product characteristic categories are determined, the characteristics shall be annotated with proper codes, which generally consist of category code letter and sequence number. Besides, supplementary symbols should be added when necessary.

7.2.2.2 Category code should be marked with capital letters.

EXAMPLE

Critical characteristics: C

Major characteristics: M

Minor characteristics: No letter

7.2.2.3 The characteristics classified should be numbered serially on each drawing and technical specification. Sequence number should be serially placed after the category code letter with an Arabic number.

EXAMPLE

Critical characteristics: C1~C99

Major characteristics: M101~M199

7.2.2.4 Supplementary symbol should be annotated after the sequence number with alphabet in order to designate requirements indicated.

EXAMPLE

A — Part whose characteristic classification is defined as critical or major characteristic when purchased as individual product changes into minor characteristic after assembled.

B — Requirement for check before assembly.

C — The technique parameters can be taken as acceptance basis.

D — Requirement for special test or check.

NOTE When there is D marked in the characteristic classification code, a special explanation on the inspection or test method, condition and requirement are provided.

7.2.2.5 The code structure of product characteristic is shown in [Figure 2](#).

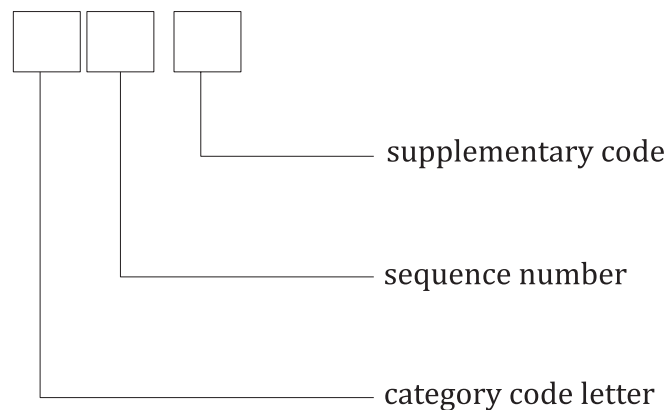


Figure 2 — Code structure of product characteristic

EXAMPLE When the surface roughness $3,2 \mu\text{m}$ is considered as the first critical characteristic of a part, and it has to be checked before assembly. It shows as $3,2 \mu\text{m}$ (C1B).

7.2.3 Annotation principles

7.2.3.1 Annotation in drawings should follow the principles below.

- When some dimension tolerance is classified as a critical or major characteristic, the category code should be marked behind the dimension value with parentheses.
- When some geometrical tolerance is classified as a critical or major characteristic, the category code should be marked behind the geometrical tolerance frame with parentheses.
- When a technical requirement is classified as a critical or major characteristic, the category code should be marked before the technical requirement with parentheses.
- When the product material is classified as a critical or major characteristic, the category code should be marked in the material column of the drawing. A supplementary symbol may be added when necessary.
- For those drawings of inspection units with critical or major characteristics, the label of “Critical” or “Major” should be marked in the blank corner top-right of the main title bar. For those assembly drawings of inspection units with critical or major characteristics, the characteristic code should be marked in the frame left of the assembly list. If this inspection unit contains both critical and major characteristics, it shall be treated as a critical characteristic.

7.2.3.2 When the product technical specification has the description of critical or major characteristics, the category code shall be marked behind the description with parentheses. Besides, the category code shall be also marked clearly on the specification cover. If this specification contains both critical and major characteristics, it shall be treated as with critical characteristic.

7.2.3.3 For examples of the category codes of critical or major characteristics in drawings or technical specifications, see [Annex A](#).

7.3 Process control and data management

7.3.1 The supplier production department shall perform process-related analysis including process realization, process stability, process inspection analysis and so on, after the documents with category codes are transitioned from the design department. Based on the above analysis, the production department shall identify significant procedures or indexes where special control shall be imposed,

determine the control methods or measures (such as operators, equipment tools and process methods) and mark “Critical” or “Major” in the process documents.

7.3.2 The personnel who perform the processes generating critical and major characteristics shall be trained and certificated or can demonstrate their proficiency through their regular activities.

7.3.3 Materials, equipment, computer systems, software and procedures involved in the process of generating critical and major product characteristics shall be stable, validated and monitored.

7.3.4 100% check shall be performed to critical and major characteristics. If necessary, key inspection points and mandatory inspection points shall be selected. The requirements for key inspection points and mandatory inspection points shall follow ISO 27025.

7.3.5 Before inspection of critical and major characteristics, the supplier quality assurance department shall organize design and production department to analyse and determine the inspection points, methods, procedures, tools, acceptable criteria, record, environment conditions and so on, which are the basis to inspect critical and major characteristics.

7.3.6 The original product data during the process generating critical and major characteristics shall be kept completely and traceable.

7.3.7 Information of abnormal variation and other quality problems shall be reported to quality management department in time.

7.3.8 The inspection results of critical and major characteristics shall be quantitative, completed and traceable.

7.3.9 Deviation and waiver of the critical and major characteristics are not allowed in general. But, if they must be done, they shall be approved by higher authority.

7.3.10 Design and production documents related to critical and major characteristics shall be considered as configuration baseline and shall be maintained stably. Their changes shall be controlled strictly. If necessary, it shall be approved by higher authority. If the categories of product characteristics change, the category codes of products in drawings and technical specifications shall be amended correspondingly.

8 Management close-out

8.1 The suppliers shall monitor and assess the product characteristics and associated control measures for status.

8.2 The suppliers shall implement corrective actions when non-conformances occur during the process of generating critical and major characteristics.

8.3 The suppliers shall analyse the quality records and other objective evidence and validate conformance of process control.

8.4 The suppliers shall retain data package associated with product characteristics and ensure that the data package are completed, specified and readily accessible and retrievable wherever they are needed.

Annex A (informative)

Examples of product characteristics annotation

A.1 Annotation on drawing

A.1.1 Annotation of measurement tolerance

When some measurement tolerance is classified as a critical or major characteristic, the characteristic classification code is marked behind the measurement value with parentheses. If the upper and lower variations of tolerance are defined with different characteristic categories, the upper variation of tolerance is marked with "+", and the lower variation of tolerance is marked with "-".

EXAMPLE 1

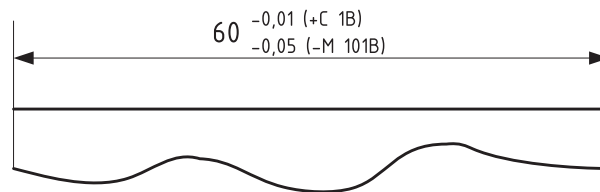


Figure A.1 — Maximum value critical characteristic and minimum value major characteristic

[Figure A.1](#) shows maximum value as a critical characteristic, the minimum value as a major characteristic and all of them shall be checked before assembly.

EXAMPLE 2

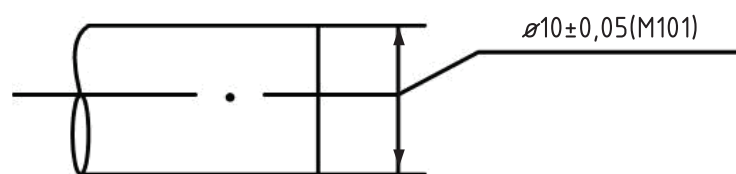


Figure A.2 — Maximum value and minimum value major characteristics

[Figure A.2](#) shows both the maximum value and minimum value are major characteristics.

EXAMPLE 3




Figure A.3 — Minimum value as major characteristic when product purchased individually

[Figure A.3](#) shows the minimum value as major characteristic when the product is purchased as an individual product. It becomes a minor characteristic after assembly.

A.1.2 Annotation of shape/position tolerance

When some shape/position tolerance is classified as a critical or major characteristic, the characteristic classification code is marked behind the shape/position tolerance frame with parentheses.

EXAMPLE 1

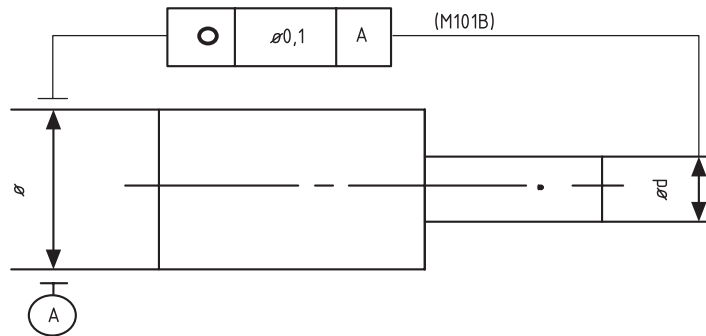


Figure A.4 — Requirement of coaxial as a major characteristic

Figure A.4 shows the requirement of coaxial as a major characteristic, and it shall be checked before assembly.

EXAMPLE 2

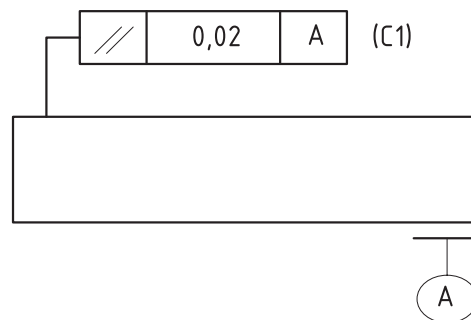


Figure A.5 — Requirement of parallel as a critical characteristic

Figure A.5 shows the requirement of parallel as a critical characteristic.

A.1.3 Annotation of technical requirement characteristics on drawing

When some technical requirement is classified as a critical or major characteristic, the characteristic classification code is marked before the technical requirement with parentheses.

EXAMPLE 1

(M101B) 1. No scratch, crack or chasm shall be on the surface of the part by visual inspection.

It means this requirement is a major characteristic and is required to be checked before assembly.

EXAMPLE 2

(M102C) 2. Heat treatment HRC=32~36.

It means the rigidity is a major characteristic and the technique parameters can be taken on an acceptance basis.

A.1.4 Annotation of material characteristics

When the material of a part is classified as a critical characteristic or a major characteristic, the category code letter and sequence number are marked in the material column of the part drawing. Material characteristic supplement code is added when necessary.

The material characteristic supplement code is shown in lowercase, and marked as subscript.


a — material component

b — material specification

c — material characteristic


d — material surface quality

EXAMPLE 1

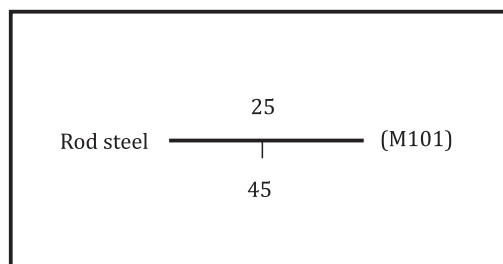

This means “Rod steel” is a major characteristic.

EXAMPLE 2

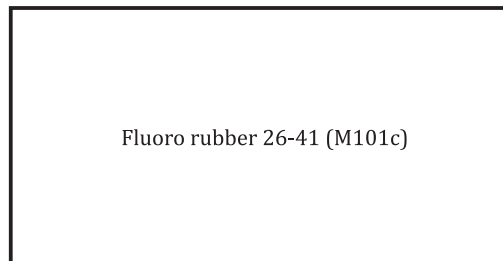

This means the characteristic of fluoro rubber is a major characteristic.

A.2 Annotation on content of design document

When the product technical requirement has the item description of critical or major characteristics, characteristic classification code shall be marked behind the item with parentheses.

EXAMPLE “Working hour without failure”: The working hour without failure shall be no less than 20 000 h (C1D) in a specified environment.

This means the 20 000-h working hour is defined as a critical characteristic and shall be checked by using a special check method.

A.3 Label on chart of design document

When the product list contains critical products (with critical characteristics) and important products (with major characteristics), their characteristic classification codes are marked in the frame 8 mm right to the list, as shown in [Figure A.6](#).

"

Format 4a

No.	Breadth			
1				
2				
C 3				
4				
M 5				

Figure A.6 — Marking characteristic classification codes

Bibliography

- [1] ISO 9000, *Quality management systems — Fundamentals and vocabulary*
- [2] ISO 10795, *Space systems — Programme management and quality — Vocabulary*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use.

Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK