

BS ISO 26422:2014



BSI Standards Publication

**Petroleum and related products  
— Determination of shear  
stability of lubricating oils  
containing polymers — Method  
using a tapered roller bearing**

**bsi.**

...making excellence a habit.™

**National foreword**

This British Standard is the UK implementation of ISO 26422:2014.

The UK participation in its preparation was entrusted to Technical Committee MCE/18/-/16, Hydraulic fluids.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.  
Published by BSI Standards Limited 2015

ISBN 978 0 580 84343 3  
ICS 75.100

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2015.

**Amendments/corrigenda issued since publication**

Date	Text affected
------	---------------

---

INTERNATIONAL  
STANDARD

**ISO**  
**26422**

Second edition  
2014-12-15

---

---

**Petroleum and related products —  
Determination of shear stability of  
lubricating oils containing polymers —  
Method using a tapered roller bearing**

*Pétrole et produits connexes — Détermination de la stabilité au  
cisaillement des huiles lubrifiantes contenant des polymères —  
Méthode avec roulement à rouleaux coniques*



Reference number  
ISO 26422:2014(E)

© ISO 2014



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Principle</b> .....	<b>2</b>
<b>5 Reagents and materials</b> .....	<b>2</b>
<b>6 Apparatus</b> .....	<b>2</b>
<b>7 Preparation</b> .....	<b>3</b>
7.1 Preparing the tapered roller bearing and testing apparatus assembly.....	3
7.2 Assembly of the shear stability apparatus.....	4
7.3 Running-in of the tapered roller bearing.....	4
7.4 Test conditions.....	5
7.5 Validation of test bearings.....	6
<b>8 Procedure</b> .....	<b>6</b>
<b>9 Referencing</b> .....	<b>6</b>
9.1 General.....	6
9.2 Validation of new test bearings.....	6
9.3 Referencing in service.....	6
9.4 Frequency of reference testing.....	7
9.5 Reference fluid control limits.....	8
9.6 Reference fluids.....	8
<b>10 Reporting of results</b> .....	<b>8</b>
<b>11 Precision</b> .....	<b>8</b>
<b>12 Test report</b> .....	<b>9</b>
<b>Bibliography</b> .....	<b>10</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 28, *Petroleum products and lubricants*.

This second edition cancels and replaces the first edition (ISO 26422:2011), which has been technically revised. The objective of the revision is to harmonize the test methodology of ISO 26422 with that of CEC L-45-99 regarding reference fluids, referencing procedure, and the precision statement, thereby avoiding differences between two test methods which are technically equivalent.

ISO 26422 is based upon DIN 51350-6,<sup>[1]</sup> which has also been adopted by the Co-ordinating European Council (CEC) as CEC-L-45-99. ISO/TC 28 acknowledges permission granted by Coordinating European Council to reproduce selected parts of CEC Test Method L-45-99<sup>[2]</sup> to assist with the preparation of this International Standard.

# Petroleum and related products — Determination of shear stability of lubricating oils containing polymers — Method using a tapered roller bearing

**WARNING** — The use of this International Standard can involve hazardous materials, operations, and equipment. This International Standard does not purport to address all of the safety problems associated with its use. It is the responsibility of the user of this International Standard to establish appropriate safety and health practices and to determine the applicability of regulatory limitations prior to use.

## 1 Scope

This International Standard specifies a method of determining the shear stability of polymer-containing lubricating oils by the four-ball machine as specified in ISO 20623, but using a tapered roller bearing. The test results allow prediction of the in-service permanent viscosity loss.

**NOTE** Other International Standards exist which evaluate viscosity loss of polymer-containing oils. The method specified within this International Standard subjects fluids to a higher shear rate than, for example, the diesel injector nozzle shear test described within ISO 20844.<sup>[3]</sup> It is particularly appropriate for lubricants being used in high shear applications, such as components with gears and roller bearings. In such applications, the shear rate in the ISO 20844 test method can be too low to generate a realistic permanent loss in viscosity of the fluid.

## 2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 3104, *Petroleum products — Transparent and opaque liquids — Determination of kinematic viscosity and calculation of dynamic viscosity*

ISO 3105, *Glass capillary kinematic viscometers — Specifications and operating instructions*

ISO 20623, *Petroleum and related products — Determination of the extreme-pressure and anti-wear properties of fluids — Four ball method (European conditions)*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1

#### percentage viscosity loss

$R_V$

measure of shear stability calculated in accordance with the following equation:

$$R_V = \frac{v_0 - v_1}{v_0} \times 100$$

where

$v_0$  is the kinematic viscosity at 100° C of the fluid before shear, expressed in mm<sup>2</sup>·s<sup>-1</sup>;

$v_1$  is the kinematic viscosity at 100° C of the fluid after shear, expressed in mm<sup>2</sup>·s<sup>-1</sup>.

Note 1 to entry: A small value indicates a high resistance to viscosity shear loss.

Note 2 to entry: The tapered roller bearing test is also referred to as the KRL (Kegelrollenlager) principle.

## 4 Principle

Using the splash lubrication method, a volume of 40 ml of the lubricating fluid is tested at a constant temperature of 60 °C in a tapered roller bearing driven in the four-ball machine. The test is performed at constant speed and the load applied during a given running time is 5 000 N. The kinematic viscosity of the lubricating fluid is determined at a temperature of 100 °C before and after the test. The percentage viscosity loss,  $R_v$ , is calculated from these two viscosity measurements.

NOTE Some classification systems specify that the kinematic viscosity before and after shear is determined at temperatures other than 100 °C, e.g. at 40 °C.

## 5 Reagents and materials

**5.1 Cleaning solvents**, appropriate to the last fluid type tested. For fluids based upon petroleum mineral oil, aliphatic hydrocarbons, and acetone are usually suitable. For some hydraulic fluids, a low molecular mass alcohol can assist in the initial stages of cleaning.

## 6 Apparatus

**6.1 Four-ball machine**, as specified in ISO 20623.

**6.2 Tapered roller bearing**, type SKF 32008 X/Q, which incorporates optimised contact geometry and surface finish. The single row tapered roller bearing consists of an inner ring with cage and roller assembly and an outer ring.

It is advisable that the inner and outer rings be considered to be a matched pair when obtained from the supplier and these components should not be interchanged with those of other sets of bearings.

Precision has been established using the 32008 X/Q test bearing manufactured by SKF. It is strongly recommended that only bearings of this specification manufactured by SKF are used. The use of ISO 355 dimension series 3CD bearings of alternative specification and manufacturer requires validation by inter-laboratory exercises to establish technical suitability, test precision, and service life.

**6.3 Shear stability testing apparatus**<sup>1)</sup>, as shown in [Figure 1](#).

This is available from several manufacturers. It is recommended that only apparatus which has been proven in tests run in accordance with CEC L-45-99[2] or DIN 51350-6[1] is used.


**6.4 Temperature control device**, for controlling the temperature of the fluid to a temperature of 60 °C ± 1 °C. This typically comprises of an electrical heating band clamped around the housing, galleries within the housing through which cooling water can be passed, a temperature sensor and a control system to automatically energize and de-energize the heating, and cooling circuits as required.

---

1) Information on suitable products available commercially can be obtained from DIN-Bezugsquellen für normgerechte Erzeugnisse im DIN Deutsches Institut für Normung e.V., Burggrafenstraße 6, D-10787 Berlin, Germany. This information is given for the convenience of users of this International Standard and does not constitute an endorsement by ISO of these products.



**6.5 Viscometer**, an appropriate glass capillary viscometer meeting the requirements of ISO 3105 or a suitable automatic viscometer should be used for the determination of kinematic viscosity in accordance with ISO 3104.

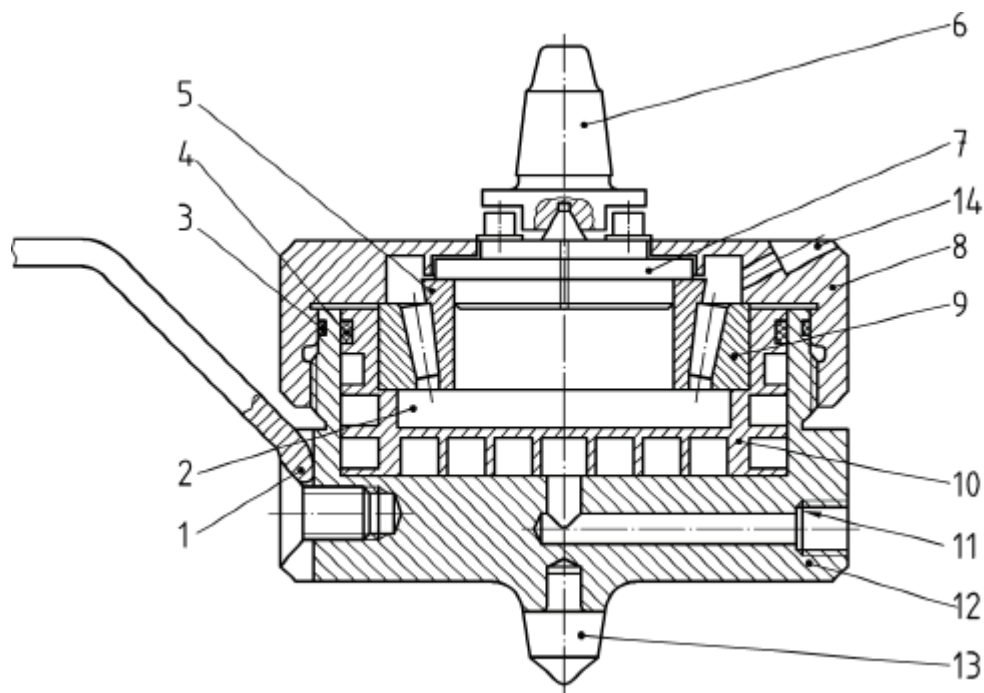

**Key**

- |   |  |
|---|--|
| 1 torque reaction arm   | 8 housing cover                              |
| 2 test fluid chamber  | 9 tapered roller bearing outer ring          |
| 3 O-ring  | 10 cooling galleries for temperature control |
| 4 O-ring  | 11 coolant inlet                             |
| 5 tapered roller bearing inner ring with cage and rollers       | 12 housing                                   |
| 6 drive spindle   | 13 conical mounting point                    |
| 7 drive assembly for tapered roller bearing inner ring assembly | 14 location of temperature sensor            |

**Figure 1 — Shear stability testing apparatus**

**7 Preparation**

NOTE The numbers in parentheses in this clause correspond to the items detailed in [Figure 1](#).

**7.1 Preparing the tapered roller bearing and testing apparatus assembly**

**7.1.1** Prior to the test, clean the housing, housing cover, and the tapered roller bearing assembly with a cleaning solvent, e.g. n-heptane, and dry in a stream of dry air or with a clean, dry, lint-free cloth.

**7.1.2** Inspect the O-rings fitted to the housing and housing cover (3) and (4) and ensure that they are properly located and free from damage.

**7.1.3** The outer ring and inner ring with cage and roller assembly of the test bearing should be carefully inspected for evidence of mechanical damage, surface deposits, corrosion, and thermal staining. Normal wear of the outer ring and rollers is indicated by a matt grey surface with light circumferential scratching.

If damage due to pitting, scoring, or surface staining is observed, the outer ring and inner ring with cage and rollers should be replaced as an assembly. If surface deposits cannot be removed by the cleaning procedure detailed in [7.1.1](#), the test bearing assembly should be discarded and replaced.

## 7.2 Assembly of the shear stability apparatus

NOTE The numbers in parentheses in this clause correspond to the items detailed in [Figure 1](#).

**7.2.1** Fit the test bearing outer ring (9) into the cleaned housing (12) and fill with  $40,0 \text{ ml} \pm 0,5 \text{ ml}$  of the test fluid.

**7.2.2** Press the cleaned inner ring with cage and roller assembly (5) onto the drive assembly (7) and check to ensure that it is seated correctly.

**7.2.3** Place the inner ring with cage and roller assembly and drive assembly into the prepared housing ensuring that the rollers are fully seated in the outer ring. Screw the housing cover into position and fully tighten it using hand pressure only.

**7.2.4** Locate the assembled testing apparatus into the four-ball machine ensuring that the drive spindle (6) engages with the drive assembly for the inner ring with cage and roller assembly (7). Apply a load of  $5\,000 \text{ N} \pm 200 \text{ N}$ .

**7.2.5** Connect the temperature sensor (located at position 14) to the temperature control unit and check their correct function.

## 7.3 Running-in of the tapered roller bearing

Before starting the test, ensure that the SKF 32008 X/Q test bearing has been run-in in accordance with the running-in procedure detailed in [Figure 2](#).

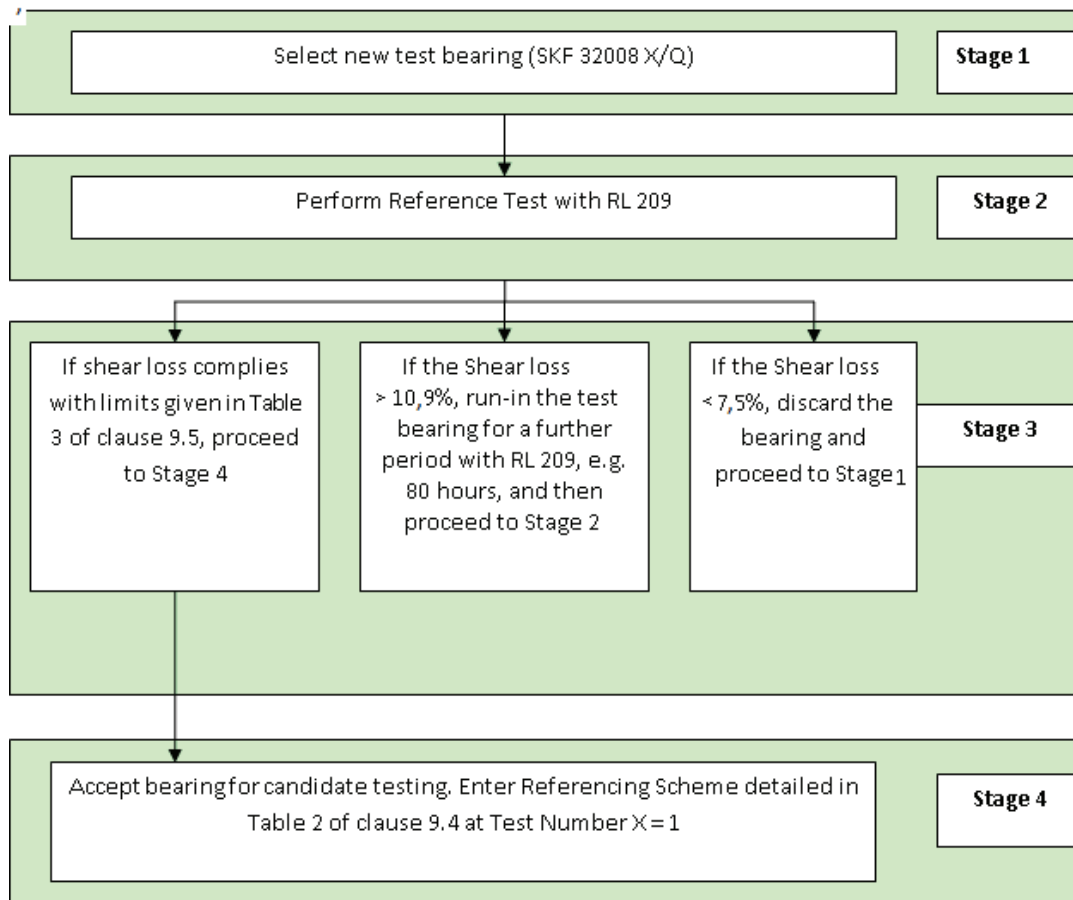


Figure 2 — Running-in procedure flowchart: Validation for new test bearings

#### 7.4 Test conditions

The test conditions are specified in [Table 1](#).

Table 1 — Test conditions

Test parameter	Test condition
Drive motor speed	1 475 min <sup>-1</sup> ± 25 min <sup>-1</sup>
Lubricant temperature	60 °C ± 1 °C
Lubricant quantity	40,0 ml ± 0,5 ml
Test load	5 000 N ± 200 N
Test duration	1 740 000 ± 500 motor revolutions, equivalent to approximately 20 h

Test runs of shorter or greater duration than 1 740 000 revolutions (approximately 20 h) might be more appropriate for certain applications. For example, longer duration tests of 200 h have shown good correlation with some high severity applications conditions as found in manual transmissions or axles, whereas shorter duration tests of 4 h or 8 h might be of appropriate severity for high viscosity index hydraulic fluids and shock absorber fluids. The precision of tests conducted for durations other than 1 740 000 revolutions has not been established.

## 7.5 Validation of test bearings

Flowcharts detailing the processes for running-in and validation of new test bearings and validation of test bearings in service are given in [Figure 2](#) and [Figure 3](#), respectively.

## 8 Procedure

**8.1** After performing the check on the function of the thermal sensor and controller as described in [7.2.5](#), and before starting the drive motor, switch on the heater control unit and pre-heat the test oil to  $50\text{ °C} \pm 1\text{ °C}$ .

**8.2** Once the temperature has achieved  $50\text{ °C} \pm 1\text{ °C}$ , set the heater control unit to a test fluid temperature of  $60\text{ °C} \pm 1\text{ °C}$  and start the motor. Allow the test to run under the conditions of applied load and number of motor revolutions as specified in [Table 1](#).

**8.3** Once the required number of revolutions of the motor has been achieved, stop the test. Switch off the heater control unit and then remove the tapered roller bearing assembly from the four-ball machine. Dismantle the assembly and decant the test fluid into a clean container.

**8.4** Using test method ISO 3104 or equivalent, determine the kinematic viscosity of the test fluid at  $100\text{ °C}$  before and after the test. Calculate the relative change in viscosity,  $R_V$ , and express the result in units of percentage change in accordance with [Clause 10](#).

## 9 Referencing

### 9.1 General

In order to verify that the test rig is functioning correctly, reference tests shall be conducted according to the scheme detailed in [Table 2](#). The control limits for each of the reference fluids are detailed in [Table 3](#). Evaluation of candidates can only commence once the referencing requirements detailed in this clause have been satisfied. All reference tests shall be conducted in accordance with the test conditions detailed in [Table 1](#).

### 9.2 Validation of new test bearings

New test bearings shall be run-in using RL 209. When a test result that complies with the limits detailed in [Table 3](#) has been obtained with RL 209, the referencing scheme detailed in [Table 2](#) shall then be entered at test number  $X = 1$ . If the reference test with RL 209 fails to comply with the upper limit detailed in [Table 3](#), further running-in of the test bearing with RL 209 should be attempted and the validation procedure repeated. In the event that a reference test with RL 209 fails to comply with the lower limit detailed in [Table 3](#), the test bearing should be discarded and another test bearing selected for running-in.

### 9.3 Referencing in service

Referencing in service is detailed in [Figure 3](#). If a reference test result for either RL 209 or RL 210 fails to satisfy the limits detailed in [Table 3](#), a reference test using RL 209 should be conducted as the next test to verify the performance of the test bearing. If the viscosity loss result of this test complies with the limits detailed in [Table 3](#), it is permissible for candidate testing to recommence. The referencing sequence should be re-joined at the position in [Table 2](#) that testing was suspended. If the viscosity loss fails to comply with the limits detailed in [Table 3](#), the bearing should be considered to be at the end of its service life and taken out of service. The test bearing should be retained.

Test bearings that were originally run-in and validated using RL 181 can continue to be used in service providing that they satisfy the Control Limits detailed in [Table 3](#) for RL 209 and RL 210.

NOTE The use of RL 181 as the running-in fluid for new test bearings and as a reference fluid for bearings in service was discontinued in August 2012 following the validation of RL 209 with revised Control Limits as its replacement.

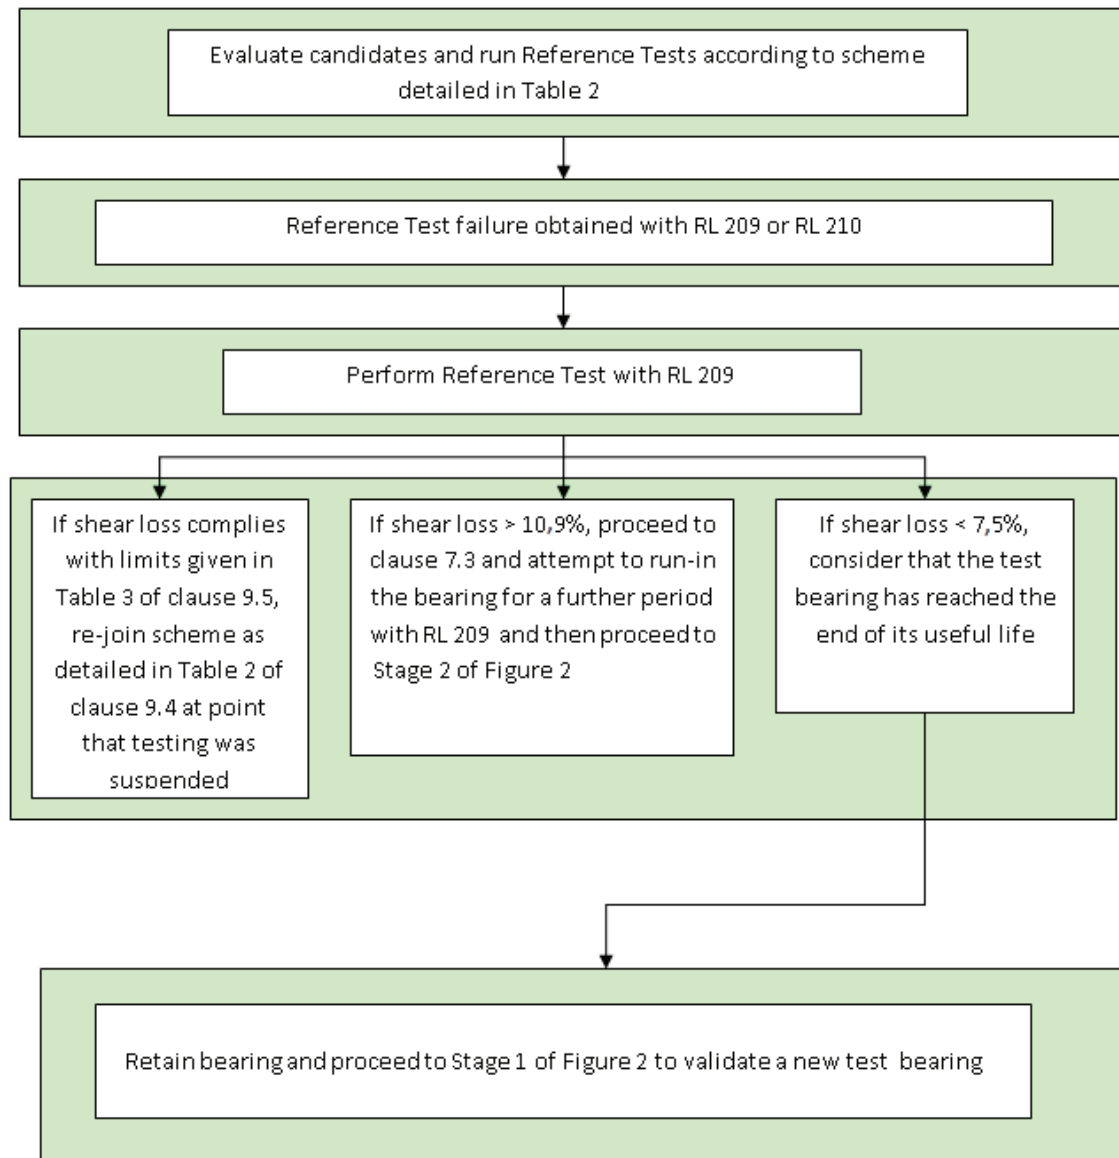


Figure 3 — Flowchart for referencing in service

#### 9.4 Frequency of reference testing

With reference to [Table 2](#) and [Table 3](#), Test Number X = 1 is the acceptance test for RL 209 with a percentage viscosity loss of between 7,5 % and 10,9 %.

Table 2 — Frequency of referencing testing

Test number	RL 209	RL 210
X = 1	√	
10	√	
11		√

**Table 2 (continued)**

Test number	RL 209	RL 210
20	√	
30	√	
31		√
40	√	
50	√	
51		√

## 9.5 Reference fluid control limits

See [Table 3](#) for the viscosity shear loss limits.

**Table 3 — Reference fluid viscosity shear loss limits**

Fluid	Lower limit	Upper limit
RL 209	7,5 %	10,9 %
RL 210	16,5 %	26,3 %

## 9.6 Reference fluids

The following shall be used as reference fluid

- **CEC RL 209**, a commercially-marketed SAE 75W/80 automotive gear lubricant. RL 209 is also used for the running-in of new test bearings and
- **CEC RL 210**, a commercially marketed API GL5 automotive gear lubricant.

NOTE 1 The use of RL 181 was discontinued as a reference fluid in August 2012 following exhaustion of stock of the final batch.

NOTE 2 The CEC Secretariat can be contacted at Interlynk Administrative Services Limited, 17 Peckleton Lane, Desford, Leicestershire, LE9 9JU, United Kingdom, for further advice and information on the availability of CEC Reference Fluids.

## 10 Reporting of results

Report the following:

- viscosity shear loss,  $R_V$ , as a percentage, rounded to the nearest 0,1 %, in accordance with [3.1](#), and
- test duration.

EXAMPLE The percentage viscosity loss after a test run of 1 740 000 motor revolutions is determined at 29,55 %,  $R_V = 29,6$  %.

## 11 Precision

The precision of this International Standard has been determined using ISO 4259[4] from reference tests generated by participating laboratories of CEC Technical Working Group SG-T-045. The reference tests were conducted between October 2010 and September 2011. The reference fluids tested were RL 181, RL 209, and RL 210. Eighteen laboratories participated and generated a total of 390 test results (110 test results for RL 181, 142 test results for RL 209, and 138 test results for RL 210).

The precision statistics are summarized in [Table 4](#).

**Table 4 — Summary of CEC precision statistics**

<b>Fluid</b>	<b>RL 181</b>	<b>RL 209</b>	<b>RL 210</b>
Data collection period	10/2010 to 09/2011	10/2010 to 09/2011	10/2010 to 09/2011
Number of laboratories	18	18	18
Number of data points	110	142	138
Mean viscosity loss, $R_V$ , %	12,79	8,61	21,54
Repeatability ( $r$ ), %	4,23	3,91	4,94
Reproducibility ( $R$ ), %	4,84	4,67	5,75
$r$ target		3	3,5
$R$ target		5	5,5
$Q_r$		1,4	0,9
$Q_R$		1,4	1,0

## 12 Test report

The test report shall contain at least the following information:

- a) a reference to this International Standard (i.e. ISO 26422);
- b) the type and complete identification of the product tested;
- c) the result of the test (refer to [Clause 10](#));
- d) any deviation, by agreement or otherwise, from the procedure specified;
- e) the date of the test;
- f) the duration of the test.

## Bibliography

- [1] DIN 51350-6, *Testing of lubricants — Testing in the Shell four-ball tester — Part 6: Determination of shear stability of lubricating oils containing polymers*
- [2] CEC-L-45-99, *Viscosity Shear Stability of Transmission Lubricants*
- [3] ISO 20844, *Petroleum and related products — Determination of the shear stability of polymer-containing oils using a diesel injector nozzle*
- [4] ISO 4259, *Petroleum products — Determination and application of precision data in relation to methods of test*
- [5] CETOP RP 112 H, *Viscosity Shear Stability of Hydraulic Oils (Taper Roller Bearing Rig)*
- [6] ISO 355, *Rolling bearings — Tapered roller bearings — Boundary dimensions and series designations*









# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™