



BSI Standards Publication

**Intelligent transport  
systems (ITS) — Cooperative  
intersection signal information  
and violation warning systems  
(CIWS) — Performance  
requirements and test  
procedures**

**National foreword**

This British Standard is the UK implementation of ISO 26684:2015.

The UK participation in its preparation was entrusted to Technical Committee EPL/278, Intelligent transport systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015.  
Published by BSI Standards Limited 2015

ISBN 978 0 580 75456 2

ICS 03.220.01; 35.240.60

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 30 April 2015.

**Amendments/corrigenda issued since publication**

Date	Text affected
------	---------------

---

---

---

**Intelligent transport systems (ITS) —  
Cooperative intersection signal  
information and violation warning  
systems (CIWS) — Performance  
requirements and test procedures**

*Systèmes intelligents de transport (ITS) — Systèmes d'avertissement  
d'information et de violation du signal d'intersection coopérative  
(CIWS) — Exigences de performance et modes opératoires d'essai*





**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2015

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Normative references</b> .....	<b>1</b>
<b>3 Terms and definitions</b> .....	<b>1</b>
<b>4 Symbols</b> .....	<b>2</b>
<b>5 Classification</b> .....	<b>3</b>
5.1 System configuration.....	3
5.2 System configuration.....	3
<b>6 Functional requirements</b> .....	<b>4</b>
6.1 CIWS state diagram.....	4
6.1.1 CIWS states.....	5
6.2 Transition criteria.....	5
6.2.1 Criterion (1): RSE activation.....	5
6.2.2 Criterion (2): RSE deactivation.....	6
6.2.3 Criterion (3): OBE activation.....	6
6.2.4 Criterion (4): OBE deactivation.....	6
6.2.5 Class II criterion (5): Warning activation.....	6
6.2.6 Class II criterion (6): Warning deactivation.....	6
6.3 Functional requirements of OBE.....	6
6.3.1 Acquisition of travel direction.....	6
6.3.2 Acquisition of vehicle position.....	6
6.3.3 Acquisition of vehicle speed.....	6
6.3.4 Identification of traffic signal information.....	6
6.3.5 Judgement of warning necessity and warning contents (Class II).....	6
6.3.6 Timing of warning output.....	7
6.3.7 Timing of warning termination.....	7
6.3.8 HMI display contents.....	7
6.4 Functional requirements of RSE.....	7
6.4.1 Data sets.....	7
6.4.2 Communication range.....	7
6.4.3 Communication delay.....	7
6.5 CIWS system performance.....	7
6.5.1 System capabilities.....	7
6.5.2 Provision of information.....	8
6.5.3 Warning threshold for signal violation.....	8
<b>7 Test requirements</b> .....	<b>9</b>
7.1 Test vehicle.....	9
7.2 Test site.....	9
7.2.1 Environmental conditions.....	9
7.2.2 Geometric conditions.....	10
7.2.3 RSE location for the systems providing communication only at <i>X<sub>AL</sub></i> .....	10
7.3 Test procedure.....	10
7.3.1 Test method.....	10
<b>Bibliography</b> .....	<b>12</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT), see the following URL: [Foreword — Supplementary information](#).

The committee responsible for this document is ISO/TC 204, *Intelligent transport systems*.

## Introduction

The main system function of cooperative intersection signal information and violation warning systems (CIWS) is to warn drivers who are about to violate an intersection's traffic signal to stop at the prescribed location. The CIWS is intended to provide a cooperative vehicle and infrastructure system that reduces the likelihood and severity of crashes at signalized intersections by providing the signal phase information and/or by warning the driver that an intersection signal violation is about to occur. The system uses information communicated from the roadside infrastructure to determine if a warning should be given to a driver.

The purpose of implementing CIWS is to reduce violations of traffic signals at signalized intersections to: (a) reduce fatalities, (b) reduce the number and/or severity of injuries, and (c) reduce property damage associated with collisions.

This International Standard addresses CIWS for use in road vehicles approaching signalized intersections.

This International Standard may be used as a system level standard by other standards, which extend the CIWS to a more detailed standard utilizing wireless communication technologies. Issues such as the specific requirements for the function and performance of communication technology or traffic control facilities (including traffic signal controllers) will not be considered in this International Standard.





# Intelligent transport systems (ITS) — Cooperative intersection signal information and violation warning systems (CIWS) — Performance requirements and test procedures

## 1 Scope

This International Standard specifies the concept of operation, system requirements, and test methods for cooperative intersection signal information and violation warning systems (CIWS) at signalized intersections. CIWS are intended to reduce the likelihood of crash injury, damage, and fatality by enhancing the capability of drivers to avoid crash situations at signalized intersections.

The scope of CIWS standardization includes basic functions, functional requirements, performance requirements, information contents, and test methods.

The characteristics of the technologies used to communicate between the signal controller and the vehicles are not addressed by this International Standard nor are the behavioural responses by drivers, the various capabilities of vehicles on the road, or the multitude of combinations of these two characteristics.

## 2 Normative references

There are no normative references cited in this document.

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1 stopping distance

distance,  $X_v$ , travelled by a vehicle with the speed of  $v$ , from the time the driver receives CIWS warning until the vehicle comes to a complete stop

Note 1 to entry: This includes the distance travelled during the driver perception and reaction time.

### 3.2 speed of vehicle

speed of the subject vehicle,  $v$

### 3.3 time to arrive at stop line of intersection

$TTAI$

time needed for a vehicle approaching the intersection at a speed of  $v$  to travel the distance,  $X$ , from its current location to the stop line

$$TTAI = \frac{X}{v}$$

### 3.4 traffic signal phase

green, yellow, and red intervals within a cycle that are assigned to an independent traffic movement or combination of movements

### 3.5

#### **stop line**

pavement marking line extending across approach lanes to indicate the point at which a stop is intended or required to be made

### 3.6

#### **road side equipment**

##### **RSE**

roadside device that can supply traffic signal information to the approaching subject vehicle and may also support determination of vehicle position and heading

### 3.7

#### **onboard equipment**

##### **OBE**

in-vehicle equipment that can provide drivers with information and/or warnings based on the information received from the RSE and the vehicle

### 3.8

#### **spot communication media**

wireless communication system between roadside and vehicles that operates only within such a small zone that the availability of the communication link can serve as a definitive indicator of the vehicle's location in support of the intended application

## 4 Symbols

$d$  deceleration rate of subject vehicle for stopping on level pavement ( $m/s^2$ ), assumed for the purpose of designing CIWS (could be specific for the vehicle type, weather conditions, and road gradient)

$G$  duration of green time (s)

$G_r$  remaining green time (s)

$t_D$  total time of information delay (s)

$t_{OBE}$  the time between when the OBE receives information from the RSE and when it displays a warning

$$t_{OBE} = t_{OBE1} + t_{OBE2}$$

where  $t_{OBE1}$  includes communication delay and judgement processing in OBE and  $t_{OBE2}$  is display delay to driver.

$t_{PRT}$  driver's perception-reaction time (PRT)

$t_{RSE}$  the time between when the RSE receives signal status information and when it broadcasts that information

$v$  approach speed (m/s)

$V_{Design}$  maximum speed of vehicle, assumed for the purpose of designing CIWS (m/s)

$X$  travel distance from the current position of the vehicle to the stop line (m)

$X_{AL}$  location of downloading information from RSE (m)

$$X_{AL} \geq v_{Design} \cdot t_D + \frac{v_{Design}^2}{2 \cdot d}$$

NOTE: Location of the RSE is limited by the physical conditions of the road. If the RSE is located upstream than  $v_{\text{Design}} \cdot t_D + v_{\text{Design}}^2 / (2 \cdot d)$ , it can communicate the information in the timing required for warning.

$$t_D = t_{\text{PRT}} + t_{\text{OBE}}$$

$X_v$  stopping distance (m)


$$X_v = v \cdot t_{\text{PRT}} + \frac{v^2}{2 \cdot d}$$

$Y$  duration of yellow time (s)

## 5 Classification

### 5.1 System configuration

The system configuration should be in accordance with [Figure 1](#).

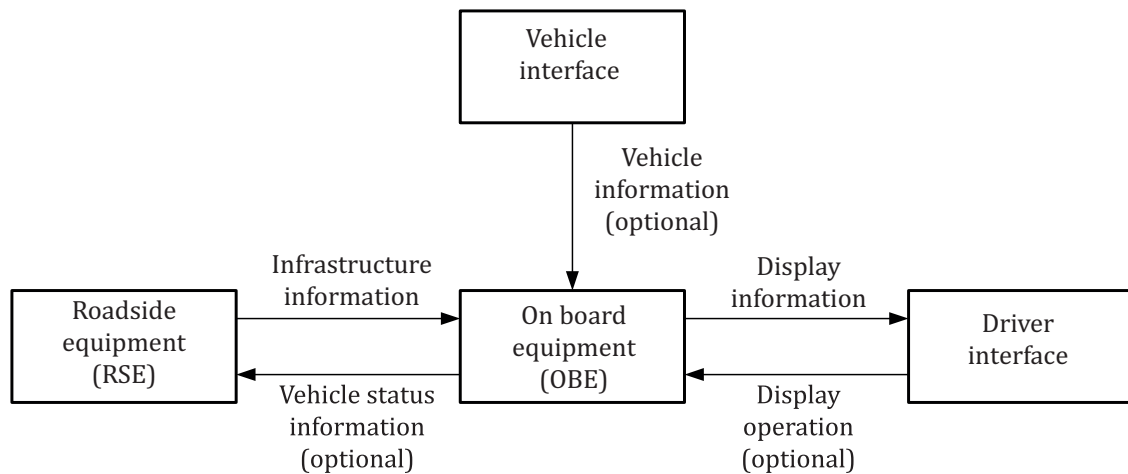

**Figure 1 — System configuration**

### 5.2 System configuration

In order to reduce the likelihood of crash injury, damage, and fatality by enhancing the capability of drivers to avoid crash situations at signalized intersections, the CIWS application shall be classified as three types as shown in [Table 1](#). Class I systems are intended to give information about the current phase of the traffic signal for enhancing the driver's awareness of the signal state. Class II systems are intended to provide an in-vehicle warning to the driver of an imminent traffic signal violation for enhancing the opportunity for the driver to avoid the signal violation.

Class III systems address future issues; they are intended to include the function of automatic brake control to reduce red light violations by inattentive drivers.


**Table 1 — Classification of CIWS applications**

Class	Function	Aims	Driver support	Infrastructure information	Vehicle information	Scope
<b>I</b>	Information	Information provision	Current state of traffic signals	Signal phase: (green/yellow/red) by direction	Direction of travel	Yes
			Timing of signal changes	Signal phase and timing by direction	Direction of travel	Future issue
<b>II</b>	Warning	Avoiding violation	Signal violation warning	Signal phase and timing by direction	Direction of travel, position, speed, <i>TTAI</i>	Yes
<b>III</b>	Control	Avoiding violation	Assisted braking or automatic stopping	Signal phase and timing by direction	Direction of travel, position, speed, <i>TTAI</i>	Future issue


## 6 Functional requirements

### 6.1 CIWS state diagram

CIWS shall, at a minimum, operate according to the state diagrams as shown in [Figures 2](#) and [3](#).

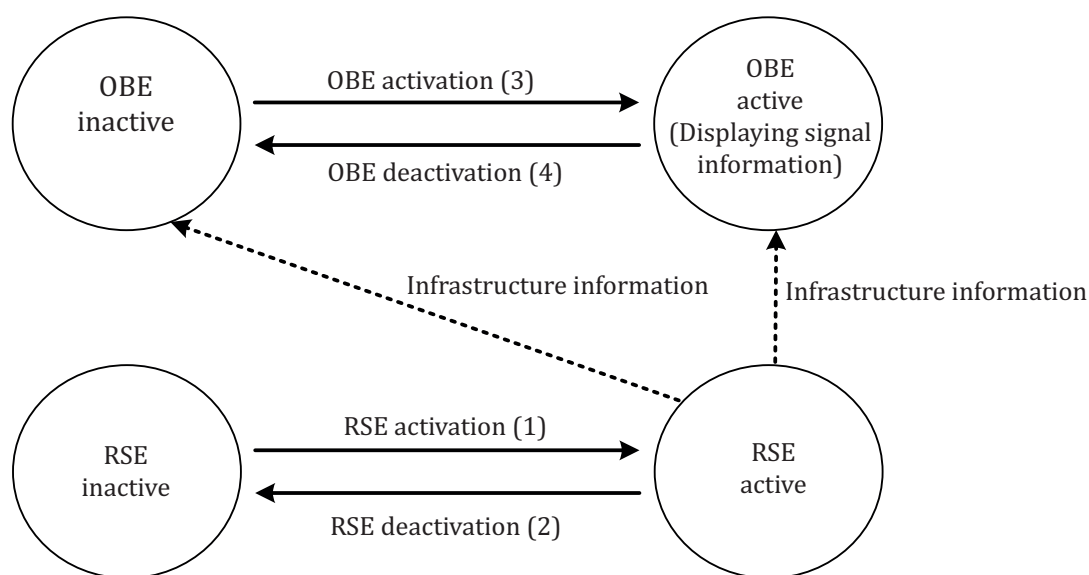

**Figure 2 — System state diagram — Class I information**

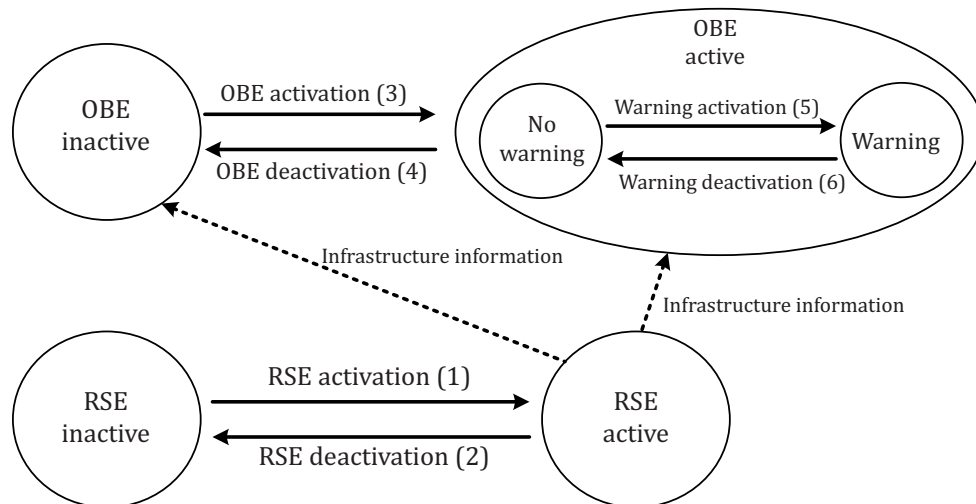

**Figure 3 — System state diagram — Class II warning**

### 6.1.1 CIWS states

#### 6.1.1.1 CIWS states

State in which RSE is inactive.

#### 6.1.1.2 RSE active

State in which RSE is active and sends information on signal phase, etc. to OBE.

#### 6.1.1.3 OBE inactive

State in which OBE is inactive.

#### 6.1.1.4 OBE active

State in which the OBE is active, (a) conditions of information provision are met and the system can provide information to driver (Class I) or (b) conditions of warning are met and the system can warn the driver (Class II).

##### 6.1.1.4.1 Warning state

State in which the warning requirements are fulfilled. In this state, a warning shall be issued to human-machine interface (HMI), which might arbitrate priorities relative to other warnings.

##### 6.1.1.4.2 No warning state

State in which the system shall give no warning to the driver because the warning requirements are not met.

## 6.2 Transition criteria

### 6.2.1 Criterion (1): RSE activation

When the RSE operator or the automatic system turns RSE on, it becomes active.

### **6.2.2 Criterion (2): RSE deactivation**

When the RSE operator or the automatic system turns RSE off to discontinue the system due to failures and maintenance, etc., it becomes inactive.

### **6.2.3 Criterion (3): OBE activation**

The OBE becomes active when the accessory/ignition switch is turned on. In systems with an optional ON/OFF switch, the OBE becomes active when this switch is turned on.

It might also transition to the active state again when a failure period ends.

### **6.2.4 Criterion (4): OBE deactivation**

The OBE becomes inactive when the accessory/ignition switch is turned off or during failure periods. In systems with an optional ON/OFF switch, the OBE becomes inactive when this switch is turned off.

### **6.2.5 Class II criterion (5): Warning activation**

For the warning in Class II, the warning shall be given when passing the area or time in which warnings are required based on the reception of information from RSE. The warning decision depends on the criteria specified in [6.5.3](#).

### **6.2.6 Class II criterion (6): Warning deactivation**

The warning shall be ended when passing the stop line or after the warning criteria are no longer met, for example, because the vehicle has decelerated so that it is no longer in danger of violation. The position of the stop line is contained in the message sent by the RSE or stored in the in-vehicle map database.

## **6.3 Functional requirements of OBE**

### **6.3.1 Acquisition of travel direction**

The direction of travel of the vehicle shall be acquired using a position-detection function such as global navigation satellite systems (GNSS) or information provided from the RSE.

### **6.3.2 Acquisition of vehicle position**

The position of the vehicle shall be acquired using a position-detection function such as GNSS or information provided from the RSE.

### **6.3.3 Acquisition of vehicle speed**

The speed of the vehicle shall be acquired by sensors onboard the vehicle.

### **6.3.4 Identification of traffic signal information**

Information about the state of the traffic signal ahead of the vehicle shall be identified from information received from the RSE.

### **6.3.5 Judgement of warning necessity and warning contents (Class II)**

The decision to issue a warning and its contents will be based on the estimated signal phase at the time the subject vehicle arrives at the intersection and on the position and speed of the subject vehicle.

### **6.3.6 Timing of warning output**

The timing and position to trigger the warning should take into account the driver's perception and reaction time.

### **6.3.7 Timing of warning termination**

The warning shall be terminated when judged unnecessary due to driver operation, vehicle position, vehicle speed, traffic signal state, or the like, or when the predetermined warning output time has elapsed.

### **6.3.8 HMI display contents**

The HMI shall display the content of the warning correctly.

## **6.4 Functional requirements of RSE**

The RSE shall be installed in the intersection area according to the type of communication links used by the system. The RSE shall be connected to the signal controller at the intersection for receiving the data of signal timing and status from the controller.

### **6.4.1 Data sets**

Data sets shall be provided with the resolution and accuracy that are sufficient to ensure system performance; for example, signal phase (Class I) and stop line position (Class II), signal phase in the direction travelled by the vehicle, remaining time of signal phase, and next signal phase.

### **6.4.2 Communication range**

The RSE shall have a communication range that is sufficient to ensure system performance with a vehicle driving at the design speed.

### **6.4.3 Communication delay**

Information shall be outputted within the maximum tolerable delay time that is sufficient to ensure the system performance for OBE and RSE, i.e. 200 m/s of  $t_{OBE1}$  and 1,0 s of  $t_{RSE}$ , respectively.

## **6.5 CIWS system performance**

### **6.5.1 System capabilities**

The OBE in the CIWS will use information transmitted from the RSE to determine if a warning or information should be given. The transmitted information should include traffic signal status and/or timing and traffic signal stopping location or distance information.

The RSE will broadcast a periodic wireless message that identifies the traffic signal and its exact location. The message will indicate the current phase of the signal and the travel direction corresponding to that information. The message could also indicate the next phase for the traffic signal, as well as the time until that phase change.

The OBE will receive the wireless message from the RSE and conduct computations to determine if a warning or information should be generated. In conjunction with information about traffic signal location, phase, and/or timing, the OBE could display signal status information or use information regarding the vehicle's location, heading, speed, and acceleration, to estimate the likelihood of violating the traffic signal phase upon entering the intersection. The calculations could also use information about road conditions, embedded in the message from the traffic signal via RSE or known from any other source, to adjust the operation of the decision algorithm.

## 6.5.2 Provision of information

### 6.5.2.1 Provision of information to drivers

The system has many ways to provide drivers with information. However, this International Standard focuses on messages to the OBE that will be used to provide the driver with current state of traffic signals (Class I) or warning signals (Class II).

### 6.5.2.2 Out-of-order indication

In case of system failure detected by the OBE, the driver shall be informed that the system is not able to provide information.

### 6.5.3 Warning threshold for signal violation

When a vehicle approaches the intersection, the distance to the intersection where the warning is activated according to the activation conditions,  $X_v$ , is based on the global navigation satellite system (GNSS) data and/or on the information about the vehicle location derived from the RSE location. Then, the time to arrive at the intersection ( $TTAI$ ) from the distance,  $X_v$ , can be determined as a function of the distance and the speed of vehicle, as follows.

$$TTAI = \frac{X_v}{v} \quad (1)$$

In this case, the requirements for providing warning could be determined by comparing the time of remaining green ( $G_r$ ) at the approach as shown in the following table.

Any warning shall be terminated when it is judged to be unnecessary in consideration of the position/state of the vehicle.

**Table 2 — Warning activation condition with respect to  $TTAI$**

Time condition	Class II	Meaning of information
$TTAI < G_r$	No warning	Green signal ahead (optional)
$G_r \leq TTAI \leq G_r + Y$	Signal violation warning (optional)	Signal changes – attention and/or reduce speed
$TTAI > G_r + Y$	Signal violation warning	Red light running – stop

When spot communication media is used by the RSE, RSE information is not available continuously. As a consequence, there are two possible system configurations.

#### 6.5.3.1 Systems for which the warning can be activated at any time during the approach

The OBE shall estimate the elapsed time and distance travelled from the point when the vehicle did pass the RSE; it shall update the time green remaining ( $G_r$ ) and the  $TTAI$ , taking into account the current vehicle speed. In this case, the provision of warning could be decided during the approach by comparing  $TTAI$  to thresholds as shown in [Table 2](#).

Any warning shall be terminated when it is judged to be unnecessary in consideration of the position/state of the vehicle.

This system should not be installed in intersections where actuated signal control, with changeable signal timing, is applied.



### 6.5.3.2 Systems for which the warning can only be activated at the location where the spot communication from the RSE is received

The warning can be activated only at the instant when the vehicle passes the location where information is downloaded from the RSE via a wireless communications link. If the duration of green time is given as  $G$  s, the warning threshold will be determined to be  $G - t_1$  before the onset of the yellow signal, i.e. the end of the green signal. Thus, a subject vehicle approaching with the speed of  $v$  might have sufficient time to reduce its speed until the vehicle reaches the intersection to stop safely. The warning threshold is determined as a function of the speed of the subject vehicle at the location for providing information.

$$t_1 = G - \frac{X_{AL}}{v} \quad (2)$$

When a vehicle is approaching the range of location,  $X_{AL}$ , with the speed of  $v$  at a specific time,  $t$ , the activation conditions for providing warnings are shown in [Table 3](#).

The warning shall be activated according to either [Table 2](#) or [Table 3](#).

Any warning shall be terminated when it is judged to be unnecessary in consideration of the position/state of the vehicle.

**Table 3 — Warning activation conditions of OBE with respect to time at  $X_{AL}$**

Time, $t$ , at $X_{AL}$	Class II	Meaning of information
$t_0 < t \leq t_1$	No warning	Green signal ahead (optional)
$t_1 < t \leq t_y$	Signal violation warning (optional)	Signal changes – attention
$t_y < t \leq t_2$	Signal violation warning	Signal changes – stop
$t_2 < t \leq t_3$	Signal violation warning	Red light running – stop

$t_0$ : time when the green signal is initiated ( $t_0$  shall be set as 0,0 s at the beginning of every green phase)

$t_1$ : time when the warning activation conditions are met

$t_y$ : time when the yellow signal is initiated

$t_2$ : time when the red signal is initiated

$t_3$ : time when the red signal is off and the next green signal is initiated

This system should not be installed in intersections where actuated signal control with changeable signal timing is applied.

## 7 Test requirements

### 7.1 Test vehicle

The test vehicle shall be equipped with a device to record the CIWS outputs as a function of time and position of the vehicle.

### 7.2 Test site

#### 7.2.1 Environmental conditions

The test intersection shall be on a flat, dry asphalt, or concrete surface. The ambient temperature during testing shall be within the range of  $10\text{ °C} \pm 30\text{ °C}$ .

## 7.2.2 Geometric conditions

The test site shall be installed at a signalized intersection which need not be on a public road.

## 7.2.3 RSE location for the systems providing communication only at $X_{AL}$

If the CIWS system has the function of warning the location of downloading information from RSE,  $X_{AL}$  can be determined for providing sufficient range where the drivers can make a safe decision for stopping regardless of approaching speed. For this, a maximum speed value for CIWS operation,  $v_{\text{Design}}$ , can be utilized as follows in determining the minimum distance for providing information to vehicles over all speed ranges.

$$X_{AL} \geq v_{\text{Design}} \cdot t_D + \frac{v_{\text{Design}}^2}{2 \cdot d} \quad (3)$$

where

$$t_D = t_{\text{PRT}} + t_{\text{OBE}}$$

## 7.3 Test procedure

The following sections describe the minimum test requirements for a signal information and violation warning system (Class I and II).

### 7.3.1 Test method

For example,  $X_{AL}$  is calculated as the distance of 125 m from the intersection if the following parameters are given;  $v_{\text{Design}} = 90$  km/h (25 m/s),  $d = 3,1$  m/s<sup>2</sup>, and  $t_D = 1,0$  s.

#### 7.3.1.1 Warning tests

##### 7.3.1.1.1 Setting the warning threshold according to the subject vehicle approaching speed

The purpose of this test is to check that the CIWS in vehicles gives both information for Class I and warning for Class II when required as the subject vehicle approaches the intersection. The test shall be conducted as follows.

The subject vehicle shall be driven in the test approach zone at a steady speed of  $v$  (where  $v \leq v_{\text{Design}}$ ). The warning threshold shall be set as described in [6.5.3](#).

For example, if a subject vehicle approaches the intersection with the speed of 65 km/h (18 m/s) and the green interval of 30,0 s, the warning threshold,  $t_1$ , becomes 23,0 s after the beginning of green signal,  $t_0$ .

##### 7.3.1.1.2 Warning issued based on [Table 3](#)

As the subject vehicle approaches the range of location,  $X_{AL}$ , in this case with the speed of  $v$  at a specific time,  $t$ , the system shall issue the warning based on the activation conditions for providing information with the type of warnings as shown in the [Table 3](#).

##### 7.3.1.1.3 Warning issued based on [Table 2](#)

As the subject vehicle approaches the intersection, the time to arrive at the intersection ( $T_{TAI}$ ) will be continuously updated at the position of vehicle,  $X_v$ . Then, the system shall issue the warning based on the activation condition with  $T_{TAI}$  as the function of  $X_v$  and the speed of vehicle, as shown in the [Table 2](#).

#### 7.3.1.2 Test run

This test shall be fulfilled according to the conditions shown in [Table 4](#).

**Table 4 — Test run conditions**

<b>Speed of subject vehicle</b>	<b>Class I: Information</b>	<b>Class II: Warning</b>
$v \leq v_{\text{Design}}$	one run (Pass or Fail by information)	two runs: one of warning activation condition and one of non-activation condition. (Pass or Fail by warning)

## Bibliography

- [1] CAMP. Vehicle Safety Communications 2, *Cooperative Intersection Collision Avoidance System Limited to Stop Sign and Traffic Signal Violations (CICAS-V)*, Interim Release v1.03, June 2007
- [2] MOON Y. J. System Integration and Field Tests for Developing In-Vehicle Dilemma Zone Warning System. *Transportation Research Record 1826*, Transportation Research Board (TRB), Washington D.C., 2003
- [3] KOBAYASHI M. Vehicle Positioning Using an Infrared Beacon and Driver Behavior Analysis for Signal, *Proceedings in Transportation Research Board Annual Meeting 08-0838*, Washington, D.C., 2008
- [4] MAILE M., NEALE V., AHMED-ZAID F., BASNYAKE C., CAMINITI L., DOERZAPH Z. Cooperative Intersection Collision Avoidance System Limited to Stop Sign and Traffic Signal Violations (CICAS-V). Phase I Final Reports, Washington, D.C., 2010







# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™