

# Nuclear criticality safety — Analysis of a postulated criticality accident

ICS 27.120.30

## National foreword

This British Standard is the UK implementation of ISO 27467:2009.

The UK participation in its preparation was entrusted to Technical Committee NCE/9, Nuclear fuel cycle technology.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 31 March 2009

© BSI 2009

ISBN 978 0 580 57126 8

### Amendments/corrigenda issued since publication

Date	Comments

INTERNATIONAL  
STANDARD

**ISO**  
**27467**

First edition  
2009-02-15

---

---

**Nuclear criticality safety — Analysis of a  
postulated criticality accident**

*Sûreté-criticité — Analyse d'un hypothétique accident de criticité*



Reference number  
ISO 27467:2009(E)

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2009

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

## Contents

Page

<b>1</b>	<b>Scope</b> .....	<b>1</b>
<b>2</b>	<b>Normative references</b> .....	<b>1</b>
<b>3</b>	<b>Terms and definitions</b> .....	<b>1</b>
<b>4</b>	<b>Criticality accident analysis objectives</b> .....	<b>2</b>
<b>5</b>	<b>Components of a criticality accident analysis</b> .....	<b>2</b>
	<b>Annex A</b> (informative) <b>Flow diagram of a criticality accident analysis</b> .....	<b>6</b>
	<b>Bibliography</b> .....	<b>7</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 27467 was prepared by Technical Committee ISO/TC 85, *Nuclear energy*, Subcommittee SC 5, *Nuclear fuel technology*.

## Introduction

In nuclear facilities processing or storing fissile material, provisions are made to avert the risk of criticality. The purpose of a criticality safety analysis is to ensure that the measures taken are adequate to prevent criticality accidents. The risk contributions associated with a criticality accident arise from direct radiation from the fission events, the presence of fission products, as well as from possible airborne radioactive gases and particulates.

Worldwide criticality-accident experience shows that these are very rare events, yet the risk associated with future occurrences cannot be completely eliminated. It is difficult to contemplate all the scenarios whose conditions can lead to a criticality accident, and even more so to avoid them, particularly with solution media where many of the past accidents have occurred. For this reason, an analysis based on postulated accident scenarios, in any facility where a potential risk of criticality can still be extant, can be the vehicle to understand the expected consequences and provide for the appropriate provisions and protective actions.





# Nuclear criticality safety — Analysis of a postulated criticality accident

## 1 Scope

This International Standard specifies areas that are important to study when analysing potential criticality accidents.

NOTE 1 It is important that a criticality accident analysis be performed each time a criticality accident is considered credible, due either to criticality contingencies (double batching, procedural violations, etc.) or to the failure of safety provisions (effectiveness of neutron absorber reduced by fire, etc.).

NOTE 2 It is important that the criticality safety specialist be mindful that the process of evaluation developed in this International Standard does not address the unforeseen, since any actually occurring criticality accident will probably result from a scenario not envisioned or from failure to comply with prevailing regulations.

This International Standard does not address detailed administrative measures, for which the responsibility lies with the public authorities, nor does it deal with criteria used to justify the accident criticality analysis of a nuclear facility.

This International Standard does not apply to nuclear power plants.

## 2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 7753, *Nuclear energy — Performance and testing requirements for criticality detection and alarm systems*

## 3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

### 3.1

#### **accident scenario**

set of credible, postulated conditions under which a fissile-material-containing facility/process develops one or more fault conditions such that it is likely to exceed the critical state, and thus to result in a criticality accident

### 3.2

#### **radiological consequences**

individual and collective radiation doses resulting from the combined effects of external exposure due to direct radiation and internal exposure caused by inhaling or ingesting either volatile radionuclides released to environment or non-volatile and fissile material suspended as particles in the facility

## 4 Criticality accident analysis objectives

4.1 Criticality accident analysis shall be comprised of the following considerations (see Figure 1):

- a) determination of the credible accident scenario(s);
- b) estimation of the power history and the energy release;
- c) suitable means of detecting the accident and suitable siting of detectors;
- d) estimation of potential individual exposure and radiological impact of radionuclide releases on the general public and the environment;
- e) suitable provisions for emergency preparedness and response to a criticality accident.

4.2 These requirements may be facilitated in part or whole by the following considerations:

- a) criticality accident dynamics, i.e. understanding the mechanisms that govern accident progress in order to estimate energy releases;
- b) accident-detection capabilities, including timely triggering of criticality alarms for immediate evacuation of individuals, as a means of limiting radiation exposure risk;
- c) analysis of "airborne releases" by measuring potentially releasable fission gases and aerosols, and suspendable nuclear matter, and estimating their impact on people and the environment;
- d) accident dosimetry, i.e. determination of the doses due to accident-induced neutron and gamma irradiation, for radiation risk analysis purposes;
- e) consideration of the overall risk of harm from measures considered in the emergency plan.

NOTE Items of information in c) and d) are used to estimate radiological consequences.

## 5 Components of a criticality accident analysis

### 5.1 Criticality accident analysis topics

The criticality accident analysis should address the following topics:

- a) definition of the accident scenarios that permit the analysis of accident dynamics (total energy release, duration, first power spike characteristics, etc.);
- b) study of adequate detector locations based on the analysis of accident phenomena, in particular the first spike characteristics;
- c) estimated risk of individual exposure in the vicinity of the criticality accident and assessment of the environmental impact of airborne releases also served by accidents characteristics (fissile media, configurations, energies, etc.);
- d) emergency preparedness and response support necessary.

NOTE Annex A illustrates how the components of an analysis of a postulated criticality accident, shown as different steps/stages of a study, can be addressed.

### 5.2 Definition of a postulated accident and associated neutronics calculations

5.2.1 The criticality safety specialist shall define the accident scenario according to

- a) the type of fissile material, type of process (high-temperature, i.e. risk of fire, aqueous, damp, mixtures, etc.) and affected equipment configurations (i.e. geometry, interaction with adjacent materials or moderators, etc.),
- b) the events leading to supercriticality, that is, definition and chronology of the accident (insertion of excess fissile material or moderator, loss of moderator, process malfunction, etc.).

**5.2.2** Based on the scenario(s) as defined in 5.2.1, the following criticality parameters should be calculated:

- a) total reactivity insertion and insertion kinetics, to estimate the power excursion (in particular the first power spike);
- b) system neutronics parameters.

NOTE The relevant parameters in b) that can be needed for the analysis are the neutron lifetime, the prompt critical state, the delayed neutron importance (i.e. effective delayed neutron fraction), the material buckling, the infinite multiplication factor, the migration lengths, etc.

### 5.3 Accident physics calculations

#### 5.3.1 Evaluating criticality accident physics

Given the postulated accident scenario as defined in 5.2, the criticality safety specialist shall evaluate the accident physics by using either or both of the following:

- a) calculation codes,
- b) simplified models.

**WARNING — The long-term effects of an accident can be driven mainly by heat exchanges in the vicinity of the supercritical system (cooling, ventilation). Consideration of the possible long-term accident effects should be given when analysing a criticality accident.**

#### 5.3.2 Using calculation codes

**5.3.2.1** These calculations require use of a criticality accident computer code that determines power and energy changes in the transient and provides trends for other parameters (temperature, radiolysis gas and steam bubbles, pressure, etc.) as a function of time.

**WARNING — Uncertainties determined by validation or justified by the inadequacy of the model to represent the criticality accident scenario can exist. So care should be taken when using computer codes.**

**5.3.2.2** The calculations shall specifically estimate

- a) the accident “envelope”, meaning the total number of fissions that can halt the accident by restoring the system to permanent subcriticality if no suitable means (e.g. neutron poisoning, robotic equipment) were used to quench it,
- b) the first power-spike characteristics, which enable the optimal location of the criticality accident alarm system detectors.

#### 5.3.3 Using simplified models

**5.3.3.1** For accident physics, simplified options providing “order-of-magnitude” data should be considered.

**5.3.3.2** These entail the use of

- a) simplified models devised from experimental data,
- b) results of experiments or past accidents that were adequately documented.

## 5.4 Calculation of neutron and gamma radiation — Criticality accident dosimetry

### 5.4.1 Evaluating criticality accident dosimetry

Radiation doses and the extent and distribution of gamma and neutron radiation fields shall be estimated based on the results of the accident physics calculations described in 5.3. The criticality safety specialist shall evaluate the criticality accident dosimetry by using

- a) calculation codes,
- b) simplified models.

### 5.4.2 Evaluation using calculation codes

#### 5.4.2.1 Calculation of radiation and associated doses should

- a) optimize the estimate of individual and collective exposure from a postulated accident and define the zones for evacuation, along with other topics related to criticality alarms and emergency response,
- b) optimize the determination of the locations for criticality detectors and demonstrate that the criticality alarms will respond to the postulated criticality accident(s).

5.4.2.2 Computer codes should then be used to estimate the radiation produced by the accident source, together with its propagation in the locality of the accident.

**WARNING — Uncertainties determined by validation or justified by the inadequacy of the model to represent the criticality accident scenario can exist. So care should be taken when using computer codes.**

### 5.4.3 Evaluation using experimental results

Experimental dose data obtained for different critical assemblies should be compiled in the form of nomographs to show dose changes registered at various short distances from each radiation source.

## 5.5 Demonstration of timely alarm actuation

5.5.1 Adequate criticality-detector locations should be justified by the dose rate and dose distribution results derived from the calculations or modelling as recommended in 5.4.

5.5.2 These locations shall be in compliance with the provision of ISO 7753.

5.5.3 It should be demonstrated that a criticality is detected if it exceeds a dose rate or integrated dose that exceeds the established threshold criteria for alarm.

NOTE The threshold criteria are established according to local or national criteria with accident radiological dose thresholds.

## 5.6 Estimation of the airborne releases and their impact


Impact of airborne gas releases or suspended nuclear matter should be evaluated on the basis of accident characteristics (number of fissions, kinetics; see 5.3) and rates of radionuclide release specific to the fissile medium.

## 5.7 Actions required following the accident

5.7.1 Actions called for by emergency response plans and specific to the criticality accident shall be managed to ensure that they are followed. The plan shall ensure that the response minimizes the potential dose and takes into account any non-radiological risks that can be present during the response.

5.7.2 These actions are as follows:

- a) taking charge of individuals at muster points and rapidly grouping them according to exposure risk;
- b) using physical and biological dosimetry data to estimate exposure levels and select appropriate medical treatments;
- c) predicting accident developments and the measures required to shut down the system where necessary;
- d) ensuring protection of the general public and the environment;
- e) liaising with the public authorities.

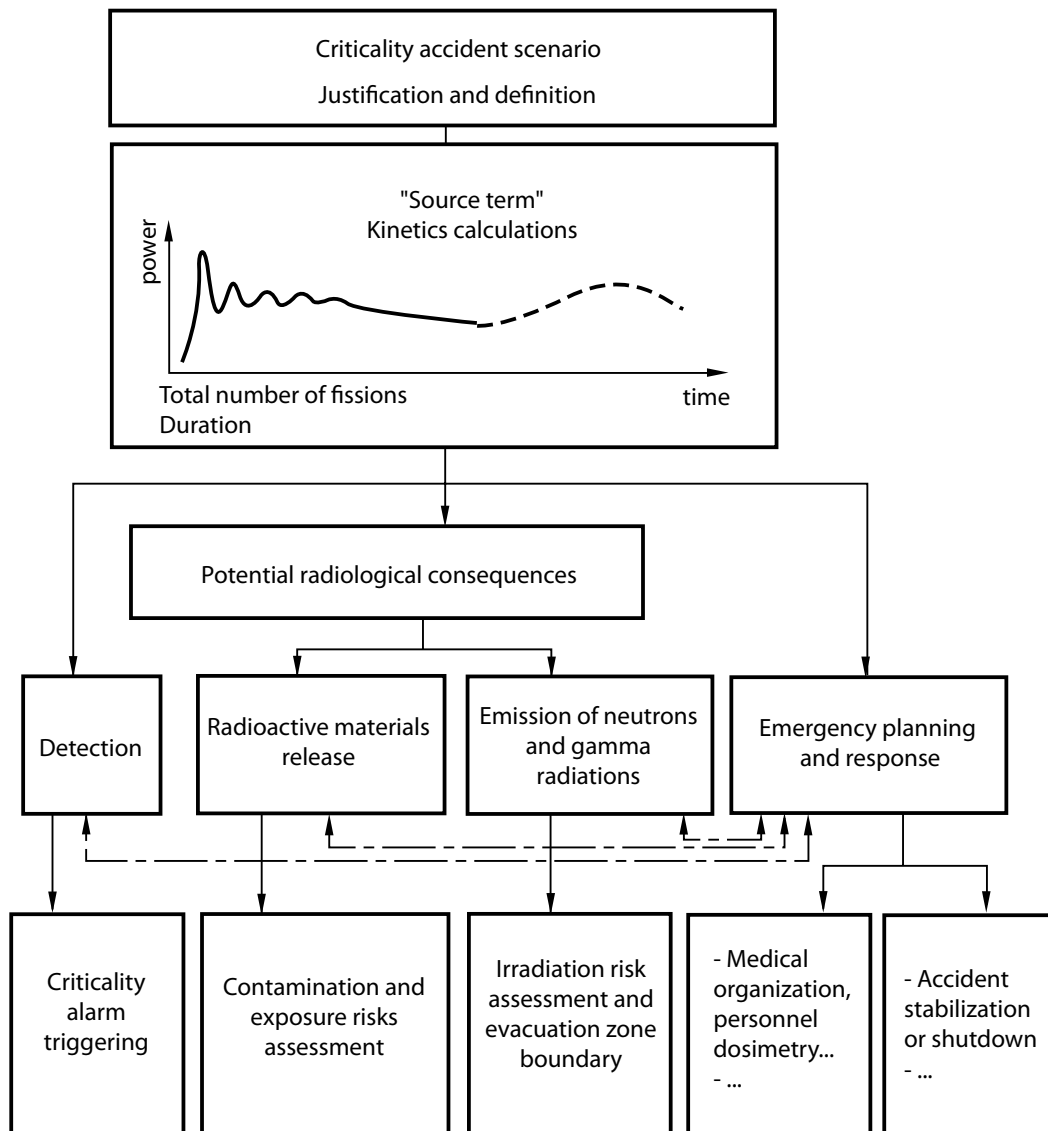

**Figure 1 — Scope of a criticality accident analysis**

## Annex A (informative)

### Flow diagram of a criticality accident analysis

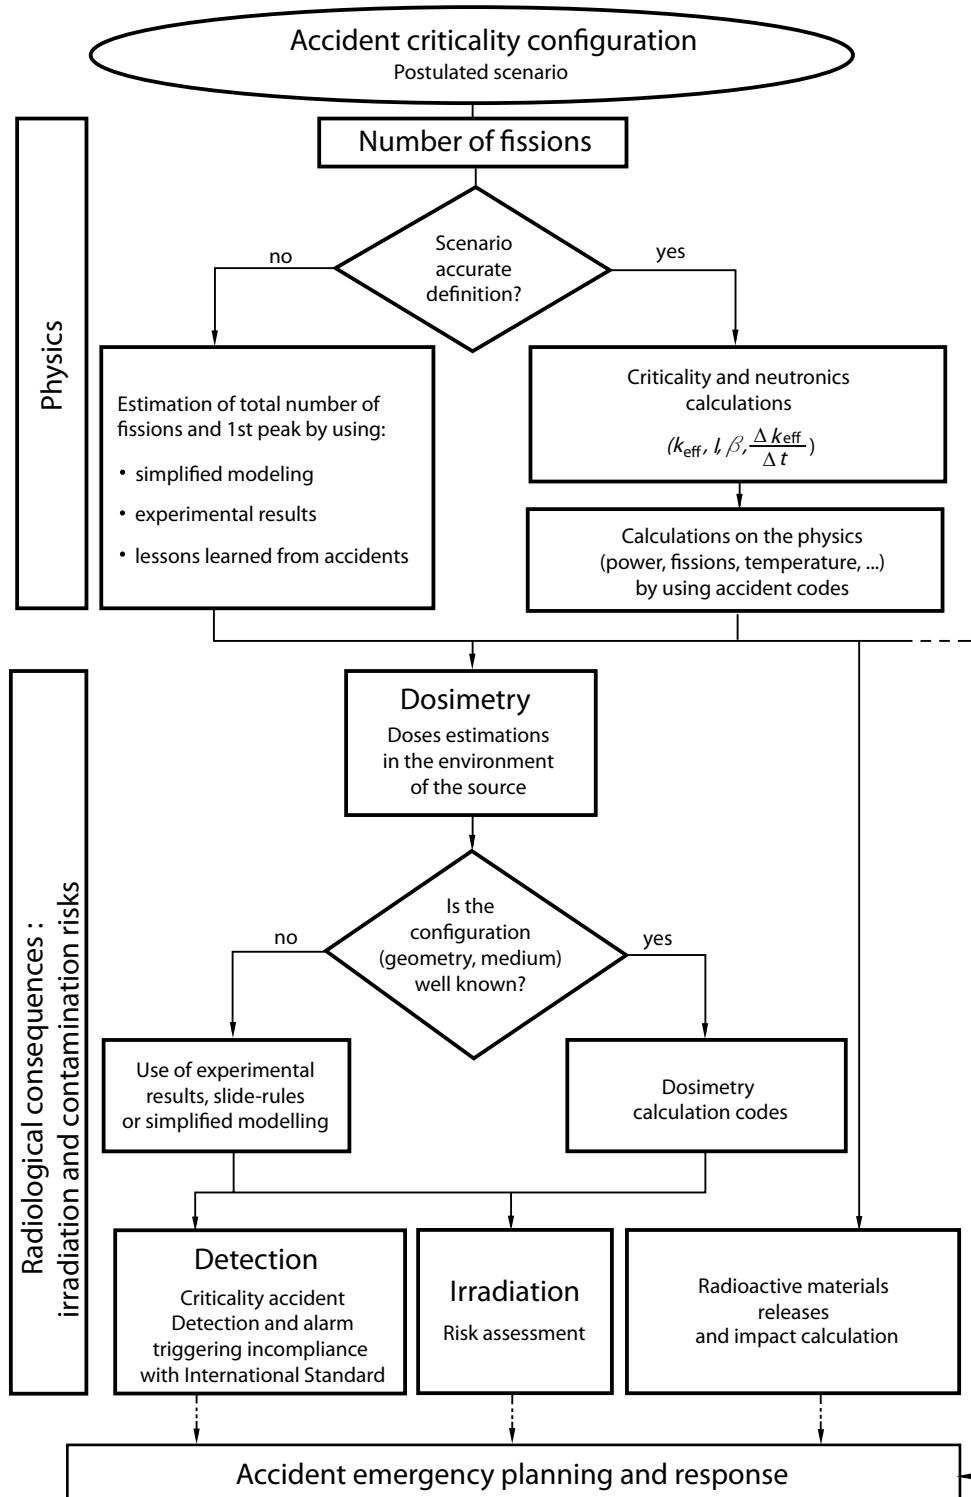


Figure A.1 — Flow diagram of a criticality accident analysis

## Bibliography

- [1] BARBRY, F., FOUILLAUD, P., and REVERDY, L., Methodology Recommended by the CEA for Criticality Accident Studies, *Transactions of the American Nuclear Society*, Vol. **89**, pp 113-114, 2003
- [2] BARBRY, F., *Recommendations for the safety assessment of a postulated criticality accident — CEA proposal for an international (ISO) standard*, CEA/DAM, Technical report DAM/SRNC 04-05, 2004
- [3] ISO 921:1997, *Nuclear energy — Vocabulary*
- [4] ISO 1709:1995, *Nuclear energy — Fissile materials — Principles of criticality safety in storing, handling and processing*







---

## BSI - British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

### Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover. Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001. Fax: +44 (0)20 8996 7001 Email: [orders@bsigroup.com](mailto:orders@bsigroup.com) You may also buy directly using a debit/credit card from the BSI Shop on the Website <http://www.bsigroup.com/shop>

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

### Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact Information Centre. Tel: +44 (0)20 8996 7111 Fax: +44 (0)20 8996 7048 Email: [info@bsigroup.com](mailto:info@bsigroup.com)

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001 Email: [membership@bsigroup.com](mailto:membership@bsigroup.com)

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsigroup.com/BSOL>

Further information about BSI is available on the BSI website at <http://www.bsigroup.com>

### Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright and Licensing Manager. Tel: +44 (0)20 8996 7070 Email: [copyright@bsigroup.com](mailto:copyright@bsigroup.com)