BS 3TA 10:2009

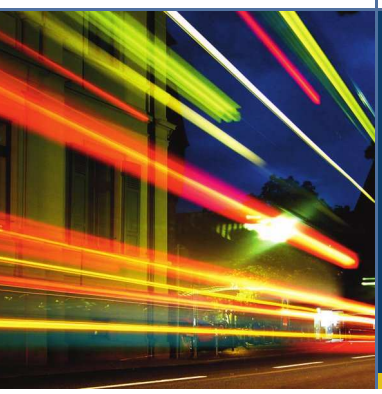

BSI British Standards

AEROSPACE SERIES

Specification for sheet of titanium-aluminium-vanadium alloy (Tensile strength 960–1 270 MPa)

Publishing and copyright information
The BSI copyright notice displayed in this document indicates when the document was last issued.

ISBN 978 0 580 65385 8

ICS 49.025.30

The following BSI references relate to the work on this standard:
Committee reference ACE/61
Draft for comment 09/30193248 DC

Publication history
First published 1968
Second edition, May 1974
Third (present) edition, November 2009

Amendments issued since publication

Date	Text affected

Contents

Summary of pages
This document comprises a front cover, an inside front cover, pages i to ii, pages 1 to 4, an inside back cover and a back cover.

Foreword

Publishing information

This British Standard is published by BSI and came into effect on 30 November 2009. It was prepared by Panel ACE/61/-/49, *Titanium and its alloys*, under the authority of Technical Committee ACE/61, *Metallic materials for aerospace purposes*. A list of organizations represented on this committee can be obtained on request to its secretary.

Supersession

This British Standard supersedes BS 2TA 10:1974, which is withdrawn.

Information about this document

This is a full revision of BS TA 10, and introduces the following principal changes.

a) Requirements are stated in tabular format in accordance with EN 4500-1 and EN 4500-4.

b) Chemical composition has been amended to add requirements for "other" elements.

c) Melting method details have been deleted and replaced by reference to Section 1 of BS TA 100.

Hazard warnings

WARNING. This British Standard calls for the use of substances and/or procedures that can be injurious to health if adequate precautions are not taken. It refers only to technical suitability and does not absolve the user from legal obligations relating to health and safety at any stage.

Use of this document

It has been assumed in the preparation of this British Standard that the execution of its provisions will be entrusted to appropriately qualified and experienced people, for whose use it has been produced.

Presentational conventions

The provisions of this standard are presented in roman (i.e. upright) type. Its requirements are expressed in sentences in which the principal auxiliary verb is "shall".

Commentary, explanation and general informative material is presented in smaller italic type, and does not constitute a normative element.

Contractual and legal considerations

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

1 Scope

This British Standard specifies requirements for titanium-aluminium-vanadium alloy sheet with a tensile strength of 960 MPa to 1 270 MPa.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

BS TA 100, *Procedure for inspection, testing and acceptance of wrought titanium and titanium alloys*

3 Technical requirements

Material to this standard shall conform to Table 1.

NOTE The format and symbols used in Table 1 are derived from EN 4500-1 and EN 4500-4.

Table 1 **Technical requirements for titanium-aluminium-vanadium alloy sheet**

1	**Material designation**			**BS TA 10**										
2	**Chemical composition %**	Element		Al	V	Fe	C	O_2	N_2	H_2	Y	Others		Ti
												Each	Total	
		Min.		5.50	3.50	—	—	—	—	—	—	—	—	Base
		Max.		6.75	4.50	0.30	0.08	0.20	0.050	0.015	0.005	0.10	0.40	
3	**Method of melting**			See Section 1 of BS TA 100										
4.1	**Form**			Sheet [1)]										
4.2	**Method of production**			Rolled										
4.3	**Limit dimension(s)**		mm	—										
5	**Technical specification**			Sections 1 and 5 of BS TA 100										

6.1	**Delivery condition**	Annealed + descaled
	Heat treatment	700 °C $\leqslant \theta \leqslant$ 900 °C / AC or FC [2)]
6.2	**Delivery condition code**	U
7	**Use condition**	Delivery condition
	Heat treatment	—

Characteristics

8.1	**Test sample(s)**				See Section 5 of BS TA 100
8.2	**Test piece(s)**				See Section 5 of BS TA 100
8.3	**Heat treatment**				Use condition
9	**Dimensions concerned**			mm	—
10	**Thickness of cladding on each face**			%	—
11	**Direction of test piece**				LT [3)]
12	T	**Temperature**	θ	°C	Ambient
13		**Proof stress**	$R_{p0.2}$	MPa	$\geqslant$ 900
14		**Strength**	R_m	MPa	960 $\leqslant R_m \leqslant$ 1 270
15		**Elongation**	A	%	$\geqslant$ 8
16		**Reduction of area**	Z	%	—
17	**Hardness**				—
18	**Shear strength**		R_c	MPa	—
19	**Bending**		κ	—	5.0; α = 180°
20	**Impact strength**				—
21	C	**Temperature**	θ	°C	—
22		**Time**		h	—
23		**Stress**	σ_a	MPa	—
24		**Elongation**	a	%	—
25		**Rupture stress**	σ_R	MPa	—
26		**Elongation at rupture**	A	%	—
27	**Notes** (see line 98)				1), 2), 3)

Table 1 **Technical requirements for titanium-aluminium-vanadium alloy sheet** *(continued)*

44	**External defects**	—	See Section 5 of BS TA 100
74	**Surface contamination**	—	See Section 5 of BS TA 100
95	**Marking**	—	See Section 5 of BS TA 100
96	**Dimensional inspection**	—	See Section 5 of BS TA 100.
		7	The tolerances applicable to material finished by hot rolling shall apply
98	**Notes**	—	[1] British Standards covering other forms of material of similar composition are:

R_m (MPa)	min.	895	900	1 100	920
	max.	1 150	1 160	1 300	1 180
Limiting ruling section (mm)			150	20	
Maximum thickness (mm)		100			
Form		British Standard			
Bar and section for machining		—	BS TA 11	—	—
Forging stock		—	BS TA 12	—	—
Forging stock and wire		—	—	BS TA 28 [4]	—
Forgings		—	BS TA 13	—	—
Plate		BS TA 56	—	—	—
Sheet and strip		—	—	—	BS TA 59

[2] Selected temperature shall be held at ±15 °C

[3] The specified mechanical properties might not be achieved if the material is tested in other than the transverse direction

[4] Primarily intended for the manufacture of fasteners conforming to the requirements of the "A" series of British Standards

Bibliography

Standards publications

For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

BS TA 11, *Specification for bar and section for machining of titanium-aluminium-vanadium alloy (Tensile strength 900–1 160 MPa) (Limiting ruling section 150 mm)*

BS TA 12, *Specification for forging stock of titanium-aluminium-vanadium alloy (Tensile strength 900–1 160 MPa) (Limiting ruling section 150 mm)*

BS TA 13, *Specification for forgings of titanium-aluminium-vanadium alloy (Tensile strength 900–1 160 MPa) (Limiting ruling section 150 mm)*

BS TA 28, *Specification for forging stock of titanium-aluminium-vanadium alloy (Tensile strength 1 100–1 300 MPa) (Limiting ruling section 20 mm)*

BS TA 56, *Specification for plate of titanium-aluminium-vanadium alloy (Tensile strength 895–1 150 MPa) (Maximum thickness 100 mm)*

BS TA 59, *Specification for sheet and strip of titanium-aluminium-vanadium alloy (Tensile strength 920–1 180 MPa)*

EN 4500-1, *Metallic materials – Rules for the drafting and presentation of material standards – Part 1: General rules* [1)]

EN 4500-4, *Metallic materials – Rules for the drafting and presentation of material standards – Part 4: Specific rules for titanium and titanium alloys* [1)]

[1)] Published as ASD-STAN Prestandard at the date of publication of this standard.

This page deliberately left blank

British Standards Institution (BSI)

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level.

It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.

Tel: +44 (0)20 8996 9000 Fax: +44 (0)20 8996 7400

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to BSI Customer Services.

Tel: +44 (0)20 8996 9001 Fax: +44 (0)20 8996 7001
Email: orders@bsigroup.com

You may also buy directly using a debit/credit card from the BSI Shop on the website **www.bsigroup.com/shop**

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library.

Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.

Tel: +44 (0)20 8996 7111
Fax: +44 (0)20 8996 7048 Email: info@bsigroup.com

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.

Tel: +44 (0)20 8996 7002 Fax: +44 (0)20 8996 7001
Email: membership@bsigroup.com

Information regarding online access to British Standards via British Standards Online can be found at **www.bsigroup.com/BSOL**

Further information about BSI is available on the BSI website at **www.bsigroup.com**

Copyright

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Tel +44 (0)20 8996 9001
Fax +44 (0)20 8996 7001
www.bsigroup.com/standards

raising standards worldwide™

British Standards