

BRITISH STANDARD

BS 3951 :
Part 2 :
Section 2.6 :
1992
ISO 9669 : 1990
(including amendment No. 1)

Freight containers

Part 2. Specification and testing of series 1 freight containers

Section 2.6 Interface connections for tank containers

NO COPYING IN ANY FORM WITHOUT WRITTEN PERMISSION FROM BSI

BSI
STANDARDS

Committees responsible for this British Standard

The preparation of this British Standard was entrusted by the Packaging and Freight Containers Standards Policy Committee (PKM/-) to Technical Committee PKM/18, upon which the following bodies were represented:

Associated Offices Technical Committee
British Airways
British Industrial Truck Association
British International Freight Association
British Ports Federation
British Railways Board
Chamber of Shipping
Department of Transport (Transport Industries)
EEA (the Association of Electronics, Telecommunications and Business
Equipment Industries)
Health and Safety Executive
Institute of Materials Management
Lloyds Register of Shipping
Road Haulage Association Ltd.
Shipowners Refrigerated Cargo Research Association
Society of Motor Manufacturers and Traders Limited

The following body was also represented in the drafting of the standard, through subcommittees and panels:

Department of Transport (Marine Directorate)

This British Standard, having been prepared under the direction of the Packaging and Freight Containers Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 15 November 1992

© BSI 1992

The following BSI references relate to the work on this standard:

Committee reference PKM/18
Drafts for comment 89/36428 DC
89/36429 DC
90/42076 DC
91/35518 DC

Amendments issued since publication

Amd. No.	Date	Text affected

Contents

	Page
Committees responsible	Inside front cover
National foreword	ii
Introduction	iii
<hr/>	
Specification	
Section 1. General	
1.1 Scope	1
1.2 Normative reference	1
1.3 Definitions	1
1.4 Design requirements — General	2
<hr/>	
Section 2. Flange connections for containers of tank type codes 70 to 77 and 85 to 88	
2.1 General	3
2.2 Dimensions	3
2.3 Flange thickness	3
<hr/>	
Section 3. Man-hole openings and man-hole lids for tank containers of type codes 70 to 76 and 85 to 88	
3.1 General	5
3.2 Dimensions and characteristics	5
3.3 Marking	5
<hr/>	
Section 4. Inlet and outlet connection screw threads for tank containers of type codes to 70 to 76 and 85 to 88	
4.1 General	7
4.2 Symbols	7
4.3 Dimensions	7
4.4 Designation	7
<hr/>	
Annex	
A (informative) Bibliography	9
<hr/>	
Tables	
1 Dimensions	4
2 Thread dimensions	8
<hr/>	
Figures	
1 Flange	4
2 Man-hole and man-hole lid dimensions	6
3 Thread profile and tolerance zones	8

National foreword

This Section of BS 3951, which is one of a series relating to freight containers, has been prepared under the direction of the Packaging and Freight Containers Standards Policy Committee. It is identical with ISO 9669 : 1990 *Series 1 freight containers — Interface connections for tank containers* including Amendment 1 : 1992 to ISO 9669, which complete the standard, published by the International Organization for Standardization (ISO).

NOTE. With the incorporation of amendment 1 to ISO 9669 into this Section of BS 3951, footnote 1 to 1.1 of ISO 9669 : 1990 is no longer applicable.

Cross-references

International standard	Corresponding British Standard
ISO 261 : 1973	BS 3643 <i>ISO Metric screw threads</i> Part 1 : 1981 <i>Principles and basic data</i> (Technically equivalent)
ISO 228-1 : 1982	BS 2779 : 1986 <i>Specification for pipe threads for tubes and fittings where pressure-tight joints are not made on the threads (metric dimensions)</i> (Technically equivalent)
ISO 1496-3 ¹⁾	BS 3951 <i>Freight containers</i> Section 2.3 : 1992 <i>Tank containers for liquids, gases and pressurized dry bulk</i> (Identical)

Compliance with a British Standard does not of itself confer immunity from legal obligations.

¹⁾ Undated in the text. The 1991 edition has now been published.

Introduction

This International Standard aims to reduce problems in the operation of tank containers caused by a multiplicity of different interface connections. The combined efforts of the manufacturing and operational sectors of the industry have been devoted to establishing a certain degree of international standardization, while recognizing the requirements of the various national standards applicable in areas where tank containers are operated.

It also aims to ensure that tank containers fitted with flanged interface connections are compatible with the flanges specified by the national standards used in the countries in which the container may travel. Such compatibility will improve safety in operation by limiting the variety of connections with which the authorities and their emergency services have to deal.

Series 1 freight containers — Interface connections for tank containers

Section 1: General

1.1 Scope

This International Standard specifies the characteristics of interface connections for tank containers complying with ISO 1496-3.

Section 1 gives the definitions and the testing and welding requirements for interface connections.

Section 2 gives a range of flange connections for tank containers, type codes 70 to 77 and 85 to 88.

Section 3¹⁾ specifies the dimensions and characteristics of man-hole openings and man-hole lids for tank containers intended to contain liquids or pressurized dry bulk, with a test pressure not exceeding 600 kPa for containers of type codes 70 to 76 and 85 to 88.

Section 4¹⁾ specifies the requirements for the interface connection screw threads.

1.2 Normative reference

The following standard contains provisions which, through reference in this text, constitute provisions of this International Standard. At the time of publication, the edition indicated was valid. All standards are subject to revision, and parties to agreements based on this International Standard are encouraged to investigate the possibility of applying the most recent edition of the standard indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

- 1) Will be published later as an amendment to this International Standard.
- 2) To be published. (Revision of ISO 1496-3:1981)
- 3) 300 kPa = 3 bar (the bar is currently used as a unit of pressure in relevant international codes, often implemented by national legislation).

ISO 1496-3:—²⁾, *Series 1 freight containers — Specification and testing — Part 3: Tank containers for liquids, gases and pressurized dry bulk.*

1.3 Definitions

For the purposes of this International Standard, the following definitions apply.

1.3.1 tank container: A freight container which includes two basic elements, the tank or tanks and the framework, and complies with the requirements of ISO 1496-3.

1.3.2 gas: A fluid substance having a vapour pressure greater than an absolute pressure of 300 kPa³⁾ at 50 °C or as otherwise defined by the competent authority (see 1.3.6).

1.3.3 liquid: A fluid substance having a vapour pressure not greater than an absolute pressure of 300 kPa³⁾ at 50 °C.

1.3.4 dry bulk: Assemblies of separate solid particles normally substantially in contact with one another which are or may be rendered capable of fluid flow.

1.3.5 dangerous goods: Those substances classified as dangerous by the United Nations Committee of experts on the transport of dangerous goods or by the competent authority (see 1.3.6).

1.3.6 competent authority: The authority or authorities designated as such in each country or in each

specific case by the government concerned for the approval of tank containers.

1.3.7 maximum allowable working pressure: That pressure assigned for operation by either a competent authority or other responsible person to a particular tank, above which that tank is not intended to be operated.

1.3.8 test pressure: The gauge pressure at which the tank is tested.

1.3.9 flange: A connecting means using bolts to interface with a similar connection.

1.3.10 interface: Identifiable area used to adjoin an external area.

1.3.11 connections: Specific points within an interface area used to join to a similar external point.

1.3.12 openings: Access points allowing communication with contents of the tank container.

1.4 Design requirements — General

1.4.1 Testing

All interfaces are considered part of the vessel and shall be subjected to the hydraulic tests prescribed for the tank.

1.4.2 Welding

If interfaces are welded to other structures, the welds and preparation for the welds shall be to a recognized code, which may be the same as that to which the tank has been designed.

Section 2: Flange connections for containers of tank type codes 70 to 77 and 85 to 88

2.1 General

This section specifies a range of flange connections for tank containers complying with ISO 1496-3, of type codes 70 to 77 and 85 to 88, i.e. tank containers for liquids, gases and dry bulk with a maximum allowable working pressure not greater than 1 000 kPa (test pressure 1 500 kPa).

The flange connections specified are the final connections used to interface with the external loading/discharge apparatus.

2.2 Dimensions

The dimensions shall be as shown on figure 1 and as specified in table 1.

2.3 Flange thickness

The minimum thickness of flanges may be based on the following examples:

Material	Ultimate tensile strength	Thickness
Carbon steel	430 N/mm ²	20 mm
Stainless steel	537 N/mm ²	16 mm

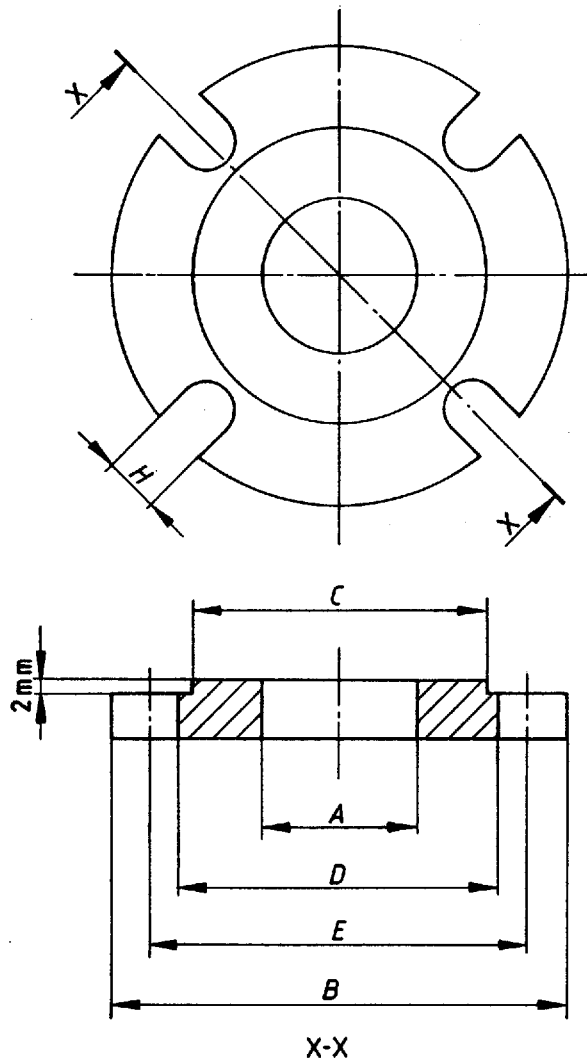


Figure 1 — Flange (see table 1)

Table 1 — Dimensions (see figure 1)

Dimensions in millimetres (Inches)

Nominal bore <i>A</i>	Outside diameter <i>B</i>	Raised face <i>C</i>	Core diameter <i>D</i>	Pitch circle <i>E</i>	Slot size <i>H</i>
40 (1 ½)	150	82	82,4	101,4	19
50 (2)	165	101	101	120	19
80 (3)	200	130	131	150	19

Section 3: Man-hole openings and man-hole lids for tank containers of type codes 70 to 76 and 85 to 88

3.1 General

This section specifies certain dimensions and characteristics of man-hole openings and man-hole lids, primarily to ensure that tank containers are equipped with openings of sufficient size to allow complete internal inspection and cleaning, and to provide ease of filling and easy passage of persons in an emergency. In addition, the dimensions and characteristics specified also simplify emergency maintenance and parts replacement by providing compatibility between manufacturing sources.

The dimensions and characteristics specified are applicable to tank containers complying with the requirements of ISO 1496-3, intended to contain liquids or pressurized dry bulk, with a specified test pressure not exceeding 600 kPa¹⁾, i.e. tank containers of type codes 70 to 76 and 85 to 88.

Except where otherwise stated, the requirements of this International Standard are minima. Tank containers to be used for the carriage of dangerous goods may be subject to additional international and national requirements as applied by competent authorities.

3.2 Dimensions and characteristics

3.2.1 General

The dimensions specified in this section relate particularly to the man-hole access opening into the tank. However, the use of the dimensions specified for hinge pins and sealing ring cross-sections should be considered when designing other tank openings closed by lids, for example cleaning apertures above the cargo level.

Care should be taken to ensure stability of the man-hole lid in the open position.

3.2.2 Pressure requirements

Man-hole openings and man-hole lids shall be constructed to a recognized pressure vessel code.

3.2.3 Opening diameter

The internal diameter of the man-hole opening shall be 500 mm \pm 1 mm (*A* on figure 2). Maximum out-of-roundness shall not exceed 5 mm.

3.2.4 Man-hole lid sealing ring

3.2.4.1 The man-hole lid sealing ring shall be positively retained in the man-hole lid, not in the neckring (see figure 2).

3.2.4.2 The nominal internal diameter of the man-hole lid sealing ring shall be 490 mm (*B* on figure 2).

3.2.4.3 The nominal cross-section of the man-hole lid sealing ring shall be 16 mm wide by 10 mm deep or 16 mm square.

3.2.4.4 The man-hole lid hinge shall be slotted to allow the use of 16 mm wide by 10 mm deep or 16 mm square sealing rings.

3.2.5 Swing bolts

3.2.5.1 There shall be six swing bolts, equally spaced around the man-hole circumference (see figure 2).

3.2.5.2 Swing bolt hinge pins shall be located on a 285 mm radius circle at their centre (*C* on figure 2).

3.2.5.3 Swing bolt hinge pins shall be 19 mm in diameter (*D* on figure 2).

3.2.5.4 Swing bolt threads (see figure 2, dimension *E*) are not specified in this International Standard. However, to ensure compatibility, it is recommended that the swing bolt thread should be ISO general purpose metric screw thread M20 (see ISO 261⁽¹⁾).

3.2.6 Slots for swing bolts

Slots for swing bolts shall have a nominal width of 22 mm (*F* on figure 2), with provision to prevent the swing bolt from slipping out of the slot as it is tightened.

3.3 Marking

Man-hole lids shall be permanently marked with their design maximum allowable working pressure and test pressure.

1) 100 kPa = 1 bar

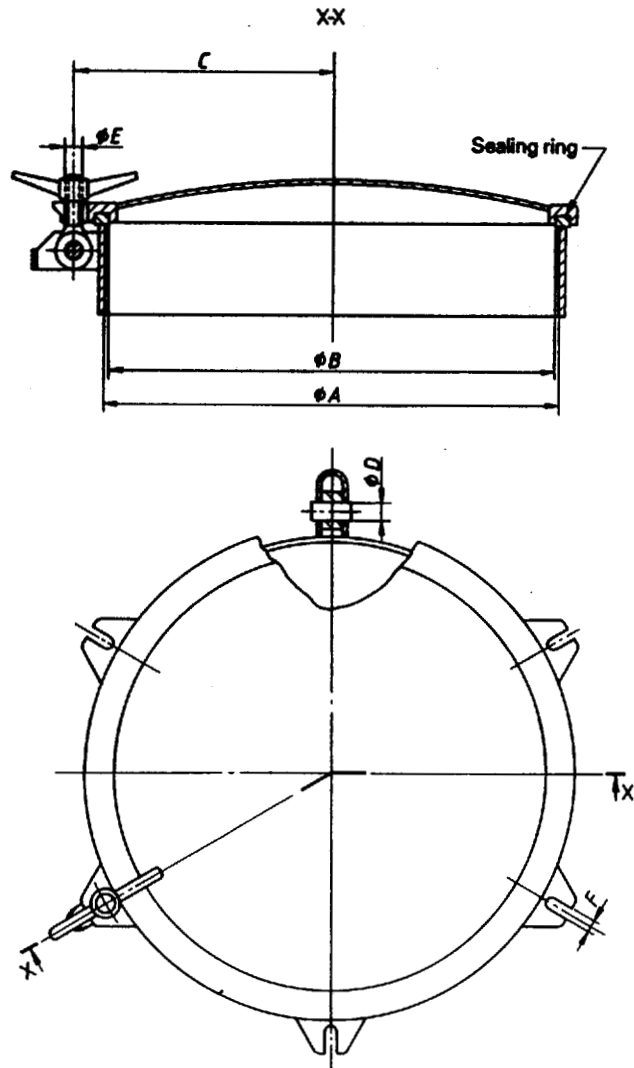


Figure 2 — Man-hole and man-hole lid dimensions

Section 4: Inlet and outlet connection screw threads for tank containers of type codes 70 to 76 and 85 to 88

4.1 General

This section specifies a range of screw threads for threaded interface connections for tank containers complying with ISO 1496-3, of type codes 70 to 76 and 85 to 88, i.e. tank containers for liquids and pressurized dry bulk with a specified test pressure not exceeding 600 kPa.

The threaded interface connections for which the screw threads are applicable are the final connections used to interface with external loading/discharge equipment, external heating and cooling sources, and air and inert gas pressure supplies.

The screw threads specified conform to ISO 228-1^[2] and, for the external threads, to tolerance class A.

4.2 Symbols

The following symbols are used in 4.4, figure 3 and table 2.

A Tighter class of tolerance of external pipe threads where pressure-tight joints are not made on the threads

d Basic major diameter of the external thread

***d*₁** = $d - 1,280\ 654\ P$; basic minor diameter of the external thread

***d*₂** = $d - 0,640\ 327\ P$; basic pitch diameter of the external thread

D = d ; basic major diameter of the internal thread

***D*₁** = $D - 1,280\ 654\ P = d_1$; basic minor diameter of the internal thread

***D*₂** = $D - 0,640\ 327\ P = d_2$; basic pitch diameter of the internal thread

G Pipe thread where pressure-tight joints are not made on the threads

h Height of the thread profile with rounded crests and roots

H Height of the triangle of the thread profile

P Pitch

r Radius of rounded crests and roots

T Truncated form of thread

***T*_d** Tolerance on the major diameter of the external thread

***T*_{d2}** Tolerance on the pitch diameter of the external thread

***T*_{D1}** Tolerance on the minor diameter of the internal thread

***T*_{D2}** Tolerance on the pitch diameter of the internal thread

4.3 Dimensions

The dimensions of the screw threads shall be as given in table 2 and as illustrated in figure 3.

The crests of external threads shall be truncated to the limits of tolerance on the major diameter as given in table 2.

4.4 Designation

For the purposes of this International Standard a simplified designation is used rather than the full designation in accordance with ISO 228-1.

EXAMPLE

For the purposes of this International Standard, the designation

G 1/2 T

indicates a 1/2 thread in accordance with ISO 228-1, with the external thread truncated.

The full designation in accordance with ISO 228-1 is

Internal thread: Pipe thread ISO 228-1 - G 1/2

External thread: Pipe thread ISO 228-1 - G 1/2 A

NOTE — ISO 228-1 contains no symbol to indicate a truncated thread.

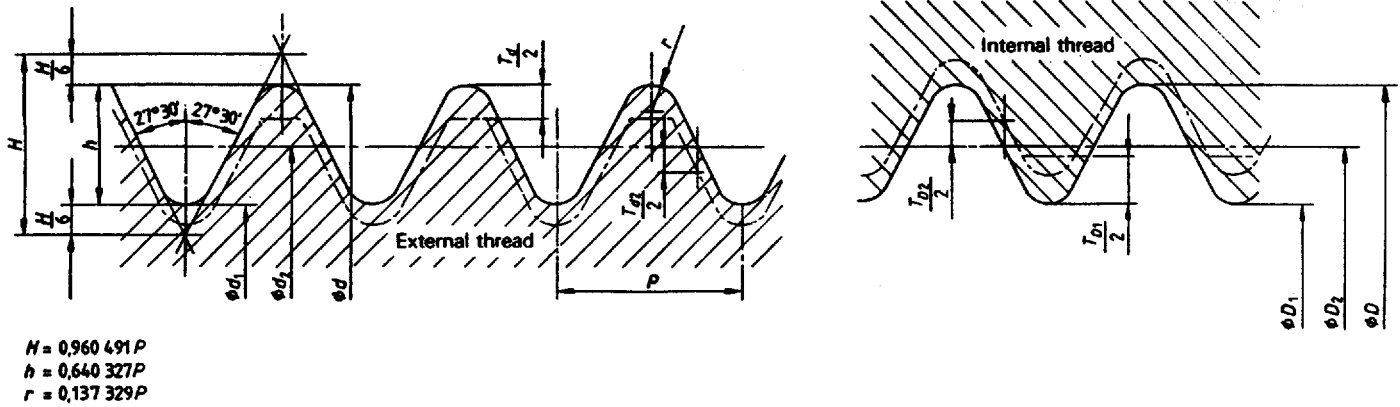


Figure 3 — Thread profile and tolerance zones

Table 2 — Thread dimensions

Designation of thread	Number of threads in 25,4 mm (1 in)	Pitch P mm (in)	Basic diameters			Permissible tolerances on pitch diameter				Tolerance on the minor diameter		Tolerance on the major diameter	
			Major d = D mm (in)	Pitch d ₂ = D ₂ mm (in)	Minor d ₁ = D ₁ mm (in)	Internal thread T _{D2}		External thread T _{d2}		Internal thread T _{D1}		External thread T _d	
						Lower deviation	Upper deviation mm (in)	Lower deviation mm (in)	Upper deviation	Lower deviation	Upper deviation mm (in)	Lower deviation mm (in)	Upper deviation
G 1/4 T	19	1,337 (0,052 6)	13,157 (0,578)	12,301 (0,484 3)	11,445 (0,450 6)	0	+ 0,125 (0,004 9)	- 0,125 (0,004 9)	0	0	+ 0,445 (0,017 5)	- 0,25 (0,010)	0
G 3/8 T			16,662 (0,656)	15,806 (0,622 3)	14,95 (0,588 6)								
G 1/2 T	14	1,814 (0,071 4)	20,955 (0,825)	19,793 (0,779 3)	18,631 (0,733 6)	0	+ 0,142 (0,005 6)	- 0,142 (0,005 6)	0	0	+ 0,541 (0,021 3)	- 0,284 (0,011)	0
G 3/4 T			26,441 (1,041)	25,279 (0,995 3)	24,117 (0,949 6)								
G 1 T	11	2,309 (0,909)	33,249 (1,309)	31,77 (1,250 8)	30,291 (1,192 6)	0	+ 0,18 (0,007 1)	- 0,18 (0,007 1)	0	0	+ 0,64 (0,025 2)	- 0,36 (0,014)	0
G 1 1/2 T			47,803 (1,882)	46,324 (1,823 8)	44,845 (1,765 6)								
G 2 T			59,614 (2,347)	58,135 (2,288 8)	56,656 (2,230 6)								
G 2 1/2 T			75,184 (2,96)	73,705 (2,901 8)	72,226 (2,843 6)								
G 3 T			87,884 (3,46)	86,405 (3,401 8)	84,926 (3,343 6)								
G 4 T			113,03 (4,45)	111,551 (4,391 8)	110,072 (4,333 6)								
G 5 T			138,43 (5,45)	136,951 (5,301 8)	135,472 (5,333 6)								
G 6 T			163,83 (6,45)	162,351 (6,391 8)	160,872 (6,333 6)								

NOTE — Dimensions are given in imperial measurements for information only.

Annex A (informative)

Bibliography

- [1] ISO 261 : 1973, *ISO general purpose metric screw threads — General plan.*
- [2] ISO 228-1 : 1982, *Pipe threads where pressure-tight joints are not made on the threads — Part 1: Designation, dimensions and tolerances.*

List of references

See national foreword.

BS 3951 :
Part 2 :
Section 2.6 :
1992
ISO 9669 : 1990

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Contract requirements

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

Any person who finds an inaccuracy or ambiguity while using this British Standard should notify BSI without delay so that the matter may be investigated swiftly.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying British Standards

Orders for all British Standard publications should be addressed to the Sales Department at Milton Keynes.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library, the Standardline Database, the BSI Information Technology Service (BITS) and its Technical Help to Exporters Service. Contact Customer Services, Information Services Group at Milton Keynes: Tel: 0908 221166.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact the Manager, Membership Development at Milton Keynes: Tel: 0908 220022.

Copyright

Copyright subsists in all BSI publications and no part may be reproduced in any form without the prior permission in writing of BSI. This does not preclude the free use, in the course of implementing the standard of necessary details such as symbols and size, type or grade designations including use by incorporation into computer programs, but where these details are reproduced including without limitation in printed form, in computer programs or in any other form whatsoever, the permission in writing of BSI must be obtained and if granted will be on terms including royalty, before the product is sold, licensed or otherwise exploited for commercial gain. Enquiries about copyright should be made to the Copyright Manager, Publications at Milton Keynes.

BSI
 2 Park Street
 London
 W1A 2BS

BSI
 Linford Wood
 Milton Keynes
 MK14 6LE