

Specification for

**Hose clamps
(worm drive type) for
general purpose use
(metric series)**

ICS 23.040.60

Confirmed
March 2009

Committees responsible for this British Standard

This British Standard was prepared under the direction of the Piping Systems Components Standards Policy Committee (PSE/-), upon which the following bodies were represented:

Associated Offices Technical Committee
 British Compressed Air Society
 British Gas plc
 British Steel Industry
 British Valve and Actuator Manufacturers' Association
 Chartered Institution of Building Services Engineers
 Chief and Assistant Chief Fire Officers' Association
 Copper Development Association
 Electricity Industry in United Kingdom
 Energy Industries Council
 Engineering Equipment and Materials Users' Association
 Institute of Petroleum
 Institution of Gas Engineers
 Institution of Manufacturing Engineers
 Institution of Plant Engineers
 Water Companies Association
 Water Services Association of England and Wales
 Department of Trade and Industry (Mechanical Engineering and Manufacturing Technology Division) (MMT)
 Department of the Environment (Property Services Agency)
 Ministry of Defence
 Health and Safety Executive

This British Standard, having been prepared under the direction of the Piping Systems Components Standards Policy Committee, was published under the authority of the Standards Board and comes into effect on 31 October 1991

© BSI 2007

First published April 1976
 Second edition October 1991

The following BSI references relate to the work on this standard:
 Committee reference PSE/6
 Draft for comment 83/78610 DC

ISBN 978 0 580 50937 7

Amendments issued since publication

| Amd. No. | Date | Comments |
|----------|----------------|---|
| 17275 | 31 August 2007 | Foreword text updated. Clause 6 reference updated. Subclause 9.4.1 changed. Publications referred to updated. |
| | | |
| | | |
| | | |

Contents

| | Page |
|---|--------------------|
| Committees responsible | Inside front cover |
| Foreword | ii |
| <hr/> | |
| 1 Scope | 1 |
| 2 Nomenclature | 1 |
| 3 Designating size | 1 |
| 4 Materials | 1 |
| 5 General requirements | 1 |
| 6 Finish | 1 |
| 7 Ranges of sizes and dimensions | 1 |
| 8 Marking | 1 |
| 9 Testing | 2 |
| <hr/> | |
| Figure 1 — Typical design and nomenclature of hose clamp | 2 |
| Figure 2 — Arrangement of a typical test rig for torque testing hose clamps | 3 |
| Figure 3 — Band tension and torque test fixture | 4 |
| Figure 4 — Hydraulic pressure test rig | 5 |
| <hr/> | |
| Table 1 — Dimensions of clamps | 3 |
| Table 2 — Torque test values | 3 |
| Table 3 — Hydraulic pressure test values | 4 |
| <hr/> | |
| Publication(s) referred to | Inside back cover |
| <hr/> | |

Foreword

This British Standard has been prepared under the direction of the Piping Systems Standards Policy Committee. It supersedes BS 5315:1976 and BS 3628:1963 which are withdrawn.

The start and finish of text introduced or altered by Amendment No.1 is indicated in the text by tags **A1** **A1**.

This edition introduces technical changes but it does not reflect a full review and revision of the standard, which will be undertaken in due course. Additional text has been included which applies specifically to clamp sizes greater than 140 mm.

Differences in the text between this edition and BS 5315:1976 are indicated by a sideline in the margin.

Product certification. Users of this British Standard are advised to consider the desirability of third party certification of product conformity with this British Standard based on testing and continuing surveillance, which may be coupled with assessment of a supplier's quality systems against the appropriate Part of BS 5750.

Enquiries as to the availability of third party certification schemes will be forwarded by BSI to the Association of Certification Bodies. If a third party certification scheme does not already exist, users should consider approaching an appropriate body from the list of Association members.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, pages 1 to 6, an inside back cover and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

1 Scope

This British Standard specifies the requirements for worm drive hose clamps for general purpose use in the size range commencing at 12 mm.

NOTE 1 Hose clamps above size 140 mm are used for a variety of purposes including strapping.

NOTE 2 The titles of the publications referred to in this standard are listed on the inside back cover.

2 Nomenclature

For the purposes of this British Standard the nomenclature given in Figure 1 has been adopted.

3 Designating size

3.1 Clamp sizes up to and including 140 mm

The designating size of a clamp shall be equal to the maximum external diameter of the component which the clamp is designed to secure.

3.2 Clamp sizes greater than 140 mm

The clamps shall be designated by the maximum working diameter in millimetres having a minimum working range of 30 mm.

4 Materials

The materials used in the manufacture of worm drive clamps shall be selected at the manufacturer's discretion provided that the finished clamps are capable of passing the tests specified in clause 9.

5 General requirements

5.1 General

When the loop is completed as in Figure 1 the screw shall be held firmly in engagement with the band during tightening and the clamp shall be capable of being decreased in diameter by turning the screw in a clockwise direction and increased in diameter by turning the screw in a counter-clockwise direction. After expanding until the band is disconnected from the screw it shall be possible to open clamps of size 35 mm and above to provide a gap equal to the largest diameter of component for which the clamp is designed and so permit easy fitting or removal of the clamp by passing the clamp over the component in situ without disturbing any connection.

The clamp shall be so designed that when tightened on the component it shall remain positively secured in position without the need for any additional locking device, and in firm engagement with the component on which it is fitted.

5.2 Screw

The screw shall be held captive in the clamp housing.

5.3 Band

The band shall have a thread form commencing at the free end and extending for a length sufficient to enable the clamp to be tightened on to the smallest diameter of component within the working range for which it is designed.

5.4 Housing

The housing shall not be readily removable from the band.

6 Finish

All component parts of the clamp shall be smooth and free from harmful burrs and sharp edges. Clamps other than those manufactured from corrosion resistant materials shall be protected against corrosion such that they shall meet the requirements of the salt spray test specified in **Annex A** BS EN ISO 9227:2006 **Annex A**, without significant corrosion of the base metal. The duration of the test shall be 48 h.

Plating shall be applied after any welding operation and prior to final assembly.

7 Range of sizes and dimensions

For the size range 12 mm up to and including 140 mm, sizes and dimensions shall be as given in Table 1 and Figure 1.

NOTE 1 This British Standard specifies tests that are performed on each size of clamp using a specified size and type of hose. The tests ensure that all makes of clamp are of equivalent performance but do not ensure that clamps will satisfactorily hold hoses of diameters at the extremities of a clamp's working range, particularly when used with a non-standard hose. The user should ensure that the size of clamp chosen is compatible with the hose diameter and type.

NOTE 2 For clamp sizes greater than 140 mm, the range of sizes may be in increments of 20 mm, starting at size 160 mm.


8 Marking

Each clamp shall be permanently and indelibly marked with the following:

- a) the name or trade mark of the manufacturer;
- b) the appropriate designating size;
- c) the number and date of this British Standard, i.e. BS 5315:1991¹⁾.

NOTE The application of any other marking is to be the subject of agreement between the purchaser and the manufacturer.

¹⁾ Marking BS 5315:1991 on or in relation to a product represents a manufacturer's declaration of conformity, i.e. a claim by or on behalf of the manufacturer that the product meets the requirements of the standard. The accuracy of the claim is therefore solely the responsibility of the person making the claim. Such a declaration is not to be confused with third party certification of conformity, which may also be desirable.

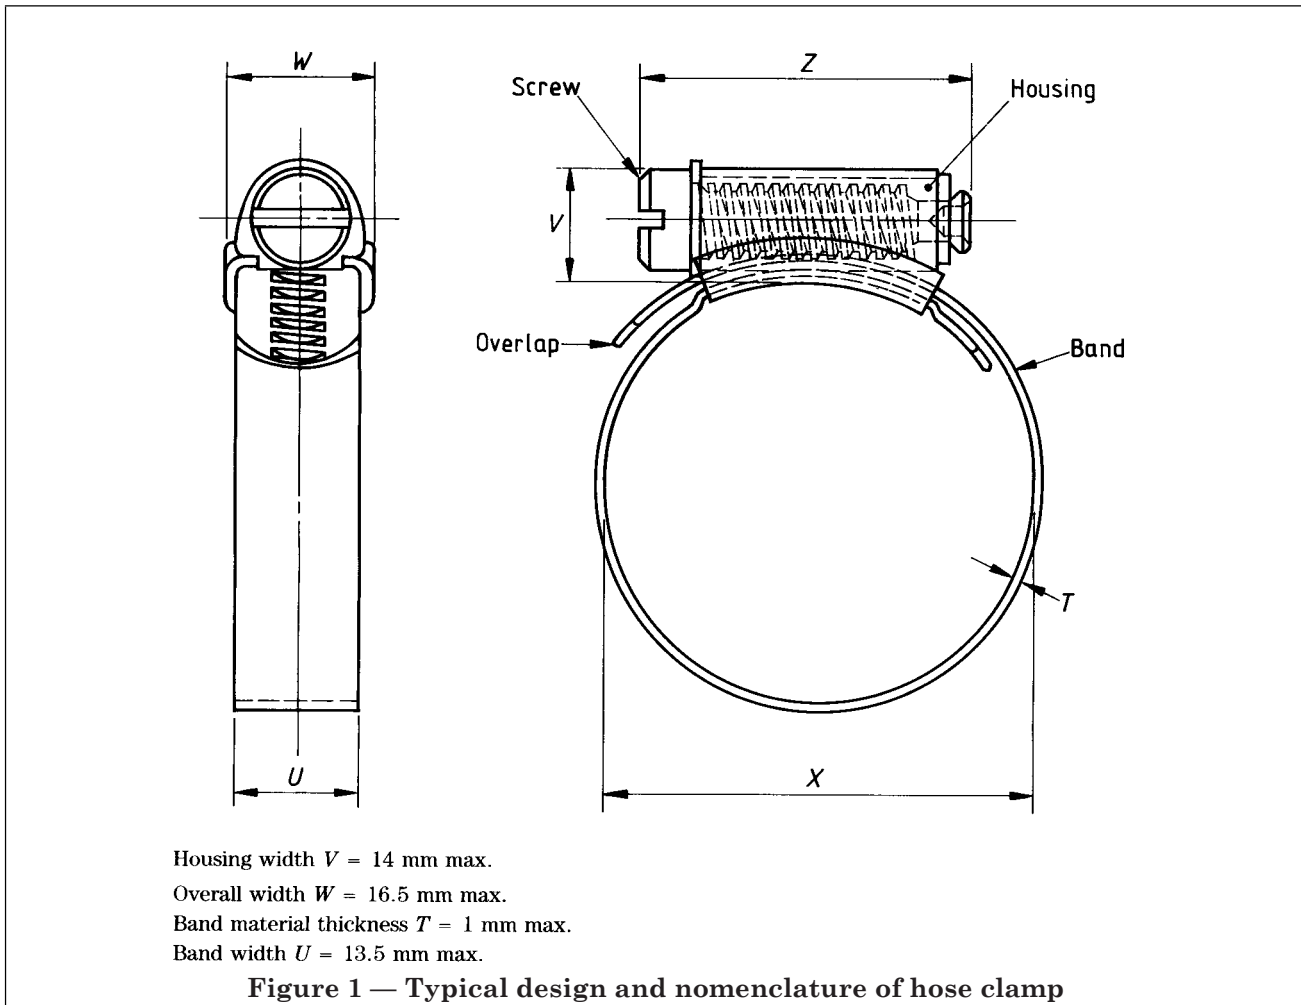

9 Testing

9.1 General

9.1.1 Clamp sizes 12 mm up to and including 140 mm

Each clamp shall be capable of passing the tests described in 9.2, 9.3.1 and 9.4.

9.1.2 Clamp sizes greater than 140 mm

Each clamp shall be capable of passing the tests described in 9.2 and 9.3.2.

9.2 Free-turning torque test

This test shall be conducted to ensure the smooth action of the lubricated clamp in its free-turning state. For this purpose, the torque required to move the screw in either direction shall not exceed 1.5 N·m.

9.3 Torque test

9.3.1 Torque test for clamp sizes 12 mm up to and including 140 mm

The test shall be conducted with the hose clamp in the lubricated condition mounted on a rigid mandrel of a diameter equal to the designating size of the clamp. A suitable test rig is shown in Figure 2. Alternative methods of applying the torque load are permissible provided that the conditions imposed by the torque rig shown in Figure 2 are simulated exactly.

The clamp shall be tightened to 75 % of the appropriate torque load as shown in Table 2. On release of the torque load, visual examination of the assembly shall reveal no sign of permanent distortion of the housing nor damage detrimental to the efficient functioning of the clamp. The clamp shall then be retightened until permanent distortion or failure occurs. The torque load at permanent distortion or failure shall be in excess of the appropriate value shown in Table 2.

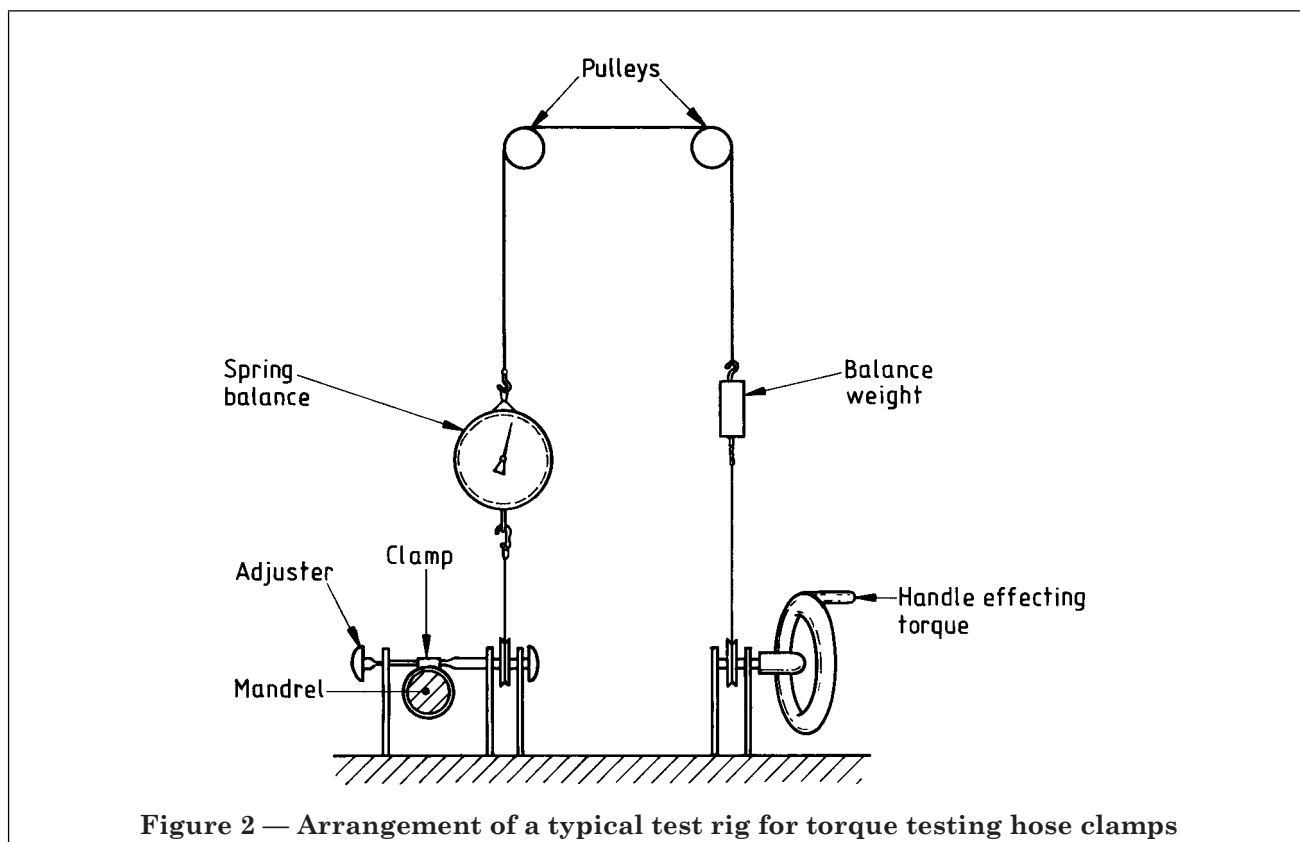


Figure 2 — Arrangement of a typical test rig for torque testing hose clamps

Table 1 — Dimensions of clamps

| Designating size | Working range X | | Z |
|------------------|-----------------|------|------|
| | min. | max. | max. |
| mm | mm | mm | mm |
| 12 | 9.5 | 12 | 25 |
| 16 | 11 | 16 | 25 |
| 20 | 13 | 20 | 25 |
| 22 | 16 | 22 | 25 |
| 25 | 18 | 25 | 25 |
| 30 | 22 | 30 | 29 |
| 35 | 25 | 35 | 29 |
| 40 | 30 | 40 | 29 |
| 45 | 35 | 45 | 33 |
| 50 | 35 | 50 | 32 |
| 55 | 40 | 55 | 33 |
| 60 | 45 | 60 | 33 |
| 70 | 55 | 70 | 33 |
| 80 | 60 | 80 | 33 |
| 90 | 70 | 90 | 33 |
| 100 | 85 | 100 | 33 |
| 120 | 90 | 120 | 33 |
| 140 | 120 | 140 | 33 |

Table 2 — Torque test valves

| size | Torque |
|---------------------|--------|
| mm | N m |
| 12 to 20 inclusive | 4.5 |
| 22 and 25 | 5.6 |
| 30 to 45 inclusive | 6.8 |
| 50 to 60 inclusive | 7.9 |
| 70 to 140 inclusive | 9.0 |

9.3.2 Band tension and torque test for clamp sizes greater than 140 mm

The test shall be conducted with the housing mounted in the anti-twist fixture and the fixed and moving parts of the band attached to a tensile test fixture as shown in Figure 3. The housing shall be checked to ensure that it is a free sliding fit.

When a torque of 6.8 N m is applied to the screw, the minimum indicated tension in the band shall be 1.5 kN. Further tightening to 7.9 N m shall be possible without permanent distortion or failure.

The housing shall be a free sliding fit after the test.

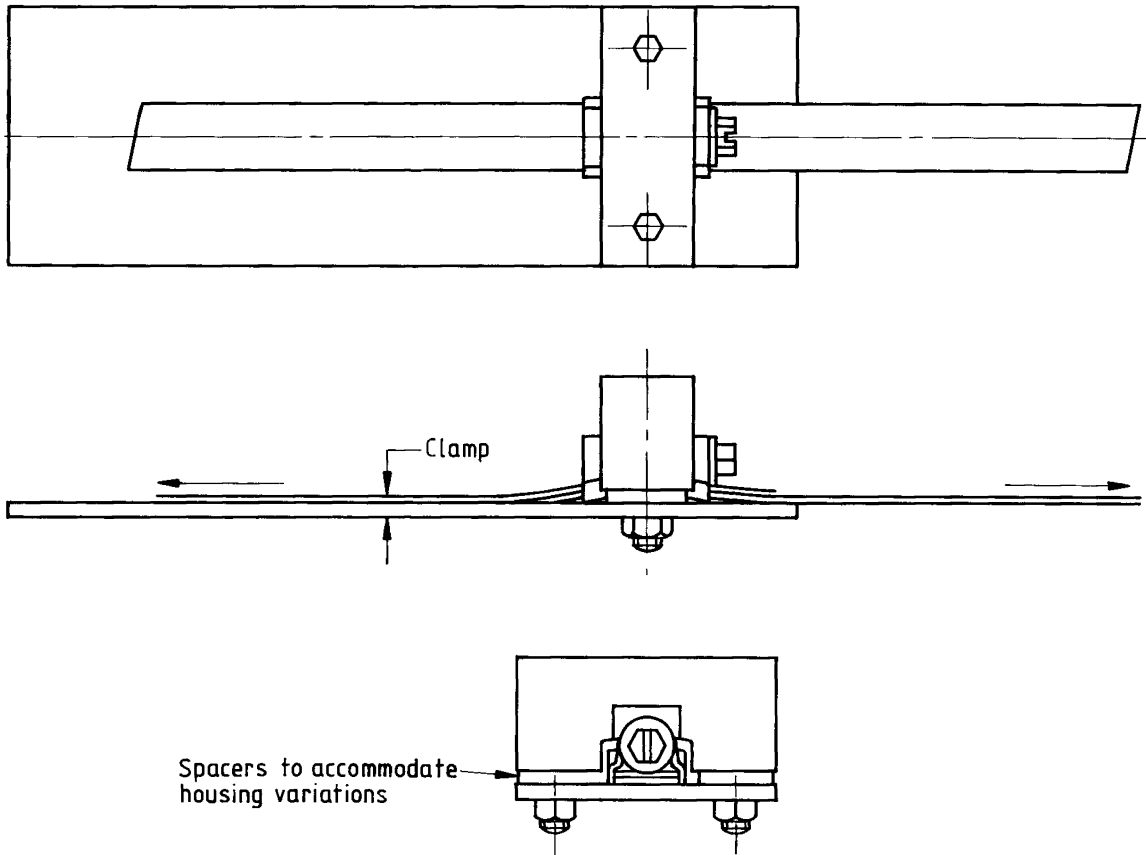


Figure 3 — Band tension and torque test fixture

9.4 Hydraulic pressure test

9.4.1 General

The test shall be conducted using the apparatus shown in Figure 4 using a hose of outside diameter nearest to the mean value of the working range of the clamp.

Ⓐ) The hose shall be rubber or PVC and have a working pressure of at least that specified in Table 3, have a smooth bore outside and have no metallic reinforcing. Ⓐ)

The fluid used for the test shall be water at room temperature.

9.4.2 Method of test

The hose and clamps shall be assembled on an unbeaded, externally smooth and polished metal mandrel as illustrated in Figure 4.


NOTE The mandrel should be a sliding fit in the hose.

The torque applied when tightening the clamps shall not exceed 75 % of the appropriate torque value specified in Table 2.

Pressure shall be applied gradually from an external source until leakage or other failure occurs, at which stage the pressure shall be not less than the appropriate value specified in Table 3.

Table 3 — Hydraulic pressure test values

| Size | Pressure |
|---------------------|----------|
| mm | MPa |
| 12 to 30 inclusive | 1.4 |
| 35 to 70 inclusive | 0.7 |
| 80 to 140 inclusive | 0.3 |

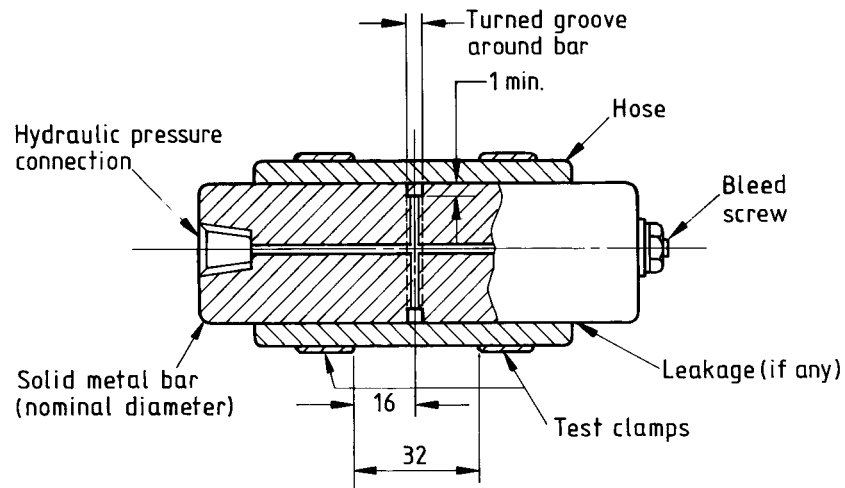

All dimensions are in millimetres.

Figure 4 — Hydraulic pressure test rig

Publication(s) referred to

Ⓐ₁ Text deleted Ⓐ₁

BS 5466, *Methods for corrosion testing of metallic coatings.*

Ⓐ₁ Text deleted Ⓐ₁

Ⓐ₁ BS EN ISO 9227, *Corrosion tests in artificial atmospheres – Salt spray tests.* Ⓐ₁

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.