

# Methods for determination of physical properties of tobacco and tobacco products —

**Part 7: Loss of tobacco from cigarette  
ends using a rotating cylindrical cage**

ICS 65.160

## National foreword

This British Standard reproduces verbatim ISO 3550-1:1997 and implements it as the UK national standard.

The UK participation in its preparation was entrusted to Technical Committee AW/40, Tobacco and tobacco products, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

### Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled "International Standards Correspondence Index", or by using the "Find" facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

**Compliance with a British Standard does not of itself confer immunity from legal obligations.**

### Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO title page, pages ii to iv, pages 1 to 7 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

This British Standard, having been prepared under the direction of the Consumer Products and Services Sector Board, was published under the authority of the Standards Board and comes into effect on 15 November 1997

© BSI 04-2000

ISBN 0 580 28803 X

### Amendments issued since publication

Amd. No.	Date	Comments

---

# Contents

	Page
National foreword	Inside front cover
Foreword	iii
Text of ISO 3550-1	1

---



INTERNATIONAL  
STANDARD

ISO  
3550-1

First edition  
1997-09-01

---

---

**Cigarettes — Determination of loss of  
tobacco from the ends —**

**Part 1:  
Method using a rotating cylindrical cage**

*Cigarettes — Détermination de la perte de tabac par les extrémités —  
Partie 1: Méthode utilisant une cage rotative cylindrique à barreaux*



Reference number  
ISO 3550-1:1997(E)

## Contents

	Page
Foreword	iii
Introduction	1
1 Scope	1
2 Normative references	1
3 Principle	1
4 Apparatus	1
5 Sampling	2
6 Procedure	2
7 Calculation of specific tobacco fallout values	3
8 Test report	4
Annex A (normative) Criteria for cigarette ends loss tester	5
Annex B (informative) Regression analysis for the calculation of the number of cigarettes	7
Annex C (informative) Example of counting tray	7
Figure 1 — Practical tester layout	2
Figure A.1	5
Figure A.2	6
Figure C.1	7
Table 1	3
Table A.1 — Theoretical rod positions	6

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 3550-1 was prepared by Technical Committee ISO/TC 126, *Tobacco and tobacco products*, Subcommittee SC 1, *Physical and dimensional tests*.

ISO 3550 consists of the following parts, under the general title *Cigarettes — Determination of loss of tobacco from the ends*:

- *Part 1: Method using a rotating cylindrical cage;*
- *Part 2: Method using a rotating cubic box (sismelatophore).*

Annex A forms an integral part of this part of ISO 3550. Annex B and Annex C are for information only.





## Introduction

The loss of tobacco from cigarette ends, which particularly affects short strands, is a nuisance for the industry as well as for the consumer.

From this standpoint, the greater a cigarette's resistance to loss from its ends, the higher its quality.

The measuring devices available are based on the rotation of a cigarette-containing device. This International Standard describes two particular types of device. The first, described in this part of ISO 3550, comprises a rotating cylindrical cage through which tobacco is allowed to fall into a weighing vessel; the second, described in ISO 3550-2, uses a cubic box rotating about its main diagonal axis.

The first system principally permits determination of losses undergone by the cigarette during the manufacturing and packaging processes, and the second one losses undergone throughout the distribution network and in the smoker's pocket.

The two methods are not mutually exclusive and other acceptable methods exist which are based upon slightly different types of device.

## 1 Scope

This part of ISO 3550 specifies a method for the determination of loss of tobacco from cigarette ends using a rotating cylindrical cage.

It applies mainly to cigarettes sampled on the manufacturing site, before or after packaging.

NOTE A method for the determination of loss of tobacco from the ends, using a cubic rotating box (sismelatophore), is described in ISO 3550-2.

## 2 Normative references

The following standards contain provisions which, through reference in this text, constitute provisions of this part of ISO 3550. At the time of publication, the editions indicated were valid. All standards are subject to revision, and parties to agreements based on this part of ISO 3550 are encouraged to investigate the possibility of applying the most recent editions of the standards indicated below. Members of IEC and ISO maintain registers of currently valid International Standards.

ISO 2971:—, *Cigarettes and filters rods — Determination of nominal diameter — Method using the laser beam measuring device*<sup>1)</sup>.

ISO 3402:1991, *Tobacco and tobacco products — Atmosphere for conditioning and testing*.

ISO 6488:—, *Tobacco — Determination of water content — Karl Fischer method*<sup>2)</sup>.

ISO 8243:1991, *Cigarettes — Sampling*.

## 3 Principle

A test portion of a given number of cigarettes is placed in a cylinder (cage) of elliptical cross section, which is formed of closely spaced parallel rods.

During the test the cage rotates around its horizontally positioned longitudinal axis and the cigarettes tumble in the cage.

The amount of tobacco fallout from the open ends of the cigarettes is determined.

The test conditions depend on the size and shape of the cage, the diameter and the spacing of the rods, the rotational speed of the cage, the number of revolutions per test, and the number of cigarettes per test portion which in turn depends on the diameter of the cigarettes.

As a first result of the test, the mass  $m_L$  of tobacco falling from the test portion is determined. From this mass and the physical dimensions of the test cigarette, the loss of tobacco per open end and per unit cross-section of open end is determined.

## 4 Apparatus

**4.1 Conditioning chamber**, capable of controlling the enclosed atmosphere in accordance with the requirements of ISO 3402.

**4.2 Cigarette ends loss tester**, complying with the following requirements.

- a) The main part of the tester shall consist of a cage having an elliptical cross section formed from a number of round stainless-steel rods. The spacing between adjacent rods shall be smaller than the diameter of the cigarettes to be tested but wide enough for any strands of tobacco lost from the test portion during a test to fall through. The positioning of the rods and their spacing shall be as detailed in Annex A.
- b) Bearings shall be provided at the centre point of each elliptical end face to enable the cage to be held horizontally and allowing it to be rotated about its longitudinal axis.
- c) To permit tests to be carried out simultaneously on more than one test portion or on test portions from different samples, the cage may be equipped with one or more dividers along its length so as to create several test compartments.

<sup>1)</sup> To be published. (Revision of ISO 2971:1987)

<sup>2)</sup> To be published. (Revision of ISO 6488:1981)

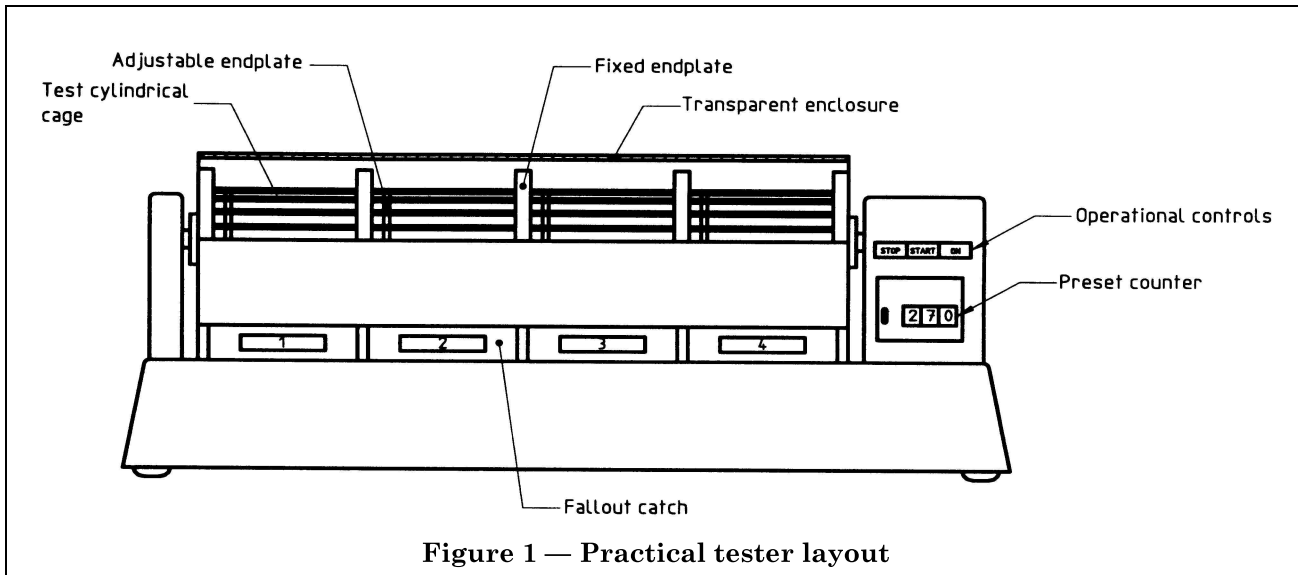


Figure 1 — Practical tester layout

d) Each test compartment shall be equipped with one movable end plate in addition to its fixed end face, so that the effective length of the compartment can be adjusted to match the length of the cigarettes under test.

e) Each test compartment shall be provided with means of opening to allow for loading and unloading of its test portion and with a removable pan arranged beneath it to collect all of the tobacco which falls out from the ends of the cigarettes during the test.

f) The tester shall be equipped with a drive system capable of rotating the cage and its contents at a rotational speed of  $90 \text{ r/min} \pm 1 \text{ r/min}$ . The drive system shall be controlled by a preset counter that stops the rotation of the cage automatically when the specified number of revolutions is reached. For normal testing, 270 revolutions is specified.

See Figure 1 for a schematic diagram of a tester.

**4.3 Device for the measurement of the diameter of the cigarettes**, in accordance with ISO 2971.

**4.4 Analytical balance**, capable of weighing to an accuracy of  $+ 0,000 \text{ g}$ .

**4.5 Ruler**, with graduations in millimetres.

**4.6 Counting trays** (optional) for filling a defined number of cigarettes for use as the test portion. The dimensions of the tray depend on the number of cigarettes in the test portion which, in turn, depends on the diameter. Annex C shows an example of a counting tray.

NOTE A counting tray is a useful device for selecting a defined number of cigarettes in a time-saving and error-free manner. The dimensions of the counting tray depend on the number of cigarettes and their diameter. The example given in Annex C is a counting tray for 50 cigarettes of 8,0 mm diameter.

## 5 Sampling

Carry out sampling in accordance with one of the procedures given in ISO 8243 where applicable or, if not, by a procedure relevant to the aim of the test. In the latter case, an appropriate reference to, or details of, the sampling procedure used shall be given in the test report.

## 6 Procedure

### 6.1 Conditioning of test sample

Place the test sample in the conditioning chamber (4.1) and condition the sample in accordance with ISO 3402.

### 6.2 Determination of water content

Take a test portion from the test sample conditioned as specified in 6.1 and determine the water content in accordance with ISO 6488.

NOTE Although the water content is not used when calculating the loss of tobacco from cigarette ends, it may affect the results considerably. The water content should, therefore, be determined and reported.

### 6.3 Preparation for the test

**6.3.1** Determine the mean diameter of the cigarettes to be tested to the nearest 0,01 mm in accordance with ISO 2971 and also their mean length ( $l$ ), to the nearest 0,5 mm using the ruler (4.5).

**6.3.2** As the test portion, select from the conditioned test sample the number of cigarettes specified in Table 1 for the measured diameter.

**6.3.3** Set the adjustable end plate(s) of the test compartment(s) to give a distance between the end faces of  $l + (5 \pm 1) \text{ mm}$ .

**6.3.4** Check that the fallout pans are clean and weigh them to the nearest 0,001 g.

## 6.4 Determination

**6.4.1** Operate in the test atmosphere specified in ISO 3402.

**6.4.2** Taking care to avoid damage to the cigarettes, transfer the test portion(s) to the test compartment(s).

**6.4.3** Close the test compartment(s) and the cover of the tester, reset the counter and start the test.

**6.4.4** Once the drive stops after 270 revolutions, remove the fallout pans and weigh them again to the nearest 0,001 g. Calculate the fallout quantity for each test portion. Discard the cigarettes tested.

**6.4.5** Repeat the test 5 to 10 times depending on the accuracy desired.

## 7 Calculation of specific tobacco fallout values

### 7.1 End-related tobacco fallout

The mass of the end-related tobacco fallout,  $m_{LOE}$ , in milligrams per open end, is given by

$$m_{LOE} = \frac{m_L}{q \cdot q_{OE}}$$

### 7.2 Area-related tobacco fallout

The mass of the area-related tobacco fallout,  $m_{LOA}$ , in milligrams per square centimetre of open end, is given by

$$m_{LOA} = \frac{m_L}{q \cdot A \cdot q_{OE}}$$

where

$m_L$  is the mass of fallout, in milligrams, related to the test portion;

$A$  is the area, in square centimetres, of one open end, to the nearest 0,01 cm<sup>2</sup>;

$q$  is the number of cigarettes in the test portion;

$q_{OE}$  is the number of open ends per cigarette.

NOTE  $q_{OE}$  is equal to 1 for filter cigarettes and 2 for plain cigarettes.

Table 1

Diameter of the cigarettes tested (mm)	Number of cigarettes for one test portion
5,00	128
5,10	123
5,20	118
5,30	114
5,40	110
5,50	106
5,60	102
5,70	98
5,80	95
5,90	92
6,00	89
6,10	86
6,20	83
6,30	80
6,40	78
6,50	76
6,60	73
6,70	71
6,80	69
6,90	67
7,00	65
7,10	63
7,20	61
7,30	60
7,40	58
7,50	57
7,60	55
7,70	54
7,80	52
7,90	51
8,00	50
8,10	48
8,20	47
8,30	46
8,40	45
8,50	44
8,60	43
8,70	42
8,80	41
8,90	40
9,00	39

NOTE See in Annex B the regression analysis for calculation of the number of cigarettes.

## 8 Test report

The test report shall include the following information:

- all information necessary for the complete identification of the tested sample(s);
- characteristic data of cigarettes (length, diameter, number of open ends);
- method and date of sampling;
- date of testing;
- number of cigarettes in the test sample;
- rotation speed and number of revolutions [if they differ from those specified in 4.2 f)];
- water content;

- number of single measuring results;
- mean value for the single measuring results;
- minimum and maximum value of single measuring results;
- standard deviation for the single measuring results if their number is > 3;
- coefficient of variation for the single measuring results if their number is > 3.

It shall also mention any operating conditions not specified in this part of ISO 3550 as well as any circumstances which may have influenced the results.

## Annex A (normative)

### Criteria for cigarette ends loss tester

#### A.1 Rotation speed

The rotational speed [see 4.2 f)] of the test cage is specified to be 90 r/min  $\pm$  1 r/min. If a different rotation speed is used, it shall be stated in the test report.

#### A.2 Number of revolutions

The number of revolutions per test [see 4.2 f)] is specified to be 270.

If a different number of revolutions is used, it shall be stated in the test report.

#### A.3 Test cage

The test cage is formed by 44 rods of stainless steel with a diameter of 3 mm  $\pm$  0,05 mm.


The centres of the rods are located on an ellipse that satisfies the following function, shown in Figure A.1:

$$\frac{x^2}{a^2} + \frac{y^2}{b^2} = 1$$

where

$$a = 54,0 \text{ mm}$$

$$b = 36,5 \text{ mm}$$

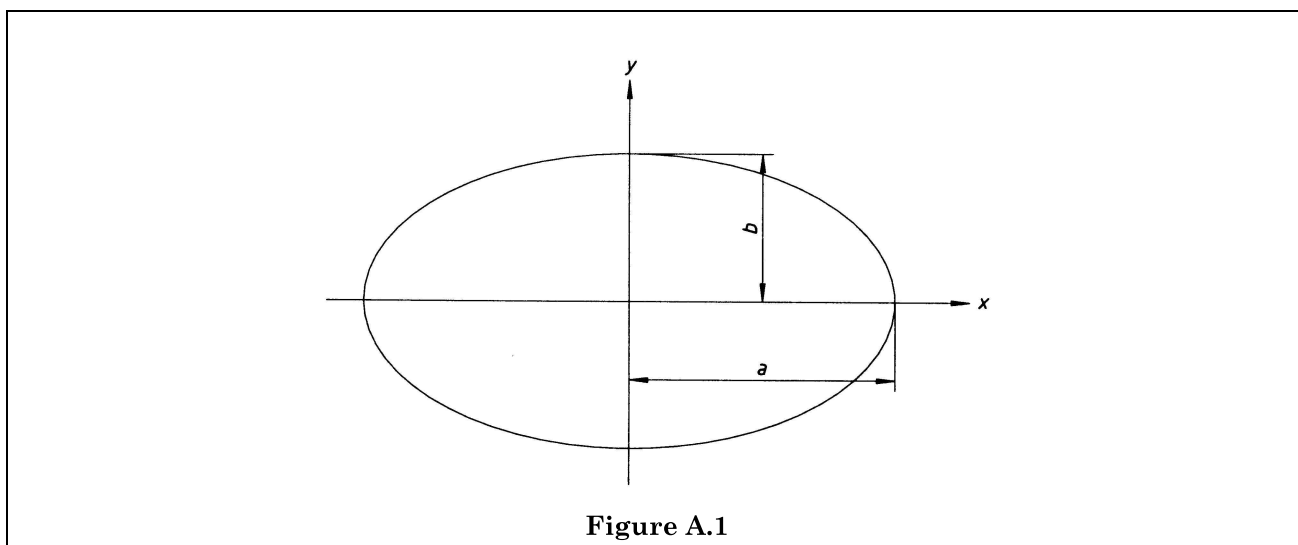

The clearance between the rods is 3,5 mm.

The theoretical location of the centre of the rods is identified by the cartesian coordinates  $X_n$  and  $Y_n$  as given in Table A.1 and shown in Figure A.2.

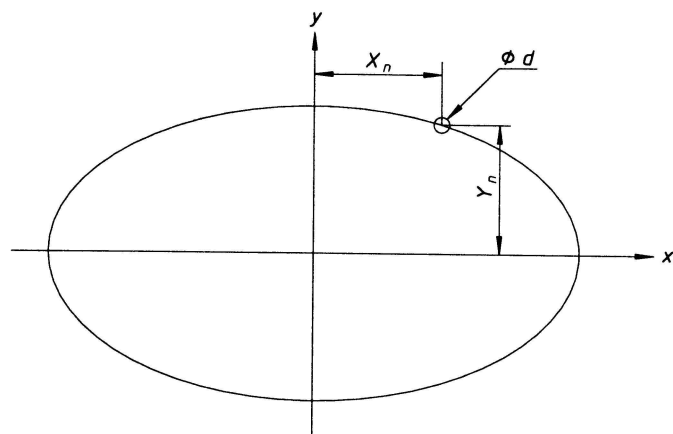


Figure A.2

Table A.1 — Theoretical rod positions

$n$	$\pm X_n$ mm	$\pm Y_n$ mm
1	3,258	36,434
2	9,752	35,900
3	16,178	34,824
4	22,484	33,186
5	28,607	30,957
6	34,463	28,100
7	39,937	24,567
8	44,869	20,309
9	49,030	15,295
10	52,116	9,556
11	53,784	3,258

In practice, the deviation from these points shall not exceed 0,3 mm.

**Annex B (informative)****Regression analysis for the calculation of the number of cigarettes**

The numbers of cigarettes for the different diameters were calculated from the equation

$$y = a \cdot x^b$$

which gave a very good fitting to the experimental figures which were obtained when the test cage was filled to the same level with cigarettes of five different diameters in the range between 5,44 mm and 8,68 mm. The filling level was taken from the recommended number of 50 cigarettes of 8,0 mm diameter.

Brand	Diameter of cigarettes $x$ (mm)	Number of cigarettes $Y$	$y$	$Y - y$	$Y - y$ (% $y$ )
A	5,44	108,00	108,11	- 0,11	- 0,10
B	6,13	85,00	84,98	0,02	0,03
C	7,41	58,00	57,98	0,02	0,04
D	7,99	50,00	49,81	0,19	0,39
E	8,68	42,00	42,15	- 0,15	- 0,35

where


$$y = a \cdot x^b; \quad \ln(y) = \ln(a) + b \times \ln(x)$$

$$\ln(a) = 8,097837577; \quad a = 3287,35174$$

$$b = -2,01603$$

$$B (\%) = 99,99760$$

$Y$  is the experimental number of cigarettes.

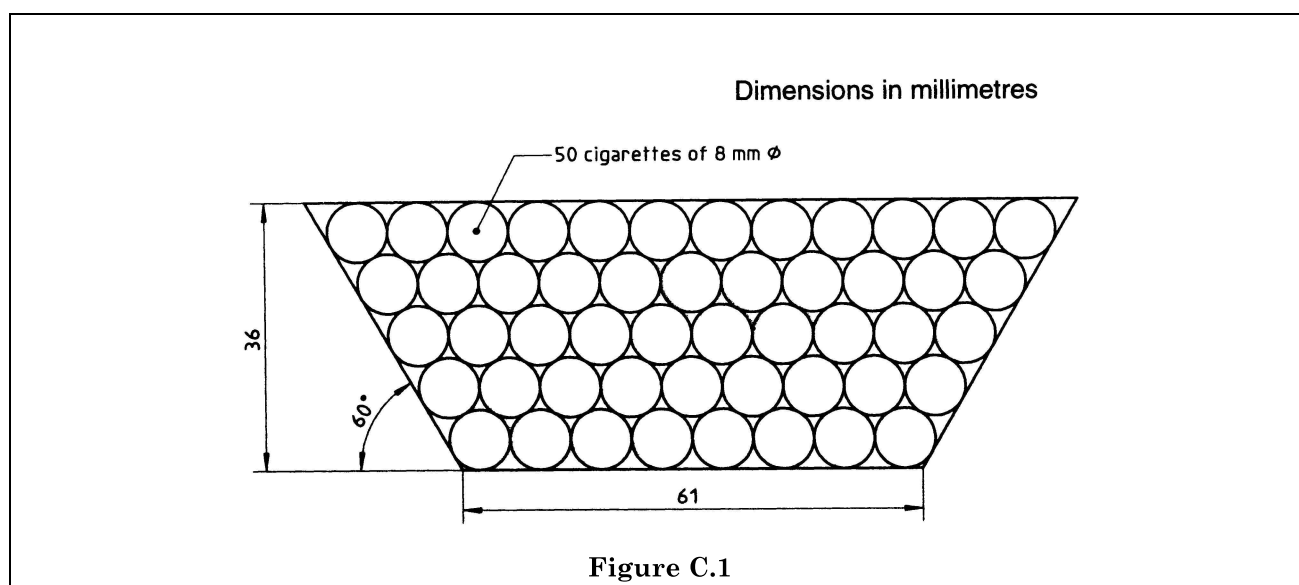**Annex C (informative)****Example of counting tray**

**BS 5381-7:  
1997  
ISO 3550-1:  
1997**

---

---

## **BSI — British Standards Institution**

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

### **Revisions**

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.  
Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

### **Buying standards**

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

### **Information on standards**

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.  
Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.  
Tel: 020 8996 7002. Fax: 020 8996 7001.

### **Copyright**

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager.  
Tel: 020 8996 7070.

BSI  
389 Chiswick High Road  
London  
W4 4AL

---