

Methods of test for

Verification of stability of pallet stackers and high lift platform trucks

[ISO title: Pallet stackers and high lift platform trucks —
Stability tests]

UDC 621.868.274:531.36:620.1

Cooperating organizations

The Mechanical Engineering Standards Committee, under whose direction this British Standard was prepared, consists of representatives from the following Government departments and scientific and industrial organizations:

Associated Offices Technical Committee*	Department of Trade (Marine Division)
Association of Consulting Engineers	Electricity Supply Industry in England and Wales
Association of Hydraulic Equipment Manufacturers	Engineering Equipment Users' Association*
Association of Mining Electrical and Mechanical Engineers	Federation of Manufacturers of Construction Equipment and Cranes
British Compressed Air Society	Health and Safety Executive*
British Electrical and Allied Manufacturers' Association (BEAMA)	Institution of Gas Engineers
British Gas Corporation	Institution of Mechanical Engineers
British Gear Manufacturers' Association	Institution of Plant Engineers
British Internal Combustion Engine Manufacturers' Association	Institution of Production Engineers
British Pump Manufacturers' Association	Lloyd's Register of Shipping
British Steel Corporation	London Transport Executive
British Steel Industry	Machine Tool Industry Research Association
British Valve Manufacturers' Association	Ministry of Defence*
Chartered Institution of Building Services	National Coal Board
Crown Agents for Oversea Governments and Administrations	Oil Companies Materials Association
Department of the Environment	Process Plant Association
Department of Industry (Mechanical Engineering)*	Railway Industry Association of Great Britain
Department of Industry (National Engineering Laboratory)	Society of Motor Manufacturers and Traders Limited
	Telecommunication Engineering and Manufacturing Association (TEMA)
	Water-tube Boilermakers' Association

The organizations marked with an asterisk in the above list, together with the following, were directly represented on the committee entrusted with the preparation of this British Standard:

British Industrial Truck Association	Contractors Plant Association
British Ports Association	Cranfield Institute of Technology
Castor Manufacturers (UK) Association	Food Manufacturers' Federation Incorporated
Chemical Industries Association	Metal Packaging Manufacturers Association

This British Standard, having been prepared under the direction of the Mechanical Engineering Standards Committee, was published under the authority of the Executive Board and comes into effect on 31 October 1979

© BSI 11-1999

The following BSI references relate to the work on this standard:
Committee reference MEE/112
Draft for comment 77/75770 DC

Amendments issued since publication

Amd. No.	Date of issue	Comments

ISBN 0 580 10924 0

Contents

	Page
Cooperating organizations	Inside front cover
National foreword	ii
1 Scope and field of application	1
2 Conditions of validity	1
3 Stability tests for pedestrian and rider controlled pallet stackers and high lift platform trucks	1
4 Stability tests for trucks with other attachments	3
Figure 1	2
Figure 2	4
Figure 3	4
Figure 4	4
Figure 5	4
Figure 6	5
Figure 7	5
Figure 8	5
Figure 9	5
Figure 10	5
Figure 11	5
Figure 12	5
Figure 13	5
Figure 14	6
Figure 15	6
Figure 16	6
Figure 17	6
Figure 18 — Test No. 3	7
Figure 19 — Test No. 4	7
Figure 20 — Test No. 6	8
Table of tests	4
Publications referred to	Inside back cover

National foreword

This British Standard has been prepared under the direction of the Mechanical Engineering Standards Committee. It is identical with ISO 5766:1978 “*Pallet stackers and high lift platform trucks — Stability tests*”, prepared by Technical Committee ISO/TC 110, Industrial trucks, of the International Organization for Standardization (ISO).

Terminology and conventions. The text of the International Standard has been approved as suitable for publication, without deviation, as a British Standard. Some terminology and certain conventions are not identical with those used in British Standards; attention is especially drawn to the following:

The comma has been used for metric values as a decimal marker. In British Standards it is current practice to use a full point on the baseline as the decimal marker.

Wherever the words “International Standard” appear, referring to this standard, they should be read as “British Standard”.

Cross-reference

International Standard	Corresponding British Standard
ISO 5767:1978	BS 5778:1979 <i>Methods of test for verification of stability of industrial trucks operating in special condition of stacking with mast tilted forward</i> (Identical)

Additional information

Clause 3.2.3. Location of truck on the test platform

In the second paragraph it is to be understood that wedging the wheels against the truck frame is carried out in such a way that articulation is not affected.

Clause 3.2.4. Verification of the vertical position of the mast

In the first paragraph the vertical position of the mast can be verified by means of a plumb line or other suitable equipment.

Figure 20 — Test No. 6

It should be understood that trucks operating on intermediate gradients should be tested at a tilt angle calculated by the appropriate formula.

The above clarifications are subject to consideration within ISO/TC 110 as amendments to ISO 5766.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, pages 1 to 8, an inside back cover and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

1 Scope and field of application

This International Standard specifies tests for verification of the stability of pedestrian and rider controlled pallet stackers and high lift platform trucks of rated capacity up to and including 5 000 kg (10 000 lb), with tilting or non-tilting masts.

2 Conditions of validity

2.1 Normal operating conditions

The tests specified in this International Standard ensure that the type of truck under consideration has satisfactory stability for operation under general operating conditions:

- a) operating on substantially level surfaces,
- b) travelling with the load in the lowered position,
- c) stacking with the mast substantially vertical.

2.2 Other conditions

When the operating conditions differ from the conditions defined in 2.1, it is necessary to use either

- a) a truck with a higher rated capacity, or
- b) a truck having design modifications which are agreed upon between the interested parties, or
- c) a truck complying with any existing International Standard(s) covering the different conditions (for example ISO 5767, when forward tilt is required during stacking with full load at full elevation.)

2.3 Complementary tests

In the case where tests other than the six tests as specified would be necessary, the details should be agreed between the interested parties.

3 Stability tests for pedestrian and rider controlled pallet stackers and high lift platform trucks

3.1 Specification of tests

The stability of these trucks shall be verified by means of the tests described below, using a test platform which can be tilted about one side.

The tests shall be carried out on an operational truck but without the operator.

For rider controlled trucks, the operator shall be represented by an object of corresponding mass, if the stability during a test is thereby decreased. For this purpose a unit mass of 90 kg (200 lb) shall be provided, and it shall be secured and centred 250 mm (10 in) above the operator's seat on sit-on trucks, and 1 000 mm (40 in) above the foot plate on stand-on trucks.

A truck being tested for stability is placed on the test platform, which is initially horizontal, in the conditions specified in 3.2, and, successively, in each of the positions described in the table of tests.

In each of these tests, the test platform shall be tilted slowly to the slope indicated in the table. The truck is considered stable if it passes all tests without overturning.

In the case of tests Nos. 3 and 4, it is permissible for one wheel to rise from the test platform and for the outer edges of the truck to come into contact with the test platform, provided that the truck does not overturn under the prescribed test platform inclination.

3.2 Conditions for carrying out the tests

3.2.1 Position of truck on test platform

For tests Nos. 1 and 2, the truck shall be placed on the test platform with the drive (steer) axle and the axle of the outrigger wheels parallel to the tilt axis, XY, of the test platform, the side nearest this axis being the one of the mast (see Figure 4 and Figure 5).

For tests Nos. 3 and 4, the truck shall be placed on the test platform with line MN parallel to the tilt axis, XY, of the test platform (see Figure 8 to Figure 13 inclusive).

In the case of Figure 10, the steerable wheel nearest to the tilt axis shall be parallel with it. Positions of steerable wheels on other designs are shown in Figure 8, Figure 9, Figure 11, Figure 12 and Figure 13.

Point N is the centre point of the area of contact between the test platform surface and the outrigger wheel nearest to the tilt axis XY (Figure 8 to Figure 13 inclusive).

Point M is defined as follows:

- a) For trucks with articulating steering axle (Figure 10) or pivoting single point support steering (Figure 12), M is the vertical projection on the test platform of the point of intersection between the centre line AB of the truck and the centre line of the axle.
- b) Figure 8, Figure 9, Figure 11 and Figure 13 indicate positions for trucks of other designs.

For tests Nos. 5 and 6, the truck shall be placed on the test platform with the drive (steer) axle and the axle of the outrigger wheels parallel to the tilt axis, XY, of the test platform, the side nearest this axis being the one opposite to the mast (see Figure 16 and Figure 17).

3.2.2 Test load

The test load shall be such that it simulates an unrestrained homogeneous cube the mass of which is equal to the maximum load Q and the dimensions of which are equal to twice the rated load centre distance D , the values of Q and D corresponding to the manufacturer's rated capacity of the truck (see Figure 1).




Figure 1

For trucks having a lift height greater than 2,5 m (100 in) or 3,3 m (130 in), the test load shall be equal to the load that the truck is able to carry in the stability conditions set out in the following table of tests.

The distance D for the respective tests is found in the table of tests.

The centre of gravity G of the test load (see Figure 1) shall be located in the vertical plane of symmetry AB of the truck (see Figure 4, Figure 5, Figure 16 and Figure 17).

3.2.3 Location of truck on the test platform

It is essential that the initial position of the truck on the test platform be maintained during testing.

This may be achieved by application of hand or service brakes, which can be secured in the "on" position, or by wedging the wheels against the truck frame.

The use of chocks or blocks between the wheels and the test platform is allowed, if their height does not exceed the values indicated in the following table:

Wheel diameter d mm	Maximum height of chocks or blocks
up to 250	25 mm
250 to 500	0,1 d
over 500	50 mm

3.2.4 Verification of the vertical position of the mast

Before proceeding with test No. 1, the vertical position of the mast shall be verified by means of a plumb-line.

The projection on the horizontal test platform of the reference point R (inner corner of the fork arm, see Figure 1), shall be the same for the lift height depending on the test load as for the lift height with lowered fork arms (i.e. in transporting position).

Deviations caused by deflections shall be corrected by varying the tilt of the mast or fork arm, within the limits imposed by the design of the truck.

NOTE These conditions do not apply to trucks where the design does not allow such corrections.

3.2.5 Height of truck platform or fork arms

Tests Nos. 2, 4 and 6 (travelling) shall be carried out with the upper face of the load platform or fork arms 300 mm (12 in) above the ground, or at the minimum height for transporting the load, whichever is the greater.





4 Stability tests for trucks with other attachments

Pallet stackers and high lift platform trucks fitted with attachments other than fork arms or platforms shall be subjected to the same stability tests, except in cases where the attachment can bring the centre of gravity of the load out of the plane of symmetry AB of the truck.

The test load, however, shall be the specified load at the specified distance indicated for the attachment when used on the truck being tested.

The lift height for tests Nos. 2, 4 and 6 shall be measured between the tilting platform or the upper part of the outriggers and the underside of the load or attachment, whichever is the smaller.

Table of tests

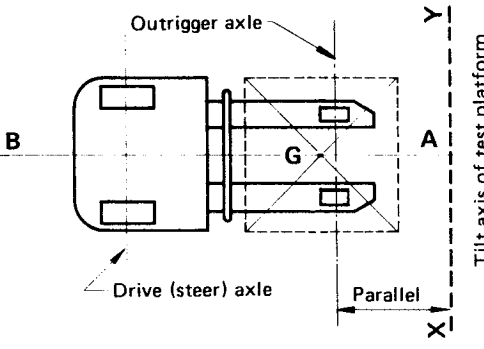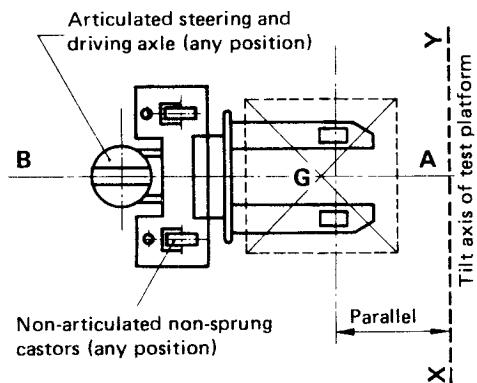Test No.	1	2 (see note 2)
Stability	Longitudinal	
Operation	Stacking	Travelling
Load	Test load	Test load
Centre of gravity distance	D	D
Lift height	Maximum	Lowered (see 3.2.5)
Platform slope	4 %	18 %
Tilt of forks or mast	Vertical (see 3.2.4)	Maximum backward tilt
Position of the truck on the tilting platform (see 3.2.1)	 <p>FIGURE 2</p>	 <p>FIGURE 3</p>
	 <p>FIGURE 4</p>	 <p>FIGURE 5</p>

NOTE 1 If the truck is equipped with a device which automatically limits the travel speed when the fork arms are elevated, this reduced speed shall be used when determining the tilt of the test platform in the formula of Figure 18.

NOTE 2 In tests Nos. 2, 4 and 6, when the outrigger legs can be raised relative to the ground, the test shall be carried out with the outriggers in the raised position

NOTE 3 The positioning of vehicles on the test platform for lateral tests depends on the type of truck to be tested (see Figure 8 to Figure 13). The true tip line between points M and N must be parallel to tilt axis XY of the test platform, test being conducted towards the side on which truck is least stable.

NOTE 4 Nominal distance D or 400 mm (16 in) if this latter distance corresponds to minimum stability and if the truck has been designed for this distance.

If the truck is designed only for distance D this shall be mentioned on the load plate.

NOTE 5 When the truck is equipped with tilting mast or tilting forks they shall be so positioned that the truck is in the condition of least stability.

Table of tests










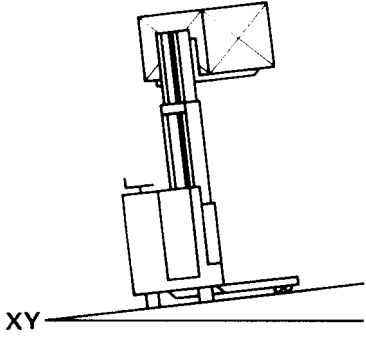
Test No.	3 (see note 3)	4 (see notes 2 and 3)	
Stability	Lateral		
Operation	Stacking	Travelling	
Load	Test load	Unladen	
Centre of gravity distance	<i>D</i> or 400 mm (16 in) (see note 4)	—	
Lift height	Maximum	Lowered (see 3.2.5)	
Platform slope	See Figure 18 See note 1	See Figure 19	
Tilt of forks or mast	See note 5	See note 5	
	 <p>FIGURE 6</p>	 <p>FIGURE 7</p>	
<p>Position of the truck on the tilting platform (see 3.2.1)</p>	 <p>FIGURE 8</p>	 <p>FIGURE 10</p>	 <p>FIGURE 12</p>
	 <p>FIGURE 9</p>	 <p>FIGURE 11</p>	 <p>FIGURE 13</p>



Table of tests

Test No.	5	6 (see note 2)
Stability	Longitudinal rearward	
Operation	Stacking	Travelling
Load	Test load	Unladen
Centre of gravity distance	D or 400 mm (16 in) (see note 4)	—
Lift height	Maximum	Lowered (see 3.2.5)
Platform slope	10 %	See Figure 20
Tilt of forks or mast	See note 5	See note 5

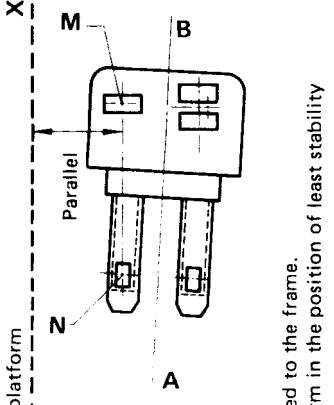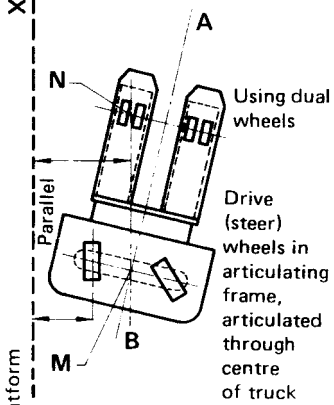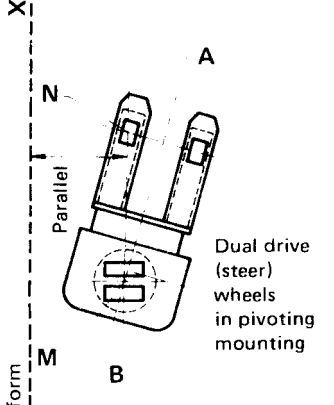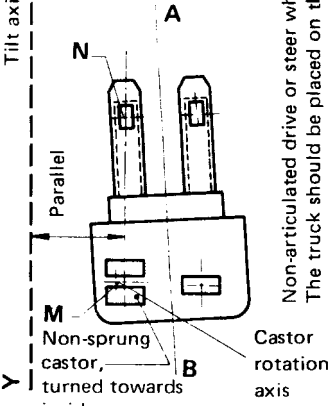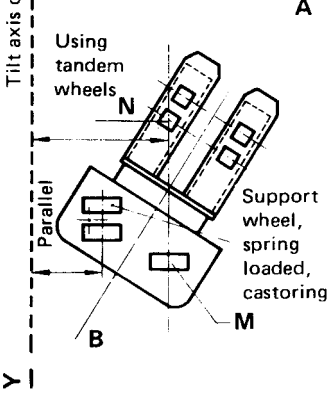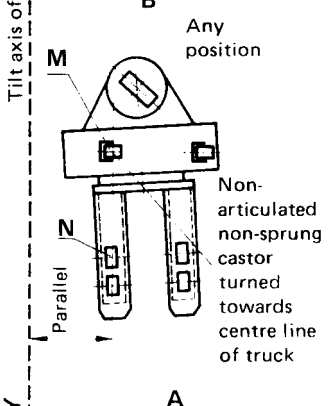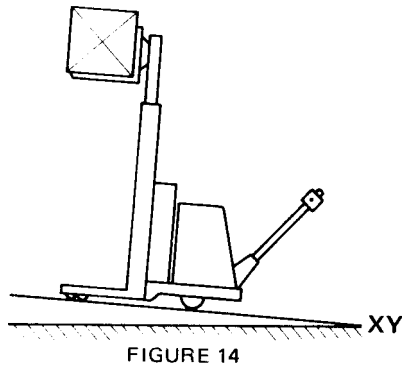

Every safety precaution shall be taken when tilting toward the drivers side during stability tests. To prevent any danger of overturning at the tilting limit, right of axis MN or left of axis MO, the articulation of the drive (steer) axle may be locked on trucks with centre-articulated axle.

Position of the truck on the tilting platform (see 3.2.1)

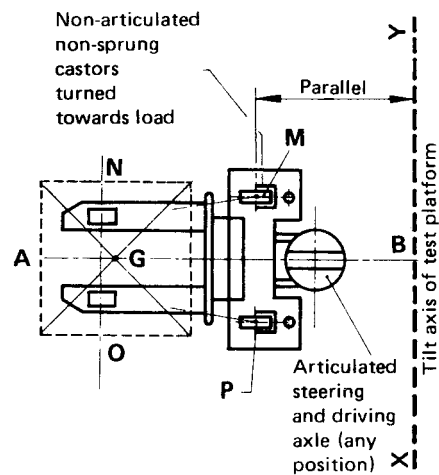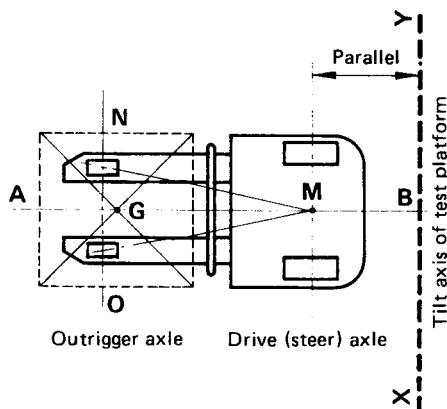

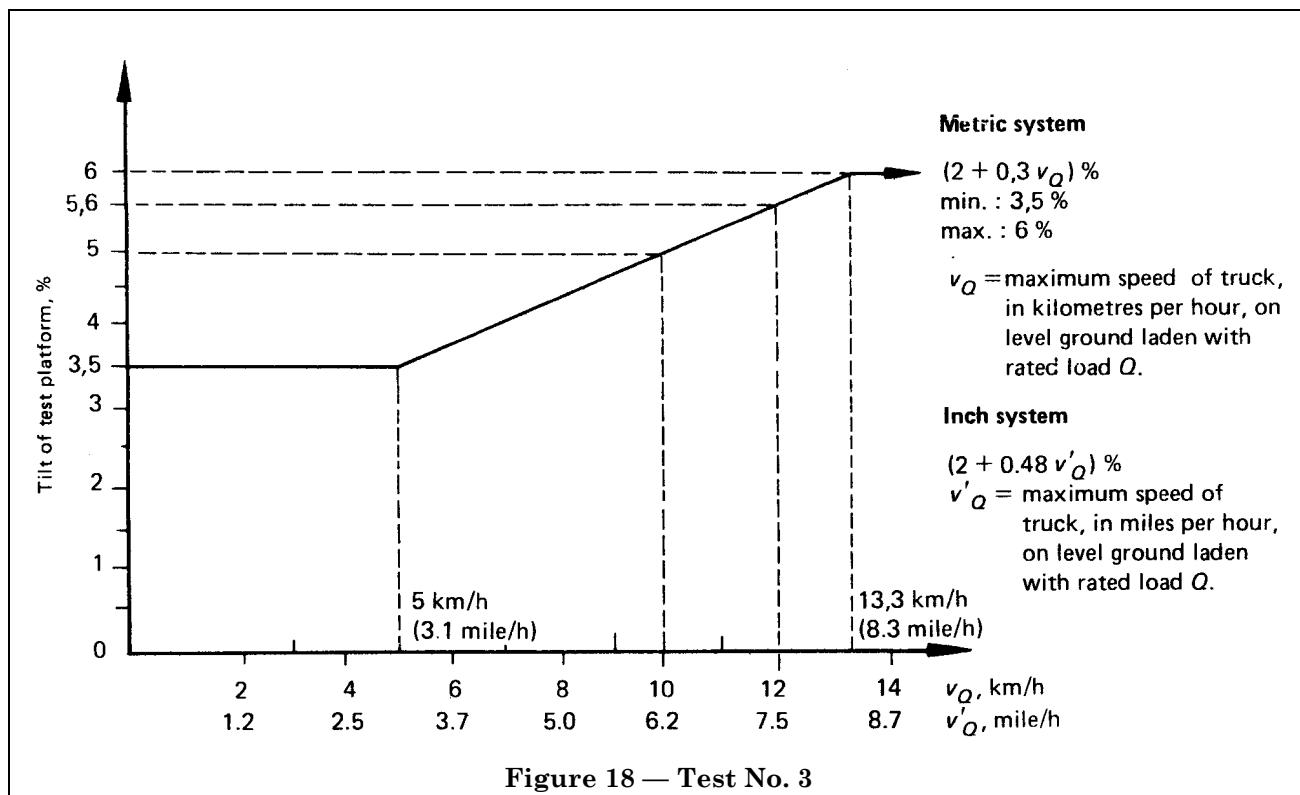


Figure 18 — Test No. 3

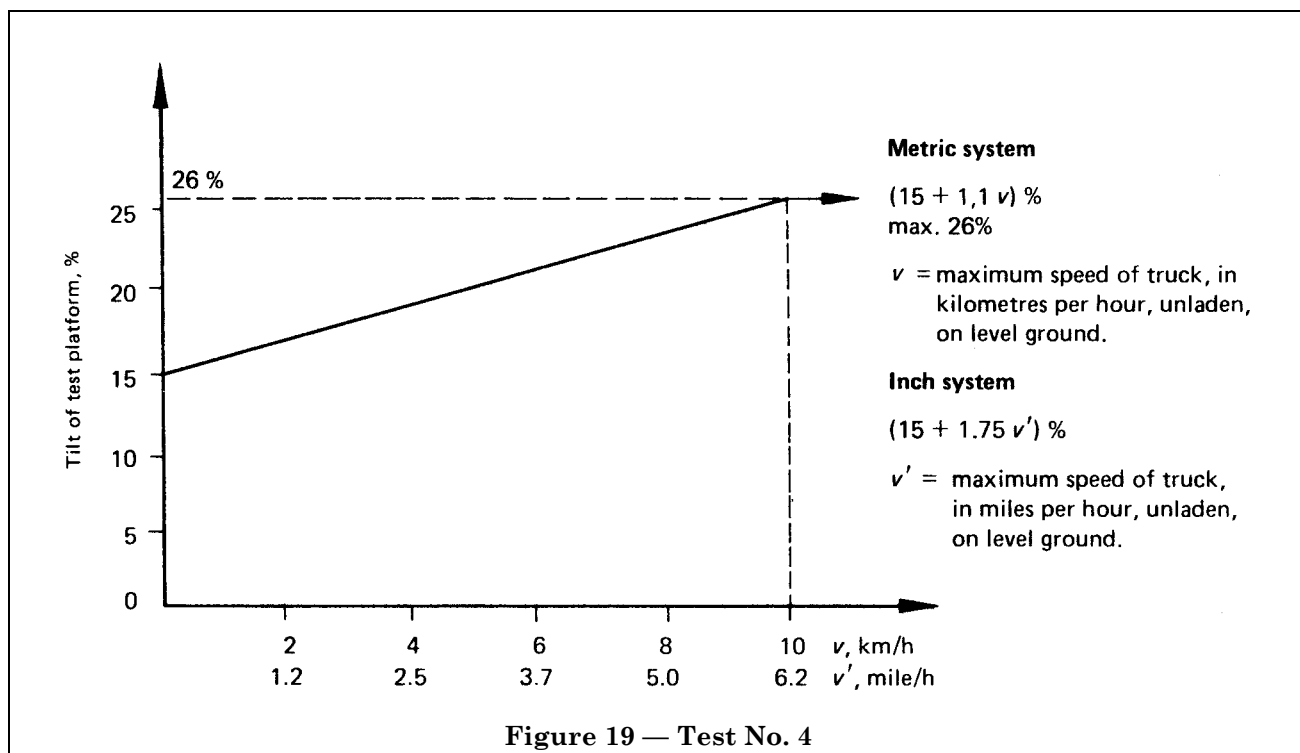


Figure 19 — Test No. 4

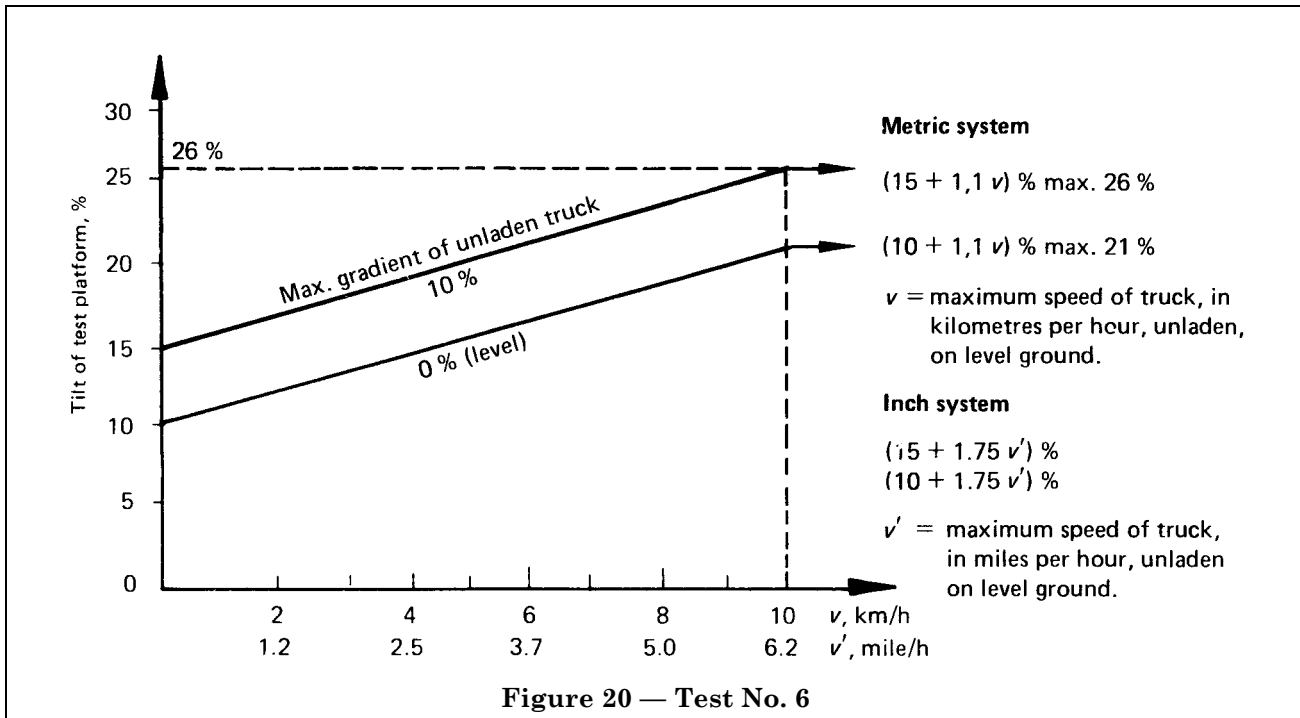


Figure 20 — Test No. 6

NOTE Test No. 6: Calculation of required tilt for intermediate gradients — Minimum platform tilt formula.

Metric system

$$\left. \begin{array}{l} \text{For } v = 0 \text{ to } 10 \text{ km/h, } \alpha = 10 + 0,5 i + 1,1 v \\ \text{For } v > 10 \text{ km/h, } \alpha = 21 + 0,5 i \end{array} \right\} \text{max. } 26 \%$$

Inch system

$$\left. \begin{array}{l} \text{For } v' = 0 \text{ to } 6.2 \text{ mile/h, } \alpha = 10 + 0.5 i + 1.75 v' \\ \text{For } v' > 6.2 \text{ mile/h, } \alpha = 21 + 0.5 i \end{array} \right\} \text{max. } 26 \%$$

where

α is the required test platform tilt expressed as a percentage (%) (maximum 26 %);

i is the maximum gradient of unladen truck (maximum 10 %);

v or v' is the maximum speed of an unladen truck on level ground (v max. = 10 km/h; v' max. = 6.2 mile/h).

Publications referred to

See national foreword.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: 020 8996 7002. Fax: 020 8996 7001.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager.
Tel: 020 8996 7070.