

Methods of sampling and test for carbonaceous materials used in aluminium manufacture —

Part 3: Electrodes —

Section 3.1: Sampling —

Subsection 3.1.1: Sampling of cathodes

ICS 71.100.10

National foreword

This British Standard is the UK national implementation of ISO 8007-1:1999. The UK participation in its preparation was entrusted to Technical Committee C11/24, Raw materials for the aluminium industry, which has the responsibility to:

- aid enquirers to understand the text;
- present to the responsible international/European committee any enquiries on the interpretation, or proposals for change, and keep the UK interests informed;
- monitor related international and European developments and promulgate them in the UK.

A list of organizations represented on this committee can be obtained on request to its secretary.

Cross-references

The British Standards which implement international or European publications referred to in this document may be found in the BSI Standards Catalogue under the section entitled “International Standards Correspondence Index”, or by using the “Find” facility of the BSI Standards Electronic Catalogue.

A British Standard does not purport to include all the necessary provisions of a contract. Users of British Standards are responsible for their correct application.

Compliance with a British Standard does not of itself confer immunity from legal obligations.

Summary of pages

This document comprises a front cover, an inside front cover, pages i and ii, the ISO title page, pages ii to iv, pages 1 to 3 and a back cover.

This standard has been updated (see copyright date) and may have had amendments incorporated. This will be indicated in the amendment table on the inside front cover.

Amendments issued since publication

Amd. No.	Date	Comments

This British Standard, having been prepared under the direction of the Sector Committee for Materials and Chemicals, was published under the authority of the Standards Committee and comes into effect on 15 October 1999

© BSI 04-2000

ISBN 0 580 32816 3

Contents

	Page
National foreword	Inside front cover
Foreword	iii
Text of ISO 8007-1	1

INTERNATIONAL
STANDARD

ISO
8007-1

First edition
1999-08-01

**Carbonaceous materials used in the
production of aluminium — Sampling plans
and sampling from individual units —**

Part 1:
Cathode blocks

*Produits carbonés utilisés pour la production de l'aluminium — Plans
d'échantillonnage et échantillonnage pour unités individuelles —
Partie 1: Blocs cathodiques*



Reference number
ISO 8007-1:1999(E)

Contents

	Page
Foreword	iii
Introduction	1
1 Scope	1
2 Normative references	1
3 Definitions	1
4 Apparatus	1
5 Taking test samples from individual cathodes	1
5.1 Procedure	1
5.2 Cathode blocks produced without a collector-bar slot	1
5.3 Cathode blocks produced with a collector-bar slot	1
5.4 Dimensions of test samples	3
6 Sampling report	3
Figure 1 — Examples of sampling-point locations for cathode blocks without a slot	2
Figure 2 — Examples of sampling-point locations for cathode blocks with a slot	2

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 8007-1 was prepared by Technical Committee, ISO/TC 47, *Chemistry*, Subcommittee SC 7, *Aluminium oxide, cryolite, aluminium fluoride, sodium fluoride, carbonaceous products for the aluminium industry*.

ISO 8007 consists of the following parts, under the general title, *Carbonaceous materials used in the production of aluminium — Sampling plans and sampling from individual units*:

- *Part 1: Cathode blocks;*
- *Part 2: Prebaked anodes.*

Part 3, which is in preparation, will give procedures for sampling sidewall blocks.

Introduction

Details of the sampling of shaped refractory products in general are given in ISO 5022, which gives the statistical basis for sampling plans for acceptance testing of a consignment or lot.

Cathode blocks used in the production of aluminium have specific requirements for sampling and, while the statistical basis for sampling given in ISO 5022 applies, further or modified requirements also apply.

1 Scope

This part of ISO 8007 specifies procedures for sampling consignments of cathode blocks used in the production of aluminium and for taking test samples from individual blocks.

2 Normative references

The following normative documents contain provisions which, through reference in this text, constitute provisions of this part of ISO 8007. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 8007 are encouraged to investigate the possibility of applying the most recent editions of the normative documents indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 5022:1979, *Shaped refractory products — Sampling and acceptance testing*.

ISO 6206:1979, *Chemical products for industrial use — Sampling — Vocabulary*.

3 Definitions

For the purposes of this part of ISO 8007, the definitions given in ISO 5022 and ISO 6206 apply.

4 Apparatus

Use suitable core-drilling equipment with cutting edges preferably coated with diamond or another extremely hard material.

5 Taking test samples from individual cathodes

5.1 Procedure

Cathode blocks shall be sampled, by core drilling or sawing, in accordance with the provisions of ISO 5022 and with the additional requirements given in 5.2, 5.3 and 5.4 of this part of ISO 8007. Examples of sample locations are given in Figure 1 and Figure 2.

Cathode blocks produced with a collector-bar slot shall be considered separately from those produced without a slot when determining the locations from which test sample(s) will be taken.

The locations from which test samples will be taken shall be agreed between the seller and buyer in accordance with 5.2 or 5.3.

5.2 Cathode blocks produced without a collector-bar slot

The positions from which test samples can be drilled from cathode blocks produced without a collector-bar slot are restricted because, after sampling, the cathode block will be used as part of an electrolysis cell. Test samples shall therefore be taken from the part of the cathode block that will be machined out as the slot. Sampling shall not weaken the cathode block or increase the likelihood of premature failure. Extreme care shall be exercised when taking vertically drilled samples. Examples of positions from which test samples can be taken are shown in Figure 1.

5.3 Cathode blocks produced with a collector-bar slot

Consignments may be delivered with a proportion of the cathode blocks manufactured to a length that is greater than that which will ultimately be required for use. This is indicated in Figure 2 as the “extra length”. The seller and buyer shall agree on the proportion of extra-length cathode blocks in a consignment.

NOTE It is strongly recommended that such an agreement to supply a proportion with extra length is made. Sampling from the extra-length part of the cathode block is preferred because the part of the cathode block that has been drilled will ultimately be machined away when the block is cut to final length.



When sampling extra-length cathode blocks, test samples shall be taken horizontally and vertically, spreading the sampling locations evenly over the entire cross-section of the block.

When no extra-length cathode blocks are available, test samples shall be taken horizontally and vertically, but the options are more restricted.

Sampling shall not weaken, contaminate or cause the destruction of the block. Extreme care shall be exercised when taking vertically drilled samples.

The availability or non-availability of extra-length cathode blocks for sampling purposes shall be reported under item e) of the sampling report.

Examples of positions from which test samples can be taken are shown in Figure 2.

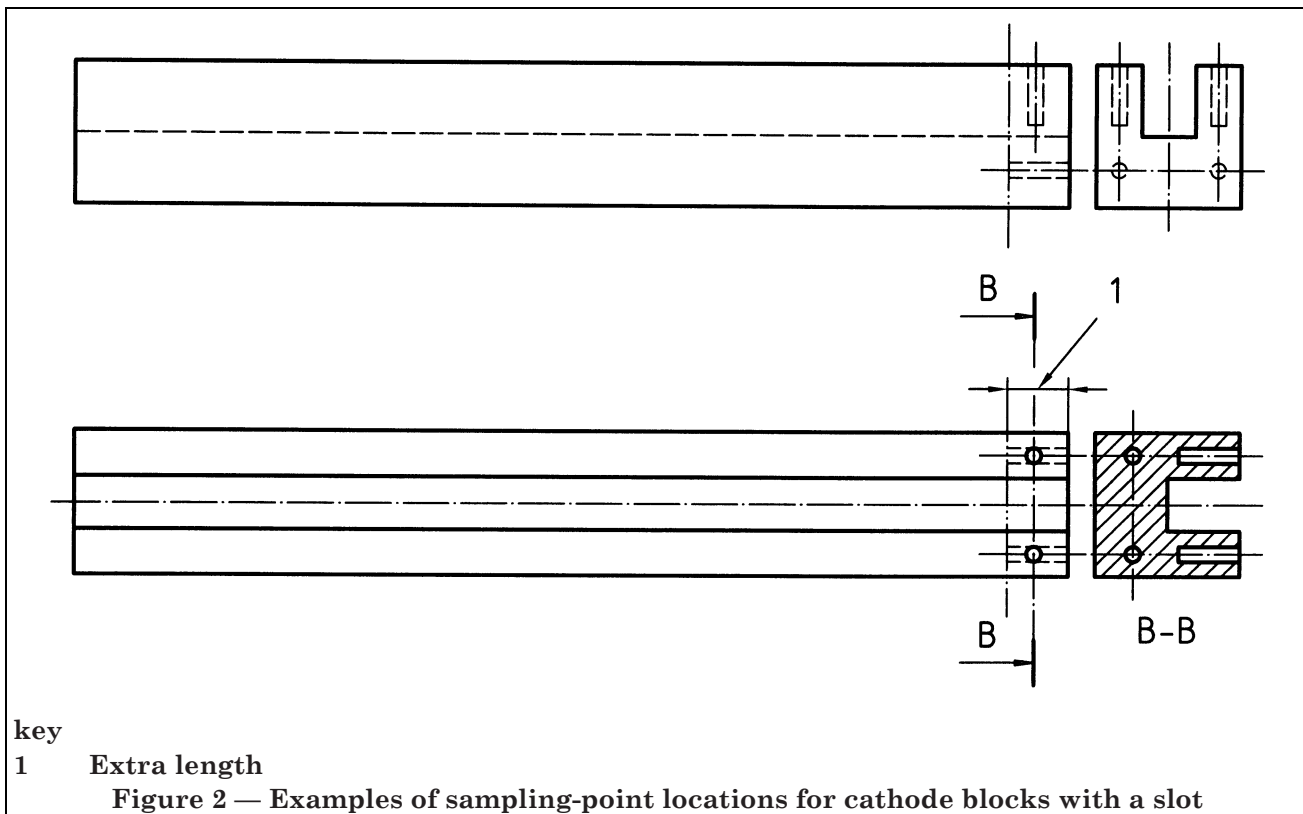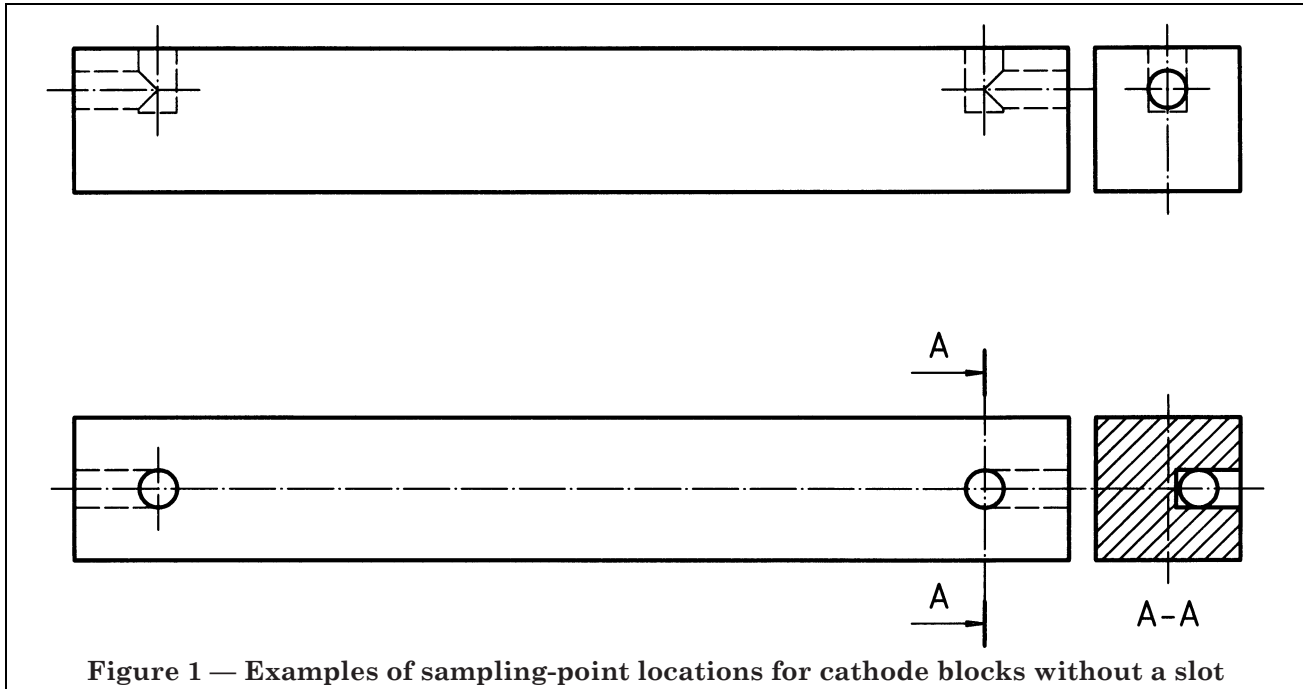

5.4 Dimensions of test samples

Choose the dimensions of each test sample according to the test to be carried out. The smallest dimension (usually the diameter) shall be at least three times the maximum particle size of the dry aggregate.

Refer to the International Standards relating to the tests to be carried out to ensure that the test samples taken from the cathode block are of suitable dimensions. Where a standard does not specify the dimensions of the test pieces, a diameter of 30 mm or 50 mm is recommended, as well as a length which is at least 1,5 times the diameter.

The cross-section of the test samples shall be circular. If parallel-sided test pieces are to be prepared from the test samples, the diameter shall be sufficient to allow this. Report the dimensions of the test samples under item g) of the sampling report.

6 Sampling report

The sampling report shall include the following:

- a) the names of the producer and customer;
- b) the number and reference marking of the batch(es);
- c) a reference to this part of ISO 8007, i.e. ISO 8007-1;
- d) the date and place of sampling;
- e) complete details of the sampling plan operated;
- f) the proportion and number of extra-length cathode blocks, if available for sampling;
- g) a sketch showing the locations of the sampling points and the direction of sampling (horizontally or vertically) (examples are given in Figure 1 and Figure 2);
- h) the dimensions of the test samples;
- i) details (name and job title) of the person(s) carrying out the sampling.

BSI — British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: 020 8996 9000. Fax: 020 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: 020 8996 9001. Fax: 020 8996 7001.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: 020 8996 7111. Fax: 020 8996 7048.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: 020 8996 7002. Fax: 020 8996 7001.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

If permission is granted, the terms may include royalty payments or a licensing agreement. Details and advice can be obtained from the Copyright Manager.
Tel: 020 8996 7070.