

BRITISH STANDARD

Writing and marking instruments –

Part 1: Specification for caps to reduce the risk of asphyxiation

ICS 01.100.40; 97.180; 97.190

Publishing and copyright information

The BSI copyright notice displayed in this document indicates when the document was last issued.

© BSI 2008

ISBN 978 0 580 59994 1

The following BSI references relate to the work on this standard:

Committee reference TDW/4

Draft for comment 07/30170002 DC

Publication history

First published as BS 7272 January 1990

Second edition, March 1998

First published as Part 1 (renumbering amendment) September 2000

Second (present) edition, April 2008

Amendments issued since publication

Amd. no.	Date	Text affected
-----------------	-------------	----------------------

Contents

Foreword *iii*

- 1 Scope *1*
- 2 Terms and definitions *1*
- 3 Requirements *1*
- 4 Identification *3*

Annexes

- Annex A (normative) Test for air flow *4*
 - Annex B (informative) Design guidance for pen caps vent area *5*
- Bibliography *7*

List of figures

- Figure 1 – Schematic diagram of gauge *2*
- Figure A.1 – Schematic diagram of test rig *5*
- Figure B.1 – Sectional view of cap *6*

Summary of pages

This document comprises a front cover, an inside front cover, pages i to iv, pages 1 to 7 and a back cover.

Foreword

Publishing information

This part of BS 7272 is published by BSI and came into effect on 30 April 2008. It was prepared by Panel TDW/4/-/2, *Drawing media*, under the authority of Technical Committee TDW/4, *Technical product realization (TPR)*. A list of organizations represented on this committee can be obtained on request to its secretary.

Supersession

This part of BS 7272 supersedes BS 7272-1:2000+A1:2000, which is withdrawn.

Relationship with other publications

This part of BS 7272 is technically related to ISO 11540.

Information about this document

If a child inhales a pen cap it might become lodged below the larynx and so block the trachea. The risk of asphyxiation can be reduced if the pen cap is ventilated or too large to enter the airway. Children should be actively discouraged from sucking, chewing or putting pen caps in their mouths. A way of avoiding the risk of inhalation of caps of writing and marking instruments is to manufacture products without caps whenever possible. However, if caps are essential, the provisions of this part of BS 7272 minimize risk by specifying the design and performance of ventilated caps which reduce the likelihood of inhalation and delays asphyxiation pending medical intervention.

The Technical Committee recognizes that whilst it is possible to identify the age range of the children who are most at risk, it is not possible to identify with certainty any writing instruments with detachable caps that would never be accessible to children and hence never pose a risk. It is, however, acknowledged that certain products (i.e. writing and marking instruments which are designed or only intended for use by adults, e.g. jewellery pens, expensive fountain pens, professional technical pens) are not intended for use by children and such items should be clearly labelled to that effect.

Presentational conventions

The provisions of this standard are presented in roman (i.e. upright) type. Its requirements are expressed in sentences in which the principal auxiliary verb is “shall”.

Commentary, explanation and general informative material is presented in smaller italic type, and does not constitute a normative element.

Requirements in this standard are drafted in accordance with *The BSI guide to standardization – Section 2: Rules for the structure, drafting and presentation of British Standards*, subclause 11.3.1, which states, “Requirements should be expressed using wording such as: ‘When tested as described in Annex A, the product shall ...’”. This means that only those products that are capable of passing the specified test will be deemed to conform to this standard.

Contractual and legal considerations

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

1 Scope

This part of BS 7272 specifies requirements to reduce the risk of asphyxiation from caps for writing and marking instruments. It relates to such instruments which in normal or foreseeable circumstances are likely to be used by children up to the age of 14 years.

This part of BS 7272 is not applicable to the following:

- writing and marking instruments which are designed or only intended for use by adults, e.g. jewellery pens, expensive fountain pens, professional technical pens.

Transit caps for refills are not covered by this part of BS 7272.

2 Terms and definitions

For the purposes of this part of BS 7272, the following terms and definitions apply.

2.1 writing and marking instruments

instruments for writing or marking with a detachable cap, including pens with a self-contained reservoir of ink or other marking fluid

2.2 cap

detachable closure designed to cover the writing or marking tip when not in use

3 Requirements

3.1 General


Caps shall conform to at least one of the following: **3.2** or **3.3**.

3.2 Cap size

When a cap is introduced with its main axis perpendicular to a $16^{+0.05}_{0.00}$ mm diameter ring gauge of at least 19 mm thickness, and part of the cap enters the gauge, at least 5 mm of the length shall not enter under its own weight. (See Figure 1.)

NOTE Caps which conform to this subclause are deemed to be too large to present an inhalation hazard.

Figure 1 Schematic diagram of gauge

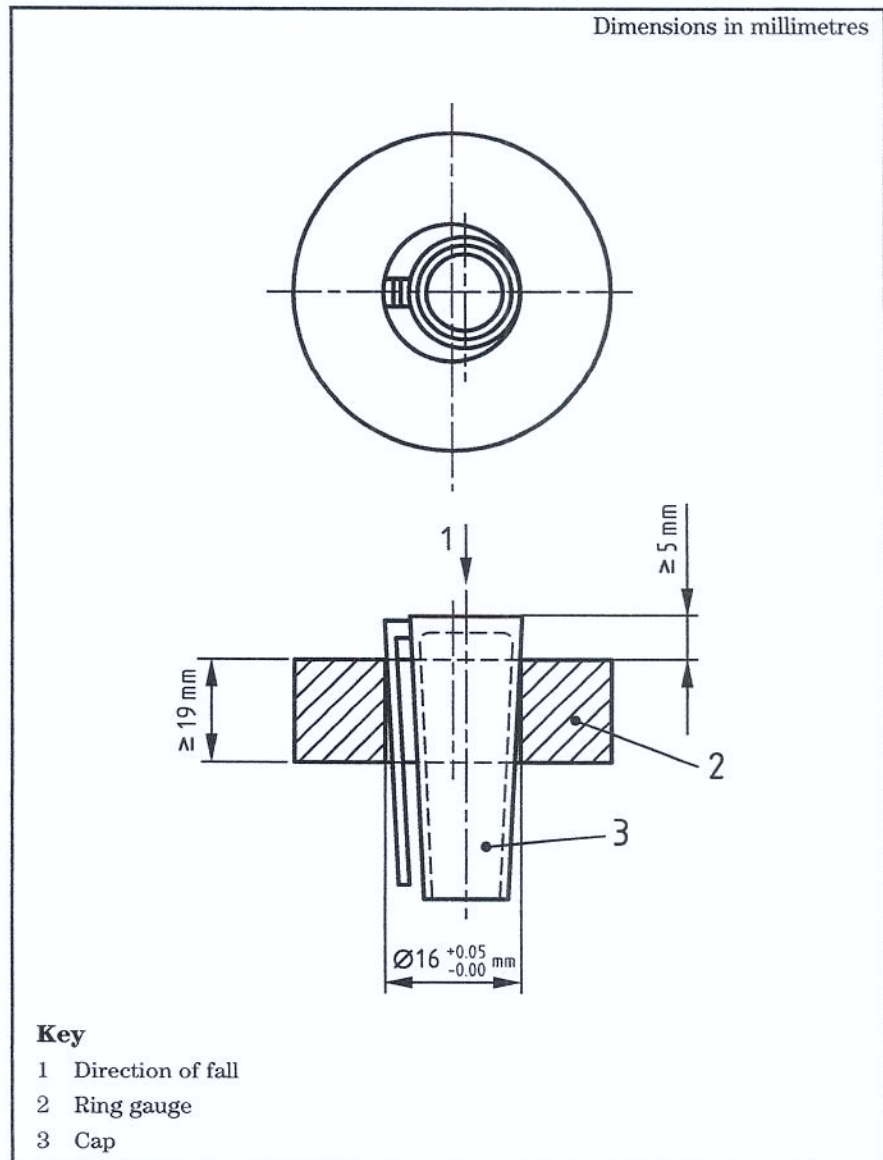

3.3 Ventilated caps air flow

When tested in accordance with Annex A, caps shall permit a minimum air flow of 8 l/min, measured at room temperature, with a maximum pressure drop of 1.33 kPa.

NOTE 1 For caps relying on internal ventilation, a singular circular orifice with a cross-sectional area of approximately 3.4 mm² can be expected to satisfy this criterion, but multiple small orifices might require a larger total cross-sectional area.

NOTE 2 Guidance is given in Annex B for caps that rely on external ventilation.

NOTE 3 Caps conforming to this subclause are deemed to not present an asphyxiation hazard.

3.4 Test report

The report shall indicate whether the cap conforms to **3.2** or **3.3**.

NOTE The test report should indicate at least the following information:

- a) the size of the tubing used (see **A.2.6**) and its % relationship to the circumscribing circle of the caps tested.*
- b) the number of caps tested, the airflow of each cap in both directions and the minimum air flow recorded.*

4 Identification

Writing or marking instruments, or their packaging or accompanying documentation, shall be legibly and indelibly identified with the name, trademark or other means of identifying the manufacturer/supplier.

Annex A (normative) Test for air flow

A.1 Principle

The test cap is fully inserted into an elastomeric tube of the appropriate diameter and the air flow through the tube and the pressure drop are measured in both directions.

A.2 Apparatus

A.2.1 Air supply, pulse free and with a flow rate of at least 25 l/min within the pressure range of 4 kPa to 50 kPa.

A.2.2 Flow regulator, capable of controlling the air flow with an accuracy of ± 0.1 l/min.

A.2.3 Flow gauge, capable of measuring a flow rate of between 5 l/min and 10 l/min with an accuracy of ± 0.2 l/min.

A.2.4 Pressure gauge, capable of measuring a pressure of at least 4.00 kPa to an accuracy of ± 0.01 kPa.

A.2.5 Coupling and tubing, suitable for connecting equipment described above in accordance with Figure A.1.

A.2.6 Elastomeric tubing, with an internal diameter of 80% to 85% of that of the circumscribing circle of the cap to be tested, measured at its widest point; with a wall thickness of $0.75 \text{ mm} \pm 0.25 \text{ mm}$ and Shore A hardness of 55 ± 10 .

NOTE 1 The apparatus is illustrated in Figure A.1.

NOTE 2 Tubing of diameters appropriate to the cap body might be difficult to obtain and it might be advantageous to manufacture the tubing, as required, by a dip-moulding technique.

A.3 Procedure


A.3.1 Cut the elastomeric tubing (see **A.2.6**) into a length such that when the cap is inserted there is a relaxed diameter of tubing at both ends of the cap when connected in the apparatus. Apply a soap solution or other suitable low viscosity lubricant to the full internal area of the tubing. Insert the cap into approximately the centre of the tube length and ensure that as far as practicable the cap is parallel to the major axis of the tubing.

A.3.2 Using suitable connectors and tubing, connect the tube/cap assembly (see **A.3.3**) to the apparatus, in accordance with Figure A.1. Turn on the air supply and adjust the flow until the pressure gauge indicates a pressure difference of 1.33 kPa. Record the flow rate indicated on the flow gauge at this pressure.

A.3.3 Turn off the air supply, remove and reverse the tube/cap assembly and repeat **A.3.2**. Test the cap, giving the air flow results found in each direction.

A.3.4 Complete the test report (see **3.4**).

Figure A.1 Schematic diagram of test rig

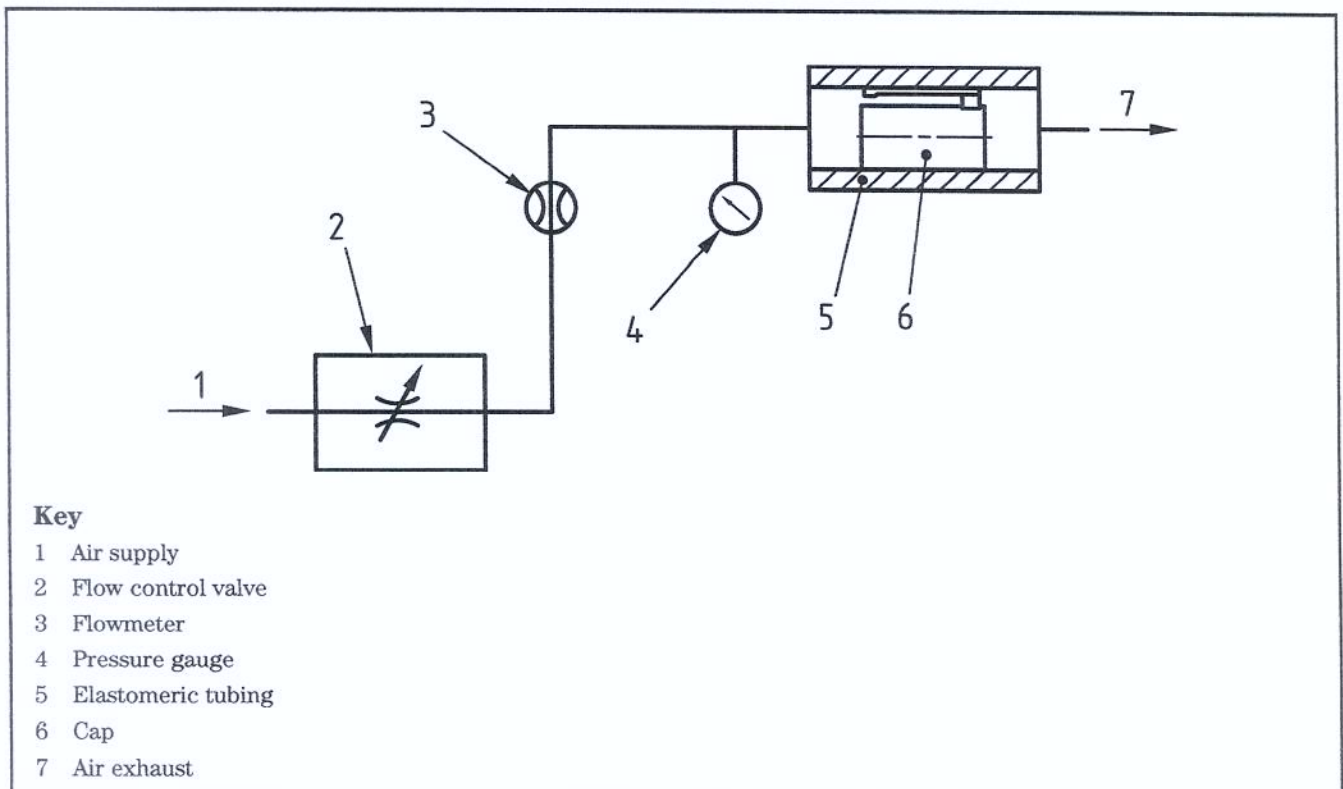


Annex B (informative) Design guidance for pen caps vent area

A continuous air passage of a least 6.8 mm^2 should extend for the length of the cap body to within 2 mm of both ends. The cross-sectional area of the continuous air passage, if not entirely enclosed, should be that area that would be enclosed by a thin piece of cotton thread wrapped tautly around any section perpendicular to the main axis or the largest dimension (see Figure B.1). Alternatively, this area can be calculated using a CAD system. Where a clip or other protrusion is the means of providing the air passage it should be securely fixed and it should extend to within at least 2 mm of each end of the cap body.

NOTE 1 The clip may extend any distance beyond the end of the cap body.

NOTE 2 Caps conforming to this annex are unlikely to present an asphyxiation hazard, but need air flow testing to validate. Some caps quite different in configuration from the design described in this annex but which rely on external ventilation might nevertheless satisfy the air flow requirements in 3.3 if tested using elastomeric tubing close to the maximum permitted internal diameter. A wise precaution is to retest such caps using tubing with an internal diameter close to 80% of the caps circumscribing circle.

Figure B.1 Sectional view of cap

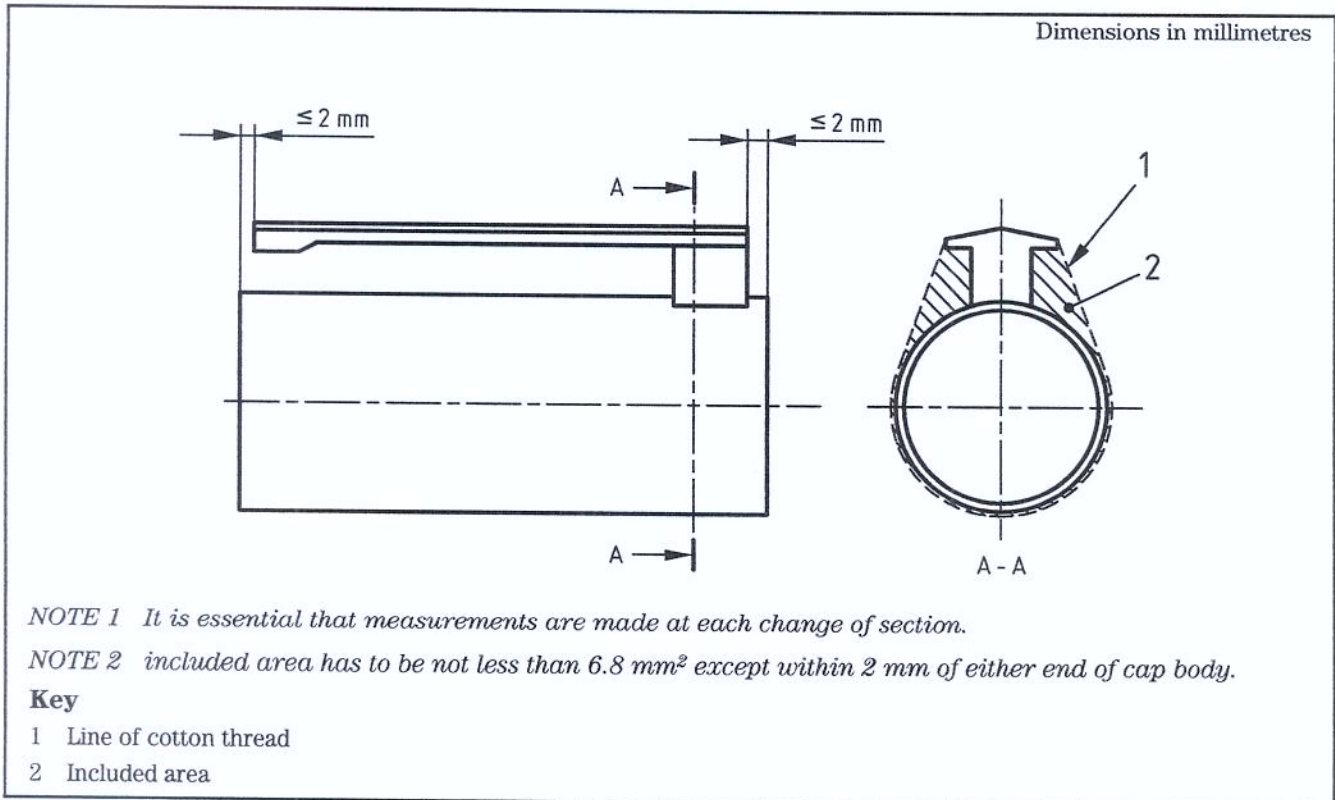

Bibliography

For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

ISO 11540, *Caps for writing and marking instruments intended for use by children up to 14 years of age – Safety requirements*

BSI – British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.

Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.

Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre. Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration. Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001. Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.

Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.

Email: copyright@bsi-global.com.



389 Chiswick High Road
London
W4 4AL