



BSI Standards Publication

European scheme for the classification of gas appliances according to the method of evacuation of the combustion products (types)

National foreword

This Published Document is the UK implementation of CEN/TR 1749:2014. It supersedes PD CEN/TR 1749:2009 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee GSE/-/4, To brief SFG_U and consider horizontal issues affecting gas utilization.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2015. Published by BSI Standards Limited 2015

ISBN 978 0 580 85656 3

ICS 91.140.40

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 28 February 2015.

Amendments issued since publication

Date	Text affected
------	---------------

English Version

European scheme for the classification of gas appliances
according to the method of evacuation of the combustion
products (types)

This Technical Report was approved by CEN on 3 July 2014. It has been drawn up by the Technical Committee CEN/SS H99.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

Page

Foreword.....	3
1 Scope	5
2 General scheme	5
2.1 General.....	5
2.2 Type A.....	5
2.3 Type B.....	5
2.4 Type C.....	7
3 Supplementary classification scheme for type A and type B appliances fitted with particular safety devices	11
4 Supplementary classification scheme for type B appliances for use in limited installation conditions.....	11
4.1 Type B appliance utilizing a third subscript “D”.....	11
4.2 Type B appliances utilizing a third subscript “P”.....	11
4.2.1 General.....	11
4.2.2 Type B appliances without draught diverters.....	11
4.2.3 Type B appliances with draught diverters	12
5 Supplementary classification scheme for type C appliances for use in limited installation conditions — Type C₁ appliances utilizing a third subscript “R”.....	12
Annex A (normative) Classification according to the mode of evacuation of the products of combustion.....	13
Annex B (normative) Special national appliance classification (types) — Germany.....	34
Annex C (informative) Special national appliance classification (types) — France.....	47
C.1 Classification type C4.p and C8.p.....	47
C.2 Provisions for C4p type	47
C.3 Provisions for C8p type	47
Annex D (normative) Special national appliance classification (types) — Slovenia	48
Annex E (informative) Appliance types designed for connection to separate chimney products	49
Table E.1	49
Bibliography	50

Foreword

This document (CEN/TR 1749:2014) has been prepared by Technical Committee CEN/TC SFG_U “Sector Forum Gas Utilisation”, the secretariat of which is held by AFNOR.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN [and/or CENELEC] shall not be held responsible for identifying any or all such patent rights.

This document supersedes CEN/TR 1749:2009.

This technical report has been prepared under the aegis of the Sector Forum Gas Utilization committee to provide guidance to CEN Technical Committees who are preparing European Standards for appliances burning combustible gases.

It gives details of a general scheme for the classification of such appliances according to the method of evacuating the products of combustion. It will be stressed that this scheme only concerns gas appliances that are intended to be installed within buildings. It does not apply to outdoor appliances. Nevertheless, it is recognized that this appliance classification scheme could be utilized in other circumstances. For example, in the case of:

- a) appliances capable of utilizing heating oil or kerosene, and
- b) gas appliances intended¹⁾ for installation in a partially protected place external to a building.

This form of appliance classification is widely used in the preparation of European Standards for gas appliances to identify the requirements and methods of test that are applicable to the various methods of evacuating the products of combustion. Appliances classified in this way are generally described as “types” and this description has been retained for the purposes of this general scheme.

The main purpose of the scheme is to promote harmonization in the classification of appliance types. This should ensure that there is a clear understanding of the various appliance types and will avoid confusion arising from Technical Committees describing them in different ways. CEN Technical committees are therefore requested to use this scheme in all circumstances in which it is appropriate. They should not deviate from it unless there are sound technical reasons for so doing.

In the preparation of this scheme it was noted that there were methods of evacuating products of combustion that were particular to a specific Technical Committee or to a particular gas appliance. These particular methods have not been included in the present scheme because, as indicated above, the main purpose of the scheme is to promote harmonization across Technical Committees.

However, it is intended that this scheme should be reviewed from time to time in order to consider its extension to other, possibly new, methods of evacuating products of combustion. At that time, such specific methods of evacuating products of combustion may be included at the request of the Technical Committees concerned.

Explanatory notes:

The following notes are given in explanation of the classification scheme.

1) If the appliance is installed in a partially protected place (if this circumstance is explicitly allowed by the manufacturer) it will not change its classification (i.e. a type B₅₃ boiler will remain B₅₃ if installed in a partially protected place according to manufacturer instructions). These appliances are subject to specific additional requirements and tests.

NOTE 1 The general scheme classifies appliances as type A, B or C according to the basic principle for the evacuation of the products of combustion. These definitions are written intentionally in very broad terms in order to cover any possible variations in the basic appliance types.

A series of subscript numbers is used in addition to these letters to identify specific variations within these basic principles.

Where this first subscript number exceeds "9" it is given in brackets to clarify that it is a single subscript number and not two subscript numbers.

The last subscript number of each specific variation indicates the absence or presence of an integral fan for the supply of combustion air and/or for the evacuation of the products of combustion. Where such a fan is present, the numbers 2, 3 or 4 are given. These three numbers are used solely to identify the location of this fan.

NOTE 2 Diagrams have been given in Annex A, showing examples of the various appliance types. However, it will be noted that diagrams for type C6 appliances have not been included. This is because such appliances are marketed without duct systems. When installed such an appliance will have a configuration similar to one of the arrangements shown for other type C appliances.

Appliance Technical Committees have the responsibility for inclusion of requirements and methods of test in their standards to ensure that type C₆ appliances are suitable for their intended method(s) of installation.

NOTE 3 The supplementary classification scheme for type A and type B appliances has been included to clarify the identification of such appliances when fitted with different safety devices. The subscript letters "AS" (atmosphere safety) refer to an atmosphere sensing device and the subscript letters "BS" (blocked safety) refer to a clearance monitoring device, which reacts to blockage or restriction of the flue system.

In order to provide information about appliance types that are recognized in certain CEN member states, Annexes B, C and D have been included in which special national appliance classifications may be identified. At present, Annex B identifies appliance types that are particular to Germany.

NOTE 4 In references to a gas appliance / gas appliances connected via "**its**" or "**their**" duct or ducts, the authors of the technical report expressed that the air inlet duct and the discharge duct for carrying any products of combustion are part of the gas appliance. This means that such ducts are certified together with the gas appliance

NOTE 5 In terms of this technical report a "**common duct**" is a flue duct designed and capable to discharging the products of combustion and/or air inlet duct for the air supply for more than one appliance.

NOTE 6 Annex E identifies appliance types that are designed for connection to separate chimney products which may be part of the construction of the building. In terms of this technical report a "**separate chimney products**" is a flue duct approved and marketed separately from the appliance.

1 Scope

This Technical Report gives details of a general scheme for the classification of gas appliances according to the method of supplying combustion air and of evacuating the products of combustion. This scheme refers to gas appliances that are intended to be installed within buildings and/or to gas appliances intended²⁾ for installation in a partially protected place external to a building.

This Technical Report is a guide for the harmonization of product standards and for the common understanding of the types of gas appliances.

This TR is not intended to be used as an installation standard or as a product standard, nor as a reference for market surveillance.

2 General scheme

2.1 General

The general scheme for type A, type B and type C appliances is given in 2.2, 2.3 and 2.4 respectively. Diagrams are also given in Annex A to assist in the identification of the various appliance types.

2.2 Type A

An appliance not intended for connection to a flue or to a device for evacuating the products of combustion to the outside of the room in which the appliance is installed.

Type A₁. An appliance without a fan.

Type A₂. An appliance with a fan downstream of the combustion chamber/heat exchanger.

Type A₃. An appliance with a fan upstream of the combustion chamber/heat exchanger.

2.3 Type B

An appliance intended to be connected to a flue that evacuates the products of combustion to the outside of the room containing the appliance. The combustion air is drawn directly from the room.

Type B₁. A type B appliance incorporating a draught diverter.

Type B₁₁. A natural draught type B₁ appliance.

Type B₁₂. A type B₁ appliance designed for a natural draught flue incorporating a fan downstream of the combustion chamber/heat exchanger and upstream of the draught diverter.

Type B₁₃. A type B₁ appliance designed for a natural draught flue incorporating a fan upstream of the combustion chamber/heat exchanger.

Type B₁₄. A type B₁ appliance having an integral fan downstream of both the combustion chamber/heat exchanger and the draught diverter.

2) If the appliance is installed in a partially protected place (if this circumstance is explicitly allowed by the manufacturer) it will not change its classification (i.e.: a type B53 boiler will remain B53 if installed in a partially protected place according to manufacturer instructions). These appliances are subject to specific additional requirements and tests.

Type B₂. A type B appliance without a draught diverter.

Type B₂₁.³⁾ A natural draught type B₂ appliance.

Type B₂₂. A type B₂ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type B₂₃. A type B₂ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type B₃. A type B appliance without a draught diverter, which is designed for connection to a common duct system. This common duct system consists of a single natural draught flue. All pressurized parts of the appliance containing products of combustion are completely enclosed by parts of the appliance supplying combustion air. Combustion air is drawn into the appliance from the room by means of a concentric duct, which encloses the flue. The air enters through defined orifices situated in the surface of the duct.

Type B₃₁. A natural draught type B₃ appliance.

Appliances of this type are not foreseen.

Type B₃₂. A type B₃ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type B₃₃. A type B₃ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type B₄. A type B appliance, incorporating a draught diverter, that is designed for connection via its flue duct to its flue terminal.

Type B₄₁.⁴⁾ A natural draught type B₄ appliance.

Type B₄₂. A type B₄ appliance designed for a natural draught flue incorporating a fan downstream of the combustion chamber/heat exchanger and upstream of the draught diverter.

Type B₄₃. A type B₄ appliance designed for a natural draught flue incorporating a fan upstream of the combustion chamber/heat exchanger.

Type B₄₄. A type B₄ appliance having an integral fan downstream of both the combustion chamber/heat exchanger and the draught diverter.

Type B₅. A type B appliance, without a draught diverter, that is designed for connection via its flue duct to its flue terminal.

Type B₅₁.⁵⁾ A natural draught type B₅ appliance.

Type B₅₂. A type B₅ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type B₅₃. A type B₅ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

3) A type B₂₁ appliance will not generally be included in the scope of European Standards for gas appliances. However, it may apply in special circumstances e.g. gas-fired incinerators.

4) Type B₄₁ appliances installed in mobile homes (caravan holiday homes) are commonly described as "closed flue" appliances; this terminology being used in EN 1949, which covers the installation of such appliances.

5) A type B₅₁ appliance will not generally be included in the scope of European Standards for gas appliances. However, it may apply in special circumstances e.g. gas-fired incinerators.

2.4 Type C

An appliance in which the combustion circuit (air supply, combustion chamber, heat exchanger and evacuation of the products of combustion) is sealed with respect to the room in which the appliance is installed.

Type C₁. A type C appliance that is designed for connection via its ducts to its horizontal terminal, which at the same time admits fresh air to the burner and discharges the products of combustion to the outside through orifices that are either concentric or close enough to come under similar wind conditions.

Type C₁₁. A natural draught type C₁ appliance.

Type C₁₂. A type C₁ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₁₃. A type C₁ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₂. A type C appliance connected via its two ducts to a common duct system ⁶⁾ serving more than one appliance. This system consists of a single duct, which supplies the combustion air and evacuates the products of combustion ⁷⁾.

Type C₂₁. A natural draught type C₂ appliance.

Type C₂₂. A type C₂ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₂₃. A type C₂ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₃. A type C appliance that is designed for connection via its ducts to a vertical terminal, which at the same time admits fresh air to the burner and discharges the products of combustion to the outside through orifices that are either concentric or close enough to come under similar wind conditions.

Type C₃₁. A natural draught type C₃ appliance.

Type C₃₂. A type C₃ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₃₃. A type C₃ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₄. A type C appliance connected via its two ducts to a common duct system ⁸⁾ designed for more than one appliance. This common duct system consists of two ducts connected to a terminal, which at the same time admits fresh air to the burner and discharges the products of combustion to the outside through orifices that are either concentric or close enough to come under similar wind conditions.

Type C₄₁. A natural draught type C₄ appliance.

Type C₄₂. A type C₄ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₄₃. A type C₄ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₅. A type C appliance connected via its separate ducts to separate terminals for the supply of combustion air and the evacuation of the products of combustion. These ducts may terminate in zones of different pressure.

6) This common duct system is part of the building and not a part of the appliance.

7) This appliance type is now obsolete and unlikely to be called up in future European standards for gas appliances.

8) This common duct system is part of the building and not a part of the appliance.

Type C₅₁. A natural draught type C₅ appliance.

Type C₅₂. A type C₅ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₅₃. A type C₅ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₆. A type C appliance which is intended to be connected to a separately approved and marketed system for the supply of combustion air and discharge of the combustion products. (see note 2 given in the foreword).

Type C₆₁. A natural draught type C₆ appliance.

Type C₆₂. A type C₆ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₆₃. A type C₆ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₇. A type C appliance in which the combustion air supply and the combustion products evacuation is provided by its two vertical ducts. The combustion air is taken from a loft and the products of combustion are discharged above the roof. A draught diverter is incorporated in the combustion products evacuation duct at a location above the combustion air inlet orifice(s)⁹⁾.

Type C₇₁. A natural draught type C₇ appliance.

Type C₇₂. A type C₇ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₇₃. A type C₇ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₈. A type C appliance connected via one of its ducts to a single or common duct system¹⁰⁾. This duct system consists of a single natural draught duct (i.e. not incorporating a fan) that evacuates the products of combustion. The appliance is connected via a second of its ducts to a terminal, which supplies air to the appliance from outside the building.

Type C₈₁. A natural draught type C₈¹¹⁾ appliance.

Type C₈₂. A type C₈ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₈₃. A type C₈ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₉. A type C appliance that is designed for connection via its flue duct to a vertical terminal and via its air inlet duct to an existing vertical duct. The terminal at the same time admits fresh air to the burner and discharges the products of combustion to the outside through orifices that are either concentric or close enough to come under similar wind conditions.

9) This appliance type is now obsolete and unlikely to be called up in future European standards for gas appliances.

10) This single or common duct system is part of the building and not a part of the appliance.

11) A type C₈₁ appliance will not generally be included within the scope of European Standards for gas appliances.

The air inlet duct¹²⁾, or part of it, is an existing vertical duct within the building e.g. a converted chimney.

Type C₉₁ .A natural draught type C₉ appliance.

Type C₉₂. A type C₉ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₉₃ . A type C₉ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₍₁₀₎ “A type C appliance connected via its two ducts to a common duct system¹³⁾ designed for more than one appliance. This common duct system consists of two ducts connected to a terminal, which at the same time admits fresh air to the burner and discharges the products of combustion to the outside through orifices that are either concentric or close enough to come under similar wind conditions.

The C₍₁₀₎ appliance is designed to become connected to a common duct system that is designed to operate under the conditions where the static pressure in the common flue duct might exceed the static pressure in the common air duct.”

Type C₍₁₀₎₂. A type C₍₁₀₎ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₍₁₀₎₃. A type C₍₁₀₎ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₍₁₁₎ A type C appliance connected via its two ducts to its common ducts which are designed for more than one appliance.

These common ducts consist of two ducts connected to their terminals, which at the same time admit fresh air to the burner and discharge the products of combustion to the outside through orifices that are either concentric or close enough to come under similar wind conditions.

The C₍₁₁₎ appliance is designed to become connected to its common ducts where the static pressure in the common flue duct might exceed the static pressure in the common air duct.

NOTE 1 The C₍₁₁₎ appliance is designed and/or specified as an integral part of a specific combined system including a number of type C appliances and its complete air/flue ducts and terminals. This complete system is evaluated and certified under the GAD (in analogy with the types C1, C3, C5).

Type C₍₁₁₎₂. A type C₍₁₁₎ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₍₁₁₎₃. A type C₍₁₁₎ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₍₁₂₎. A type C appliance connected via one of its ducts to a common flue duct system¹⁴⁾. The appliance is connected via a second of its ducts to a terminal, which supplies air to the appliance from outside the building.

A type C₍₁₂₎ appliance is designed to become connected to a common flue duct that is designed to operate under the conditions where the static pressure in the common flue duct might exceed the static pressure in the individual air ducts.

12) The vertical air inlet duct is part of the building and not a part of the appliance.

13) This common duct system is part of the building and not a part of the appliance.

14) This single or common duct system is part of the building and not a part of the appliance.

Type C₍₁₂₎₂. A type C₍₁₂₎ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₍₁₂₎₃. A type C₍₁₂₎ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₍₁₃₎. A type C appliance connected via one of its ducts to a common duct system which is designed for more than one appliance. The appliance is connected via a second of its ducts to a terminal, which supplies air to the appliance from outside the building.

The C₍₁₃₎ appliance is designed to become connected to its common duct where the static pressure might exceed the static pressure in its individual air supply duct.

NOTE 2 The C₍₁₃₎ appliance is designed and/or specified as an integral part of a specific combined system including a number of type C appliances and its complete air/flue ducts and terminals. This complete system is evaluated and certified under the GAD (in analogy with the types C1, C3, C5).

Type C₍₁₃₎₂. A type C₍₁₃₎ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₍₁₃₎₃. A type C₍₁₃₎ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₍₁₄₎. A type C appliance connected via its flue duct to its common flue duct which is designed for more than one appliance. The appliance is connected via its air inlet duct to a common existing vertical duct, which supplies air to the appliance from outside the building.

These common duct consist of two ducts connected to their terminals, which at the same time admit fresh air to the burner and discharge the products of combustion to the outside through orifices that are either concentric or close enough to come under similar wind conditions.

The C₍₁₄₎ appliance is designed to become connected to its common duct where the static pressure might exceed the static pressure in the common air supply duct.

The common air inlet duct¹⁵⁾, or part of it, is an existing vertical duct within the building (e.g. a converted chimney).

NOTE 3 The C₍₁₄₎ appliance is designed and/or specified as an integral part of a specific combined system including a number of type C appliances and its complete flue ducts and terminal. The complete flue system is evaluated and certified under the GAD (in analogy with the types C1, C3, C5).

Type C₍₁₄₎₂. A type C₍₁₄₎ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₍₁₄₎₃. A type C₍₁₄₎ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Type C₍₁₅₎. A type C appliance that is designed for connection via its flue duct to a vertical terminal and via its air inlet duct to an existing common air inlet vertical duct. The terminal at the same time admits fresh air to the burner and discharges the products of combustion to the outside through orifices that are either concentric or close enough to come under similar wind conditions.

The common air inlet vertical duct¹⁶⁾, or part of it, is an existing vertical duct within the building e.g. a converted chimney.

15) The vertical air inlet duct is part of the building and not a part of the appliance.

16) The vertical air inlet duct is part of the building and not a part of the appliance.

Type C₍₁₅₎₁ .A natural draught type C₍₁₅₎ appliance.

Type C₍₁₅₎₂. A type C₍₁₅₎ appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C₍₁₅₎₃ . A type C₍₁₅₎ appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

3 Supplementary classification scheme for type A and type B appliances fitted with particular safety devices

Type A_{AS}. A type A appliance fitted with an atmosphere sensing device, e.g. type A_{1AS}.

Type B_{AS}. A type B appliance fitted with an atmosphere sensing device, e.g. type B_{11AS}.

Type B_{BS}. A type B appliance fitted with a clearance monitoring device, e.g. type B_{11BS}.

4 Supplementary classification scheme for type B appliances for use in limited installation conditions

4.1 Type B appliance utilizing a third subscript “D”¹⁷⁾

Indicating that the appliance is designed for connection to a flexible non-metallic duct that evacuates humid air and products of combustion to the outside of the room containing the appliance.

Type B_{22D}. A type B₂₂ appliance that is designed for connection to a flexible non-metallic duct that evacuates humid air and products of combustion to the outside of the room containing the appliance.

Type B_{23D}. A type B₂₃ appliance that is designed for connection to a flexible non-metallic duct that evacuates humid air and products of combustion to the outside of the room containing the appliance.

4.2 Type B appliances utilizing a third subscript “P”¹⁸⁾

4.2.1 General

Indicating that the appliance is intended to be connected to a flue system that is designed to operate at a positive pressure. This subscript “P” is only used when installation of the appliance in accordance with the appliance manufacturer’s instructions on a flue specified by the appliance manufacturer results in the flue operating at a positive pressure. The following types exist.

4.2.2 Type B appliances without draught diverters

Type B_{22P}. A type B₂₂ appliance intended to be connected to a flue system that is designed to operate at a positive pressure.

Type B_{23P}. A type B₂₃ appliance intended to be connected to a flue system that is designed to operate at a positive pressure.

17) At present, these types are only applicable to gas-fired tumble dryers.

18) This identification “P” is in accordance with the designation of the classes of tightness, agreed by CEN/TC 166: Chimneys, depending on the pressure of operation of the duct (e.g. see EN 1443).

Type B_{52P}. A type B₅₂ appliance intended to be connected to a flue system that is designed to operate at a positive pressure.

Type B_{53P}. A type B₅₃ appliance intended to be connected to a flue system that is designed to operate at a positive pressure.

4.2.3 Type B appliances with draught diverters

Type B_{14P}. A type B₁₄ appliance intended to be connected to a flue system that is designed to operate at a positive pressure.

Type B_{44P}. A type B₄₄ appliance intended to be connected to a flue system that is designed to operate at a positive pressure.

5 Supplementary classification scheme for type C appliances for use in limited installation conditions — Type C₁ appliances utilizing a third subscript “R”

Indicating that the appliance is also capable of being installed via its ducts to a horizontal terminal on a roof. The following types exist.

Type C_{1R}. A type C₁ appliance which is capable of roof termination as well as wall termination.

Type C_{11R}. A natural draught type C_{1R} appliance.

Type C_{12R}. A type C_{1R} appliance incorporating a fan downstream of the combustion chamber/heat exchanger.

Type C_{13R}. A type C_{1R} appliance incorporating a fan upstream of the combustion chamber/heat exchanger.

Annex A (normative)

Classification according to the mode of evacuation of the products of combustion

NOTE 1 The diagrams given in this annex have been included as examples to assist in the identification of the various appliance "types". However, it is important to stress:



- a) that alternatives to any given example are equally valid if they fit the description of that particular appliance type, and
- b) that these diagrams are not intended to be used as a guide to installation of such appliances; in all matters concerning installation, it is essential to refer to the installation rules in force in the CEN member country in which the appliance type is to be installed.

NOTE 2 For convenience the diagrams for type C₂, type C₄, type C₈, type C₍₁₀₎, type C₍₁₁₎, type C₍₁₂₎, type C₍₁₃₎ and type C₍₁₄₎, show the common duct system with each of the specific variations in type connected to it. For the reasons given in NOTE 1 above, this will not be regarded as accepted installation practice.

NOTE 3 In order to make sure that the sense of definitions is clear, each part of the flue and air system (appliance, chimney, part of the buildings) is shown with different marks to define if the part of the system is to be considered as an integral part of the appliance or as a separate chimney product (see the legend below).


Where the connecting flue pipes are not shown they are not an integral part of the appliance.

Key


- | | |
|---|---|
|  | Thin black line means that the flue duct and/or the air inlet duct is an integral part of the appliance (this applies to connecting air/flue pipes and to vertical air/flue ducts); |
|  | Thick grey line means that the vertical flue duct and/or air inlet duct is a separate chimney product. |

Type A


Type A₁



Type A₂




Type A₃




Type B₁


Type B₁₁




Type B₁₂



Type B₁₃




Type B₁₄

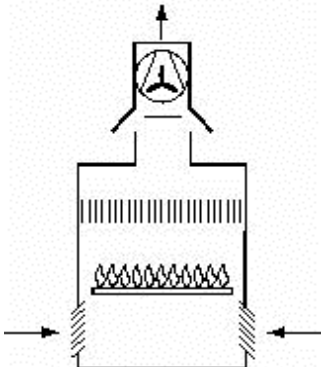


Type B₂


Type B₂₁



Type B₂₂




Type B₂₃




Type B₃

Type B₃₂


Type B₃₃

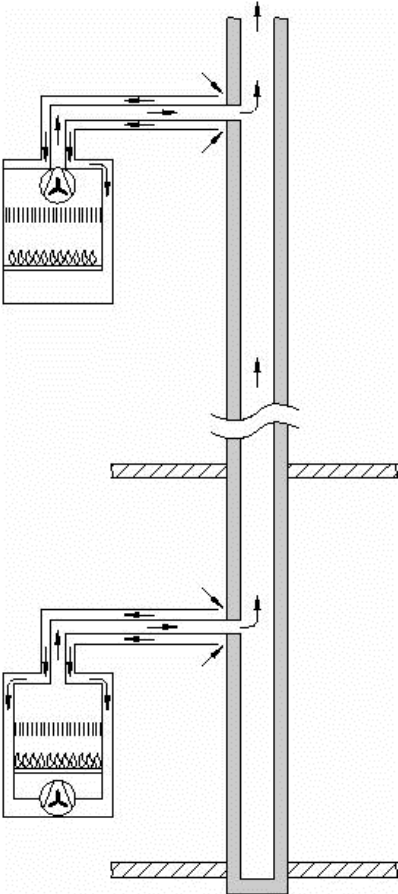


Type B₄

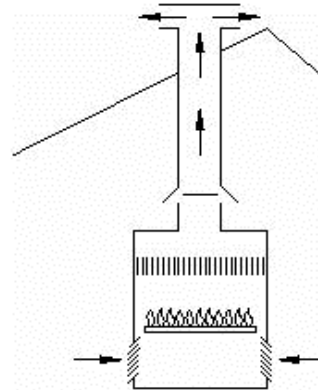


Type B₄₁

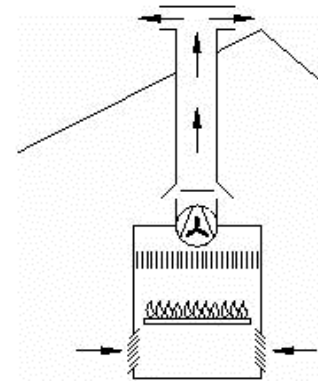

Type B₄₂

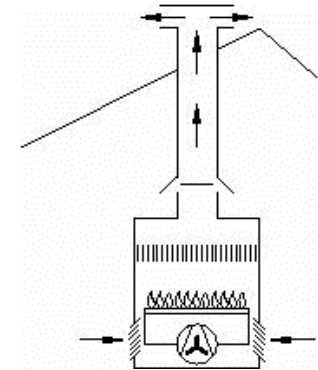


Type B₄₃

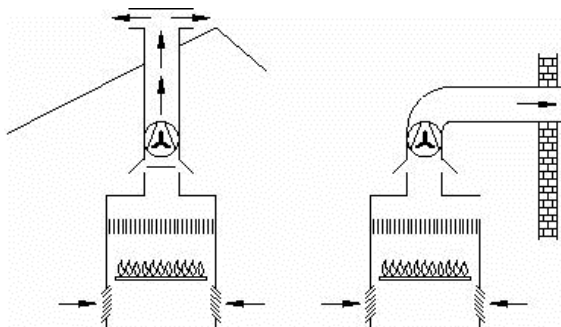


Type B₄₄


Type B₅



Type B₅₁

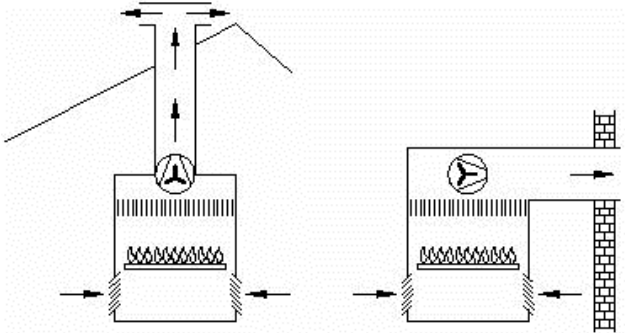


Type B₅₂

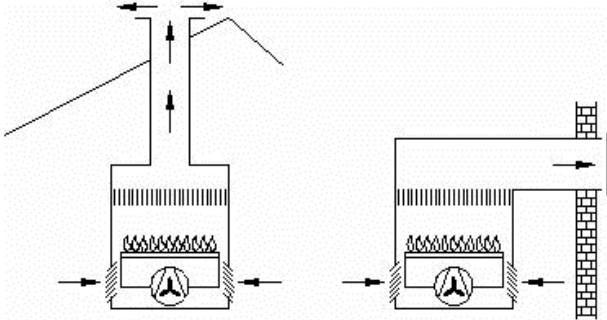


Type B₅₃

Type C₁


Type C₁₁

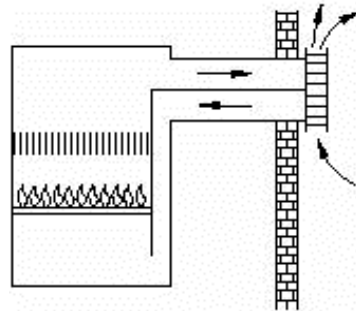


Type C₁₂

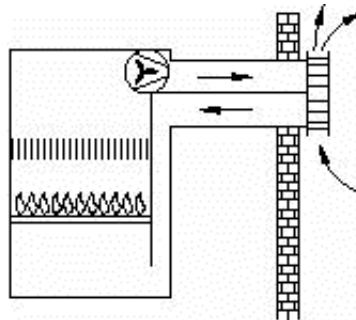

Type C₁₃

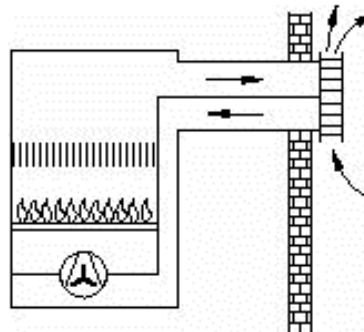


Type C₂¹⁹⁾

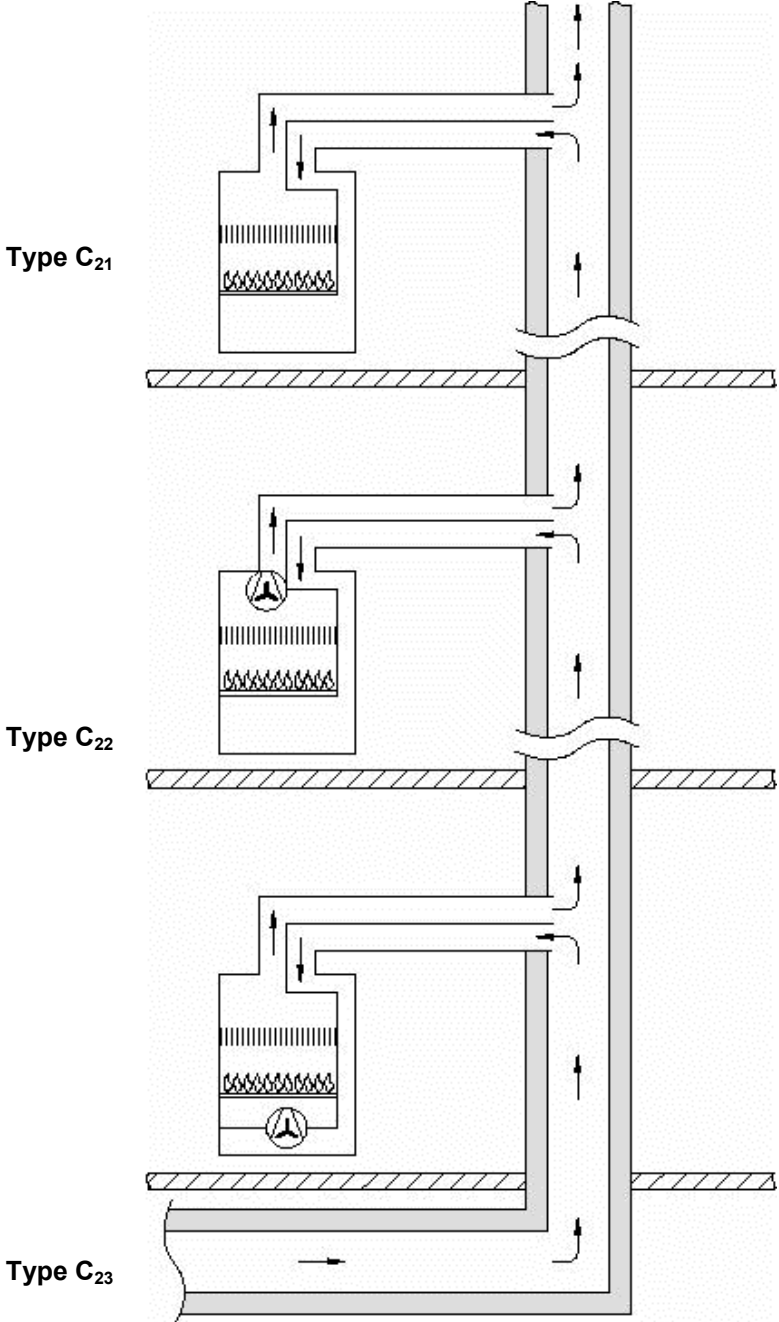


¹⁹⁾ (see Annex A, NOTE 2)


Type C₃

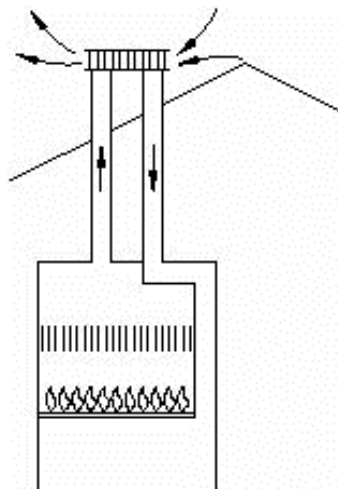

Type C₃₁

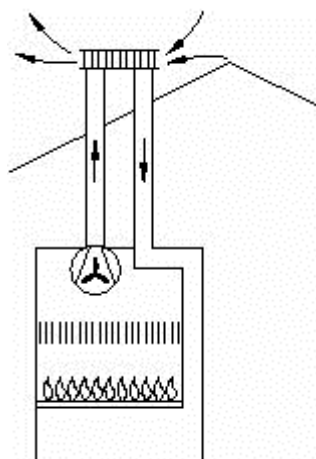

Type C₃₂

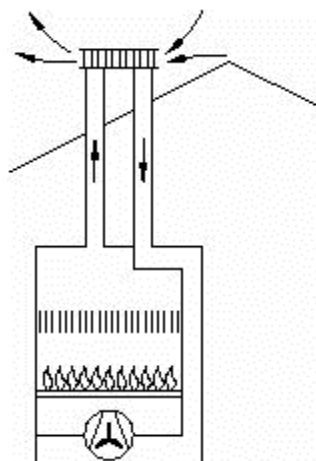


Type C₃₃

Type C₄²⁰⁾

Type C₄₁

Type C₄₂


Type C₄₃

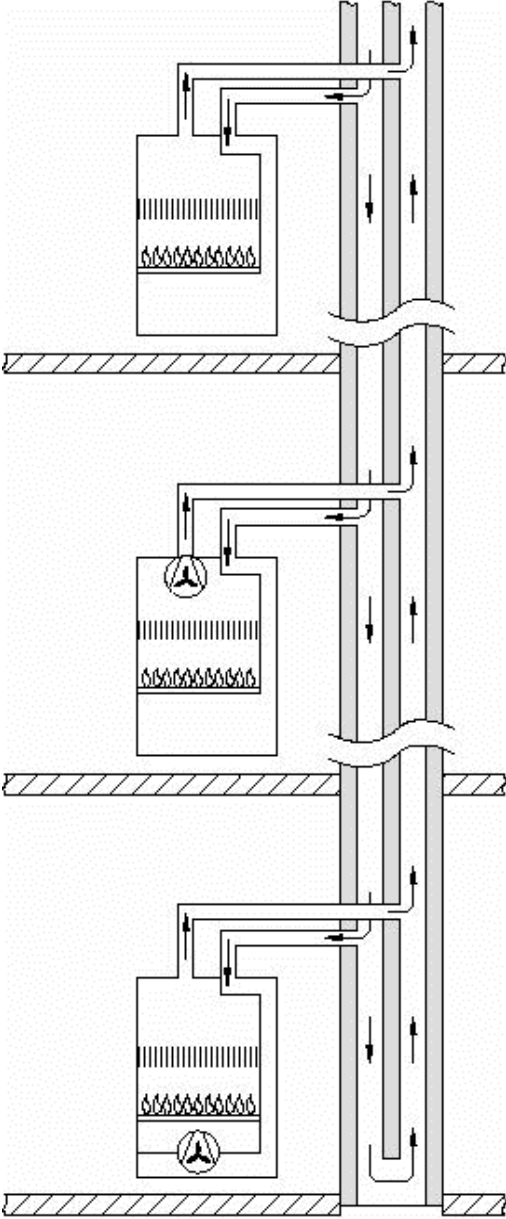


²⁰⁾ (see Annex A, NOTE 2)

Type C₅²¹⁾


Type C₅₁

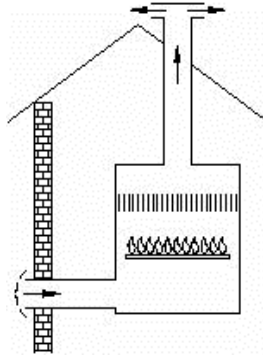

Type C₅₂

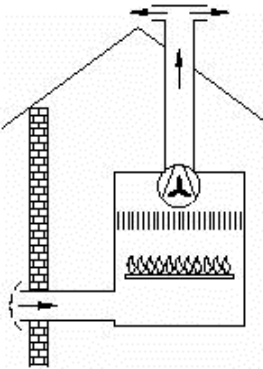


Type C₅₃

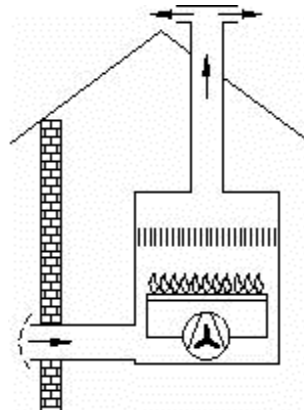


²¹⁾ (see Annex A, NOTE 1)


Type C₇

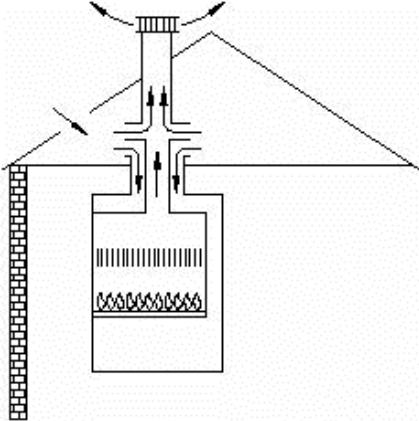

Type C₇₁

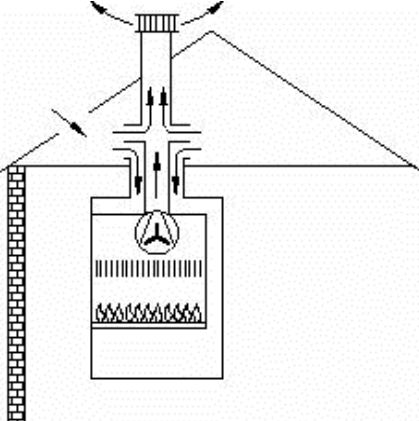

Type C₇₂

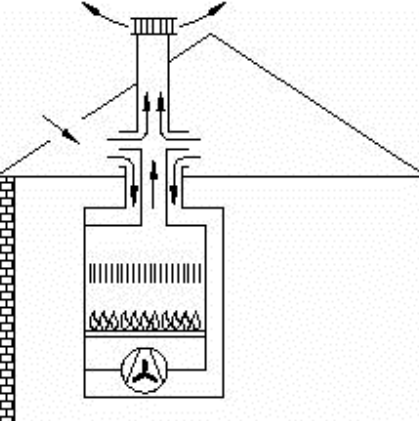

Type C₇₃


Type C₈²²⁾

Type C₈₁

Type C₈₂


Type C₈

3

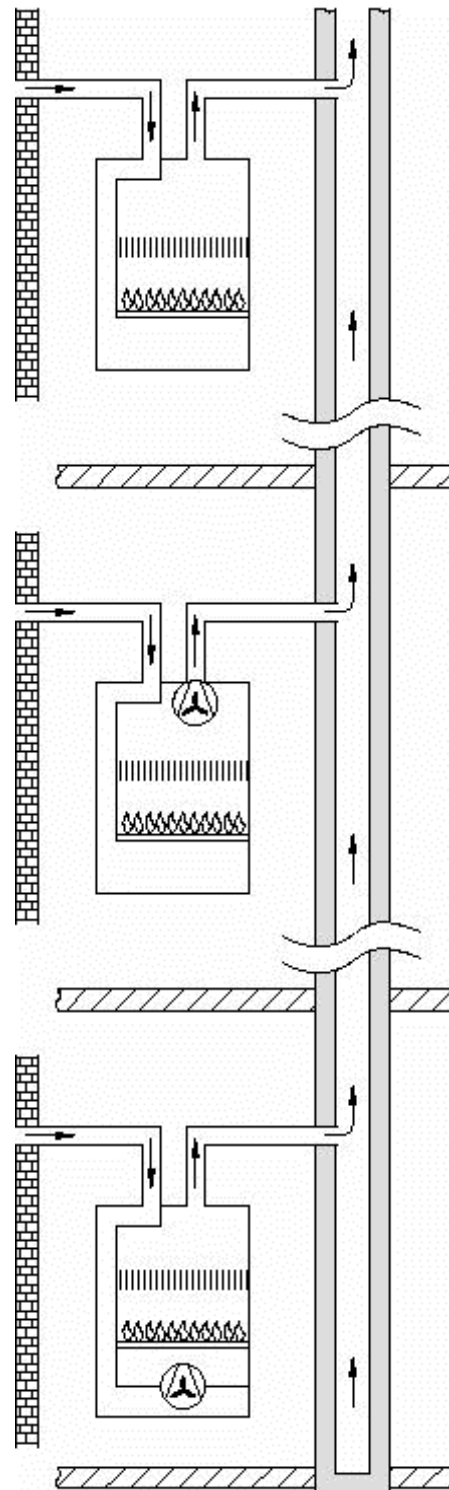


²²⁾ (see Annex A, NOTE 2)


Type C₉

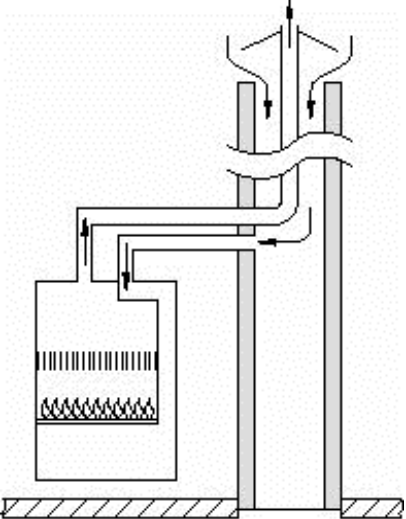

Type C₉₁

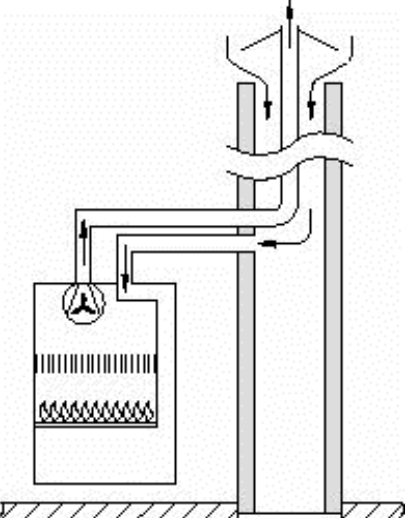

Type C₉₂

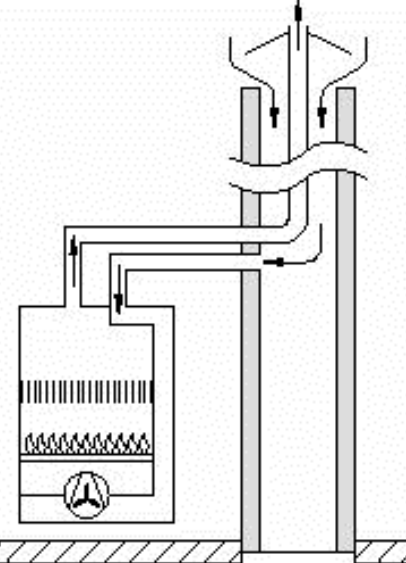


Type C₉₃


Type C₍₁₀₎

Type C₍₁₀₎₂

Type C₍₁₀₎₃

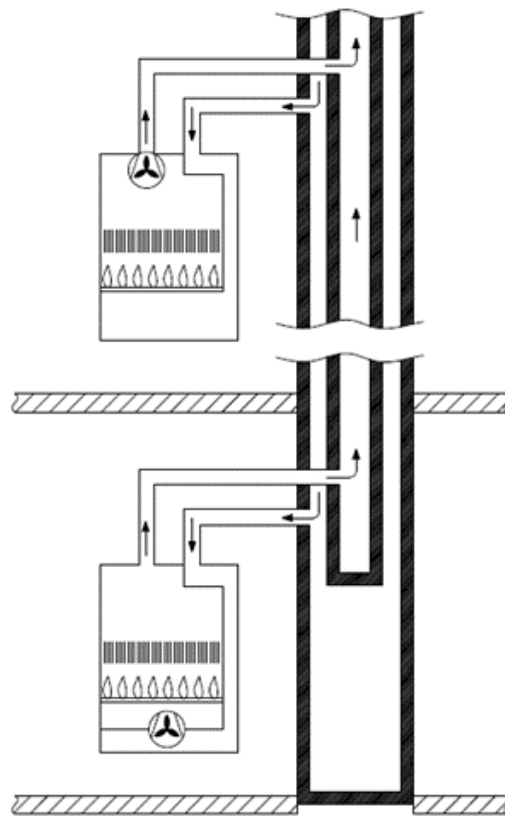

NOTE Example for "concentric vertical ducts".

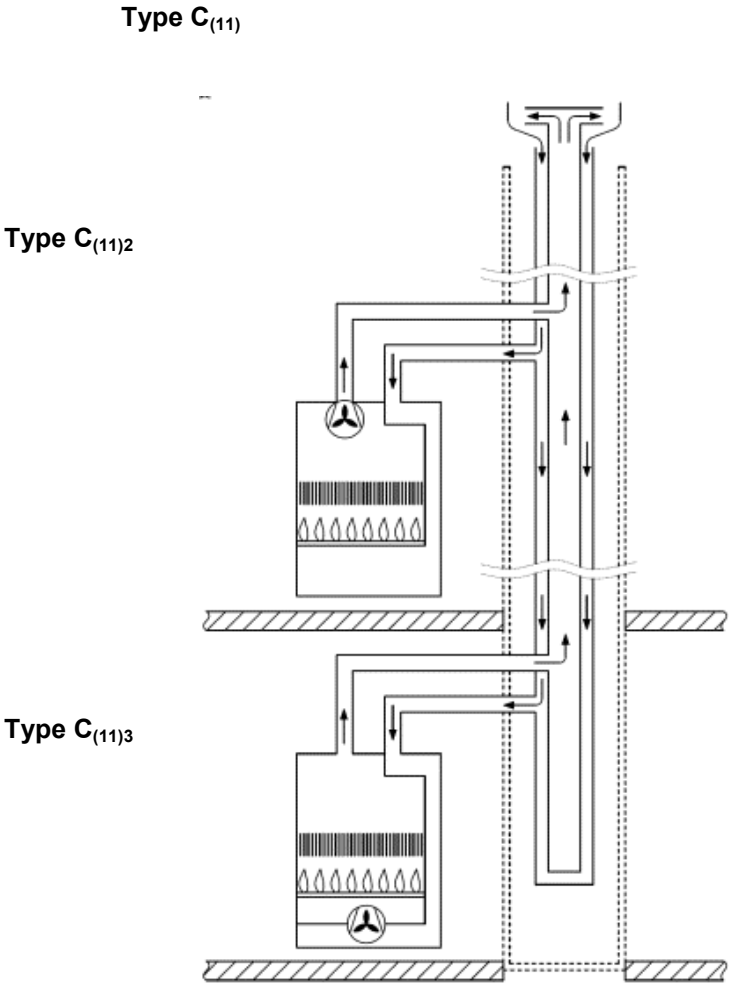


NOTE Example for “concentric vertical ducts”.


Type C₍₁₂₎

Type C₍₁₂₎₂


Type C₍₁₂₎₃

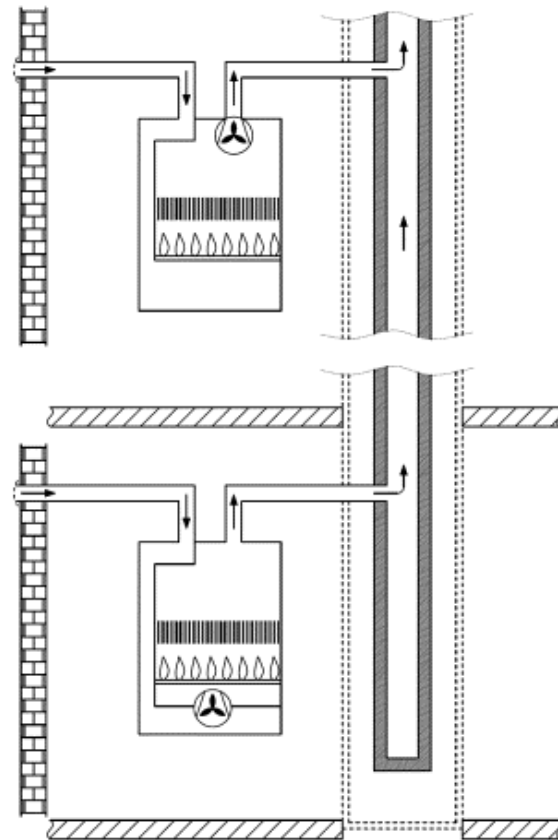

Type C₍₁₃₎

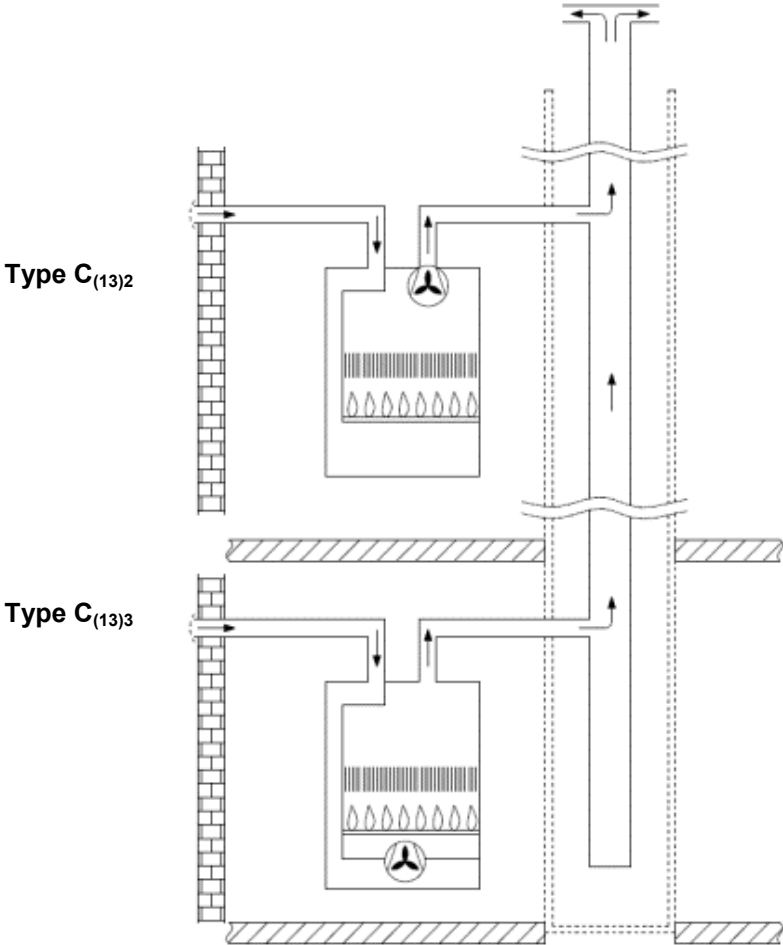


Type C₍₁₄₎

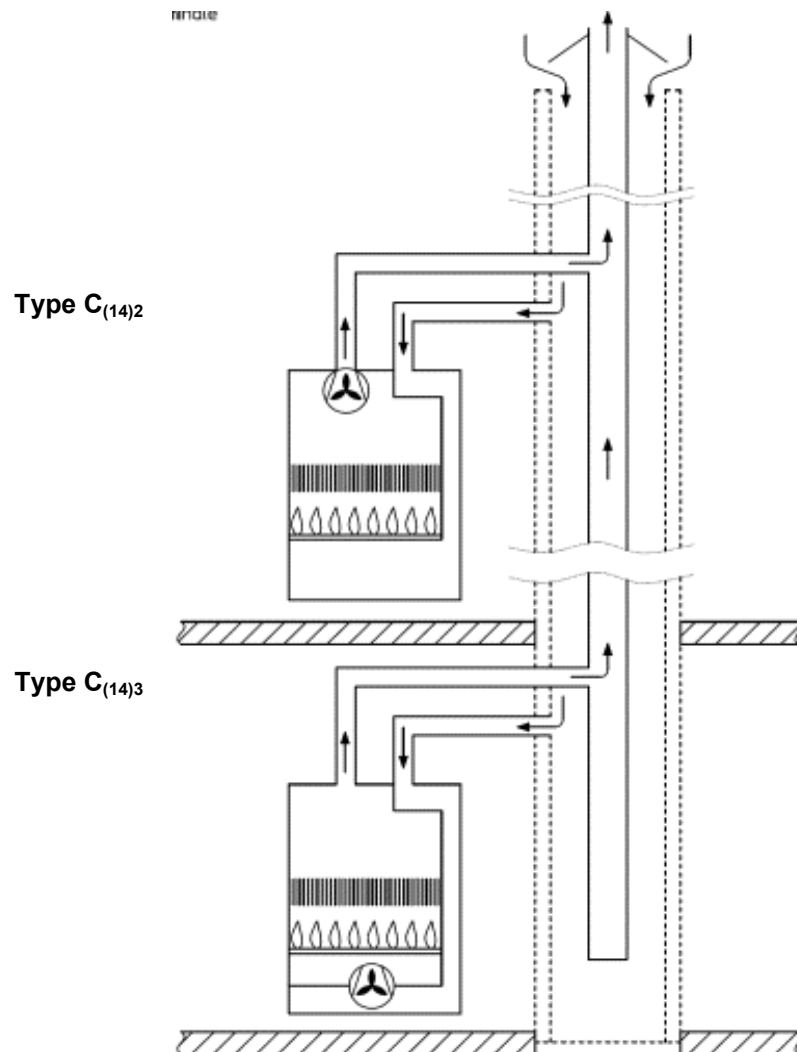

Type C₍₁₅₎

Type C₍₁₅₎₂

Type C₍₁₅₎₃

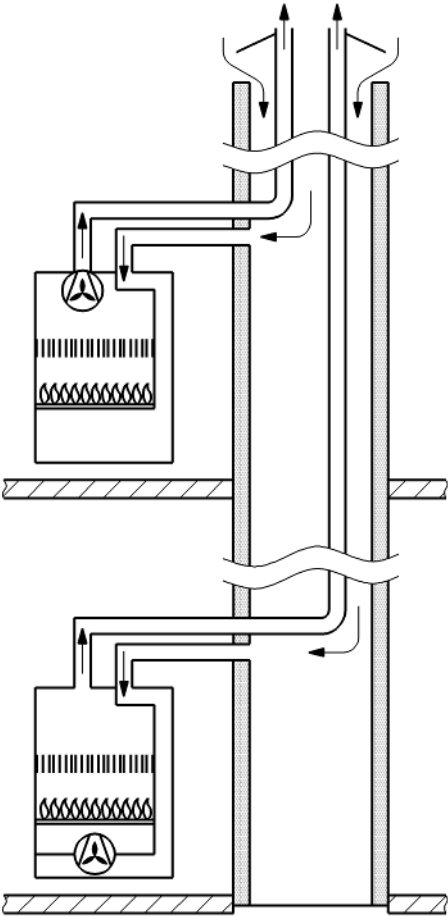

Annex B (normative)

Special national appliance classification (types) — Germany

Subscript Letter “X”:

In accordance with the German Law some type C appliances shall bear a subscript letter “X”, indicating the fulfilment of the following requirement.

Appliances without the designation “X” shall be installed in rooms having a ventilation orifice ((1 x 150) cm² or (2 x 75) cm² at least) to the outside.

Type C_{.X}: A type C appliance in which all pressurized parts of the appliance and the attached duct containing the products of combustion:


- are completely enclosed by parts of the appliance and the duct supplying combustion air, or
- meet higher soundness requirements, ensuring that no release of products of combustion in a dangerous quantity can occur²³⁾.

List of type C_{.X} appliances: C_{12X}, C_{13X}, C_{32X}, C_{33X}, C_{42X}, C_{43X}, C_{52X}, C_{53X}, C_{62X}, C_{63X}, C_{82X}, C_{83X}, C_{92X}, C_{93X}, C_{(10)2X}, C_{(10)3X}, C_{(11)2X}, C_{(11)3X}, C_{(12)2X}, C_{(12)3X}, C_{(13)2X}, C_{(13)3X}, C_{(14)2X}, C_{(14)3X}, C_{(15)2X}, C_{(15)3X}.


23) These higher soundness requirements are fulfilled if:

- the appliance is a type C_{X2} appliance and
- all joints of the metallic flue pipe under pressure are made with compression joints or threads with metal to metal seal; or
- the flue pipe under pressure is made with welded joints.

Type C_{1_x}




Type C_{12x}

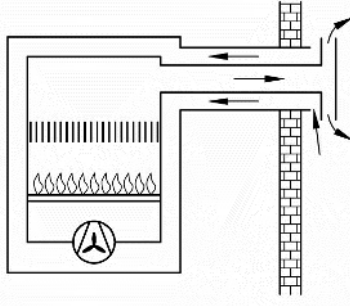


Type C_{13x}

Type C_{3_x}

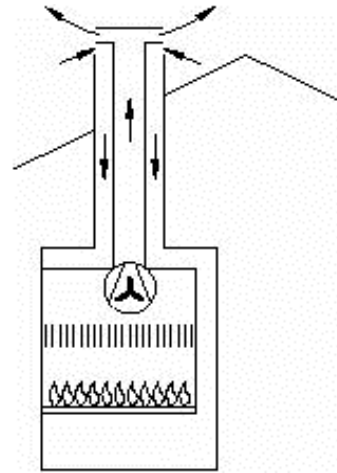

Type C_{32x}

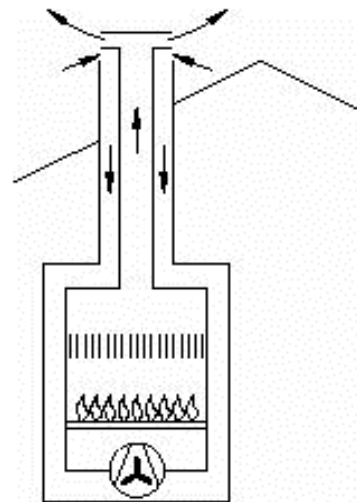


Type C_{33x}


Type C_{4_x}

Type C_{42x}


Type C_{43x}

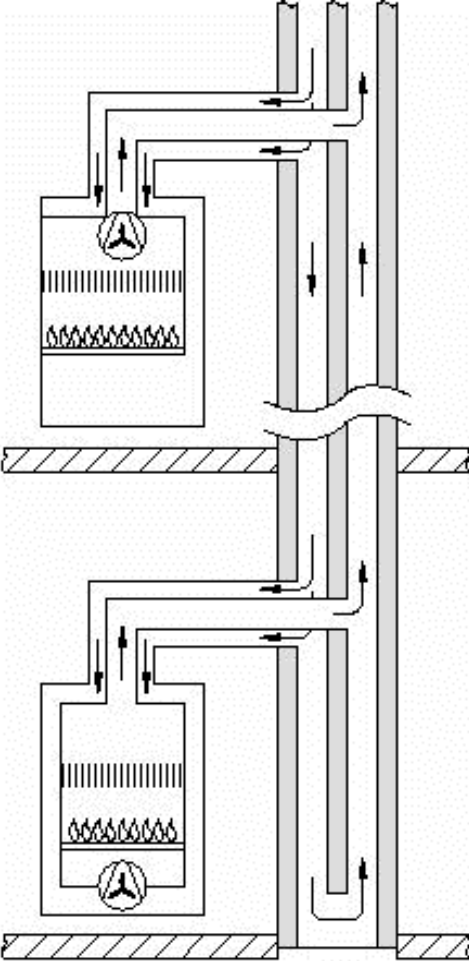

Type C_{5_X}

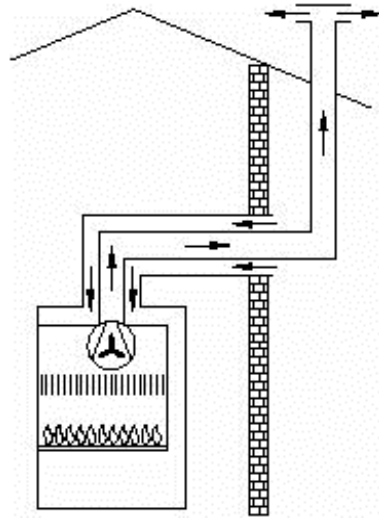

Type C_{52X}

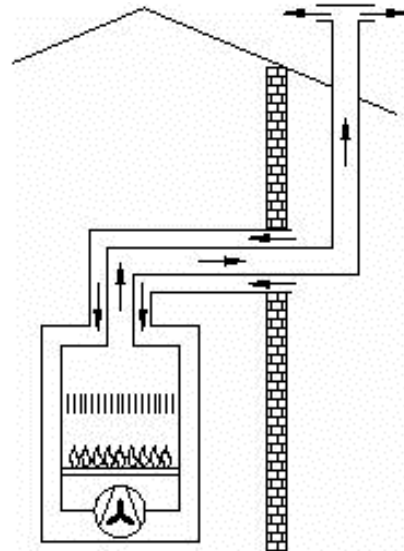


Type C_{53X}

Type C_{8_x}


Type C_{82x}

Type C_{83x}

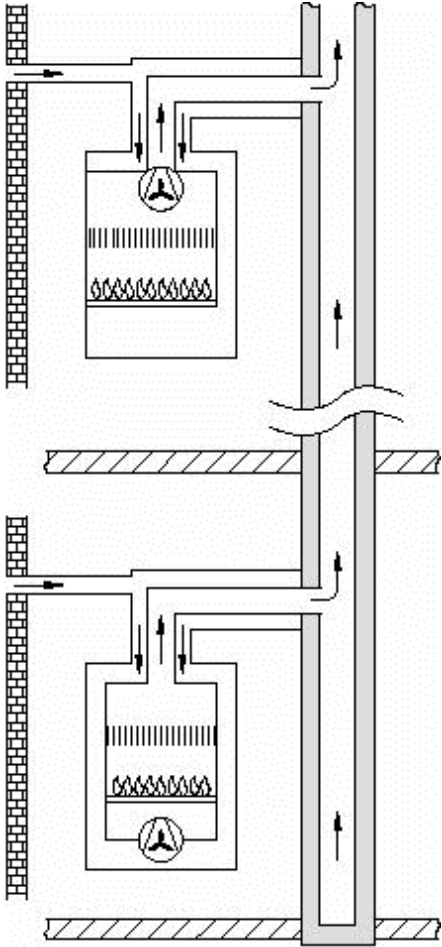


Type C_{9_x}

Type C_{92x}

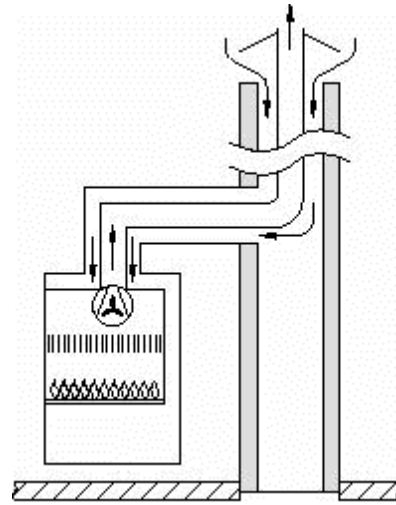


Type C_{93x}

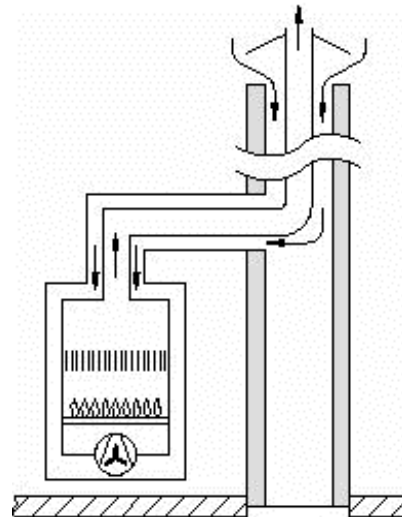

Type C_{(10)_X}

Type C_{(10)2X}


Type C_{(10)3X}

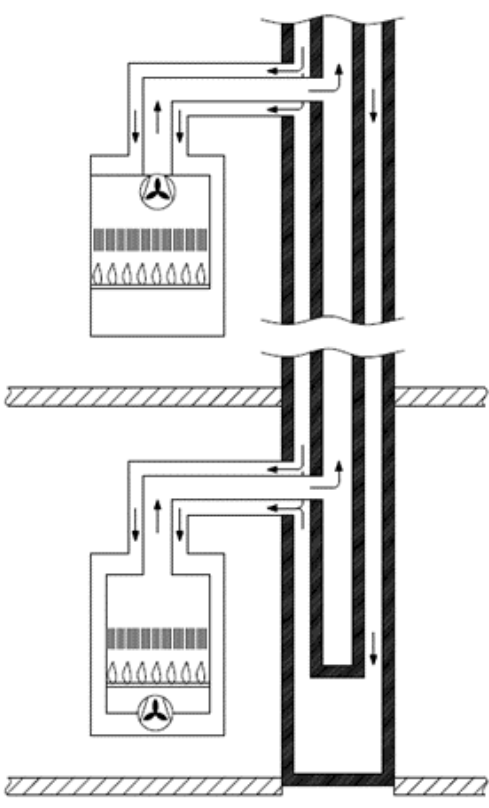

Type C_{(11)_x}

Type C_{(11)2x}


Type C_{(11)3x}

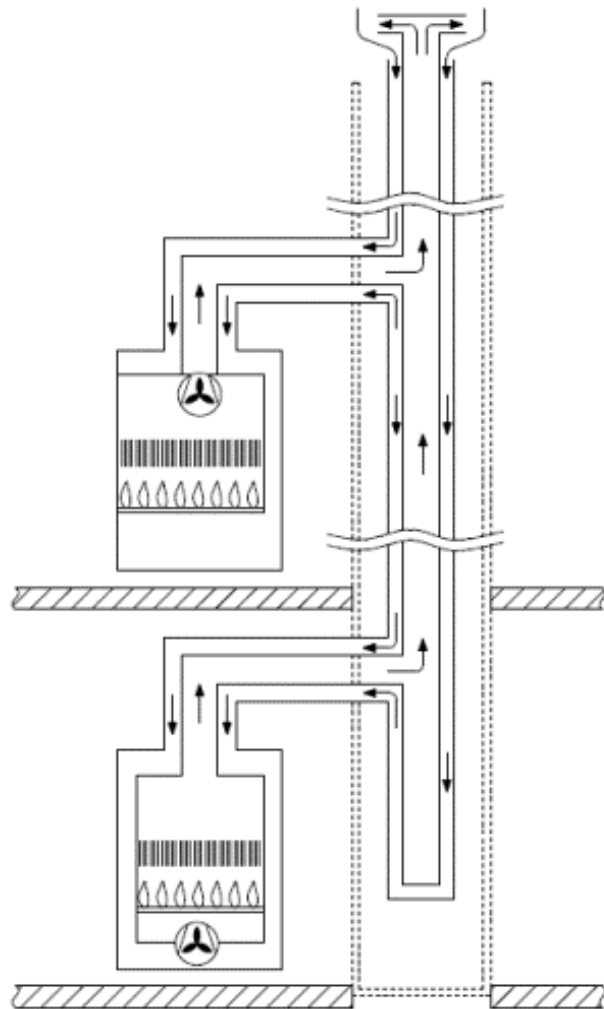

Type C_{(12)_X}

Type C_{(12)2X}


Type C_{(12)3X}

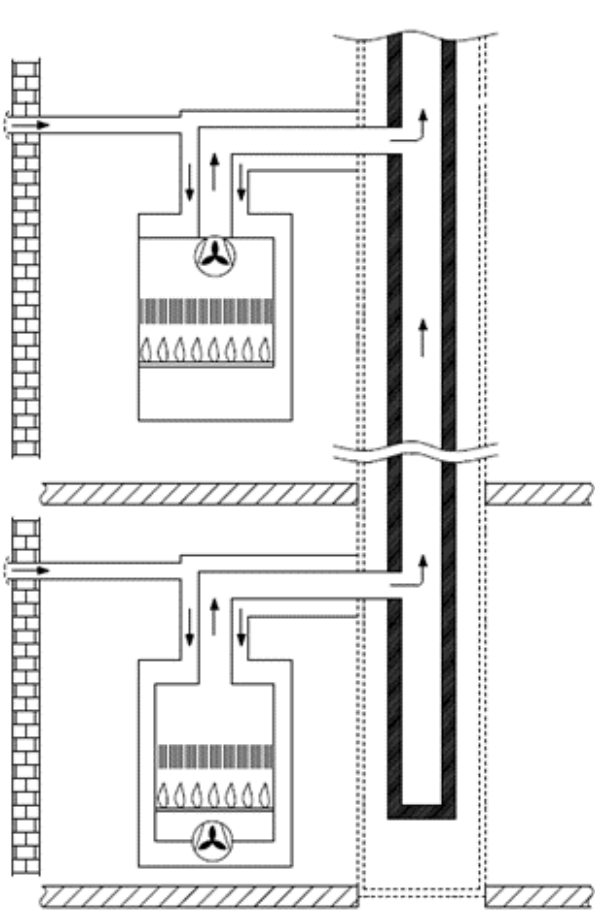

Type C_{(13)_x}

Type C_{(13)2x}


Type C_{(13)3x}

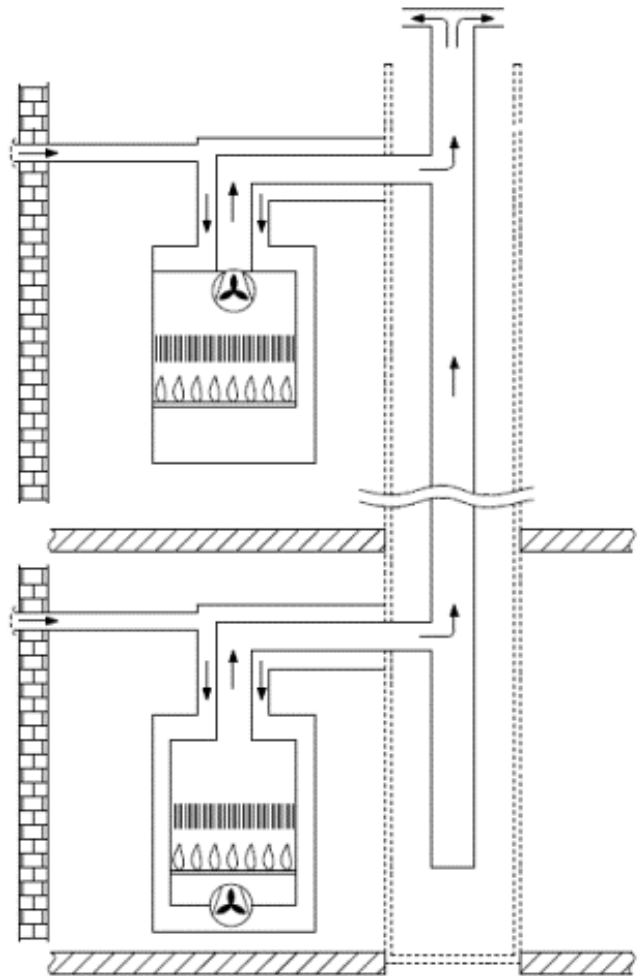


Type C_{(14)_X}

Type C_{(14)2X}

Type C_{(14)3X}

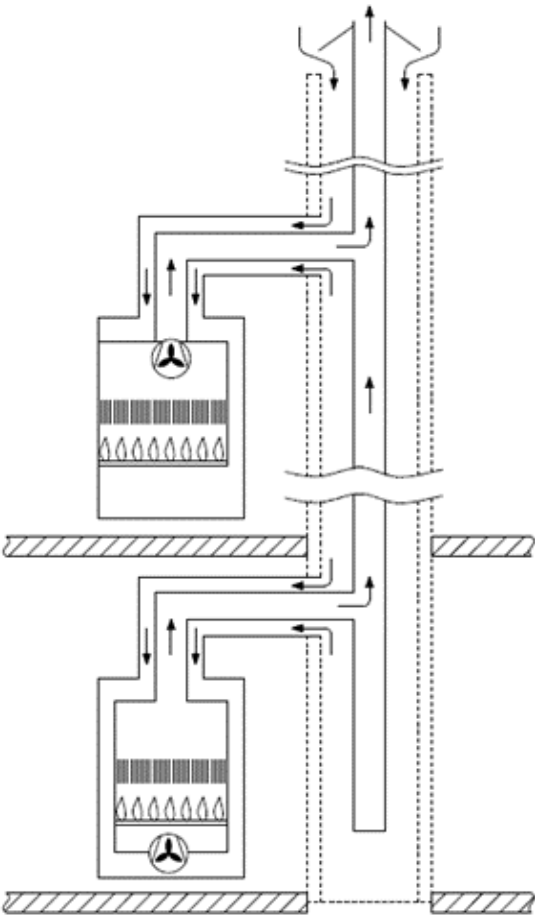

Type C_{(15)_x}

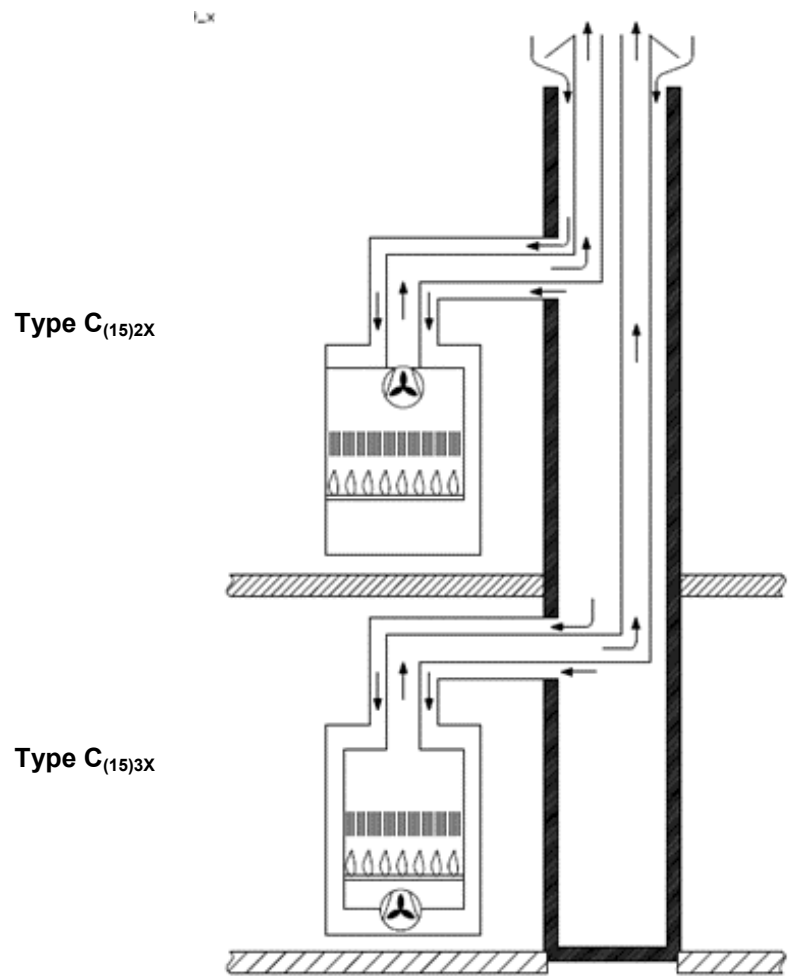

Annex C (informative)

Special national appliance classification (types) — France

C.1 Classification type C4.p and C8.p

When this TR is approved the French classifications C4p and C8p will be replaced respectively by C₍₁₀₎ and C₍₁₂₎.

The following provisions will be withdrawn when gas appliances standards under development are published.

C.2 Provisions for C4p type

- a) Each appliance is fitted with a Back Flow Device. The fitting pieces and the back Flow Device are an integral part of the appliance and certified with it.
- b) The Back Flow Device could be located either:
 - 1) inside the appliance, or
 - 2) inside the flue gas circuit between the boiler outlet and the connecting duct.
- c) Instructions in the event of demounting of the appliance or during maintenance operation shall be included into the manufacturer's instructions for the installer. The same instructions apply in case of not used connection points.

C.3 Provisions for C8p type

- a) Each appliance is fitted with a Back Flow Device. The fitting pieces and the back Flow Device are an integral part of the appliance and certified with it.
- b) The Back Flow Device is located either:
 - 1) inside the appliance, or
 - 2) inside the flue gas circuit between the appliance outlet and the connecting duct.
- c) Instructions in the event of demounting of the appliance or during maintenance operation shall be included into the manufacturer's instructions for the installer. The same instructions apply in case of not used connection points.
- d) The mounting and dismounting of the inlet air duct shall be carried out with specific tool.
- e) The air inlet duct shall be insulated for avoiding any risk of condensation on the surface.
- f) This appliance is installed in a room fitted with a ventilation orifice to the outside. This ventilation orifice is used for air renewal of the concerned room.

Annex D (normative)

Special national appliance classification (types) — Slovenia

In accordance with Slovenian building regulations some type C appliances shall be identified by the letter “X” (see Annex B, Special national appliance classification (types) — Germany).

In accordance with Slovenian building regulations and technical guideline TSG-1-001 Fire safety in buildings, gas appliances and installations are based on the requirements of the German technical guidelines for gas installations DVGW TRGI and DVFG TRF.

Annex E (informative)

Appliance types designed for connection to separate chimney products

This annex identifies appliance types that are designed for connection to separate chimney products which may be part of the construction of the building. These appliance types are listed in Table E.1 for information purposes.

Table E.1

Appliance Types	Separate chimney product
Type B ₁ appliances	the combustion products outlet duct after the draught diverter
Type B ₂ appliances	the combustion products outlet duct connected to the appliance outlet
Type B ₃ appliances	the common duct system
Type C ₂ appliances	the common duct system
Type C ₄ appliances	the common duct system
Type C ₆ appliances	the combustion products outlet duct (and the combustion air inlet duct) connected to the appliance outlet
Type C ₈ appliances	the single or common duct system
Type C ₉ appliances	the vertical combustion air duct
Type C ₍₁₀₎ appliances	the common duct system
Type C ₍₁₂₎ appliances	the common duct system
Type C ₍₁₄₎ appliances	the vertical combustion air duct
Type C ₍₁₅₎ appliances	the vertical combustion air duct

Whether or not a particular gas-burning appliance and a particular “separate chimney product” are compatible will depend in part on the operational characteristics of the gas-burning appliance and in part on the construction and operational characteristics of the separate chimney product.

It is in the interest of the manufacturers of the above-mentioned appliance types to provide information in their installation instructions to assist the installer in determining whether the appliance and the separate chimney product to which it is intended to be installed are compatible. The separate chimney product may be marked with its characteristics to assist this process.

Bibliography

- [1] EN 1443, *Chimneys - General requirements*
- [2] EN 1949, *Specification for the installation of LPG systems for habitation purposes in leisure accommodation vehicles and accommodation purposes in other vehicles*

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com



...making excellence a habit.™