

PD CEN/TR 16978:2016



BSI Standards Publication

Railway applications — Infrastructure — Survey on isolated defects

bsi.

National foreword

This Published Document is the UK implementation of CEN/TR 16978:2016.

The UK participation in its preparation was entrusted to Technical Committee RAE/2, Railway Applications - Track.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016.

Published by BSI Standards Limited 2016

ISBN 978 0 580 87234 1

ICS 93.100

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 31 October 2016.

Amendments/corrigenda issued since publication

Date	Text affected
------	---------------

TECHNICAL REPORT

CEN/TR 16978

RAPPORT TECHNIQUE

TECHNISCHER BERICHT

October 2016

ICS 93.100

English Version

Railway applications - Infrastructure - Survey on isolated defects

Bahnanwendungen - Infrastruktur - Überblick von
Einzelfehlern

This Technical Report was approved by CEN on 23 May 2016. It has been drawn up by the Technical Committee CEN/TC 256.

CEN members are the national standards bodies of Austria, Belgium, Bulgaria, Croatia, Cyprus, Czech Republic, Denmark, Estonia, Finland, Former Yugoslav Republic of Macedonia, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland, Turkey and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

CEN-CENELEC Management Centre: Avenue Marnix 17, B-1000 Brussels

Contents

	Page
European foreword.....	4
Introduction	5
1 Scope.....	6
2 Normative references.....	6
3 Terms and definitions	6
4 Symbols and abbreviations	6
5 Methodology	7
5.1 General considerations.....	7
5.2 Collected data	7
5.2.1 Scope of survey.....	7
5.2.2 Speed classes.....	8
5.2.3 Parameters investigated	8
5.2.4 Calculation of lengths of exceedances	9
5.2.5 Data processing.....	9
6 Participating networks and involvement.....	10
6.1 Participating networks	10
6.2 Coverage	10
7 Results.....	11
7.1 General remarks.....	11
7.2 Results for longitudinal level in D1	11
7.3 Results for alignment in D1	12
7.4 Results for mean gauge over 100 m	13
7.5 Results for twist on a base of 3 m	14
7.6 Results for narrow gauge	15
7.7 Results for wide gauge	16
7.8 Results for longitudinal level in domain D2	17
7.9 Results for alignment in domain D2	18
Annex A (informative) Spread of collected data	19
A.1 General.....	19
A.2 Results for longitudinal level in D1 with $V \leq 80 \text{ km/h}$.....	19
A.3 Results for longitudinal level in D1 with $80 \text{ km/h} < V \leq 120 \text{ km/h}$	20
A.4 Results for longitudinal level in D1 with $120 \text{ km/h} < V \leq 160 \text{ km/h}$.....	21
A.5 Results for longitudinal level in D1 with $160 \text{ km/h} < V \leq 230 \text{ km/h}$.....	22
A.6 Results for longitudinal level in D1 with $230 \text{ km/h} < V \leq 300 \text{ km/h}$.....	23
A.7 Results for alignment in D1 with $V \leq 80 \text{ km/h}$.....	24
A.8 Results for alignment in D1 with $80 \text{ km/h} < V \leq 120 \text{ km/h}$	25
A.9 Results for alignment in D1 with $120 \text{ km/h} < V \leq 160 \text{ km/h}$	26
A.10 Results for alignment in D1 with $160 \text{ km/h} < V \leq 230 \text{ km/h}$.....	27

A.11	Results for alignment in $D1$ with $230 \text{ km/h} < V \leq 300 \text{ km/h}$	28
A.12	Results for mean gauge over 100 m with $V \leq 80 \text{ km/h}$	29
A.13	Results for mean gauge over 100 m with $80 \text{ km/h} < V \leq 120 \text{ km/h}$	30
A.14	Results for mean gauge over 100 m with $120 \text{ km/h} < V \leq 160 \text{ km/h}$	31
A.15	Results for mean gauge over 100 m with $160 \text{ km/h} < V \leq 230 \text{ km/h}$	32
A.16	Results for mean gauge over 100 m with $230 \text{ km/h} < V \leq 300 \text{ km/h}$	33
A.17	Results for twist on a base of 3 m with $V \leq 80 \text{ km/h}$	34
A.18	Results for twist on a base of 3 m with $80 \text{ km/h} < V \leq 120 \text{ km/h}$	35
A.19	Results for twist on base of 3 m with $120 \text{ km/h} < V \leq 160 \text{ km/h}$	36
A.20	Results for twist on a base of 3 m with $160 \text{ km/h} < V \leq 230 \text{ km/h}$	37
A.21	Results for twist on a base of 3 m with $230 \text{ km/h} < V \leq 300 \text{ km/h}$	38
A.22	Results for narrow gauge $V \leq 80 \text{ km/h}$	39
A.23	Results for narrow gauge $80 \text{ km/h} < V \leq 120 \text{ km/h}$	40
A.24	Results for narrow gauge $120 \text{ km/h} < V \leq 160 \text{ km/h}$	41
A.25	Results for narrow gauge $160 \text{ km/h} < V \leq 230 \text{ km/h}$	42
A.26	Results for narrow gauge $230 \text{ km/h} < V \leq 300 \text{ km/h}$	43
A.27	Results for wide gauge $V \leq 80 \text{ km/h}$	44
A.28	Results for wide gauge $80 \text{ km/h} < V \leq 120 \text{ km/h}$	45
A.29	Results for wide gauge $120 \text{ km/h} < V \leq 160 \text{ km/h}$	46
A.30	Results for wide gauge $160 \text{ km/h} < V \leq 230 \text{ km/h}$	47
A.31	Results for wide gauge $230 \text{ km/h} < V \leq 300 \text{ km/h}$	48
A.32	Results for longitudinal level in domain $D2$ with $160 \text{ km/h} < V \leq 230 \text{ km/h}$	49
A.33	Results for longitudinal level in domain $D2$ with $230 \text{ km/h} < V \leq 300 \text{ km/h}$	50
A.34	Results for alignment in domain $D2$ with $160 \text{ km/h} < V \leq 230 \text{ km/h}$	51
A.35	Results for alignment in domain $D2$ with $230 \text{ km/h} < V \leq 300 \text{ km/h}$	52
	Bibliography	53

European foreword

This document (CEN/TR 16978:2016) has been prepared by Technical Committee CEN/TC 256 “Railway applications”, the secretariat of which is held by DIN.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN and CENELEC shall not be held responsible for identifying any or all such patent rights.

Introduction

The Working Group CEN/TC 256 SC1/WG 28 "*Railway applications/Infrastructure/Track geometry quality*" conducted a European Survey on Isolated Defects (ESID) in order to support the process of the development of the EN 13848 series. The goal of the survey was to get an overview of certain thresholds of selected track geometry parameters in several European networks in terms of Isolated Defects (ID).

This Technical Report does not include urban rail matters.

1 Scope

This Technical Report describes the methodology used for the survey on Isolated Defects (ID) and gives the results.

2 Normative references

The following documents, in whole or in part, are normatively referenced in this document and are indispensable for its application. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 13848-1, *Railway applications — Track — Track geometry quality — Part 1: Characterisation of track geometry*

EN 13848-5:2008+A1:2010, *Railway applications — Track — Track geometry quality — Part 5: Geometric quality levels — Plain line*

3 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

3.1

decolouring

algorithm which converts one signal into a different signal

Note 1 to entry: It is used in EN 13848 series to convert a chord measurement signal into a *D1* or *D2* measurement signal.

3.2

Immediate Action Limit

IAL

value which, if exceeded, requires taking measures to reduce the risk of derailment to an acceptable level

Note 1 to entry: To reduce the risk of derailment can be done either by closing the line, reducing speed or by correction of track geometry.

3.3

isolated defect

part of the signal exceeding a given limit such as IAL with at least one sample (data break)

Note 1 to entry: The length of the exceedance is given by the number of samples exceeding the limit. A minimum length of exceedance may be applied to determine an isolated defect.

4 Symbols and abbreviations

For the purposes of this Technical Report, the following symbols and abbreviations apply.

Table 1 — Symbols and abbreviations

Symbol	Designation	Unit
<i>AL</i>	Alignment	mm
<i>D1</i>	Wavelength range $3 \text{ m} < \lambda \leq 25 \text{ m}$	m
<i>D2</i>	Wavelength range $25 \text{ m} < \lambda \leq 70 \text{ m}$	m
<i>LL</i>	Longitudinal level	mm
<i>LoE</i>	Length of exceedance	m
<i>V</i>	Speed	km/h

NOTE In this Report, *AL* stands for “alignment” and is not to be confused with *AL* standing for “alert limit” as defined in EN 13848-5.

5 Methodology

5.1 General considerations

The objective of the European Survey on Isolated Defects (ESID) is to get an understanding and an overview concerning isolated defects within European networks. In a first step it was ensured that at least 6 networks showed interest in participating in this study. The initial idea was to collect the number of isolated defects which exceed certain threshold levels. A discussion between the networks showed very different approaches concerning definition and counting rules of such isolated defects. In addition some networks had very limited availability of appropriate national databases and evaluation tools and concerns regarding costs and effort of a too detailed evaluation were raised.

So the experts of CEN/TC 256/SC 1/WG 28 worked out an alternative methodology which was more practical for most participating networks and less time consuming. First of all, the number of measurement parameters was limited to 8. For the next step, it was agreed to base the survey on cumulative frequency distributions of exceeding lengths. These cover at least the range of thresholds up to and above the IALs according to EN 13848-5. That means that for each threshold of a measurement parameter, the number of metres exceeding this threshold within the participating network were determined.

Finally each of the participating networks provided data for a representative part of their network according to the technical specification described below in 5.2. With the help of a standardised inquiry form, the cumulative frequency distributions of the data were determined and were sent to the CEN/TC 256/SC 1/WG 28 clearing office.

In order to make the data anonymous, the clearing office assigned a random network number to the data of each network and summarized the data in anonymous charts. These were supplied to CEN/TC 256/SC 1/WG 28 only.

Without agreement of all participating networks neither the clearing office nor CEN/TC 256/SC 1/WG 28 may disclose or publish any of the data or the assignment between data and participating networks as a whole or in parts to anyone else.

5.2 Collected data

5.2.1 Scope of survey

The survey collected data for all main lines of the participating networks; main tracks in stations are included in the survey as well. Isolated switches or group of switches situated in plain line and run at line speed are included in the provided data, unless typical errors due to measuring systems occur. In

the latter case, the respective data were excluded from the survey. In any case, all side tracks have been excluded. This prevents counting non-representative exceedances.

The survey was based on measurements of track taken typically at 0,25 m spacing. For a network length of 10 000 km track this would result in a cumulative frequency distribution comprising over 40 million measurements.

The survey was conducted using the most current measurement value for each location. This was summarized in a cumulative frequency distribution.

Where it was not possible for a participating network to do the calculation over their whole network, all data sets containing at least 10 % of the network were taken into account while the track layout and track quality considered in the sample had to be as representative as possible for the whole network. The track length considered for each speed class had to be quoted in the standardised inquiry form.

5.2.2 Speed classes

The survey was done in 5 speed classes according to the EN 13848 series:

- 1) $230 \text{ km/h} < V \leq 300 \text{ km/h};$
- 2) $160 \text{ km/h} < V \leq 230 \text{ km/h};$
- 3) $120 \text{ km/h} < V \leq 160 \text{ km/h};$
- 4) $80 \text{ km/h} < V \leq 120 \text{ km/h};$
- 5) $V \leq 80 \text{ km/h}.$

Speeds higher than 300 km/h were not taken into account due to the lack of sufficient data.

In order to ensure anonymity of networks with high-speed tracks, the network lengths of the participating networks were not disclosed in the results. They were just used as weighting factors to calculate European exceedance lengths.

5.2.3 Parameters investigated

The survey was done on the parameters in the ranges given in Table 2.

Table 2 — Parameters and studied ranges

Parameters	Threshold range (min to max) for speed classes [km/h]				
	$V \leq 80$	$80 < V \leq 120$	$120 < V \leq 160$	$160 < V \leq 230$	$230 < V \leq 300$
1 Longitudinal level (<i>LL</i>) for domain <i>D1</i> according to EN 13848-1	(1 to 30) mm	(1 to 28) mm	(1 to 25) mm	(1 to 22) mm	(1 to 18) mm
2 Alignment (<i>AL</i>) for domain <i>D1</i> according to EN 13848-1	(1 to 24) mm	(1 to 19) mm	(1 to 16) mm	(1 to 14) mm	(1 to 12) mm
3 Mean Gauge (average over 100 m) narrow according to EN 13848-1	(-1 to -10) mm	(-1 to -9) mm	(-1 to -7) mm	(-1 to -7) mm	(-1 to -5) mm
4 <i>LL</i> for domain <i>D2</i> according to EN 13848-1	—	—	—	(1 to 35) mm	(1 to 30) mm
5 <i>AL</i> for domain <i>D2</i> according to EN 13848-1	—	—	—	(1 to 26) mm	(1 to 22) mm
6 Twist on a base of 3 m and expressed in mm/m according to EN 13848-1	(1 to 9) mm/m	(1 to 9) mm/m	(1 to 9) mm/m	(1 to 9) mm/m	(1 to 7) mm/m
7 Narrow gauge according to EN 13848-1	(-1 to -13) mm	(-1 to -13) mm	(-1 to -12) mm	(-1 to -9) mm	(-1 to -7) mm
8 Wide gauge according to EN 13848-1	(1 to 37) mm	(1 to 37) mm	(1 to 37) mm	(1 to 30) mm	(1 to 30) mm

Where the origin of the measurement data for *LL* and *AL* was chord based, they were decoloured to obtain *D1*.

5.2.4 Calculation of lengths of exceedances

For each of the parameters above, the length of exceedances (LoEs) were collected for all threshold levels in steps of 1 mm according to the range of values given in Table 2, except for twist where the LoEs were collected for threshold levels in steps of 1 per mille. All LoEs were collected in the units of [metres per 100 km] which means it was collected from the number of metres which exceed the threshold level related to a distance of 100 km.

For longitudinal level and alignment in domain *D1* as well as *D2* the exceedance lengths of left and right rail have been added.

5.2.5 Data processing

The tables of LoEs for all participating networks for the 5 speed classes were produced and a weighted average was calculated for each step of the frequency distribution. The line length of each participating network in the considered speed class was used as a weighting factor. In this way 'European Lengths of Exceedances' were determined for the 5 speed classes and all 8 parameters. These cumulative frequency distributions are shown in Clause 6.

6 Participating networks and involvement

6.1 Participating networks

The following alphabetic list gives the 12 networks that provided data to the survey:

Austria	ÖBB-Infrastructure
Belgium	Infrabel
Czech Republic	SZDC
Denmark	Rail Net Denmark
France	SNCF / RFF
Germany	DB-Netz
Hungary	MÁV
Italy	RFI
Portugal	IP
Sweden	Trafikverket
Switzerland	SBB
United Kingdom	Network Rail

6.2 Coverage

The survey is comprised data for approximately 63 000 km of track. This represents a 41 % sample of the participating networks. The total track length of all participating networks is about 154 000 km, this is more than half of the track length of the European Union member states.

Some networks provided data for nearly all the lines, others provided smaller samples. In any case, they have been chosen carefully as representative for the speed class in the whole network. However, just in 3 out of 34 cases, data of one network had to be removed because of poor coverage. Therefore, in these cases, data of the concerned networks were simply not taken into account in 3 out of 34 charts.

Furthermore, the data set of 1 network was not taken into account, because of significant distortion of the European results.

Table 3 shows the coverage of the individual speed classes related to the respective track length.

Table 3 — Sample size of track data for each speed class (points)

Speed range	Network length	Sample size	Percentage
230 km/h < V ≤ 300 km/h	5 955 km	3 263 km	55 %
160 km/h < V ≤ 230 km/h	12 400 km	7 253 km	58 %
120 km/h < V ≤ 160 km/h	55 355 km	15 874 km	29 %
80 km/h < V ≤ 120 km/h	49 652 km	21 964 km	44 %
V ≤ 80 km/h	30 797 km	15 060 km	49 %


7 Results

7.1 General remarks

The following summary charts show for each parameter and all speed classes the most relevant parts of the European exceedance lengths. Each line in the charts represents the weighted averages of the LoEs of all evaluated networks for one speed class. In addition, the charts show the current IALs according to EN 13848-5:2008+A1:2010 for each speed class.

As the charts cover in most cases several decades of values; a logarithmic scaling on the ordinate is used. It has to be pointed out therefore, that values close to zero cannot be shown on this type of chart.

7.2 Results for longitudinal level in D1

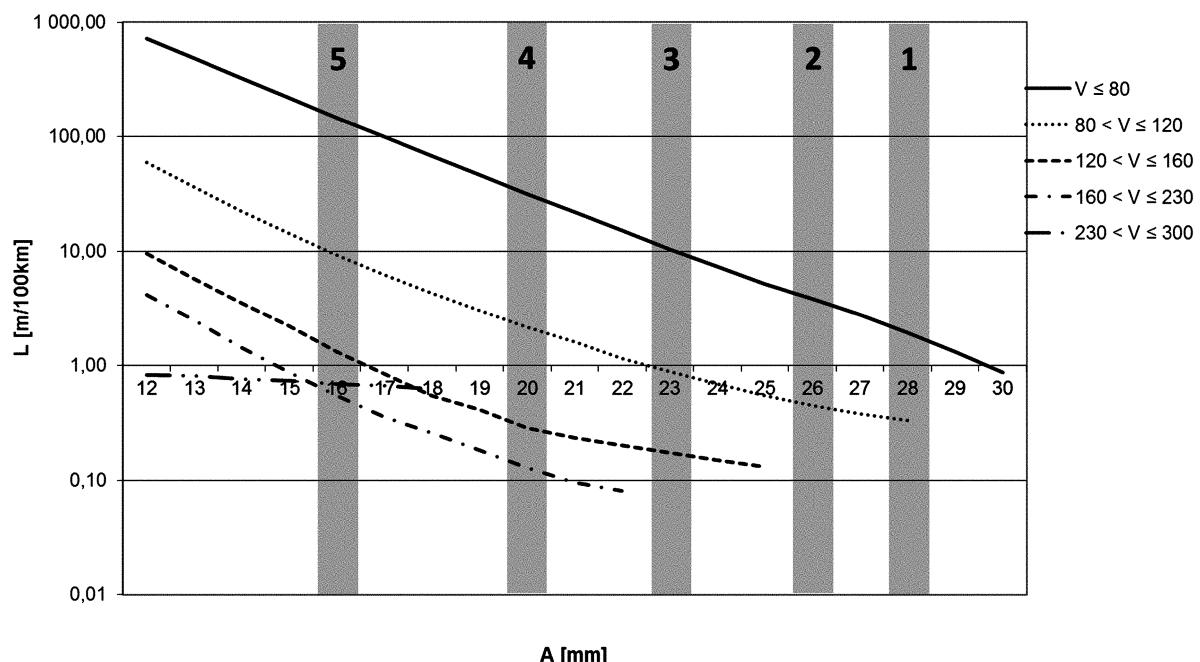

Key


- 1 IAL $V \leq 80$ km/h
- 2 IAL $80 < V \leq 120$ km/h
- 3 IAL $120 < V \leq 160$ km/h
- 4 IAL $160 < V \leq 230$ km/h
- 5 IAL $230 < V \leq 300$ km/h
- A amplitude
- L length of exceedances

Figure 1 — Longitudinal level (D1)

- The numbers of participating networks per speed class are: 9 ($V \leq 80$ km/h), 10 ($80 < V \leq 120$ km/h), 11 ($120 < V \leq 160$ km/h), 9 ($160 < V \leq 230$ km/h) and 4 ($230 < V \leq 300$ km/h).
- The curves for the different speed ranges show an important spread over more than two decades, indicating a strong dependence of the longitudinal level track quality on the line speed.

- The length of exceedance at the IAL values decreases with increasing speed except for the speed range $230 \text{ km/h} < V \leq 300 \text{ km/h}$ which may be not representative enough because data from only 4 networks is available, thus increasing the effect of outliers.
- For all speed ranges, the length of exceedance at the current IAL value is in a range between $0,1 \text{ m}/100 \text{ km}$ and $2 \text{ m}/100 \text{ km}$, indicating an appropriate choice of the IAL values.

7.3 Results for alignment in D1

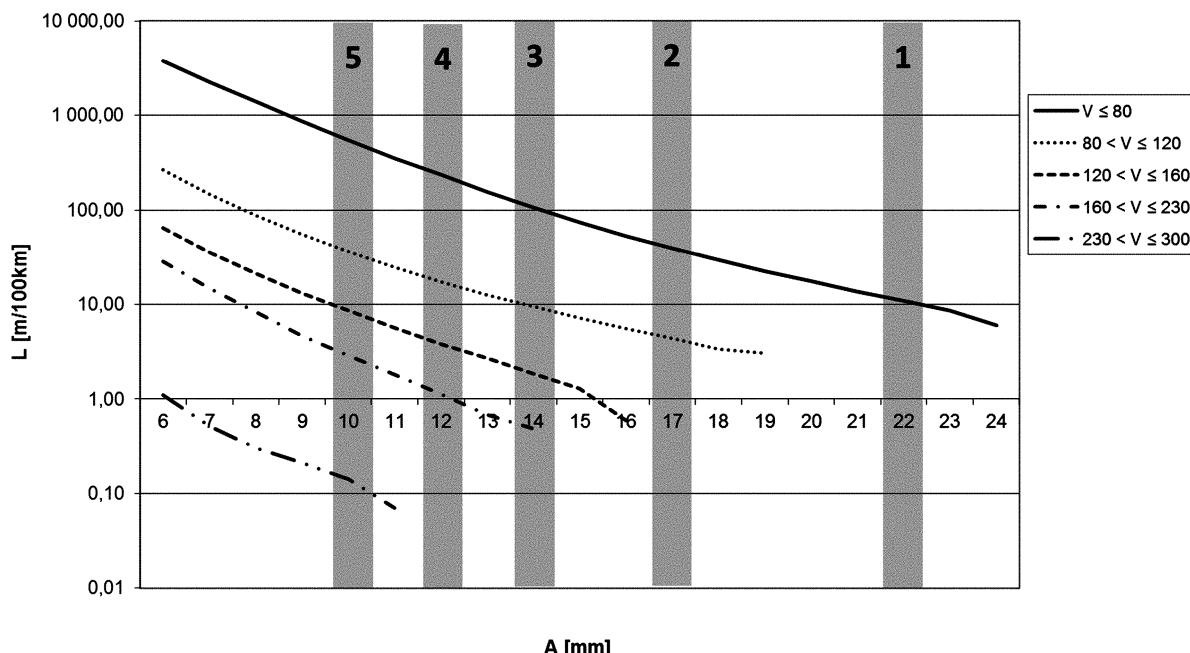

Key


- 1 IAL $V \leq 80 \text{ km/h}$
 - 2 IAL $80 \text{ km/h} < V \leq 120 \text{ km/h}$
 - 3 IAL $120 \text{ km/h} < V \leq 160 \text{ km/h}$
 - 4 IAL $160 \text{ km/h} < V \leq 230 \text{ km/h}$
 - 5 IAL $230 \text{ km/h} < V \leq 300 \text{ km/h}$
- A amplitude
L length of exceedances

Figure 2 — Alignment (D1)

- The numbers of participating networks per speed class are: 9 ($V \leq 80 \text{ km/h}$), 10 ($80 \text{ km/h} < V \leq 120 \text{ km/h}$), 11 ($120 \text{ km/h} < V \leq 160 \text{ km/h}$), 9 ($160 \text{ km/h} < V \leq 230 \text{ km/h}$) and 4 ($230 \text{ km/h} < V \leq 300 \text{ km/h}$).
- The curves for the different speed ranges show an important spread over more than three decades, indicating a strong dependence of the alignment level quality on the line speed.
- The length of exceedance at the IAL value decreases monotonously with increasing speed in a range between $0,1 \text{ m}/100 \text{ km}$ and $10 \text{ m}/100 \text{ km}$. The latter value corresponds to the speed range $V \leq 80 \text{ km/h}$.

- Taking the actual IAL values as reference, the alignment *D1* shows a worse track geometry quality compared to the longitudinal level. The current IAL values are appropriate.

7.4 Results for mean gauge over 100 m

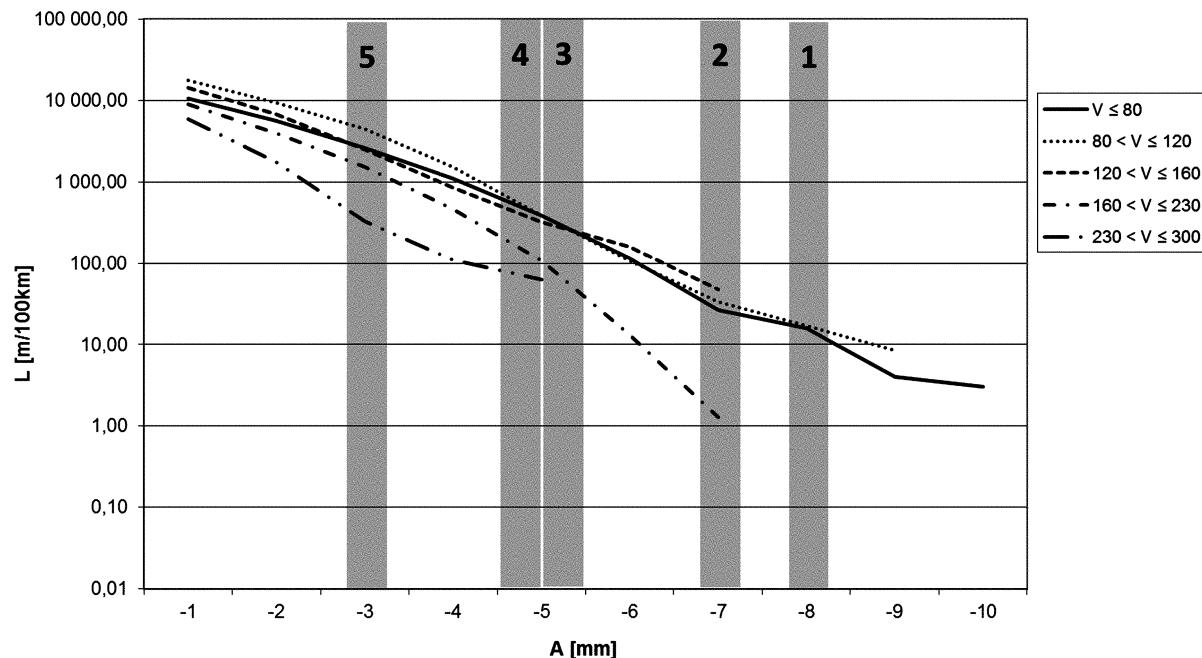

Key


- 1 IAL $V \leq 80$ km/h
 - 2 IAL $80 \text{ km/h} < V \leq 120 \text{ km/h}$
 - 3 IAL $120 \text{ km/h} < V \leq 160 \text{ km/h}$
 - 4 IAL $160 \text{ km/h} < V \leq 230 \text{ km/h}$
 - 5 IAL $230 \text{ km/h} < V \leq 300 \text{ km/h}$
- A amplitude
length of exceedances

Figure 3 — Track gauge over 100 m

- The numbers of participating networks per speed class are: 9 ($V \leq 80 \text{ km/h}$), 10 ($80 \text{ km/h} < V \leq 120 \text{ km/h}$), 11 ($120 \text{ km/h} < V \leq 160 \text{ km/h}$), 9 ($160 \text{ km/h} < V \leq 230 \text{ km/h}$) and 4 ($230 \text{ km/h} < V \leq 300 \text{ km/h}$).
- The small spread of the curves indicates a relatively small influence of the line speed on the mean gauge over 100 m compared to longitudinal level and alignment. However, taking into account the logarithmic representation, the range $230 \text{ km/h} < V \leq 300 \text{ km/h}$ has a considerably lower length of exceedance.
- Consequently, the exceedance length at the IAL value increases with increasing speed. For $V \leq 80 \text{ km/h}$ it is at 10 m/100 km while it goes up to 300 m/100 km for the range $120 \text{ km/h} < V \leq 160 \text{ km/h}$.

- These high values can be explained by the specificity of mean track gauge exceedances which usually can be several tens of metres long.

7.5 Results for twist on a base of 3 m

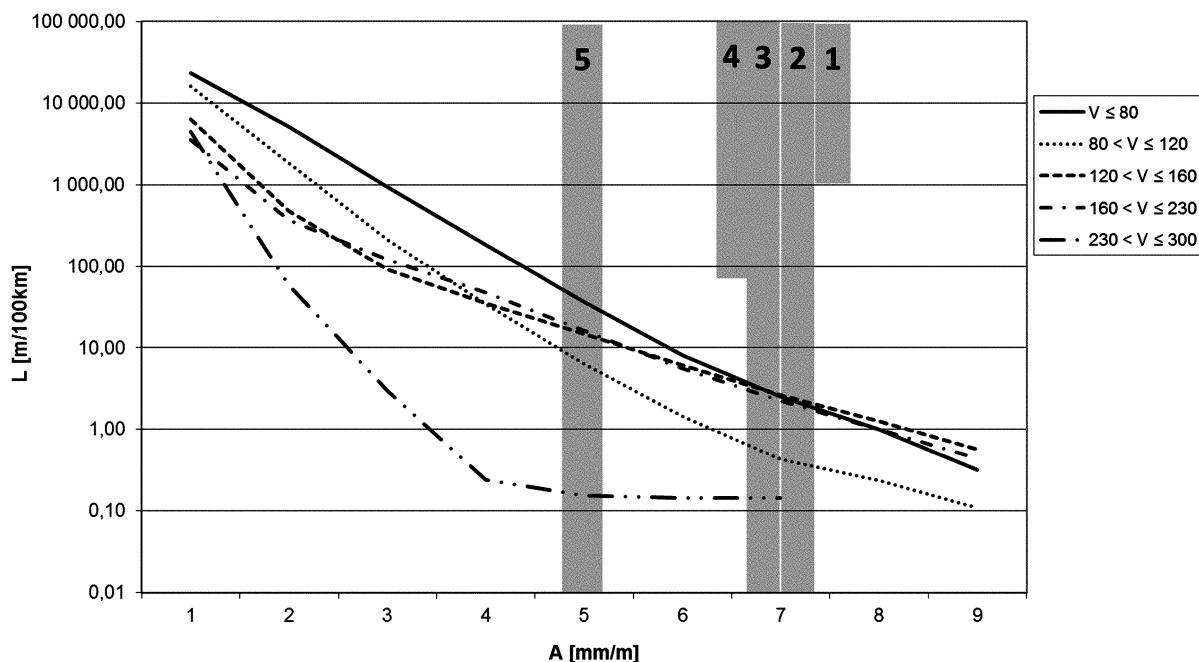


Key

- 1 IAL $V \leq 80$ km/h
 - 2 IAL $80 \text{ km/h} < V \leq 120 \text{ km/h}$
 - 3 IAL $120 \text{ km/h} < V \leq 160 \text{ km/h}$
 - 4 IAL $160 \text{ km/h} < V \leq 230 \text{ km/h}$
 - 5 IAL $230 \text{ km/h} < V \leq 300 \text{ km/h}$
- A amplitude
L length of exceedances

Figure 4 — Twist 3 m

- The numbers of participating networks per speed class are: 9 ($V \leq 80$ km/h), 10 ($80 \text{ km/h} < V \leq 120 \text{ km/h}$), 11 ($120 \text{ km/h} < V \leq 160 \text{ km/h}$), 9 ($160 \text{ km/h} < V \leq 230 \text{ km/h}$) and 4 ($230 \text{ km/h} < V \leq 300 \text{ km/h}$).
- The twist over 3 m shows a relatively small spread except for the speed range $230 \text{ km/h} < V \leq 300 \text{ km/h}$, which shows a better track quality regarding twist.
- The exceedance length at the IAL value is low with values between 0,1 m/100 km and 3 m/100 km, indicating an appropriate choice of the limit value and a scrupulous respect of twist limits amongst European Networks.

7.6 Results for narrow gauge

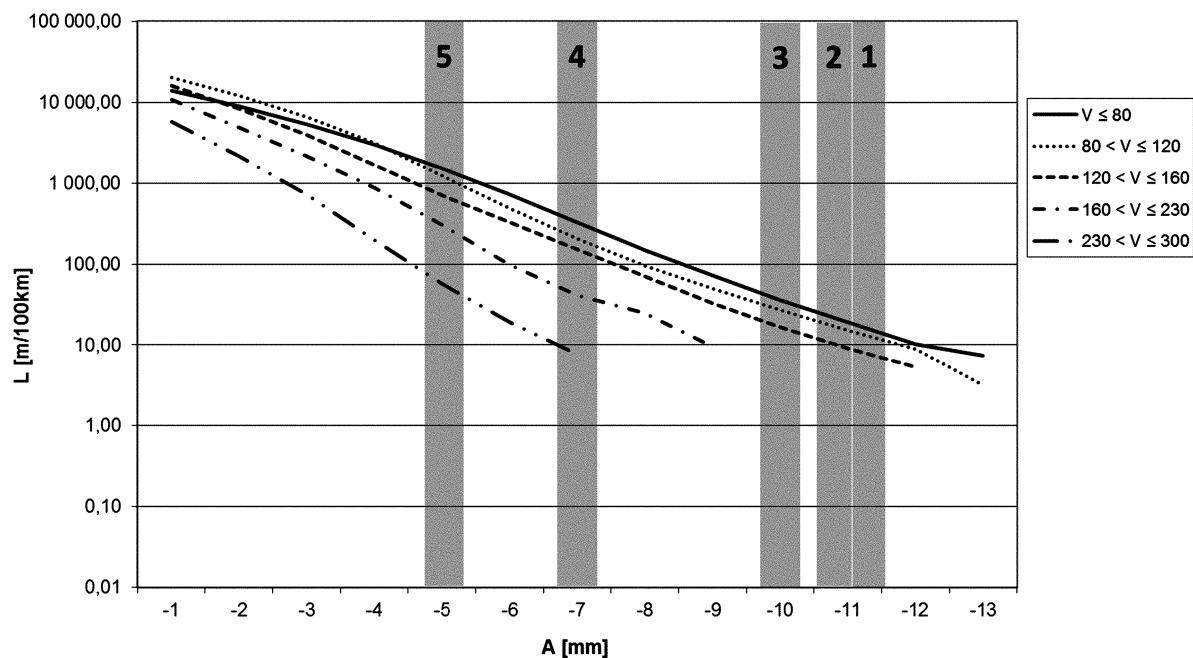


Key

- 1 IAL $V \leq 80$ km/h
- 2 IAL $80 < V \leq 120$ km/h
- 3 IAL $120 < V \leq 160$ km/h
- 4 IAL $160 < V \leq 230$ km/h
- 5 IAL $230 < V \leq 300$ km/h
- A amplitude
- L length of exceedances

Figure 5 — Narrow gauge

- The numbers of participating networks per speed class are: 9 ($V \leq 80$ km/h), 10 ($80 < V \leq 120$ km/h), 11 ($120 < V \leq 160$ km/h), 9 ($160 < V \leq 230$ km/h) and 4 ($230 < V \leq 300$ km/h).
- The track quality regarding narrow gauge depends clearly on the line speed. The exceedance length differs more than one decade between minimal and maximal speeds.
- The lengths of exceedance at the IAL values are situated between 10 m/100 km and 50 m/100 km for all speed ranges, which remains appropriate.

7.7 Results for wide gauge

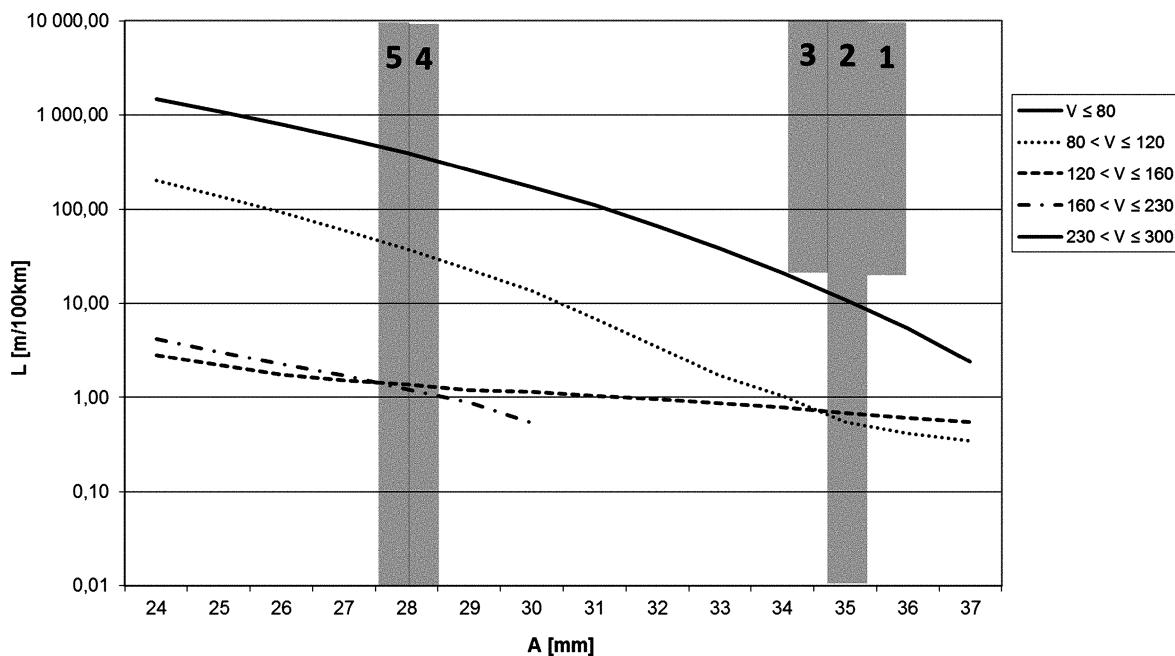


Key

- 1 IAL $V \leq 80$ km/h
 - 2 IAL $80 < V \leq 120$ km/h
 - 3 IAL $120 < V \leq 160$ km/h
 - 4 IAL $160 < V \leq 230$ km/h
 - 5 IAL $230 < V \leq 300$ km/h
- A amplitude
L length of exceedances

Figure 6 — Wide gauge

- The numbers of participating networks per speed class are: 9 ($V \leq 80$ km/h), 10 ($80 < V \leq 120$ km/h), 11 ($120 < V \leq 160$ km/h), 9 ($160 < V \leq 230$ km/h) and 4 ($230 < V \leq 300$ km/h).
- The distribution of the graphs shows a big spread of the wide gauge over nearly three decades taking into account the speed ranges up to 230 km/h. The speed range $230 < V \leq 300$ km/h is not visible in the logarithmic representation because of very small (or zero) values of exceedance length. In general, lower line speed leads to higher exceedance length.
- The exceedance length at the IAL values lies approximately between 0,6 m/100 km and 2 m/100 km except for the lowest speed where 10 m/100 km are observed. All these curves confirm that the IAL values are appropriate.

7.8 Results for longitudinal level in domain D2

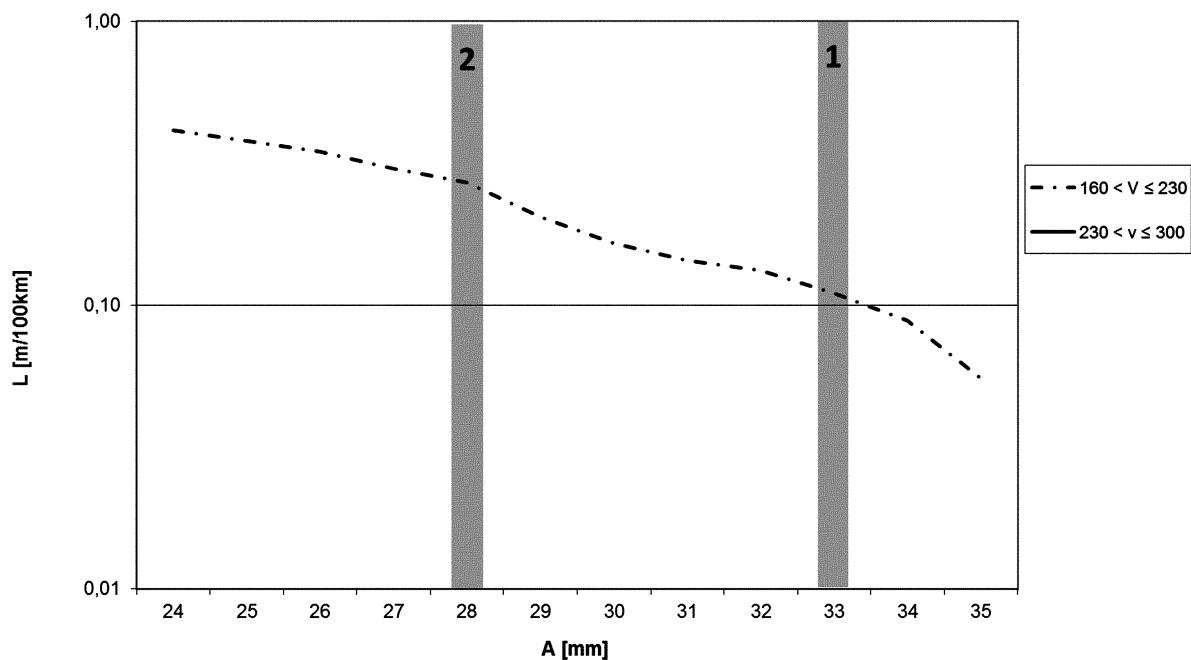

Key

1 IAL $160 \text{ km/h} < V \leq 230 \text{ km/h}$

2 IAL $230 \text{ km/h} < V \leq 300 \text{ km/h}$


A amplitude

L length of exceedances

Figure 7 — Longitudinal level D2

- The numbers of participating networks per speed class are: 6 ($160 \text{ km/h} < V \leq 230 \text{ km/h}$) and 2 ($230 \text{ km/h} < V \leq 300 \text{ km/h}$).
- For the longitudinal level (D2) only the speed range $160 \text{ km/h} < V \leq 230 \text{ km/h}$ is represented in the figure. The exceedance length at the IAL value is very low (0,1 m/100 km).
- The speed range $230 \text{ km/h} < V \leq 300 \text{ km/h}$ is not visible in the logarithmic representation because of very small or zero values of the exceedance length.

7.9 Results for alignment in domain D2

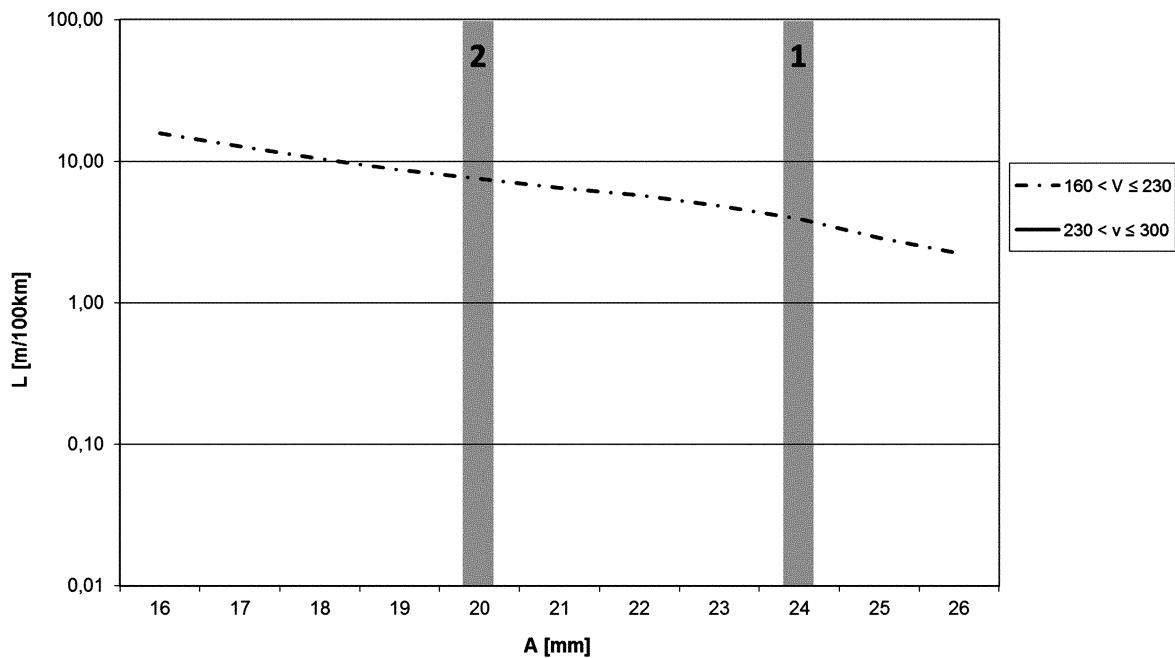

Key

- 1 IAL $160 \text{ km/h} < V \leq 230 \text{ km/h}$
- 2 IAL $230 \text{ km/h} < V \leq 300 \text{ km/h}$
- A amplitude
- L length of exceedances

Figure 8 — Alignment D2

- The numbers of participating networks per speed class are: 6 ($160 \text{ km/h} < V \leq 230 \text{ km/h}$) and 2 ($230 \text{ km/h} < V \leq 300 \text{ km/h}$).
- For the alignment (D2) only the speed range $160 \text{ km/h} < V \leq 230 \text{ km/h}$ is represented in the figure. The exceedance length at the IAL value is higher than for the longitudinal level (4 m/100 km).
- The speed range $230 \text{ km/h} < V \leq 300 \text{ km/h}$ is not visible in the logarithmic representation because of very small or zero values of the exceedance length.

Annex A (informative)

Spread of collected data

A.1 General


In this annex, details of the spread of the data are shown.

One chart per parameter and speed class shows the LoEs of each individual network. Each line in the charts represents the LoEs of one participating network together with the weighted average, which is displayed by a bold and dashed line.

In addition, the charts show the current IALs according to EN 13848-5:2008+A1:2010 indicated by "1".

As the charts cover in most cases several decades of values, a logarithmic scaling on the ordinate is used. It has to be pointed out therefore, that values close to zero cannot be shown on this kind of charts.

A.2 Results for longitudinal level in D1 with $V \leq 80 \text{ km/h}$

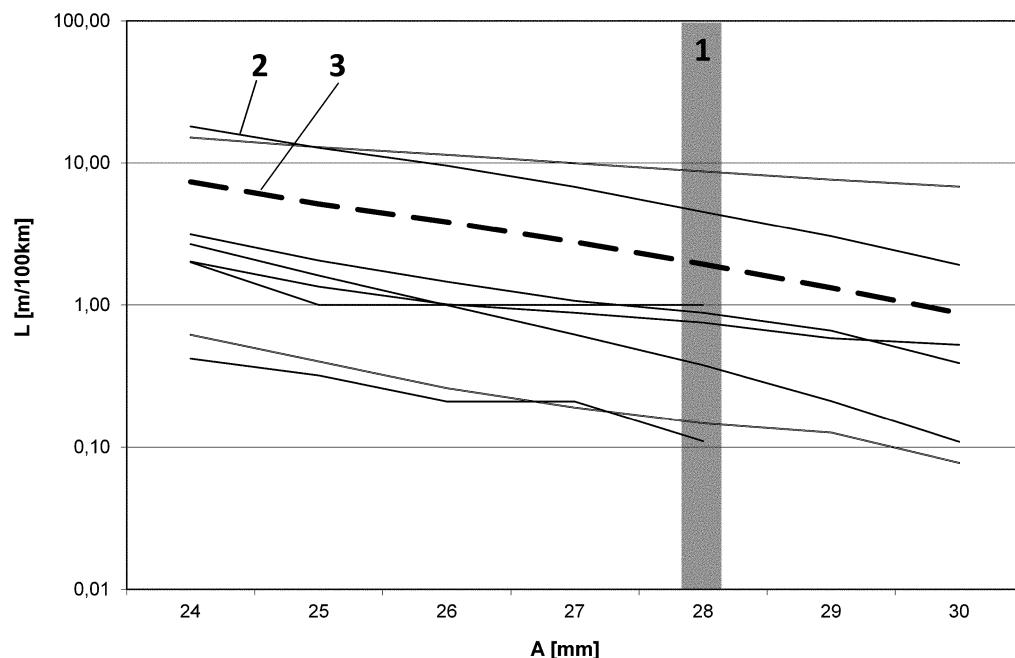


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.1 — Longitudinal level D1 with $V \leq 80 \text{ km/h}$ for participating networks

A.3 Results for longitudinal level in *D1* with $80 \text{ km/h} < V \leq 120 \text{ km/h}$

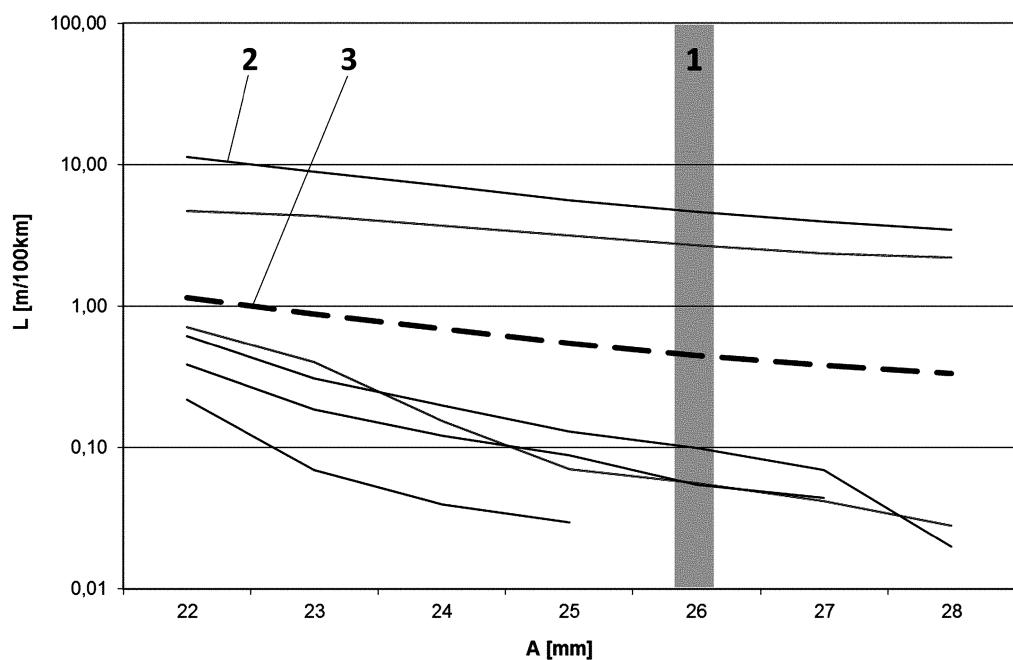


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.2 — Longitudinal level *D1* with $80 \text{ km/h} < V \leq 120 \text{ km/h}$ for participating networks

A.4 Results for longitudinal level in D1 with $120 \text{ km/h} < V \leq 160 \text{ km/h}$

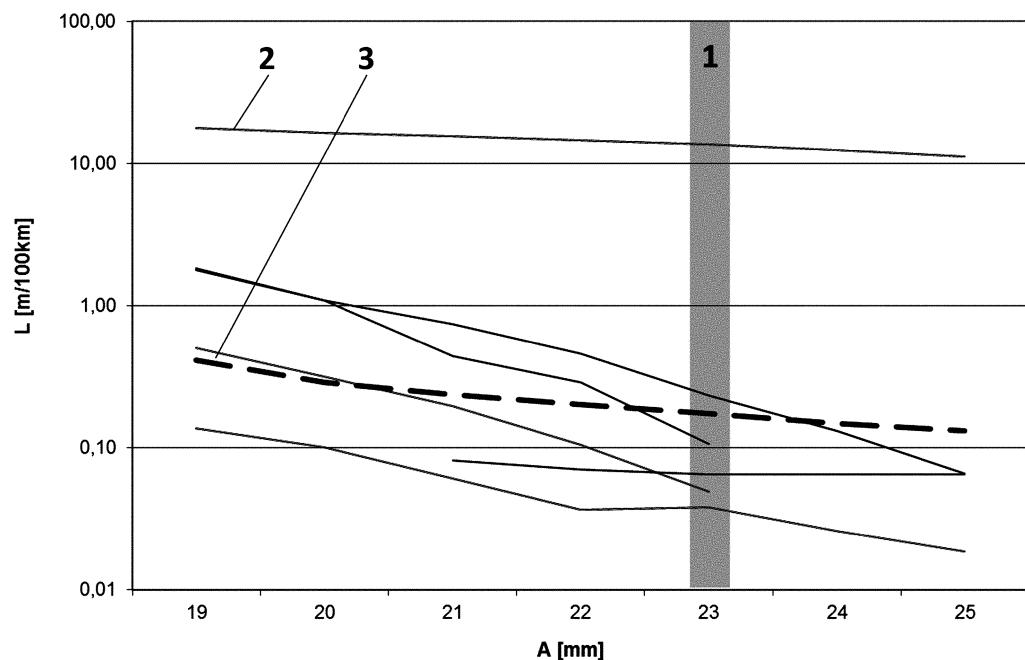


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.3 — Longitudinal level D1 with $120 \text{ km/h} < V \leq 160 \text{ km/h}$ for participating networks

A.5 Results for longitudinal level in *D1* with $160 \text{ km/h} < V \leq 230 \text{ km/h}$

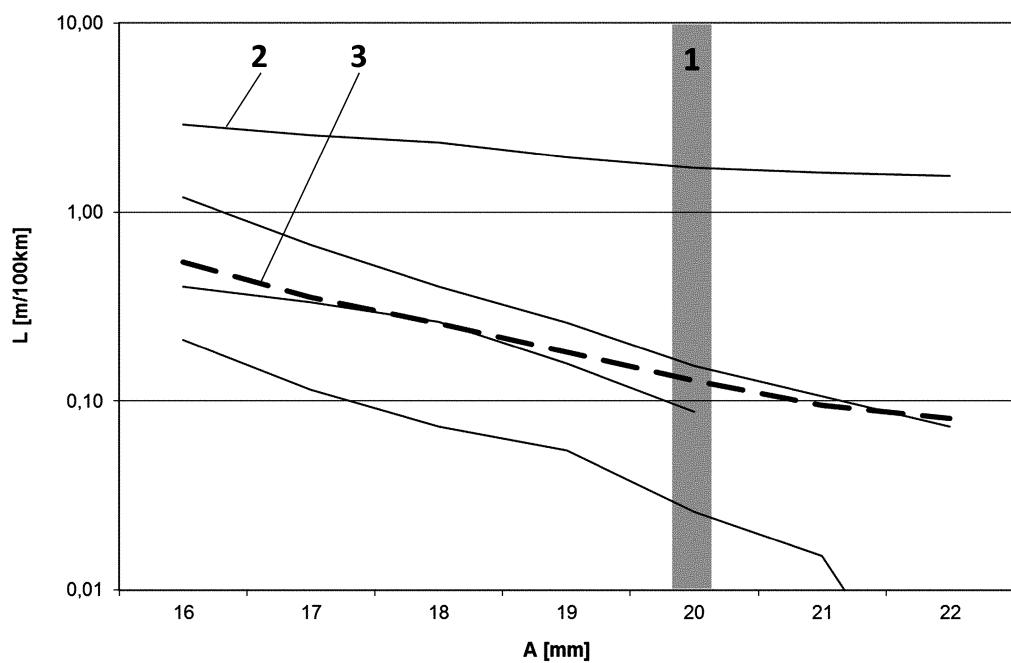


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.4 — Longitudinal level *D1* with $160 \text{ km/h} < V \leq 230 \text{ km/h}$ for participating networks

A.6 Results for longitudinal level in *D1* with $230 \text{ km/h} < V \leq 300 \text{ km/h}$

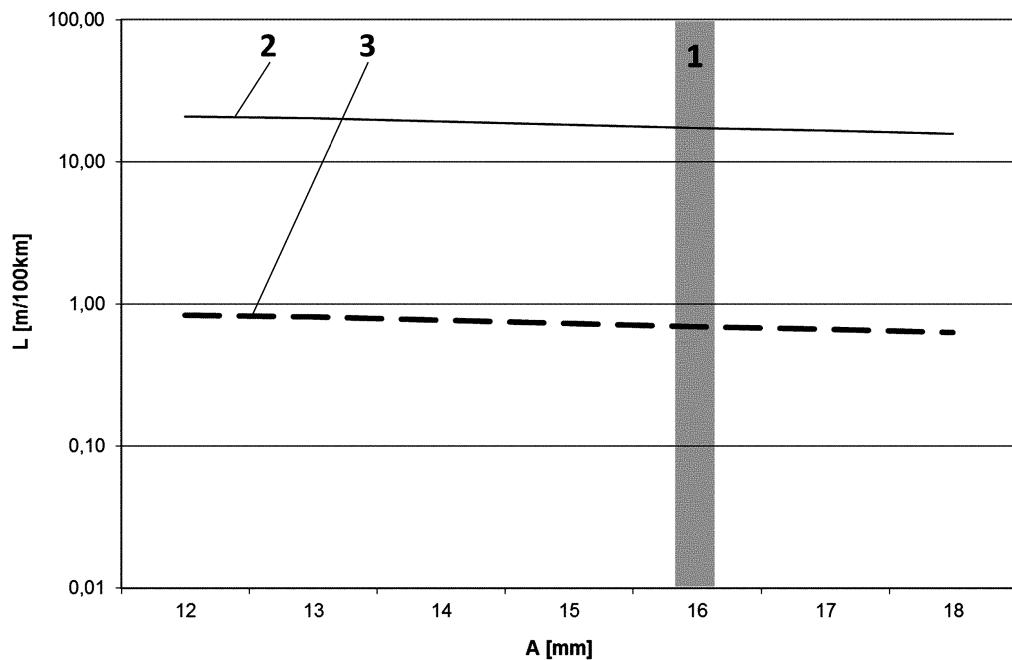


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

One or more Networks are not represented because of very small or zero values of the exceedance length.

Figure A.5 — Longitudinal level *D1* with $230 \text{ km/h} < V \leq 300 \text{ km/h}$ for participating networks

A.7 Results for alignment in *D1* with $V \leq 80 \text{ km/h}$

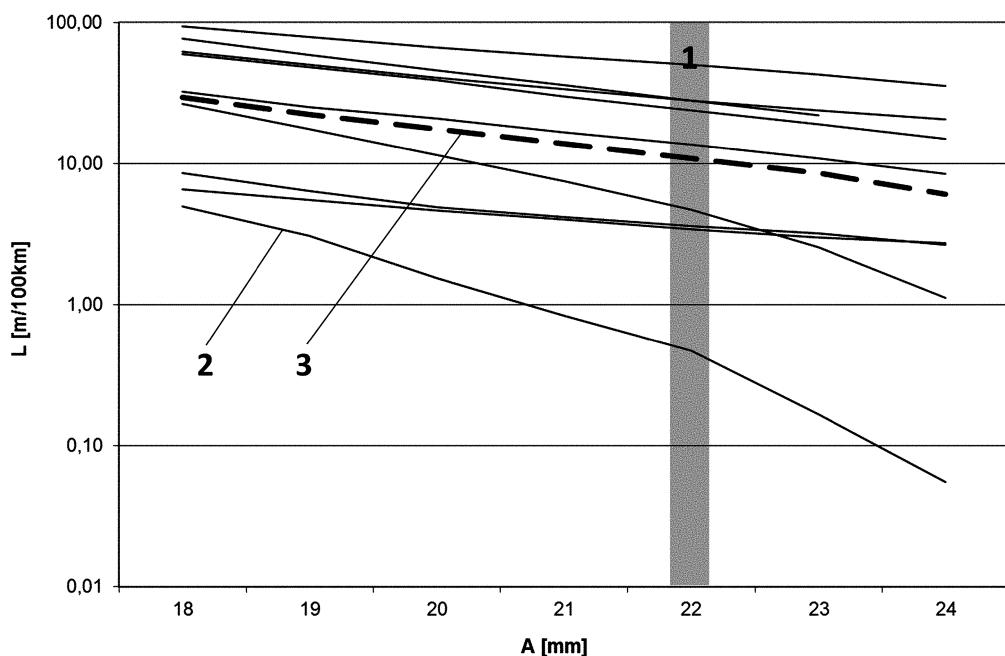


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.6 — Alignment *D1* with $V \leq 80 \text{ km/h}$ for participating networks

A.8 Results for alignment in *D1* with $80 \text{ km/h} < V \leq 120 \text{ km/h}$

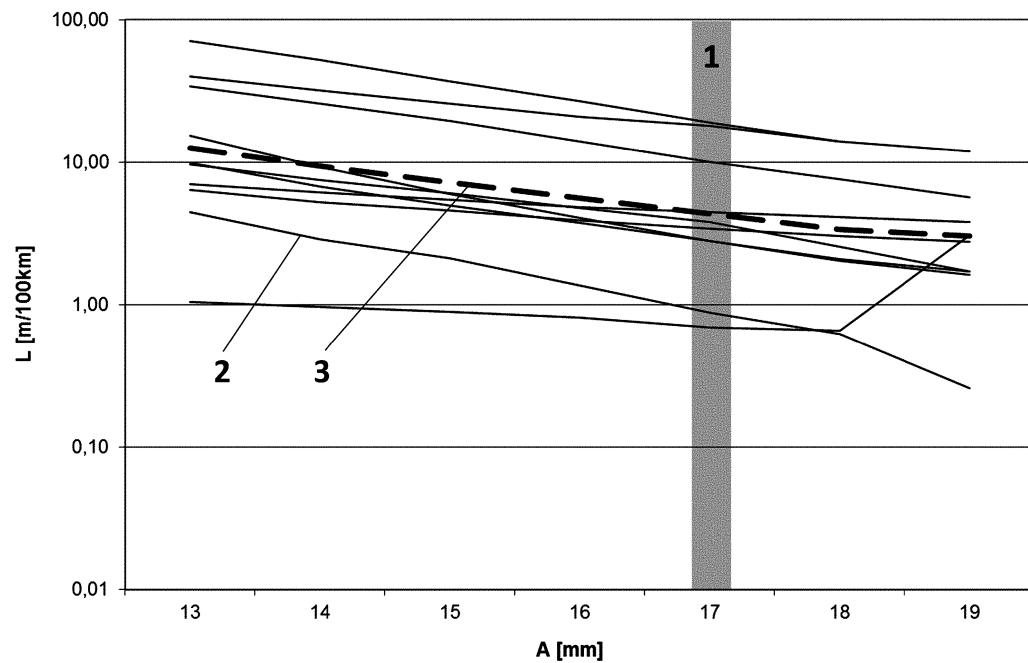


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.7 — Alignment *D1* with $80 \text{ km/h} < V \leq 120 \text{ km/h}$ for participating networks

A.9 Results for alignment in *D1* with $120 \text{ km/h} < V \leq 160 \text{ km/h}$

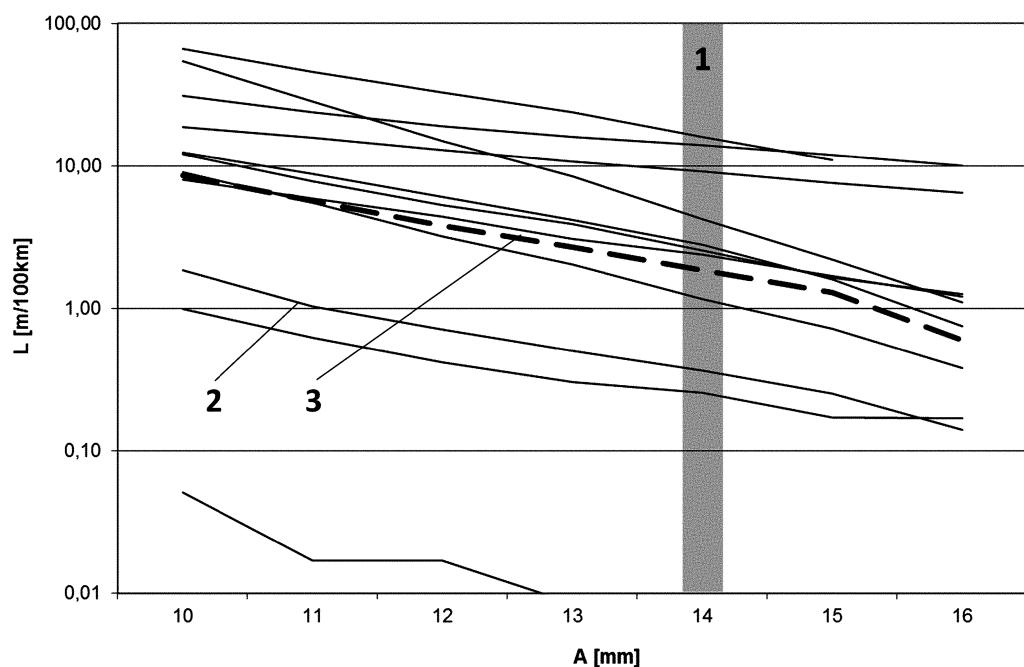


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.8 — Alignment *D1* with $120 \text{ km/h} < V \leq 160 \text{ km/h}$ for participating networks

A.10 Results for alignment in *D1* with $160 \text{ km/h} < V \leq 230 \text{ km/h}$

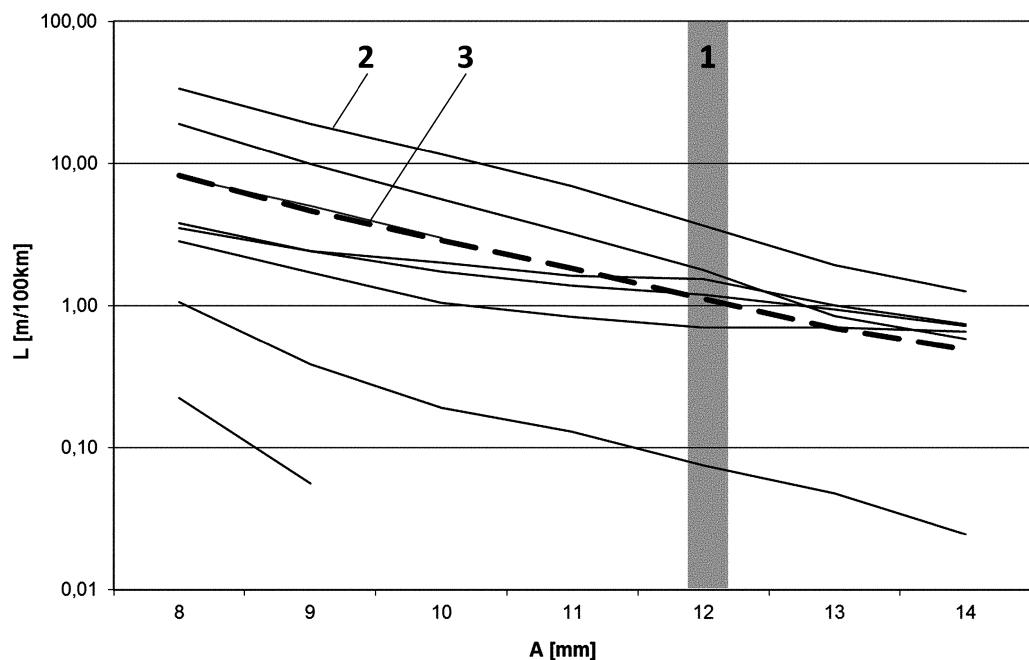


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.9 — Alignment *D1* with $160 \text{ km/h} < V \leq 230 \text{ km/h}$ for participating networks

A.11 Results for alignment in *D1* with $230 \text{ km/h} < V \leq 300 \text{ km/h}$

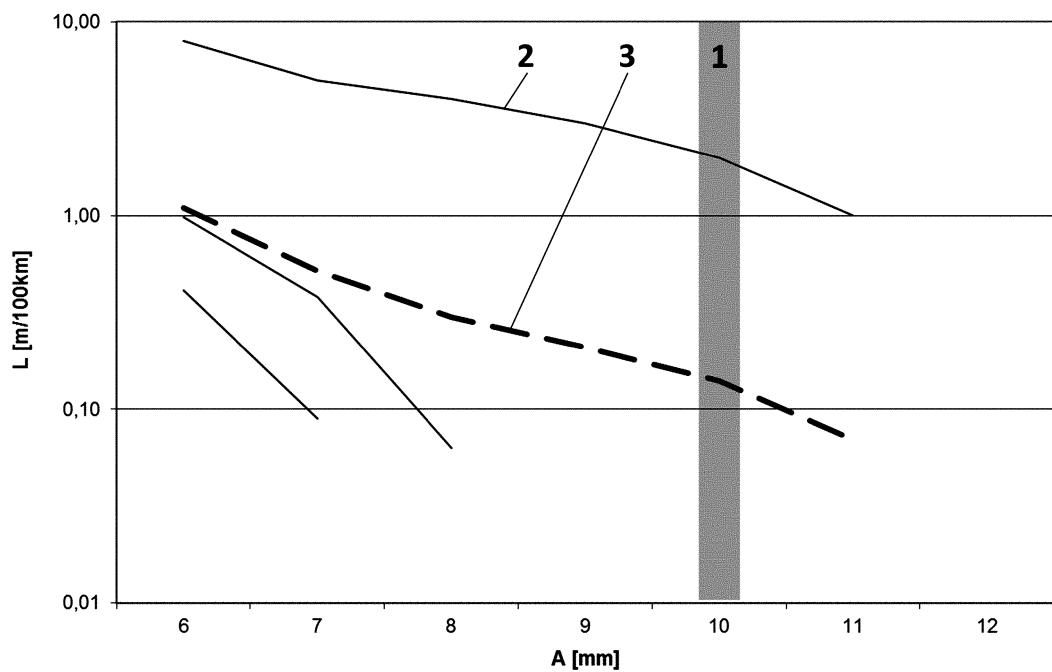


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.10 — Alignment *D1* with $230 \text{ km/h} < V \leq 300 \text{ km/h}$ for participating networks

A.12 Results for mean gauge over 100 m with $V \leq 80$ km/h

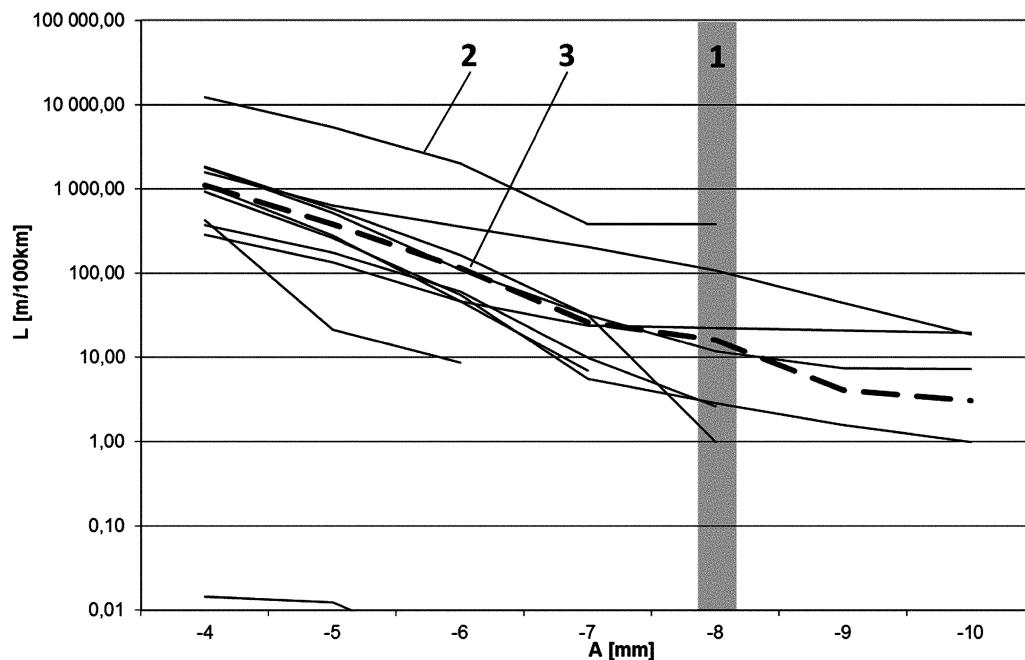


Key

- 1 IAL value
- 2 participating Network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.11 — Mean gauge over 100 m with $V \leq 80$ km/h for participating networks

A.13 Results for mean gauge over 100 m with $80 \text{ km/h} < V \leq 120 \text{ km/h}$

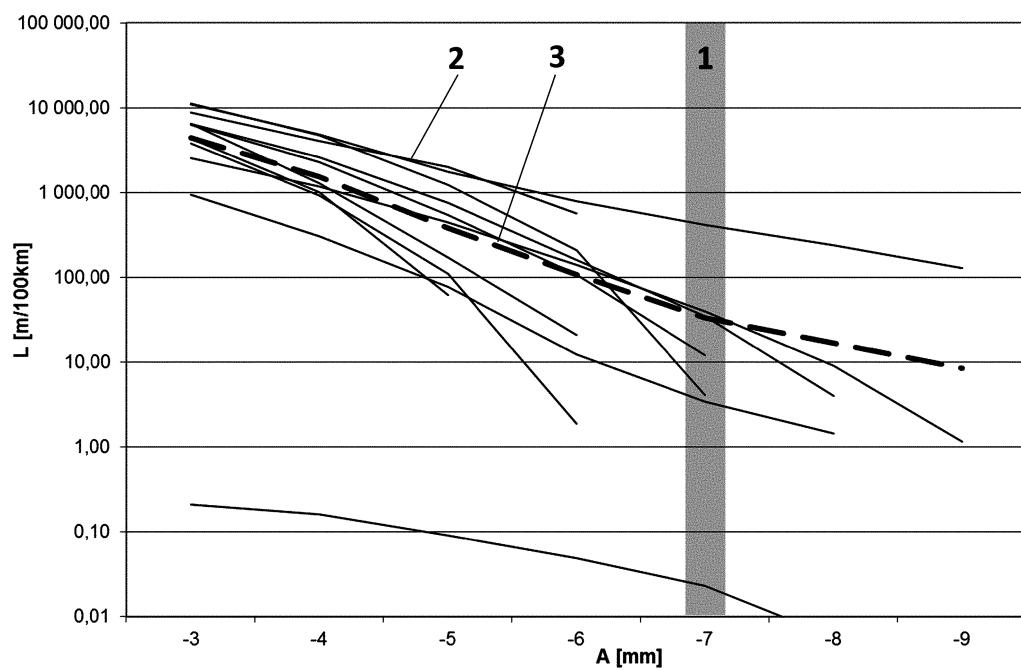


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.12 — Mean gauge over 100 m with $80 \text{ km/h} < V \leq 120 \text{ km/h}$ for participating networks

A.14 Results for mean gauge over 100 m with $120 \text{ km/h} < V \leq 160 \text{ km/h}$

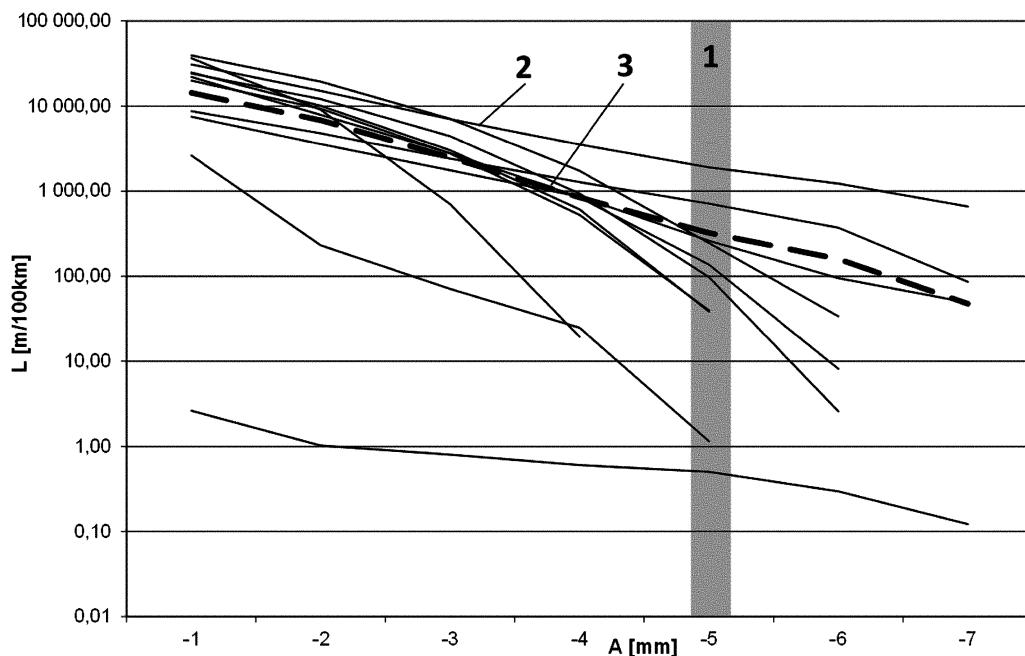


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.13 — Mean gauge over 100 m with $120 \text{ km/h} < V \leq 160 \text{ km/h}$ for participating networks

A.15 Results for mean gauge over 100 m with $160 \text{ km/h} < V \leq 230 \text{ km/h}$

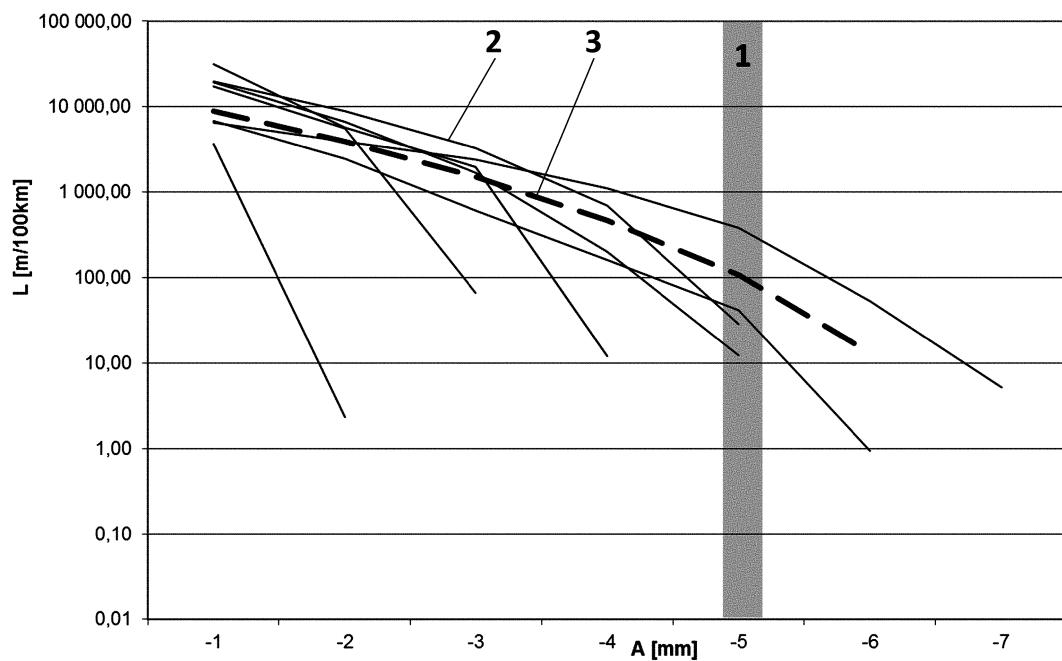


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.14 — Mean gauge over 100 m with $160 \text{ km/h} < V \leq 230 \text{ km/h}$ for participating networks

A.16 Results for mean gauge over 100 m with $230 \text{ km/h} < V \leq 300 \text{ km/h}$

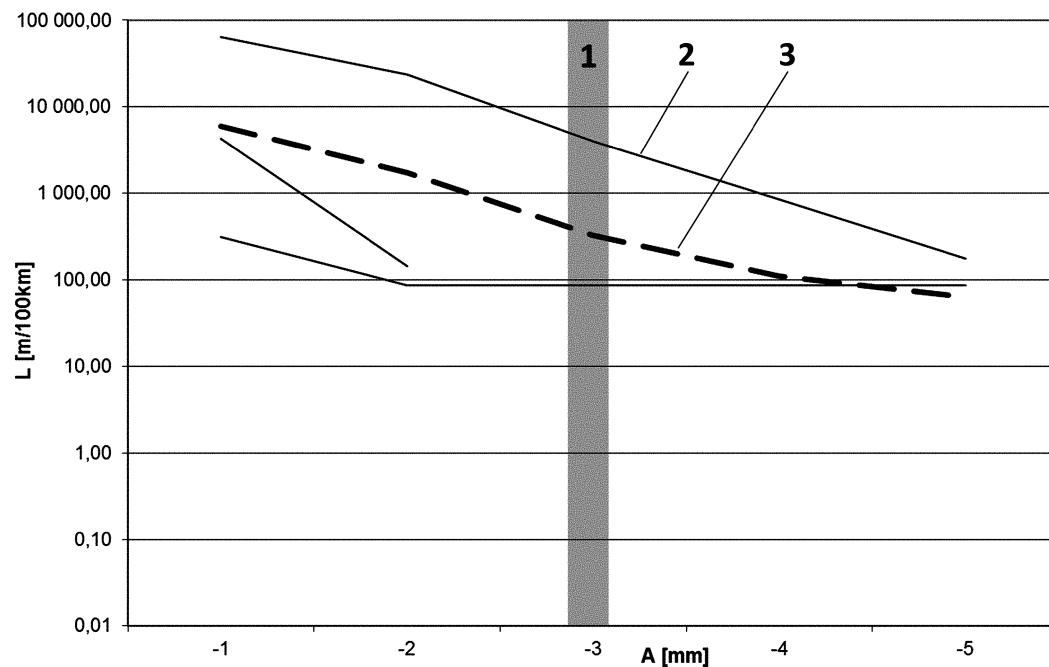


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.15 — Mean gauge over 100 m with $230 \text{ km/h} < V \leq 300 \text{ km/h}$ for participating networks

A.17 Results for twist on a base of 3 m with $V \leq 80$ km/h

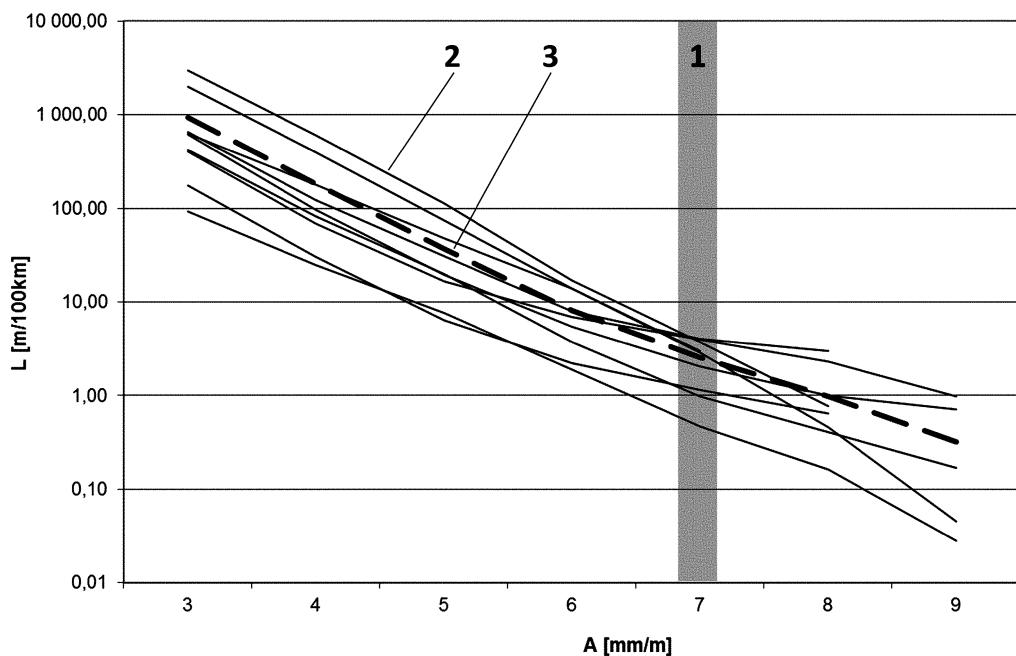


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.16 — Twist on a base of 3 m with $V \leq 80$ km/h for participating networks

A.18 Results for twist on a base of 3 m with $80 \text{ km/h} < V \leq 120 \text{ km/h}$

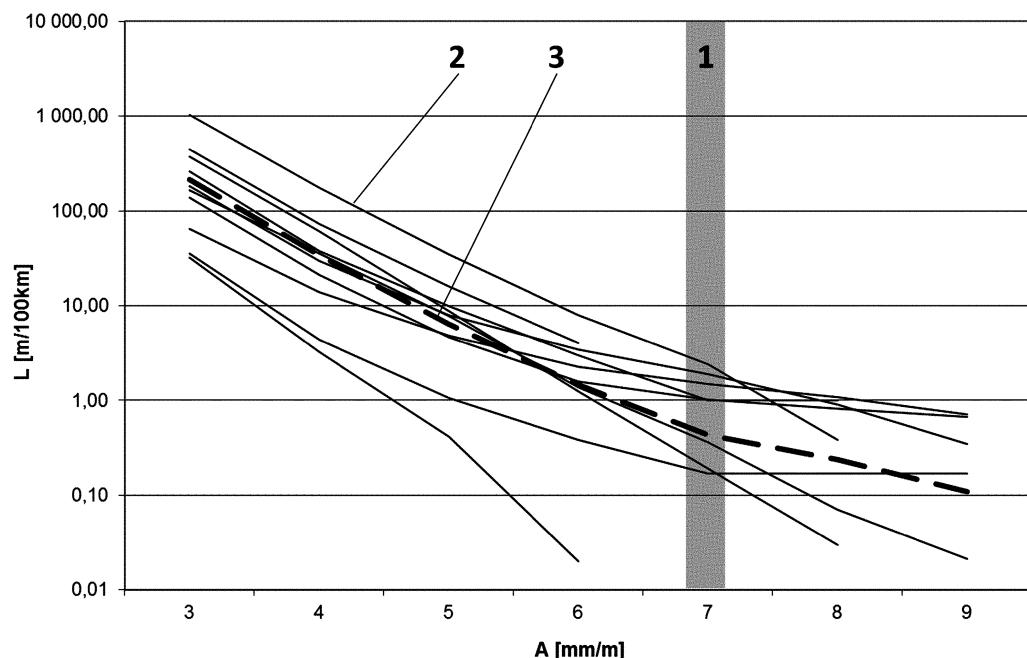


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.17 — Twist on a base of 3 m with $80 \text{ km/h} < V \leq 120 \text{ km/h}$ for participating networks

A.19 Results for twist on base of 3 m with $120 \text{ km/h} < V \leq 160 \text{ km/h}$

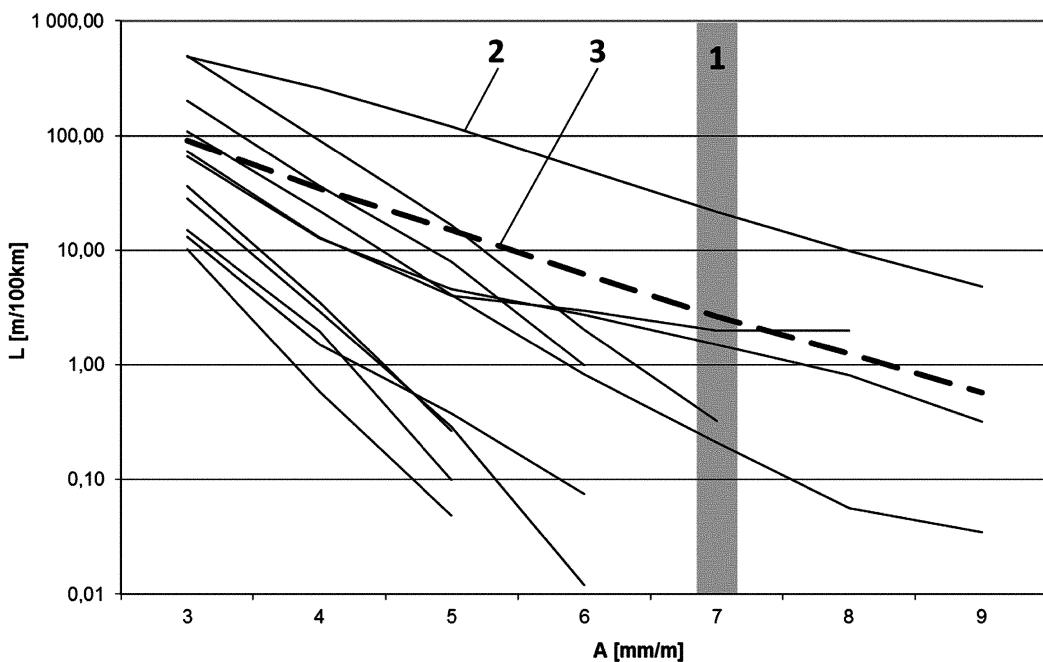


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.18 — Twist on a base of 3 m with $120 \text{ km/h} < V \leq 160 \text{ km/h}$ for participating networks

A.20 Results for twist on a base of 3 m with $160 \text{ km/h} < V \leq 230 \text{ km/h}$

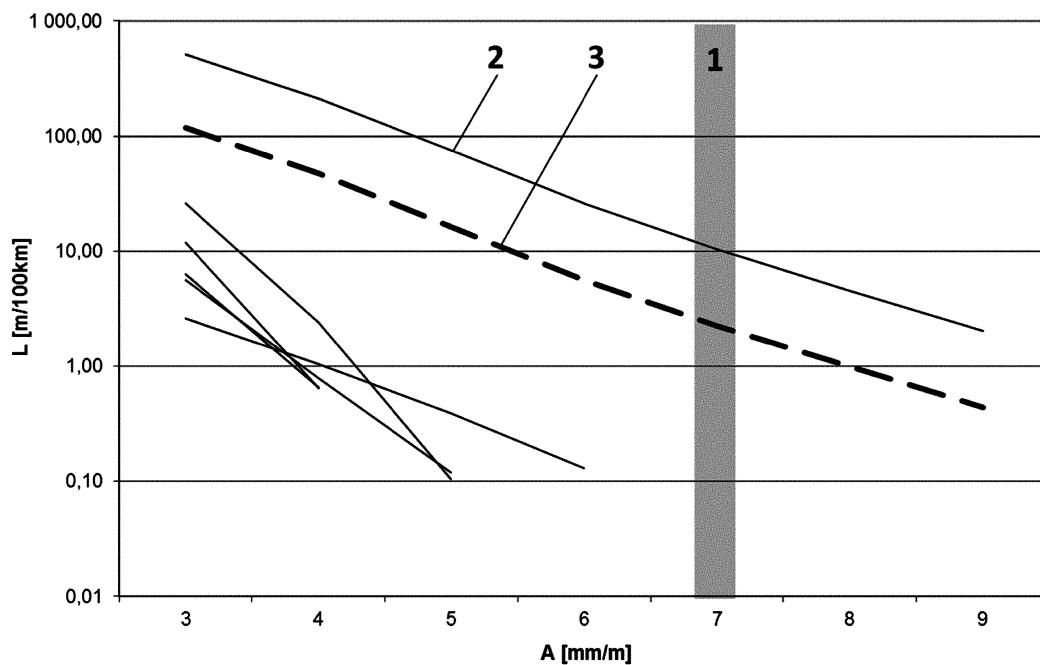


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.19 — Twist on a base of 3 m with $160 \text{ km/h} < V \leq 230 \text{ km/h}$ for participating networks

A.21 Results for twist on a base of 3 m with $230 \text{ km/h} < V \leq 300 \text{ km/h}$

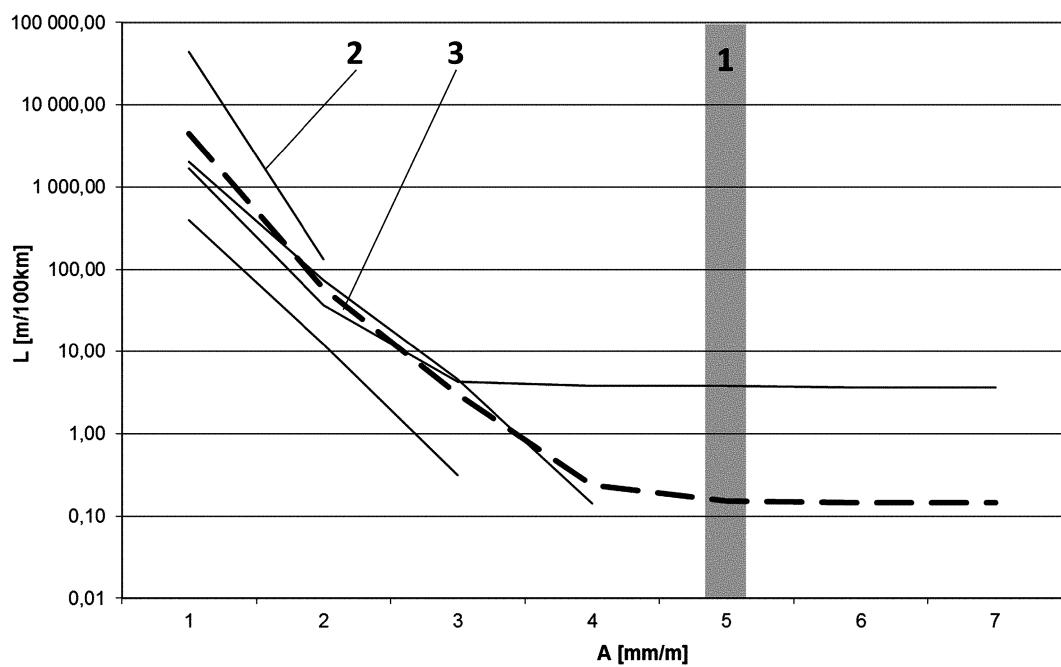


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.20 — Twist on a base of 3 m with $230 \text{ km/h} < V \leq 300 \text{ km/h}$ for participating networks

A.22 Results for narrow gauge $V \leq 80$ km/h

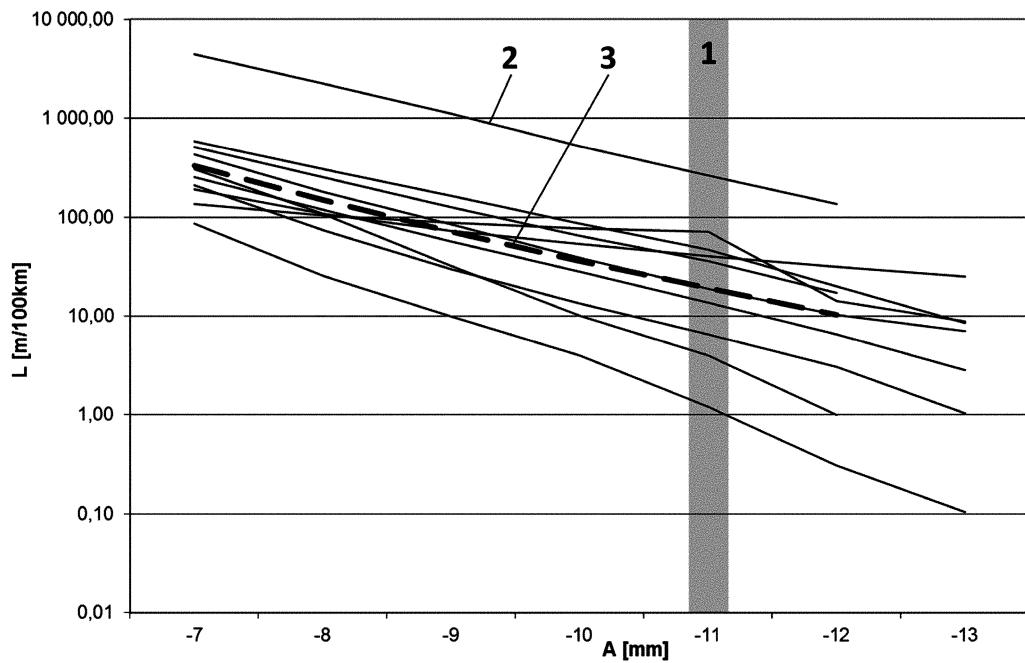


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.21 — Narrow gauge with $V \leq 80$ km/h for participating networks

A.23 Results for narrow gauge $80 \text{ km/h} < V \leq 120 \text{ km/h}$

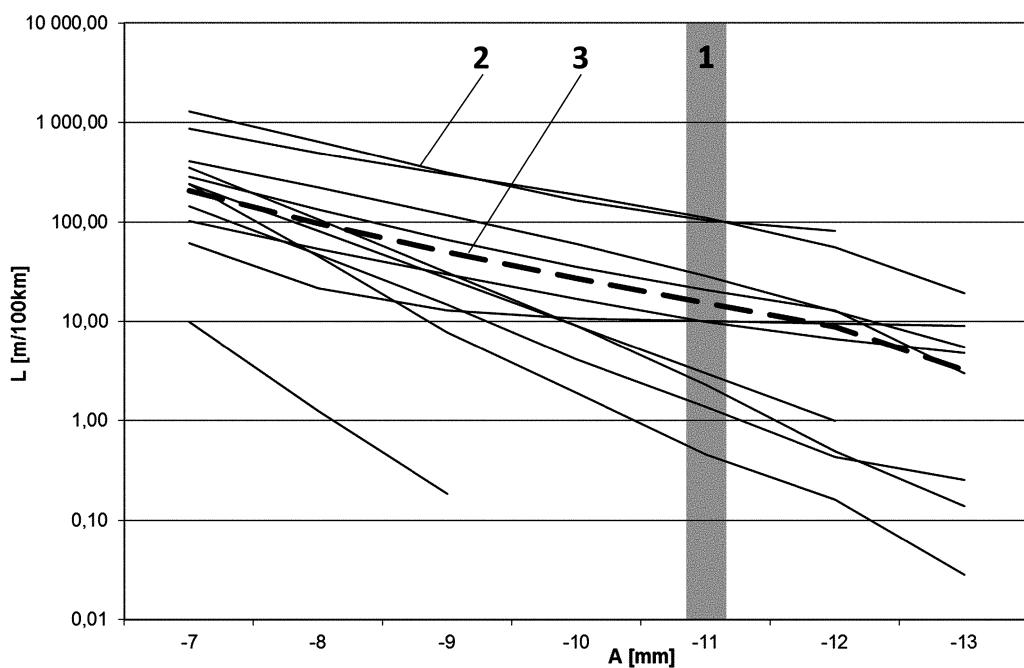


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.22 — Narrow gauge with $80 \text{ km/h} < V \leq 120 \text{ km/h}$ for participating networks

A.24 Results for narrow gauge $120 \text{ km/h} < V \leq 160 \text{ km/h}$

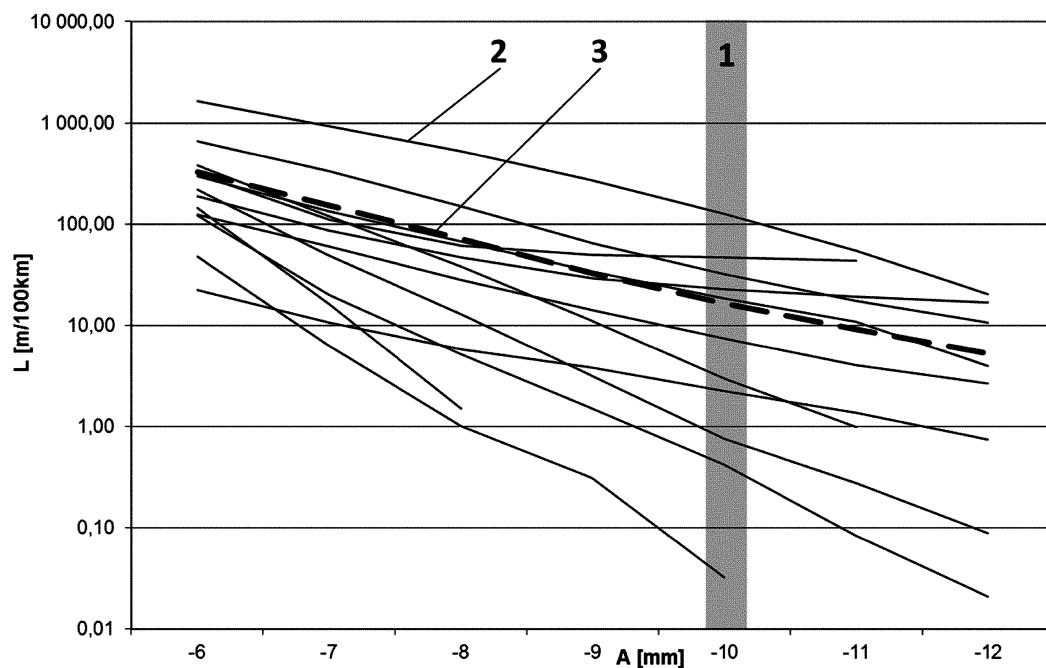


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.23 — Narrow gauge with $120 \text{ km/h} < V \leq 160 \text{ km/h}$ for participating networks

A.25 Results for narrow gauge $160 \text{ km/h} < V \leq 230 \text{ km/h}$

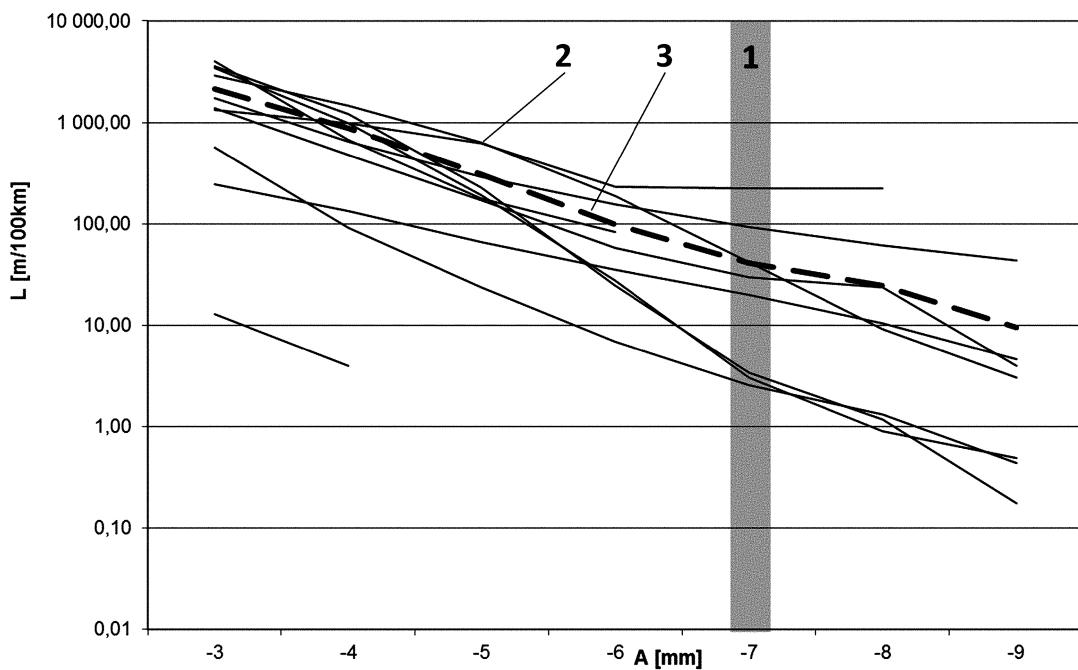


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.24 — Narrow gauge with $160 \text{ km/h} < V \leq 230 \text{ km/h}$ for participating networks

A.26 Results for narrow gauge $230 \text{ km/h} < V \leq 300 \text{ km/h}$

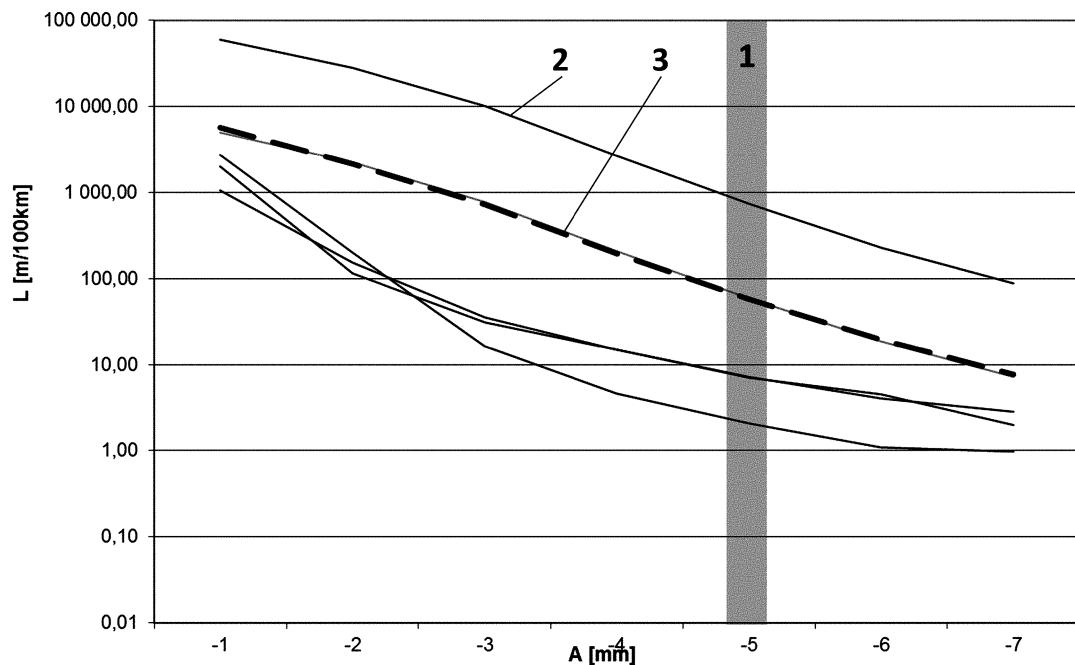


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.25 — Narrow gauge with $230 \text{ km/h} < V \leq 300 \text{ km/h}$ for participating networks

A.27 Results for wide gauge $V \leq 80 \text{ km/h}$

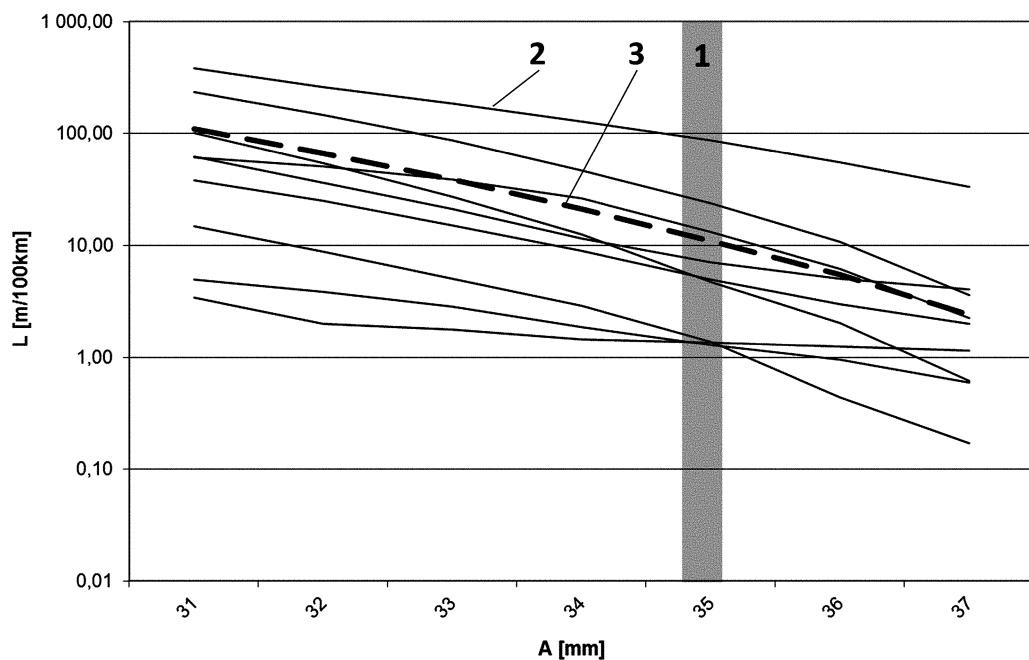


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.26 — Wide gauge with $V \leq 80 \text{ km/h}$ for participating networks

A.28 Results for wide gauge $80 \text{ km/h} < V \leq 120 \text{ km/h}$

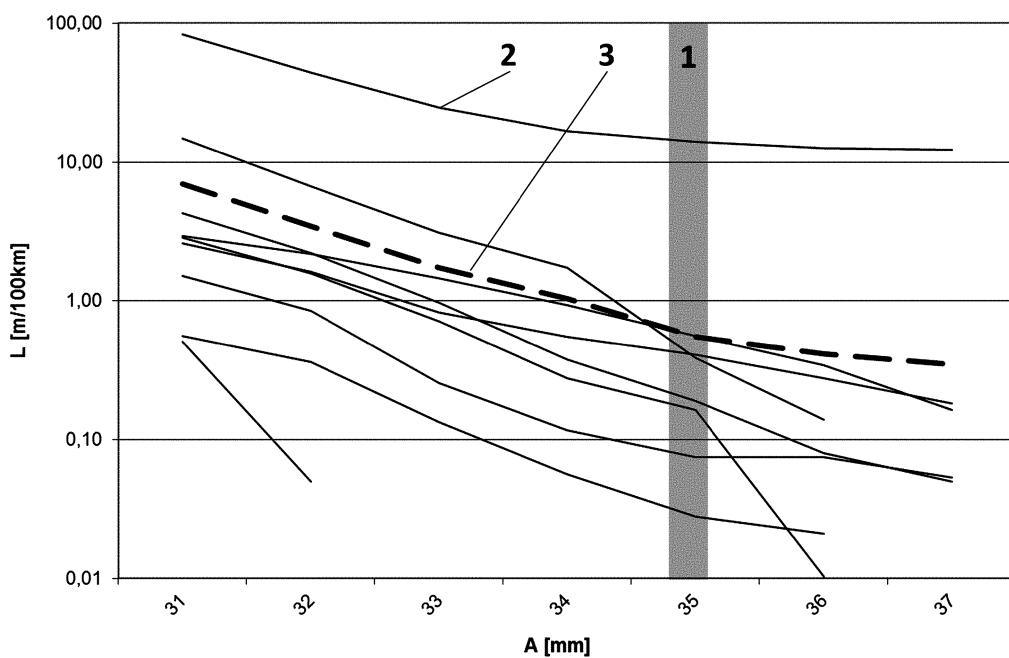


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.27 — Wide gauge with $80 \text{ km/h} < V \leq 120 \text{ km/h}$ for participating networks

A.29 Results for wide gauge $120 \text{ km/h} < V \leq 160 \text{ km/h}$

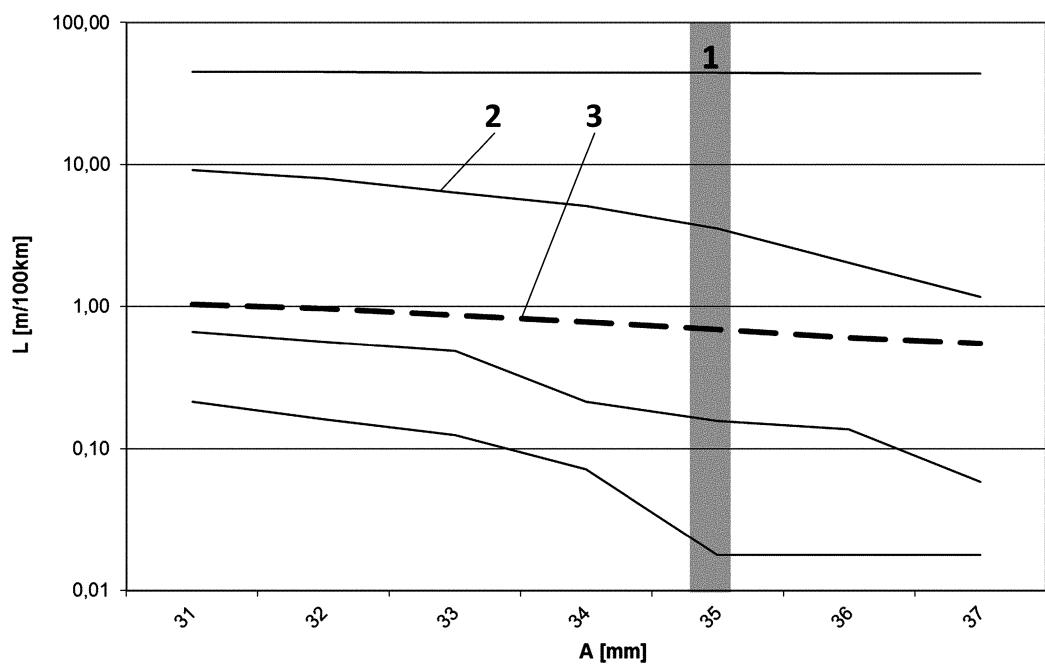


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.28 — Wide gauge with $120 \text{ km/h} < V \leq 160 \text{ km/h}$ for participating networks

A.30 Results for wide gauge $160 \text{ km/h} < V \leq 230 \text{ km/h}$

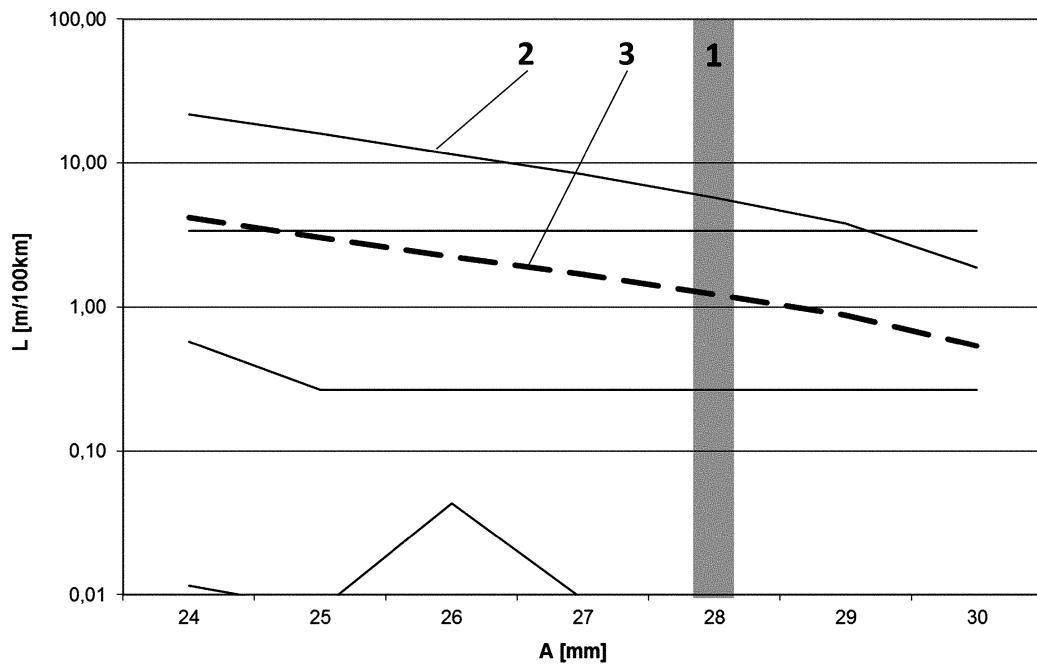


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.29 — Wide gauge with $160 \text{ km/h} < V \leq 230 \text{ km/h}$ for participating networks

A.31 Results for wide gauge $230 \text{ km/h} < V \leq 300 \text{ km/h}$

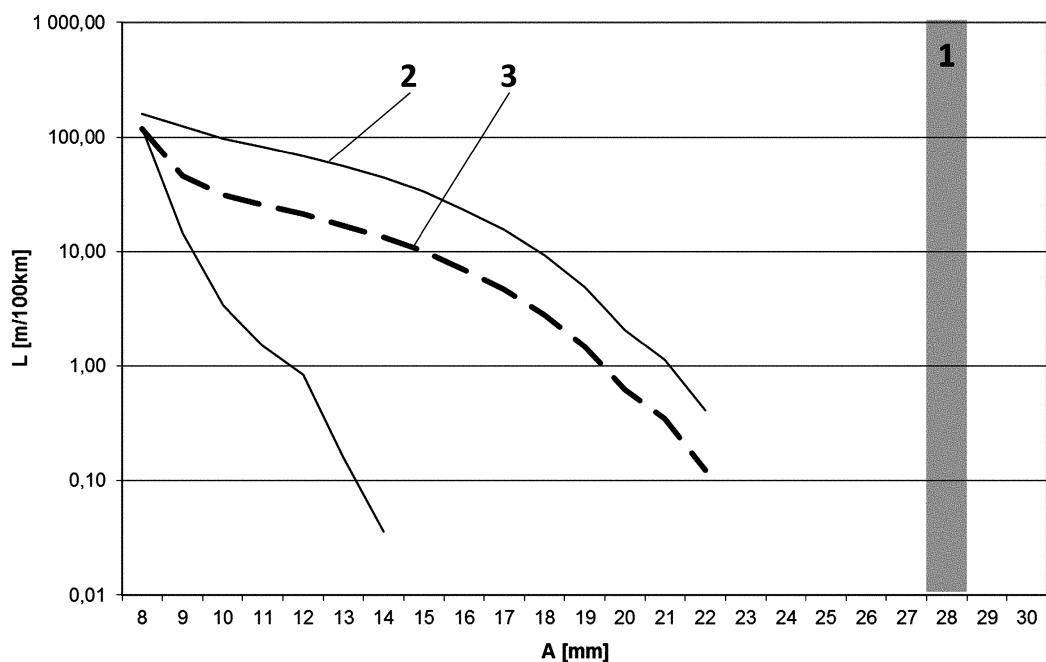


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.30 — Wide gauge with $230 \text{ km/h} < V \leq 300 \text{ km/h}$ for participating networks

A.32 Results for longitudinal level in domain D2 with $160 \text{ km/h} < V \leq 230 \text{ km/h}$

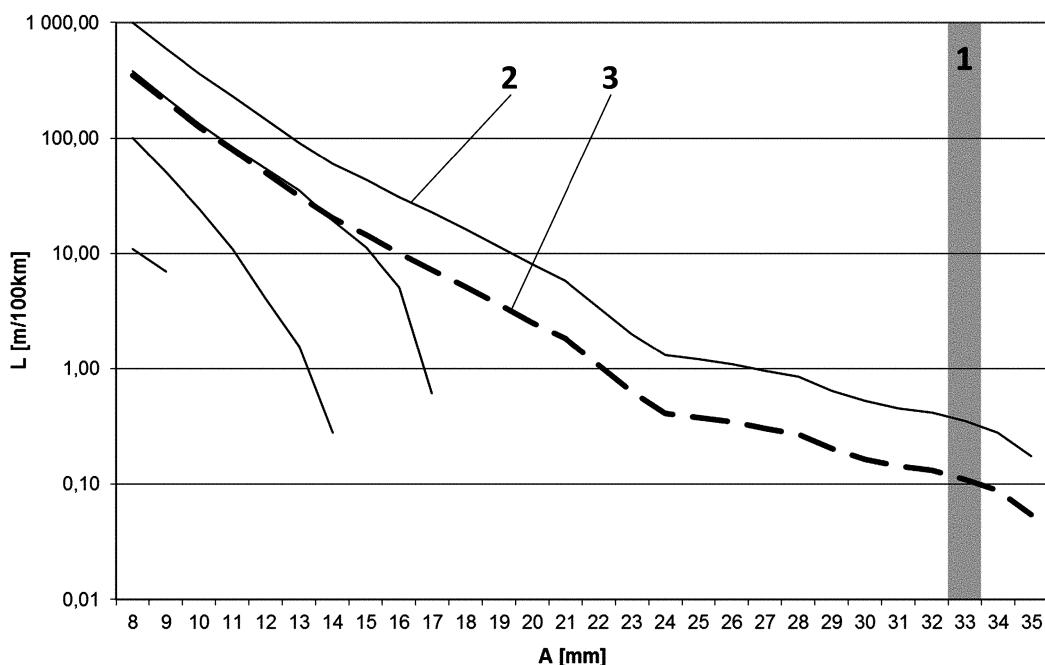


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.31 — Longitudinal level D2 with $160 \text{ km/h} < V \leq 230 \text{ km/h}$ for participating networks

A.33 Results for longitudinal level in domain D2 with $230 \text{ km/h} < V \leq 300 \text{ km/h}$

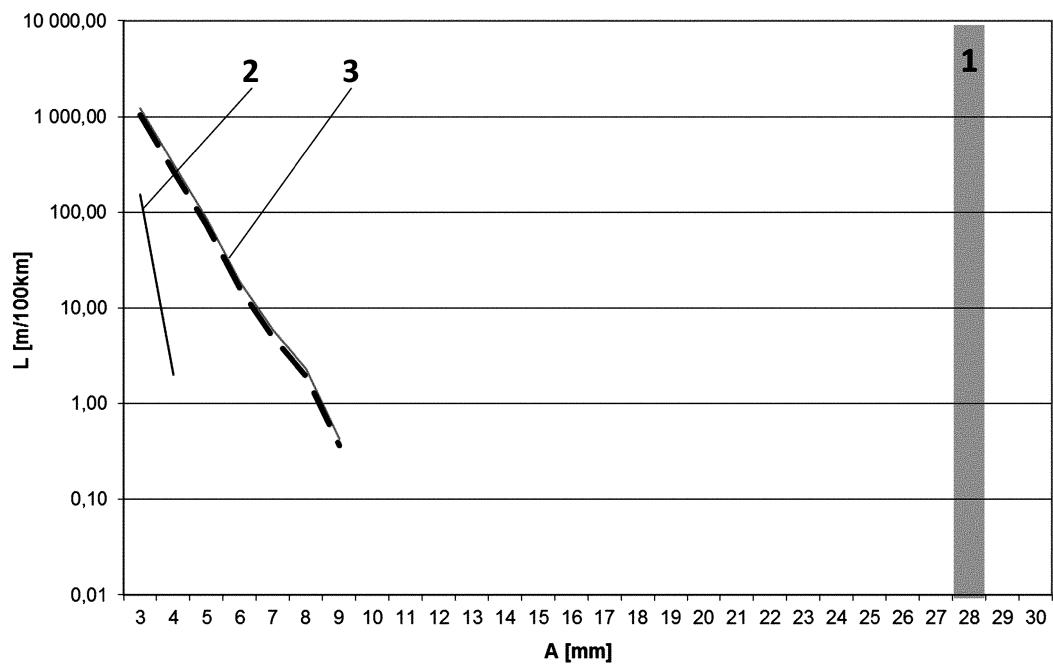


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

One or more Networks are not represented because of very small or zero values of the exceedance length.

Figure A.32 — Longitudinal level D2 with $230 \text{ km/h} < V \leq 300 \text{ km/h}$ for participating networks

A.34 Results for alignment in domain D2 with $160 \text{ km/h} < V \leq 230 \text{ km/h}$

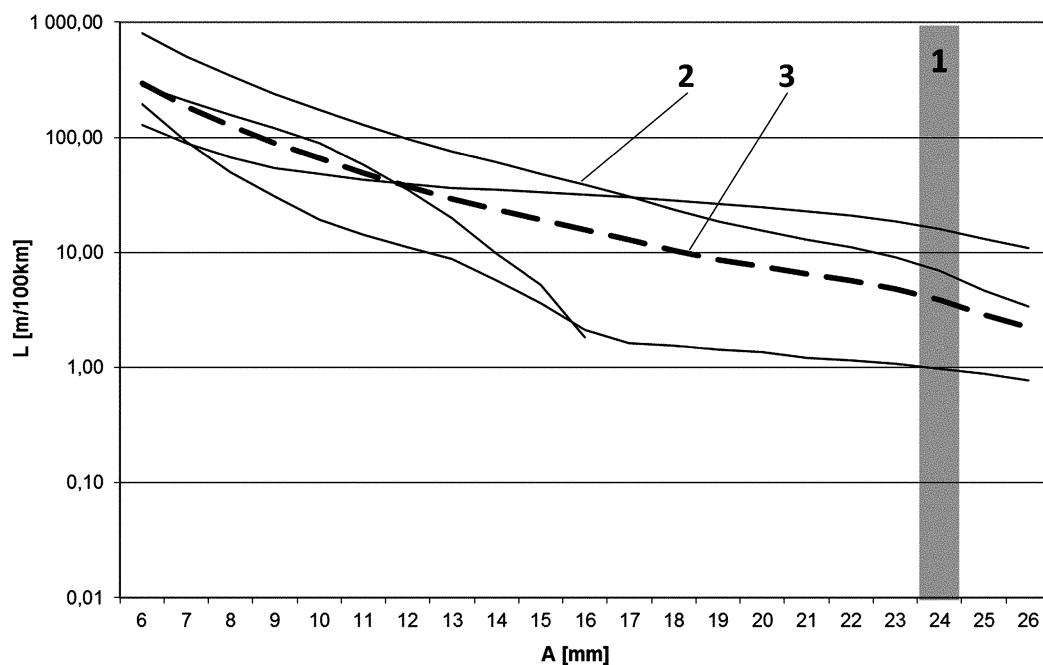


Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

Figure A.33 — Alignment D2 with $160 \text{ km/h} < V \leq 230 \text{ km/h}$ for participating networks

A.35 Results for alignment in domain D2 with $230 \text{ km/h} < V \leq 300 \text{ km/h}$

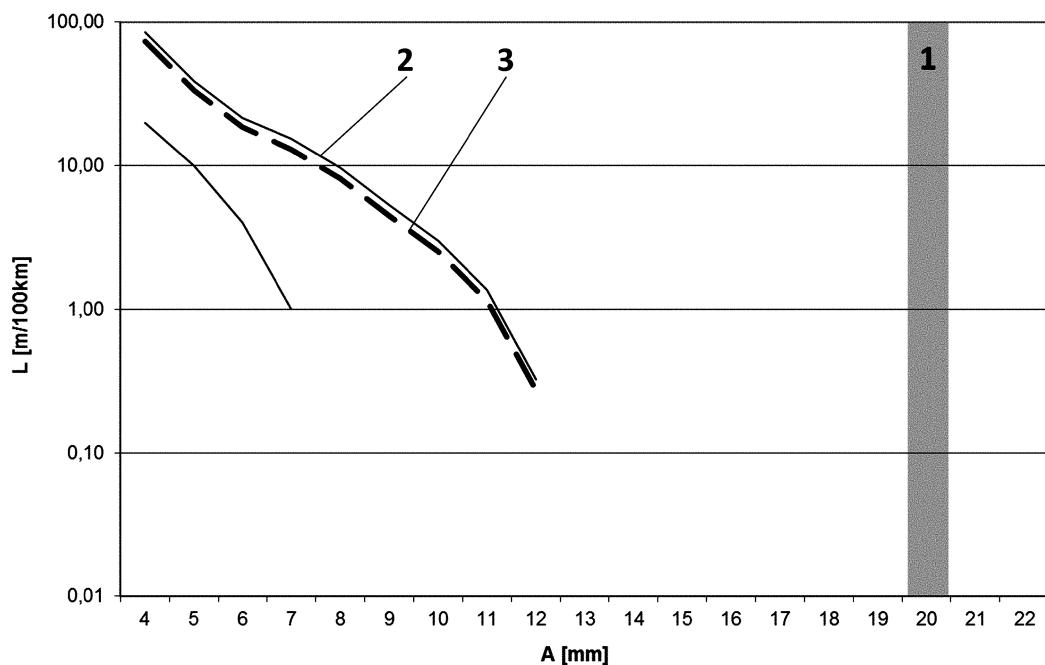

Key

- 1 IAL value
- 2 participating network
- 3 mean weighted value of participating networks
- A amplitude
- L length of exceedances

One or more Networks are not represented because of very small or zero values of the exceedance length.

Figure A.34 — Alignment D2 with $230 \text{ km/h} < V \leq 300 \text{ km/h}$ for participating networks

Bibliography

EN 13848 (all parts), *Railway applications — Track — Track geometry quality*

This page deliberately left blank

This page deliberately left blank

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Copyright in BSI publications

All the content in BSI publications, including British Standards, is the property of and copyrighted by BSI or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Save for the provisions below, you may not transfer, share or disseminate any portion of the standard to any other person. You may not adapt, distribute, commercially exploit, or publicly display the standard or any portion thereof in any manner whatsoever without BSI's prior written consent.

Storing and using standards

Standards purchased in soft copy format:

- A British Standard purchased in soft copy format is licensed to a sole named user for personal or internal company use only.
- The standard may be stored on more than 1 device provided that it is accessible by the sole named user only and that only 1 copy is accessed at any one time.
- A single paper copy may be printed for personal or internal company use only.

Standards purchased in hard copy format:

- A British Standard purchased in hard copy format is for personal or internal company use only.
- It may not be further reproduced – in any format – to create an additional copy. This includes scanning of the document.

If you need more than 1 copy of the document, or if you wish to share the document on an internal network, you can save money by choosing a subscription product (see 'Subscriptions').

Reproducing extracts

For permission to reproduce content from BSI publications contact the BSI Copyright & Licensing team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email subscriptions@bsigroup.com.

Rewrites

Our British Standards and other publications are updated by amendment or revision. We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Useful Contacts

Customer Services

Tel: +44 345 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 345 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK