

PD ISO/PAS 19295:2016



BSI Standards Publication

Electrically propelled road vehicles — Specification of voltage sub-classes for voltage class B

National foreword

This Published Document is the UK implementation of ISO/PAS 19295:2016.

The UK participation in its preparation was entrusted to Technical Committee PEL/69, Electric vehicles.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2016. Published by BSI Standards Limited 2016

ISBN 978 0 580 84773 8

ICS 43.120

Compliance with a British Standard cannot confer immunity from legal obligations.

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 April 2016.

Amendments issued since publication

Date	Text affected
------	---------------

**PUBLICLY
AVAILABLE
SPECIFICATION**

**ISO/PAS
19295**

First edition
2016-04-01

**Electrically propelled road vehicles —
Specification of voltage sub-classes for
voltage class B**

Véhicules routiers à propulsion électrique — Spécification de sous-classes de tension pour les tensions de classe B



Reference number
ISO/PAS 19295:2016(E)



COPYRIGHT PROTECTED DOCUMENT

© ISO 2016, Published in Switzerland

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office
Ch. de Blandonnet 8 • CP 401
CH-1214 Vernier, Geneva, Switzerland
Tel. +41 22 749 01 11
Fax +41 22 749 09 47
copyright@iso.org
www.iso.org

Contents

Page

Foreword	iv
Introduction	v
1 Scope	1
2 Terms and definitions	1
3 Voltage sub-classes	2
4 Characteristics of voltage sub-classes	3
4.1 General.....	3
4.2 Component operating status.....	3
4.3 Voltage operating ranges.....	4
4.4 Under- and overvoltage.....	5
4.4.1 General.....	5
4.4.2 Overvoltage.....	5
4.4.3 Undervoltage.....	6
4.5 Allocation of voltage ranges and operation status — Overview.....	6
4.6 Voltage transients and ripple.....	7
4.6.1 General.....	7
4.6.2 Voltage slope.....	7
4.6.3 Voltage ripple.....	8
4.6.4 Load dump.....	10
Annex A (informative) Example for voltage ranges per voltage sub-class	11

Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see www.iso.org/directives).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see www.iso.org/patents).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: [Foreword - Supplementary information](#)

The committee responsible for this document is ISO/TC 22, *Road vehicles*, Subcommittee SC 37, *Electrically propelled vehicles*.

Introduction

Electric systems operating at voltage class B are efficient systems for electrically propelled road vehicles. The requirements for voltage class B electric circuits that are used for electric power transfer for the propulsion of electric road vehicles are significantly different to those of voltage class A electric circuits used for power grids at, for example, 12 V d.c. or 24 V d.c.

This PAS provides definition of voltage sub-classes for rechargeable energy storage system (RESS) and electric propulsion system and lists up specified values based on maximum working voltage. Voltage sub-classes listed in this PAS are used for voltage class B systems of all kinds of current or future electrically propelled road vehicles. It enables vehicles manufacturers and automotive supply industry to evaluate the characteristics of a component according to the specified sub-class.

The voltage sub-class itself and the component characteristics have large cost impact on the component design and the overall design of the electric system. A high variety of different voltage sub-class and operating conditions hinders the use of an existing component in different vehicle models.

Today, a huge variety of different RESS and electric propulsion system maximum working voltages are used for electrically propelled road vehicles on the market. Because some systems use voltage boost converters, maximum working voltage of electric propulsion system can be different from that of RESS. This variety of maximum working voltages often results from different numbers of cells in the design of the electrical energy source, e.g. battery stack or variety of power requirement by each vehicle. As a consequence, many system or component designs of a voltage class B electric circuit are currently related to one specific working voltage. When a maximum working voltage is selected for the design, often only one supplier for a component is available. Hence, a change to another component supplier or a change of the dedicated maximum working voltage is not possible, when the system design is finished. It is necessary to reduce the variety of maximum working voltages in order to

- lower the component and system costs by limiting the variety of maximum working voltages,
- decouple the system or component designs of a voltage class B electric circuit from the design of the electric energy source,
- enable an exchange of components from different suppliers during and after the system development and to enable competition and access to the worldwide market for component suppliers, and
- support the system design by specifying basic voltage sub-classes for automotive propulsion systems within voltage class B.

This PAS lists only those RESS and electric propulsion system voltage sub-classes which are used or will be used in current or planned vehicle models and for which electronic parts, e.g. semiconductor switches, are currently available without any restrictions on the market.

The range of voltage class B is too wide to be used for a component design referring to voltage. Therefore, this PAS divides voltage class B in a set of voltages sub-classes, which enable a component design referring to voltage for each voltage sub-class.

This specification is not intended to restrict the development of component performance or technology. It does not exclude the use of other maximum operating voltages for an individual system design.

Electrically propelled road vehicles — Specification of voltage sub-classes for voltage class B

1 Scope

This PAS provides specification of voltage sub-classes for electric propulsion systems and conductively connected auxiliary electric systems of electrically propelled road vehicles.

The voltage sub-classes are related to d.c. electric circuits.

It applies only to electric circuits and components with maximum working voltages according to voltage class B.

This PAS provides specifications of characteristics which are relevant for design and operation of components and systems for the standardized voltage sub-classes.

It enables vehicle manufacturers and supply industry to evaluate the characteristics of components or systems for their specific vehicle applications.

2 Terms and definitions

For the purposes of this document, the following terms and definitions apply.

2.1

component operating status

describes the general functional behaviour of components which depend directly on the voltage in voltage class B electric circuits

2.2

customer

party that is interested in using voltage class B component or system

2.3

DUT

device under test

2.4

electric circuit

entire set of interconnected live parts through which electrical current is designed to flow under normal operating conditions

2.5

electric propulsion system maximum working voltage

highest value of d.c. voltage that can occur in an electric propulsion system under any normal operating conditions according to the customer's specifications, disregarding transients

2.6

maximum working voltage

highest value of a.c. voltage (rms) or of d.c. voltage that can occur in an electric system under any normal operating condition according to the customer's specifications, disregarding transients

Note 1 to entry: In this definition taken from ISO 6469-3, transients include ripple.

2.7
rechargeable energy storage system
RESS

system that stores energy for delivery of electric power and which is rechargeable

EXAMPLE Batteries, capacitors, etc.

2.8
ripple

set of unwanted periodic deviations with respect to the average value of the measured or supplied quantity, occurring at frequencies which can be related to that of components within a system

2.9
supplier

party that provides voltage class B component or system

2.10
transient

pertaining to or designating a phenomenon or a quantity which varies between two consecutive steady states during a time interval short compared with the time-scale of interest

2.11
voltage class B

classification of an electric component or circuit with a maximum working voltage between 30 V a.c. (rms) and 1 000 V a.c. (rms) or between 60 V d.c. and 1 500 V d.c.

Note 1 to entry: Values for voltage class B are taken from ISO 6469-3.

2.12
upper voltage limit

maximum voltage of a voltage class B sub-class

Note 1 to entry: Maximum working voltages within a voltage sub-class are less than or equal to the voltage limit.

2.13
voltage range

general term covering voltage sub-class, working voltages and deviations from working voltages

2.14
voltage sub-class

classification of an electric component or circuit with a d.c. voltage within the voltage class B

2.15
working voltage

a.c. voltage (rms) or d.c. voltage that can occur in an electric system under normal operating conditions according to the customer's specifications, disregarding transients

3 Voltage sub-classes

The specifications and requirements on voltage sub-classes shall apply to electric circuits, systems and components at voltage class B.

The specifications and descriptions of voltages for a component shall apply to the voltage at its terminals to the voltage class B electric circuit, if not otherwise stated in this International Standard.

The voltage sub-classes shown in [Table 1](#) are based on the specification of an upper voltage limit for each voltage sub-class.

Table 1 — Voltage sub-classes

Voltage sub-class	Upper voltage limit V d.c.
B_220	$U \leq 220$
B_420	$U \leq 420$
B_470	$U \leq 470^a$
B_750	$U \leq 750^b$
B_850	$U \leq 850$
B_1250	$U \leq 1\,250^c$
<p>^a B_470 is considering 700 V breakdown voltage for IGBT and dedicated module technology (Table A.2).</p> <p>^b B_750 is related to a voltage classification of 750 V d.c. given by regulation in Japan.</p> <p>^c B_1250 is considering the limit of 1 000 V a.c. for voltage class B.</p>	

4 Characteristics of voltage sub-classes

4.1 General

The specifications and characteristics for voltage sub-classes include the following subjects:

- component operating status;
- voltage operating ranges;
- under- and overvoltages;
- voltage transients and ripple for components.

The voltage ranges and operating status shall apply to all components for the selected voltage sub-class. The voltage sub-class depends on a vehicle project and shall be selected by an agreement between customer and supplier.

The requirements in accordance with [Table 1](#) shall apply to a RESS when it is disconnected from the voltage class B electric circuit.

Different requirements may be specified by the customer for a RESS when it is connected to the voltage class B electric circuit because the voltage of RESS is limited to the maximum working voltage of the vehicle project and given by the number of battery cells.

For each voltage sub-class, the corresponding working voltages, component operating status, overvoltage and under-voltage are described as follows.

4.2 Component operating status

The operating status is introduced to describe the general operating behaviour of components that depends directly on the voltage at the terminals of a component of the voltage class B electric circuit and is mainly focused on performance and electrical power.

In every operating status, the components shall fulfil the following requirements:

- it shall be ready to operate;
- it shall not enter any undefined states;
- it shall not cause any failure in other components.

The different operating statuses are described in [Table 2](#).

Table 2 — Component operating status

Operating status	Operating status description
OS1	<p>The component shall provide the specified full performance (reduction of performance not allowed).</p> <p>The component shall automatically change its operating status depending on the voltage relevant for the operating status.</p>
OS2	<p>The component shall provide the specified reduced performance within its permissible deviations (reduction of performance allowed).</p> <p>The component shall automatically change its operating status depending on the voltage relevant for the operating status.</p>
OS3	<p>The component may derate or cut-off its performance for self-protection purpose.</p> <p>The component shall automatically change its operating status depending on the voltage relevant for the operating status.</p>
OS4	<p>The component may cut-off its performance.</p> <p>Triggered by a reset or an external event (e.g. change of ignition status, restart vehicle), the component shall change its operating status depending on the voltage relevant for the operating status.</p>

The specified operating statuses in [Table 2](#) are valid exclusively for functions that depend directly on the voltage in voltage class B electric circuits.

Detailed requirements for an operating status for individual voltage class B components shall be based on an agreement between customer and supplier.

4.3 Voltage operating ranges

For further description of characteristics of a voltage sub-class, different voltage operating ranges are introduced as follows:

- upper limited operating capability;
- unlimited operating capability;
- lower limited operating capability.

[Figure 1](#) shows an overview on the voltage operating ranges of a voltage sub-class.

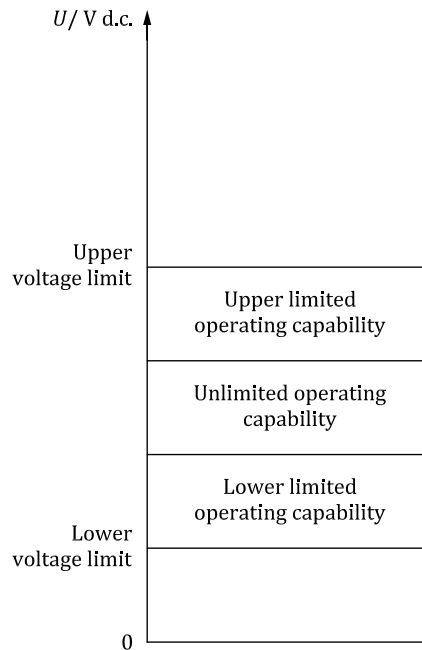


Figure 1 — Overview on voltage operating ranges at a voltage sub-class

The specific values for voltage operating ranges (upper limited, unlimited and lower limited operating capability) are specified by the customer for a vehicle project.

The characteristics of a component in the different voltage operating ranges are specified by the allocation of operating statuses to the voltage operating ranges as described in 4.5.

4.4 Under- and overvoltage

4.4.1 General

Voltage deviations are deviations from normal system operation. These deviations can occur intentionally (e.g. as a consequence of a system or component reaction) or may be caused by a fault.

Voltage deviations as follows are considered:

- overvoltage;
- undervoltage.

4.4.2 Overvoltage

The overvoltage range is the range between

- upper voltage limit, and
- overvoltage limit (see Figure 2).

The overvoltage limit is the maximum voltage that can occur under abnormal operating conditions. The overvoltage limit is the maximum voltage a component shall withstand without impact on its specified service life. Within the overvoltage range, the operating status OS3 or OS4 according to Table 2 shall be fulfilled.

When the voltage exceeds the overvoltage limit temporarily or continuously, a severe fault, e.g. breakdown of a component, may occur.

4.4.3 Undervoltage

The undervoltage range is the range between

- 0 V d.c., and
- the lower voltage limit (see [Figure 2](#)).

The lower voltage limit is the lowest voltage for which a component shall fulfil OS2 or OS1.

Within the undervoltage range, the operating status OS3 or OS4 according to [Table 2](#) shall be fulfilled.

4.5 Allocation of voltage ranges and operation status — Overview

[Figure 2](#) shows the allocation of a component operating status to the voltage operating ranges of a voltage sub-class.

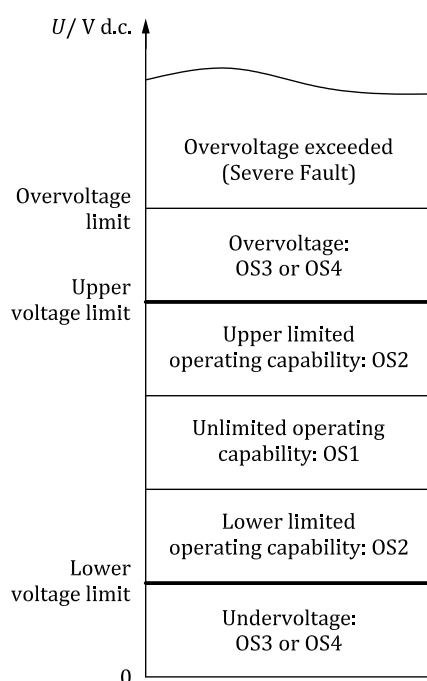


Figure 2 — Component operating status at a voltage sub-class

NOTE An example for voltage operating ranges of voltage sub-class B_220 is given in [Table A1](#).

A dedicated voltage sub-class can be used for different vehicle projects. Within this sub-class, different values for operating ranges and minimum and maximum working voltages can be used.

The maximum working voltage for the vehicle project shall be less or equal than the upper voltage limit of this voltage sub-class.

The minimum working voltage is the lowest voltage that can occur under normal operating conditions for a vehicle project. The minimum working voltage for a project shall be higher than or equal to the lower voltage limit of the components.

A component developed for a dedicated voltage sub-class can be used for different vehicle projects which are using different voltage ranges within this voltage sub-class.

[Figure 3](#) shows how a sub-class B_x component can be used for different vehicle projects with different working voltages.

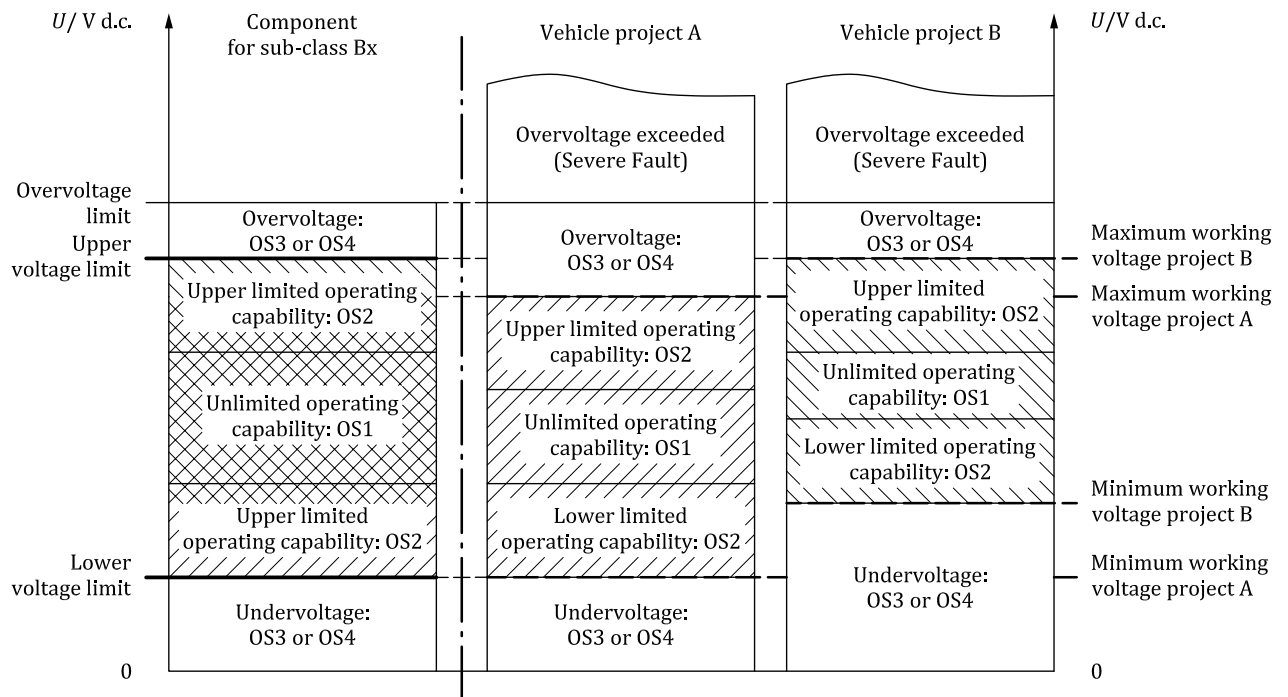


Figure 3 — Use of a component for sub class B_x for different vehicle projects — Example

4.6 Voltage transients and ripple

4.6.1 General

Voltage transients can occur due to switching on or off of electrical loads, rapid load changes and electric load unbalance. Ripple is caused by switching of semiconductors. For this International Standard, only those transients are considered, which have an effect on the voltage at the terminals of a component to the voltage class B electric circuit. In Table 3, an overview is given on characteristics for transients and ripple, which are considered in this International Standard.

Table 3 — Overview on voltage transients and ripple

Parameter	Unit
Generated voltage transient (slope, ΔV)	V/ms; V
Present voltage transient (slope, ΔV)	V/ms; V
Generated voltage ripple (V pp)	V
Present voltage ripple (V pp)	V
Load dump transient (slope, V peak)	V/ms; V

In the following, it is assumed that the system is operated with an RESS (RESS switched on). If it is intended to run a component in a system without RESS (RESS switched off), different values for requirements on voltage dynamics need to be considered.

4.6.2 Voltage slope

A voltage slope is a singular dynamic change of the working voltage expressed in voltage difference over time. It does not occur periodically or continuously. It is typically due to a change of power demand or caused by the unbalance between input and output power and is mostly associated to a component action (e.g. control loop regulation by software).

Generated voltage transient (slope)

Every component that is controlled by power electronics shall limit the change of the d.c. circuit voltage across time according to the specified maximum generated voltage transient (slope).

Maximum value for generated voltage transient shall be agreed between customer and supplier.

Present voltage transient (slope)

In the event of a change over time of the d.c. circuit voltage according to the specified maximum present voltage transient (slope), the component shall fulfil the conditions according to the corresponding operating status.

Maximum value for present voltage transient shall be agreed between customer and supplier.

4.6.3 Voltage ripple

Voltage ripple is an overlay of an a.c. voltage on the d.c. voltage. This overlay is caused by switching of semiconductor switches inside components. The ripple is specified by its peak to peak voltage and a frequency range. It occurs quasi-periodically or continuously.

A component shall not change its operating status due to the specified voltage ripple.

An example for a voltage ripple is given in [Figure 4](#).

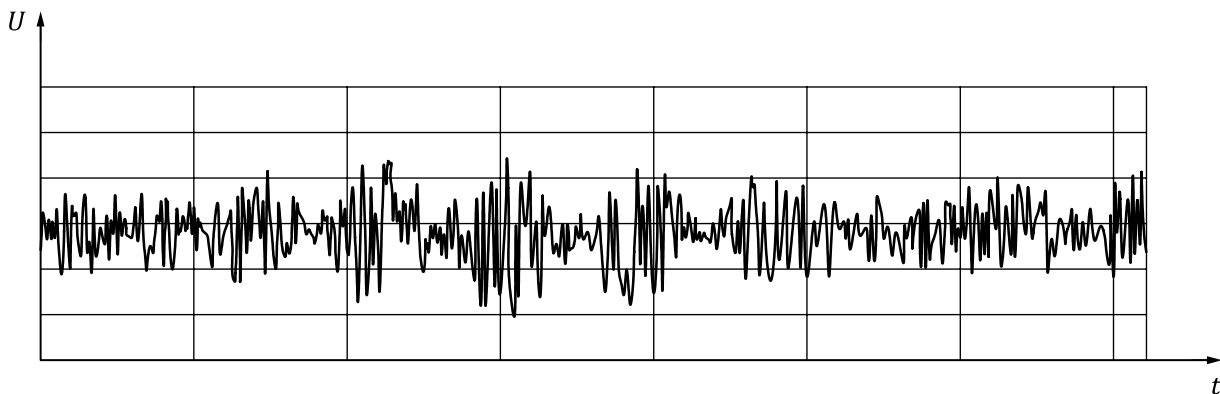



Figure 4 — Example for voltage ripple

Generated voltage ripple

In general, the generated voltage ripple in the d.c. circuit should be optimized.

Every component controlled by power electronics shall limit its generated voltage ripple (amplitude and frequency range) to the values agreed between customer and supplier.

An example for a test setup for measuring a generated voltage ripple is given in [Figure 5](#).

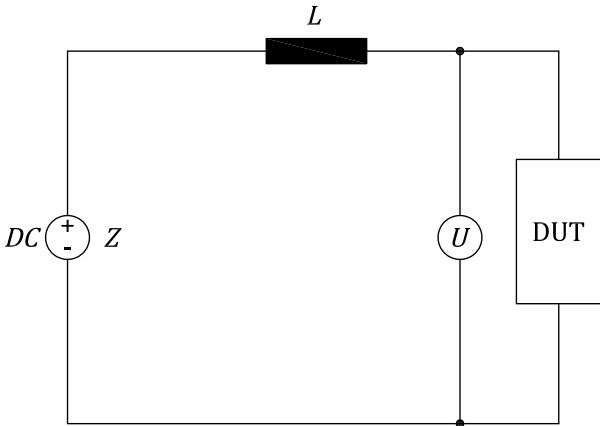

Key
 Z impedance of DC power supply
 L inductance of wiring

Figure 5 — Example for test setup for measurement of generated voltage ripple


The test setup shall be agreed between customer and supplier.

Present voltage ripple

For every component, robustness and stable operation shall be fulfilled when there is a voltage ripple present during the operation of the system.

The present voltage ripple (amplitude and frequency range) at the terminals of the DUT shall be as agreed between customer and supplier.

An example for a test setup to apply a present voltage ripple is given in [Figure 6](#).

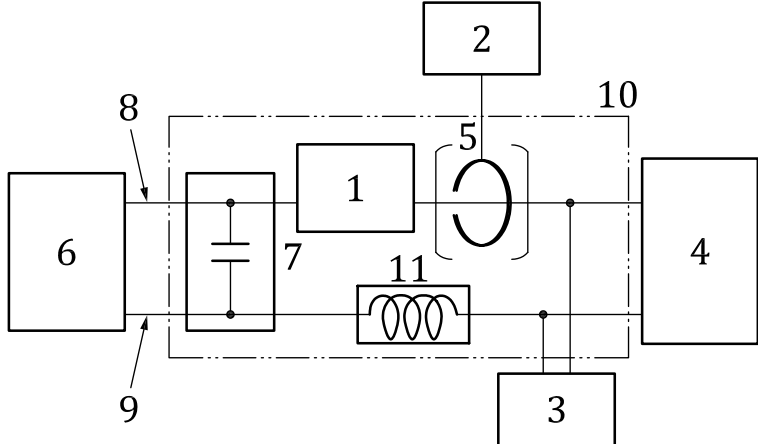

Key

1 ripple supply instrument	7 capacitor
2 current measuring instrument	8 DC- line
3 voltage measuring instrument	9 DC+ line
4 DUT	10 shielded box
5 current probe	11 series inductance
6 DC power supply	

Figure 6 — Example for test setup to apply a present voltage ripple

The test setup shall be agreed between customer and supplier.

4.6.4 Load dump

Load dump is a sudden increase of the voltage caused by a failure. The voltage might exceed the overvoltage limit if no means for protection of the component are provided.

A load dump can occur when a component feeds electrical energy into the voltage class B electric circuit and high load is disconnected abruptly.

Every component which is able to feed electrical energy into the voltage class B electric circuit shall limit the slope and the peak value of the voltage according to the specifications agreed between customer and supplier.

[Figure 7](#) shows an example of a load dump without suppression.

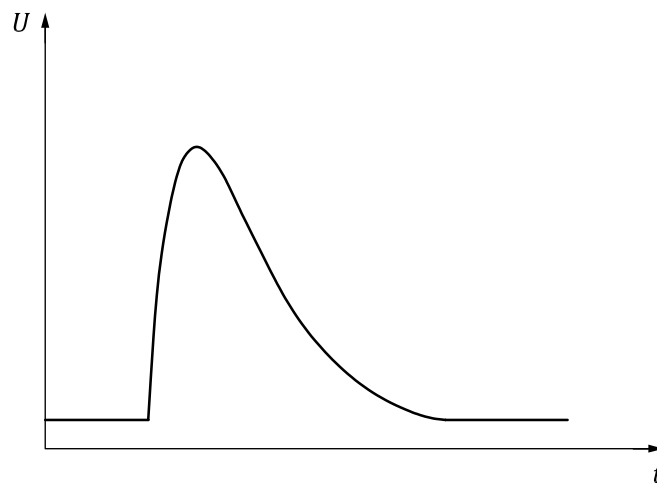


Figure 7 — Example for load dump without suppression

Annex A (informative)

Example for voltage ranges per voltage sub-class

A.1 General

Table A.1 — Example of voltage operating ranges per voltage sub-class

Voltage ranges	Operating status	Unit	B_220 example only
Overvoltage in the event of load dump ^b	OS3/OS4	V pk	250
Overvoltage limit ^b	OS3/OS4	V pk	250
Upper voltage limit ^a		V d.c.	220
Upper limited operating capability ^a	OS2	V d.c.	>190 to 220
Unlimited operating capability ^a	OS1	V d.c.	90 to 190
Lower operating capability ^a	OS2	V d.c.	60 to <90
Lower voltage limit ^a		V d.c.	60
Undervoltage ^b	OS3/OS4	V d.c.	0 to <60
^a Working voltages.			
^b Voltage deviations.			

A.2 Technical background for selection of voltage sub-classes

Table A.2 — Voltage sub-classes and related semiconductor technologies

Voltage sub-class	Upper voltage limit (RESS or Electric propulsion system) V d.c.	Related semiconductor technology — Example
B_220	$U \leq 220$	MOSFETs 300 V breakdown voltage
B_420	$U \leq 420$	Standard IGBTs and MOSFETs 600 V breakdown voltage
B_470	$U \leq 470$	Selected IGBTs 700 V breakdown voltage and dedicated module technology
B_750	$U \leq 750$	IGBTs 1 200 V breakdown voltage
B_850	$U \leq 850$	IGBTs 1 200 V breakdown voltage
B_1250	$U \leq 1\,250$	IGBTs 1 700 V breakdown voltage

British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at bsigroup.com/standards or contacting our Customer Services team or Knowledge Centre.

Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at bsigroup.com/shop, where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to bsigroup.com/subscriptions.

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

PLUS is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit bsigroup.com/shop.

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email bsmusales@bsigroup.com.

Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

Useful Contacts:

Customer Services

Tel: +44 845 086 9001

Email (orders): orders@bsigroup.com

Email (enquiries): cservices@bsigroup.com

Subscriptions

Tel: +44 845 086 9001

Email: subscriptions@bsigroup.com

Knowledge Centre

Tel: +44 20 8996 7004

Email: knowledgecentre@bsigroup.com

Copyright & Licensing

Tel: +44 20 8996 7070

Email: copyright@bsigroup.com

BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

