

PD ISO/TS 21219-2:2014



BSI Standards Publication

# Intelligent transport systems — Traffic and travel information (TTI) via transport protocol experts group, generation 2 (TPEG2)

Part 2: UML modelling rules

**bsi.**

...making excellence a habit.™

**National foreword**

This Published Document is the UK implementation of ISO/TS 21219-2:2014.

The UK participation in its preparation was entrusted to Technical Committee EPL/278, Intelligent transport systems.

A list of organizations represented on this committee can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

© The British Standards Institution 2014.  
Published by BSI Standards Limited 2014

ISBN 978 0 580 88644 7  
ICS 03.220.01; 35.240.60

**Compliance with a British Standard cannot confer immunity from legal obligations.**

This Published Document was published under the authority of the Standards Policy and Strategy Committee on 30 November 2014.

**Amendments/corrigenda issued since publication**

Date	Text affected
------	---------------

---

---

---

**Intelligent transport systems —  
Traffic and travel information (TTI)  
via transport protocol experts group,  
generation 2 (TPEG2) —**

**Part 2:  
UML modelling rules**

*Systèmes intelligents de transport — Informations sur le trafic et le  
tourisme via le groupe expert du protocole de transport, génération 2  
(TPEG2) —*

*Partie 2: Règles de modelage UML*





**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2014

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized otherwise in any form or by any means, electronic or mechanical, including photocopying, or posting on the internet or an intranet, without prior written permission. Permission can be requested from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

# Contents

Page

<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>vi</b>
<b>1 Scope</b> .....	<b>1</b>
<b>2 Terms, definitions and abbreviated terms</b> .....	<b>1</b>
2.1 Terms and definitions.....	1
2.2 Abbreviated terms.....	2
<b>3 TPEG UML model definition</b> .....	<b>2</b>
3.1 Allowed UML elements.....	2
3.2 Modelling rules and recommendations.....	7
3.3 Extending TPEG UML models.....	12
3.4 Adding documentation to TPEG UML models.....	12
<b>4 Drafting specifications using UML models</b> .....	<b>13</b>
4.1 Specification of contents.....	13
4.2 Normative clauses.....	15
4.3 Specification of normative annexes.....	16
<b>Annex A (normative) TPEG abstract data types</b> .....	<b>17</b>
<b>Annex B (normative) TPEG tables</b> .....	<b>20</b>
<b>Bibliography</b> .....	<b>44</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 204 *Intelligent transport systems*, in cooperation with the Traveller Information Services Association (TISA), TPEG Applications Working Group through Category A Liaison status.

ISO/TS 21219 consists of the following parts, under the general title *Intelligent transport systems — Traffic and travel information (TTI) via transport protocol expert group, generation 2 (TPEG2)*:

- *Part 2: UML modelling rules* [Technical Specification]
- *Part 3: UML to binary conversion rules* [Technical Specification]
- *Part 4: UML to XML conversion rules* [Technical Specification]
- *Part 5: Service framework* [Technical Specification]
- *Part 6: Message management container* [Technical Specification]
- *Part 7: Location referencing container* [Technical Specification]
- *Part 18: Traffic flow and prediction application* [Technical Specification]

The following parts are planned:

- *Part 1: Introduction, numbering and version* [Technical Specification]
- *Part 9: Service and network information* [Technical Specification]
- *Part 10: Conditional access information* [Technical Specification]
- *Part 14: Parking information application* [Technical Specification]
- *Part 15: Traffic event compact application* [Technical Specification]
- *Part 16: Fuel price information application* [Technical Specification]

- *Part 19: Weather information for travellers application* [Technical Specification]
- *Part 20: Extended TMC locations for applications* [Technical Specification]
- *Part 21: Geographic location referencing* [Technical Specification]
- *Part 22: OpenLR-location-reference* [Technical Specification]

## Introduction

### History

TPEG technology was originally proposed by the European Broadcasting Union (EBU) Broadcast Management Committee, who established the B/TPEG project group in the autumn of 1997 with a brief to develop, as soon as possible, a new protocol for broadcasting traffic and travel-related information in the multimedia environment. TPEG technology, its applications and service features were designed to enable travel-related messages to be coded, decoded, filtered and understood by humans (visually and/or audibly in the user's language) and by agent systems. Originally a byte-oriented data stream format, which may be carried on almost any digital bearer with an appropriate adaptation layer, was developed. Hierarchically structured TPEG messages from service providers to end-users were designed to transfer information from the service provider database to an end-user's equipment.

One year later in December 1998, the B/TPEG group produced its first EBU specifications. Two documents were released. Part 2 (TPEG-SSF, which became ISO/TS 18234-2) described the Syntax, Semantics and Framing structure, which was used for all TPEG applications. Meanwhile Part 4 (TPEG-RTM, which became ISO/TS 18234-4) described the first application, for Road Traffic Messages.

Subsequently in March 1999, CEN TC 278/WG 4, in conjunction with ISO/TC 204/WG 10, established a project group comprising members of the former EBU B/TPEG and they continued the work concurrently. Further parts were developed to make the initial set of four parts, enabling the implementation of a consistent service. Part 3 (TPEG-SNI, ISO/TS 18234-3) described the Service and Network Information Application, used by all service implementations to ensure appropriate referencing from one service source to another.

Part 1 (TPEG-INV, ISO/TS 18234-1), completed the series, by describing the other parts and their relationship; it also contained the application IDs used within the other parts. Additionally, Part 5, the Public Transport Information Application (TPEG-PTI, ISO/TS 18234-5), was developed. The so-called TPEG-LOC location referencing method, which enabled both map-based TPEG-decoders and non map-based ones to deliver either map-based location referencing or human readable text information, was issued as ISO/TS 18234-6 to be used in association with the other applications parts of the ISO/TS 18234-series to provide location referencing.

The ISO/TS 18234-series has become known as TPEG Generation 1.

### TPEG Generation 2

With the inauguration of the Traveller Information Services Association (TISA) in December 2007 derived from former Forums and the CEN/ISO development project group, the TPEG Applications Working Group took over development work for TPEG technology.

It was about this time that the (then) new Unified Modeling Language (UML) was seen as having major advantages for the development of new TPEG Applications in communities who would not necessarily have binary physical format skills required to extend the original TPEG TS work. It was also realised that the XML format for TPEG described within the ISO/TS 24530-series (now superseded) had a greater significance than previously foreseen; especially in the content-generation segment and that keeping two physical formats in synchronism, in different standards series, would be rather difficult.

As a result TISA set about the development of a new TPEG structure that would be UML based – this has subsequently become known as TPEG Generation 2.

TPEG2 is embodied in the ISO/TS 21219-series and it comprises many parts that cover introduction, rules, toolkit and application components. TPEG2 is built around UML modelling and has a core of rules that contain the modelling strategy covered in Parts 2, 3, 4 and the conversion to two current physical formats: binary and XML; others could be added in the future. TISA uses an automated tool to convert from the agreed UML model XMI file directly into an MS Word document file, to minimise drafting errors, that forms the Annex for each physical format.



TPEG2 has a three container conceptual structure: Message Management (Part 6), Application (many Parts) and Location Referencing (Part 7). This structure has flexible capability and can accommodate many differing use cases that have been proposed within the TTI sector and wider for hierarchical message content.

Toolkit parts: TPEG2-INV (Part 1), TPEG2-UML (Part 2), TPEG2-UBCR (Part 3), TPEG2-UXCR (Part 4), TPEG2-SFW (Part 5), TPEG2-MMC (Part 6), TPEG2-LRC (Part 7)

Special applications: TPEG2-SNI (Part 9), TPEG2-CAI (Part 10)

Location referencing: TPEG2-ULR (Part 11), TPEG2-ETL (Part 20), TPEG2-GLR (Part 21), TPEG2-OLR (Part 22)

Applications: TPEG2-PKI (Part 14), TPEG2-TEC (Part 15), TPEG2-FPI (Part 16), TPEG2-TFP (Part 18), TPEG2-WEA (Part 19), TPEG2-RMR (Part 23)

TPEG2 also has many location referencing options as required by the service provider community, any of which may be delivered by vectoring data included in the Location Referencing Container.

TPEG2 has been developed to be broadly (but not totally) backward compatible with TPEG1 to assist in transitions from earlier implementations, whilst not hindering the TPEG2 innovative approach and being able to support many new features, such as dealing with applications having both long-term, unchanging content and highly dynamic content, such as Parking Information.



# Intelligent transport systems — Traffic and travel information (TTI) via transport protocol experts group, generation 2 (TPEG2) —

## Part 2: UML modelling rules

### 1 Scope

This Technical Specification specifies rules for the creation and extending of TPEG application UML models. The rules are intended to ensure that TPEG application UML models can be interpreted unambiguously for conversion to physical format representations. TPEG application UML models that are defined according to these rules may be used for automatic generation of TPEG standards and for automatic generation of TPEG application physical format descriptions.

This Technical Specification also specifies the preferred structure of TPEG application specifications.

The TPEG abstract data types and the set of TPEG tables of common use are specified in the annexes.

### 2 Terms, definitions and abbreviated terms

#### 2.1 Terms and definitions

##### 2.1.1

##### **abstract data type**

data type of atomic nature

##### 2.1.2

##### **attribute compartment**

graphical section of a UML class box positioned directly under the class name compartment

##### 2.1.3

##### **class name compartment**

top most graphical section of a class box defining the name of the class and optionally a stereotype, inherited class and package scope

##### 2.1.4

##### **data structure**

data type being composed of other data types being either of abstract or complex data type, not having a component header, stereotyped as <<DataStructure>>

##### 2.1.5

##### **component**

revisable, named, complex data type, not stereotyped as <<DataStructure>>

##### 2.1.6

##### **component header**

data structure consisting of a component identifier, component length indicator and attribute length indicator

### 2.1.7

#### **element**

component or data structure

### 2.1.8

#### **link**

relation between two or more elements

### 2.1.9

#### **TPEG Application**

set of classes and rules defining TPEG information services at the highest layer of the ISO OSI model

## 2.2 Abbreviated terms

IPR	Intellectual Property Right(s)
ISO	International Organization for Standardization
LRC	Location Referencing Container
MMC	Message Management Container
OSI	Open Systems Interconnection
PTI	PTI Public Transport Information
TISA	Traveller Information Services Association
TPEG	Transport Protocol Experts Group
UML	Unified Modelling Language

## 3 TPEG UML model definition

### 3.1 Allowed UML elements

TPEG UML models are based on the UML standard<sup>[1]</sup>, but only use a subset of the elements defined in the standard. This clause provides a description of the elements of UML that are used for modelling TPEG. This clause also defines restrictions on these elements. TPEG UML models shall only use the UML elements described in this clause. The defined restrictions shall be obeyed.

#### 3.1.1 Class

A class provides a description of the structure of the data stored in an instance of a class. The data are stored in the class attributes.

#### 3.1.2 Abstract class

Abstract classes may be used to define shared properties of specialized child classes.

#### 3.1.3 Attribute

An attribute provides a data type description of data that is stored in a class. Attributes can be either of primitive data type or compound data type. Within a class, an attribute has a multiplicity. If not explicitly indicated, the multiplicity is one. Other multiplicities may be indicated between square brackets: [minOccurs .. maxOccurs].

Attribute multiplicity shall be interpreted as listed in [Table 1](#). If no multiplicity is indicated, a multiplicity of *one* (mandatory attribute) is implied.


**Table 1 — TPEG multiplicity**

Multiplicity	TPEG meaning
1	mandatory attribute
1..n	mandatory list of attributes
0..1	optional attribute
0..n	optional list of attributes

Attributes in classes are always modelled as public. Each attribute must have a data type. Attributes occur in the order as listed in the class definition in TPEG physical formats, unless this is overruled by the stereotype <<UnorderedComponentGroup>> .

### 3.1.4 Dependency

Graphical representation used for ordered components (attributes stereotyped as <<OrderedComponentGroup>> ) and DataStructures to show the hierarchical structure of the UML model.

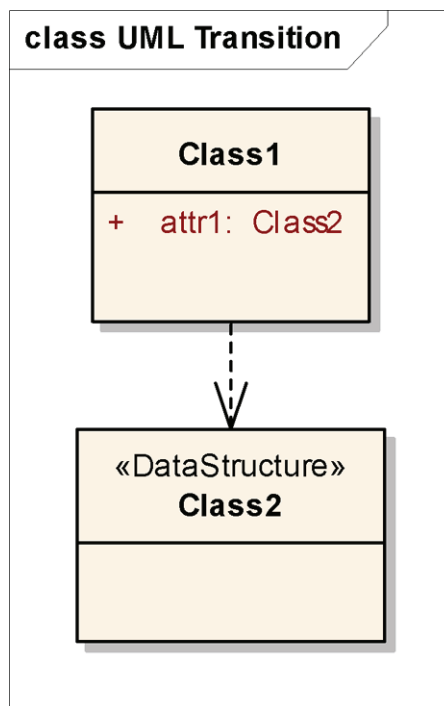

**Figure 1 — UML dependency relation**

### 3.1.5 Aggregation

An aggregation is an association representing a part-whole relationship. The containing object may have objects of the contained class, but the contained class is not life cycle dependent of the containing class. Classes included by aggregation may occur in random order in TPEG physical formats.

NOTE Using aggregations in TPEG UML Models is deprecated. Instead of using aggregations, the aggregated class should be included as attribute. The attribute can then either be stereotyped as <<OrderedComponentGroup>> or <<UnorderedComponentGroup>> (see [3.1.8](#) for details).

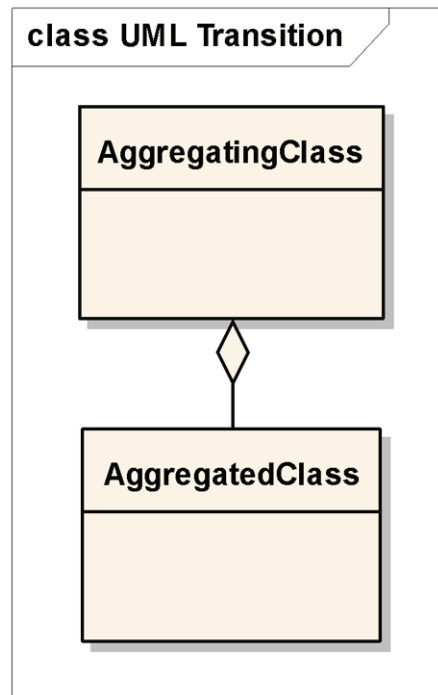


Figure 2 — UML aggregation relation

### 3.1.6 Composition

A composition is a stronger variant of the aggregation association. The contained object can only exist within the container class. Classes included by composition may occur in random order in TPEG physical formats.

NOTE Using compositions in TPEG UML Models is deprecated. Instead of using compositions, the composed class should be included as attribute. The attribute can then either be stereotyped as <<OrderedComponentGroup>> or <<UnorderedComponentGroup>> (see [3.1.8](#) for details).

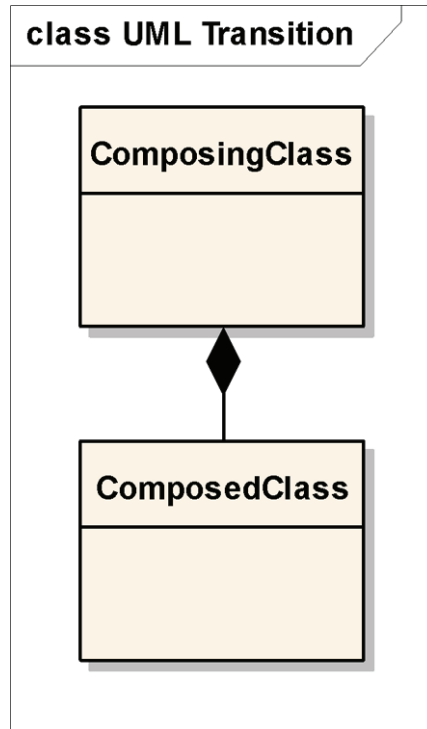


Figure 3 — UML composition relation

### 3.1.7 Specialization

A specialization relates a parent class to a child class. The child class inherits properties from the parent class. Classes shall not inherit from multiple parent classes. Classes shall only inherit from classes with the same stereotype.

Derived classes copy all attributes from the parent class. Parent classes shall contain no aggregations or classes not stereotyped as <<DataStructure>>. Parent classes shall be modelled as abstract class. In future versions of a standard, parent classes shall not be extended. Classes shall not be both parent and child class.

NOTE Extending parent classes in future versions of a standard breaks backwards compatibility.

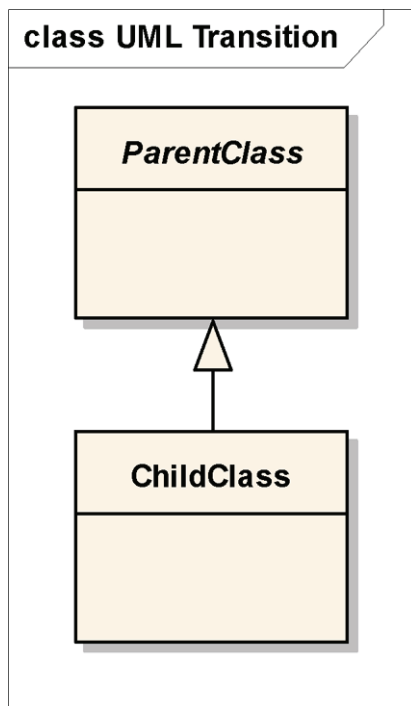


Figure 4 — UML specialization relation

### 3.1.8 Stereotype

A stereotype is used to provide an additional classification of UML properties. A physical format specification may use stereotype information to select a rule set for converting UML to the physical format.

The stereotypes as listed in [Table 2](#) may be used for UML modelling of TPEG applications. Other stereotypes shall not be used.

Table 2 — TPEG stereotypes

UML element	Stereotype	TPEG meaning
Package	TPEG Application	self standing protocol specification for a given application
Package	TPEG Toolkit	specification of general interest being referenced by different other specifications
Package	TPEG DataTypes	specification defining data structures and tables belonging to one single package
Class	DataSet	TPEG data structure
Class	Enumeration	list of defined, constant expressions not containing attributes or sub data elements
Class	External	TPEG Component defined in an external document
Attribute	OrderedComponentGroup	Attribute is of component type, and belongs to the group of components occurring in the order as defined by the attribute order
Attribute	UnorderedComponentGroup	Attribute is of component type, and belongs to the group of components that may occur in random order, after all other attributes.



### 3.1.9 Tagged values

Tagged values may be used to provide additional information on a UML element, used for the creation of the specification document.

Only the tagged values listed in [Table 3](#) shall be used.

**Table 3 — Allowed tagged values**

Tag	TPEG meaning	Example
ApplicationAbbreviation	Abbreviation of the application name	TEC
ApplicationName	Name of the application	Traffic Event Compact
ApplicationRoot	Root class of an application	TECMessage
TableEntryExample	Comment for a table entry	
Documentation	Description of generic properties of a class	
Description	Description of single attributes within a class	

In UML packages that are stereotyped as <<TPEG Application>> , the ApplicationAbbreviation, ApplicationName and ApplicationRoot tagged values are mandatory.

### 3.1.10 Notes

Notes may be used to provide additional information that is used for generating the specification document.

## 3.2 Modelling rules and recommendations

TPEG UML models are used to generate TPEG specifications. A fundamental assumption is that applications will develop and new features will be added. Correct designs permit applications to be upgraded and extended over time, providing new features to new decoders, and yet permit existing decoders to continue to operate. This clause describes design principles that shall be obeyed when building and upgrading TPEG applications.

### 3.2.1 Order of elements

In a physical format, attributes shall occur in the same order as listed in the UML class definition.

When components may occur in any order (independent of the order in which they are listed in the UML class definition), they should be modelled as attributes with the stereotype <<UnorderedComponentGroup>> and of the type of the corresponding class. The unordered components shall be linked by the embedding class using a dependency relation.

When components shall occur in a specific order, they shall be modelled as attributes with the stereotype <<OrderedComponentGroup>> and of the type of the corresponding class. The ordered components shall be linked by the embedding class using a dependency relation.

Mandatory attributes should occur *before* optional attributes. Mandatory Booleans should occur *after* the other mandatory attributes. Optional attributes should occur *after* mandatory attributes. Components shall occur *after* all other attributes. Ordered components shall occur *before* unordered components.

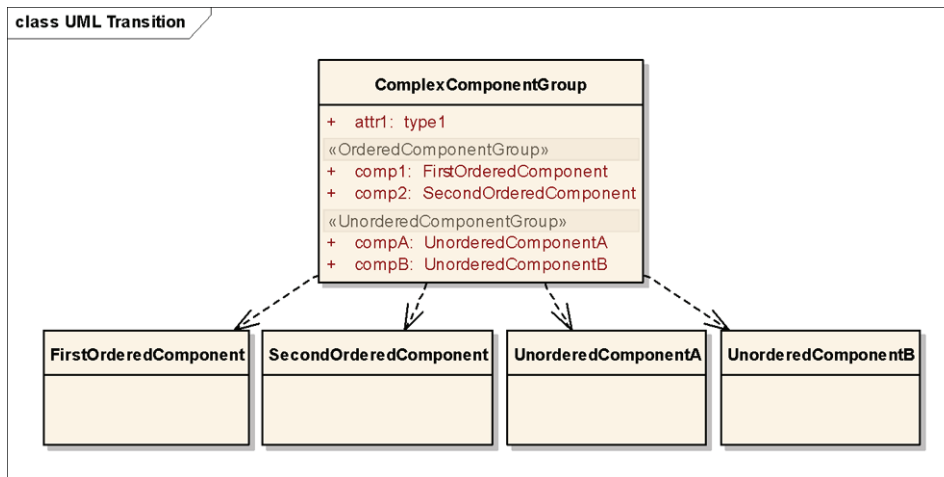


Figure 5 — Ordering of class elements

NOTE Special rules for extending TPEG UML models for newer revisions of a standard are provided in [3.3](#). Extending TPEG UML models in a backwards compatible way may break the recommendations for ordering mandatory and optional elements described in [3.2.1](#).

## 3.2.2 Stereotypes

### 3.2.2.1 TPEG Application

The <<TPEG Application>> stereotype is used to identify a UML package as TPEG Application.

### 3.2.2.2 TPEG Toolkit

TPEG Toolkits are used to share common functionality between different TPEG Applications. For example the Location Referencing Container and Message Management Container are toolkits that are used by all TPEG applications. A TPEG Application therefore can refer to a data type definition not specified in the same model.

TPEG Toolkits are designed such that its root components are defined as templates which can be used as external reference within other packages. A TPEG Application using a toolkit template therefore needs to specify a unique interface class for this instantiation of the imported toolkit interface's component.

All subsequent components in a toolkit are defined as out of the scope of the TPEG application, i.e. the toolkit on its own defines subcomponents beginning with local identifiers.

The <<TPEG Toolkit>> stereotype is applied at UML package level.

### 3.2.2.3 TPEG DataTypes

General TPEG datatypes and TPEG Application specific datatypes are defined in separate UML packages. This only applies for elementary data types and classes that are stereotyped as <<DataStructure>> .

The <<TPEG DataTypes>> stereotype is applied at UML package level.

### 3.2.2.4 DataStructure

The TPEG binary format distinguishes between *components* and *datastructures*. In this physical representation, a component is a compound data type, containing a header, providing type and length information. The type information of a component shall be unique within an application. A datastructure is a compound datatype not containing this type and length information.

Datastructures shall explicitly be stereotyped as <<DataStructure>> . Classes that are not explicitly stereotyped as <<DataStructure>> shall be interpreted as component. The differentiation between components and datastructures is not relevant for tpegML as both variants are represented as xs:element.

Components can be included in classes both by using an aggregation or composition or by attributes typed as this component. Datastructures shall not be included using an aggregation or composition, but shall be included as regular attribute only.

The <<DataStructure>> stereotype is applied at UML class level.

NOTE The specific usage of datastructures or components depends on the requirements of the particular application. Components should be used wherever future extensions are envisioned, and where ‘future proofing’ is a strong requirement. Datastructures are more bandwidth efficient as they contain no header information but are not extendible in a backwards-compatible manner.

### 3.2.2.5 Enumeration

TPEG Tables are modelled as enumerations and shall have no more than 256 entries. Each enumeration shall have a unique name which consists of two parts. The first part is the abbreviation of the application where the enumeration is specified in, appended with a three-digit number, starting at value 001. The second part is a description of the content of the table in camel-case. The two parts are separated by a semicolon.

EXAMPLE typ001:LanguageCode

When applicable, the enumeration entry with index zero should have the value “unknown”. If tables are likely to be extended in future versions of a standard, a default value shall be defined. This default value shall have index 255.

EXAMPLE See [Figure 6](#).

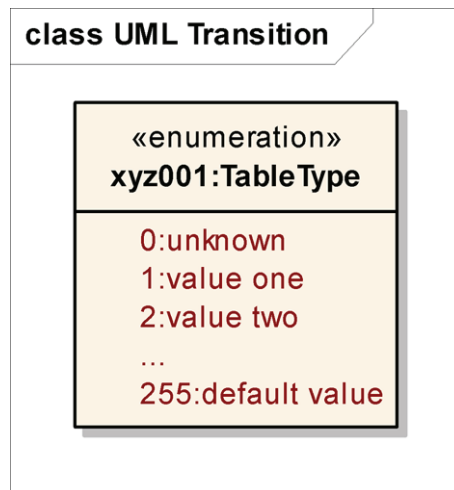


Figure 6 — Enumeration stereotype

The <<Enumeration>> stereotype is applied at UML class level.

### 3.2.2.6 External

TPEG applications can use classes that are not defined in the same package, but are defined in other TPEG applications or TPEG toolkits. These classes shall be stereotyped as <<External>> .

The <<External>> stereotype is applied at UML class level.

### 3.2.2.7 UnorderedComponentGroup

By default, *components* that are included in classes are unordered: The order in which the components appear in a model has no influence on the order in a physical format representation. These components should be modelled as attributes with the stereotype <<UnorderedComponentGroup>> .

The <<UnorderedComponentGroup>> stereotype is applied at UML attribute level.

NOTE Unordered components could also be included by aggregation or composition. Due to practical and model layout reasons, this method is deprecated. Use of the method described above is encouraged.

### 3.2.2.8 OrderedComponentGroup

By default, components that are included in classes are unordered (see 3.2.2.7). When *components* should appear in a fixed order, they shall be modelled as attributes with the stereotype <<OrderedComponentGroup>> and of the type of the corresponding class. See 3.2.1 for details on ordering of attributes.

The <<OrderedComponentGroup>> stereotype is applied at UML attribute level.

### 3.2.3 Data types

An overview of TPEG abstract data types is given in Annex A.

### 3.2.4 Optional Booleans

Due to encoding in the binary physical format, usage of optional Booleans is deprecated. The preferred solution is to use two mandatory Booleans, with the first one indicating the validity of the second Boolean. Alternatively, the enumeration as defined in typ008:OptionalBoolean (see Annex B) may be used as attribute.

### 3.2.5 Tables and Switching Tables

TPEG Tables represent defined groupings of pre-defined concepts (see 3.2.2.5 for details on the modelling of tables and Annex B for an overview of the general TPEG tables). TPEG enables hierarchical tables (see example below) by using 'Switching Tables'. Switching Tables are modelled in UML using abstract classes. The switched table is referenced by including an attribute of the abstract table class type (see Figure 7).

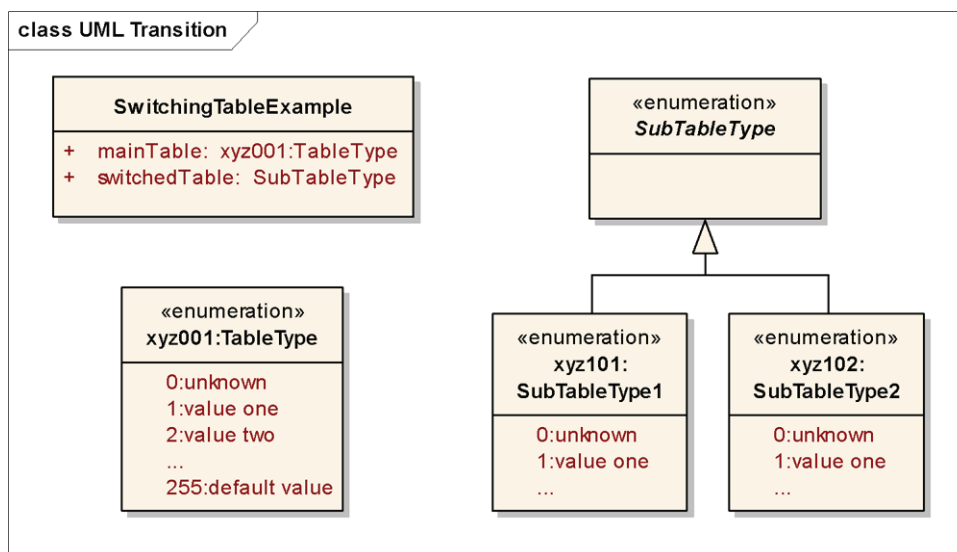


Figure 7 — TPEG Switching Table concept

The Application Specification shall define an unambiguous relation between the mainTable entry and the switchedTable type. It is recommended that the name of the switchedTable matches the entry in the mainTable and that the switchedTable number has a direct relation with the mainTable number.

EXAMPLE 'One table called 'xyz001:furniture' has one entry '1:chair'. One hierarchical level below the 'xyz001:furniture' table might be a table called 'xyz101:chair', having entries '1:computer chair', '2:rocking chair', etcetera. If an attribute of type xyz001:furniture has value 1, the referenced table is of type xyz101:chair.

### 3.2.6 Aggregations and compositions of DataStructures

Classes that are stereotyped as <<DataStructure>> shall not be included in a class using aggregation or composition but by an attribute of type of this DataStructure.


### 3.2.7 Aggregations and compositions in DataStructures

Classes that are stereotyped as <<DataStructure>> shall not include classes using aggregation or composition. When a class stereotyped as <<DataStructure>> shall include a class, this class shall be modelled as an attribute stereotyped as <<OrderedComponentGroup>> .

### 3.2.8 Linking abstract classes

Classes can link to abstract classes. In this case, an instance of exactly one of the child classes is instantiated.

EXAMPLE The LinkingClass has one attribute of abstract type, which can be instantiated with ChildClass1 and ChildClass2 (see [Figure 8](#)). The class only links to the abstract class. Each linked instance is of one of the two child class types.

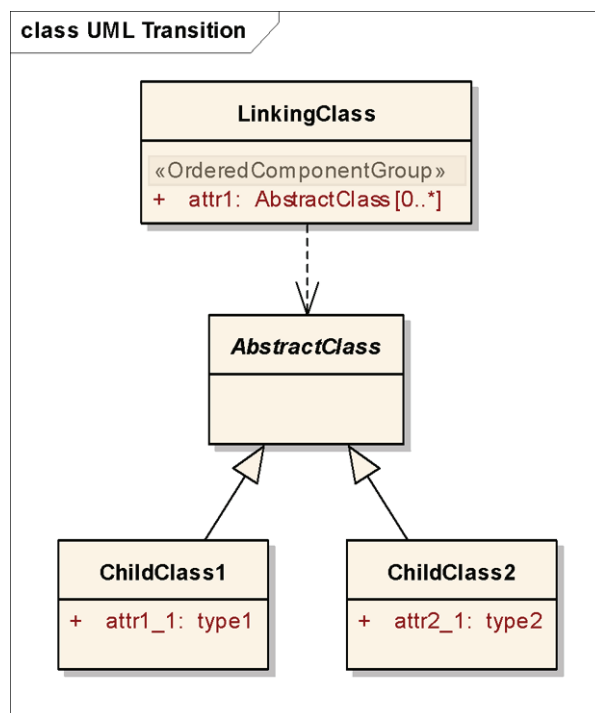

**Figure 8 — Linking of abstract class**

### 3.2.9 Graphical representation

Linked classes should be represented below the linking class. This provides a graphical hierarchical representation, improving readability.

### 3.2.10 Documentation

Each class should contain a functional description of the class and its attributes.

NOTE More information on documenting TPEG UML models is given in [3.4](#).

### 3.3 Extending TPEG UML models

TPEG provides means for extending applications without breaking backward compatibility. Classes can be extended by appending components, mandatory and optional attributes.

For each revision of a standard, the following rules shall be obeyed:

Classes that are stereotyped as <<DataStructure>> shall not be extended.

Mandatory attributes shall be appended *after* all previously defined attributes and *before* all components that are modelled as attributes with the stereotype <<OrderedComponentGroup>>. Optional attributes shall be appended *after* all previously defined attributes and newly added mandatory attributes and *before* all components that are modelled as attributes with the stereotype <<OrderedComponentGroup>>.

The order and the multiplicity of the attributes shall not be changed.

Newly added ordered components shall occur only *after* the last ordered component of the extended class. No additional rules for adding components not stereotyped as <<OrderedComponentGroup>> apply.

Newly added unordered components shall only occur *after* the last unordered component of the extended class. No additional rules for adding components not stereotyped as <<UnorderedComponentGroup>> apply.

Attributes and aggregations shall not be added to parent classes (classes that other classes inherit from), this would cause breaking backward compatibility.

Other application extensions break backward compatibility and are therefore strongly deprecated.

EXAMPLE [Figure 9](#) shows a complex component in a first and second revision of a standard. The second revision contains a newly added mandatory attribute, optional attribute and ordered component.

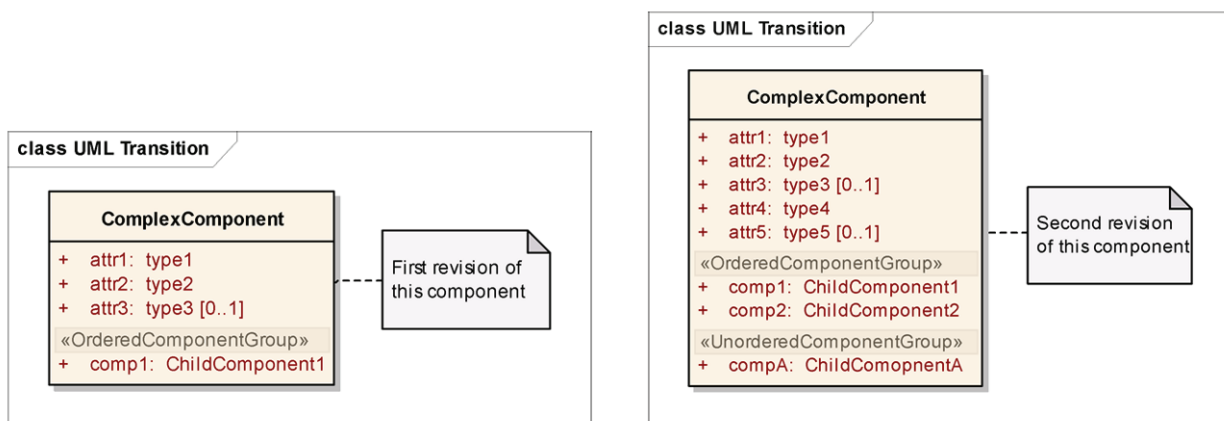


Figure 9 — Extending a TPEG component in a backwards compatible way

### 3.4 Adding documentation to TPEG UML models

Several parts from TPEG specifications are automatically generated from TPEG UML models. This particularly concerns class and attribute descriptions. All information required for generating these TPEG specification sections is contained in the UML models.

### 3.4.1 Class documentation

Each class

### 3.4.2 Attribute description

## 4 Drafting specifications using UML models

This clause specifies rules for creating TPEG specification documents using TPEG compliant UML models.

### 4.1 Specification of contents

#### 4.1.1 Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

The procedures used to develop this document and those intended for its further maintenance are described in the ISO/IEC Directives, Part 1. In particular the different approval criteria needed for the different types of ISO documents should be noted. This document was drafted in accordance with the editorial rules of the ISO/IEC Directives, Part 2 (see [www.iso.org/directives](http://www.iso.org/directives)).

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights. Details of any patent rights identified during the development of the document will be in the Introduction and/or on the ISO list of patent declarations received (see [www.iso.org/patents](http://www.iso.org/patents)).

Any trade name used in this document is information given for the convenience of users and does not constitute an endorsement.

For an explanation on the meaning of ISO specific terms and expressions related to conformity assessment, as well as information about ISO's adherence to the WTO principles in the Technical Barriers to Trade (TBT) see the following URL: Foreword - Supplementary information

The committee responsible for this document is ISO/TC 204 *Intelligent transport systems*, in cooperation with the Traveller Information Services Association (TISA), TPEG Applications Working Group through Category A Liaison status.

ISO/TS 21219 consists of the following parts, under the general title *Intelligent transport systems — Traffic and travel information (TTI) via transport protocol expert group, generation 2 (TPEG2)*:

- *Part 2: UML modelling rules* [Technical Specification]
- *Part 3: UML to binary conversion rules* [Technical Specification]
- *Part 4: UML to XML conversion rules* [Technical Specification]
- *Part 5: Service framework* [Technical Specification]
- *Part 6: Message management container* [Technical Specification]
- *Part 7: Location referencing container* [Technical Specification]
- *Part 18: Traffic flow and prediction application* [Technical Specification]



The following parts are planned:

- *Part 1: Introduction, numbering and version* [Technical Specification]
- *Part 9: Service and network information* [Technical Specification]
- *Part 10: Conditional access information* [Technical Specification]
- *Part 14: Parking information application* [Technical Specification]
- *Part 15: Traffic event compact application* [Technical Specification]
- *Part 16: Fuel price information application* [Technical Specification]
- *Part 19: Weather information for travellers application* [Technical Specification]
- *Part 20: Extended TMC locations for applications* [Technical Specification]
- *Part 21: Geographic location referencing* [Technical Specification]
- *Part 22: OpenLR-location-reference* [Technical Specification]

#### 4.1.2 Introduction

##### History

TPEG technology was originally proposed by the European Broadcasting Union (EBU) Broadcast Management Committee, who established the B/TPEG project group in the autumn of 1997 with a brief to develop, as soon as possible, a new protocol for broadcasting traffic and travel-related information in the multimedia environment. TPEG technology, its applications and service features were designed to enable travel-related messages to be coded, decoded, filtered and understood by humans (visually and/or audibly in the user's language) and by agent systems. Originally a byte-oriented data stream format, which may be carried on almost any digital bearer with an appropriate adaptation layer, was developed. Hierarchically structured TPEG messages from service providers to end-users were designed to transfer information from the service provider database to an end-user's equipment.

One year later in December 1998, the B/TPEG group produced its first EBU specifications. Two documents were released. Part 2 (TPEG-SSF, which became ISO/TS 18234-2) described the Syntax, Semantics and Framing structure, which was used for all TPEG applications. Meanwhile Part 4 (TPEG-RTM, which became ISO/TS 18234-4) described the first application, for Road Traffic Messages.

Subsequently in March 1999, CEN TC 278/WG 4, in conjunction with ISO/TC 204/WG 10, established a project group comprising members of the former EBU B/TPEG and they continued the work concurrently. Further parts were developed to make the initial set of four parts, enabling the implementation of a consistent service. Part 3 (TPEG-SNI, ISO/TS 18234-3) described the Service and Network Information Application, used by all service implementations to ensure appropriate referencing from one service source to another.

Part 1 (TPEG-INV, ISO/TS 18234-1), completed the series, by describing the other parts and their relationship; it also contained the application IDs used within the other parts. Additionally, Part 5, the Public Transport Information Application (TPEG-PTI, ISO/TS 18234-5), was developed. The so-called TPEG-LOC location referencing method, which enabled both map-based TPEG-decoders and non map-based ones to deliver either map-based location referencing or human readable text information, was issued as ISO/TS 18234-6 to be used in association with the other applications parts of the ISO/TS 18234-series to provide location referencing.

The ISO/TS 18234-series has become known as TPEG Generation 1.

##### TPEG Generation 2



With the inauguration of the Traveller Information Services Association (TISA) in December 2007 derived from former Forums and the CEN/ISO development project group, the TPEG Applications Working Group took over development work for TPEG technology.

It was about this time that the (then) new Unified Modeling Language (UML) was seen as having major advantages for the development of new TPEG Applications in communities who would not necessarily have binary physical format skills required to extend the original TPEG TS work. It was also realised that the XML format for TPEG described within the ISO/TS 24530-series (now superseded) had a greater significance than previously foreseen; especially in the content-generation segment and that keeping two physical formats in synchronism, in different standards series, would be rather difficult.

As a result TISA set about the development of a new TPEG structure that would be UML based – this has subsequently become known as TPEG Generation 2.

TPEG2 is embodied in the ISO/TS 21219-series and it comprises many parts that cover introduction, rules, toolkit and application components. TPEG2 is built around UML modelling and has a core of rules that contain the modelling strategy covered in Parts 2, 3, 4 and the conversion to two current physical formats: binary and XML; others could be added in the future. TISA uses an automated tool to convert from the agreed UML model XMI file directly into an MS Word document file, to minimise drafting errors, that forms the Annex for each physical format.

TPEG2 has a three container conceptual structure: Message Management (Part 6), Application (many Parts) and Location Referencing (Part 7). This structure has flexible capability and can accommodate many differing use cases that have been proposed within the TTI sector and wider for hierarchical message content.

Toolkit parts: TPEG2-INV (Part 1), TPEG2-UML (Part 2), TPEG2-UBCR (Part 3), TPEG2-UXCR (Part 4), TPEG2-SFW (Part 5), TPEG2-MMC (Part 6), TPEG2-LRC (Part 7)

Special applications: TPEG2-SNI (Part 9), TPEG2-CAI (Part 10)

Location referencing: TPEG2-ULR (Part 11), TPEG2-ETL (Part 20), TPEG2-GLR (Part 21), TPEG2-OLR (Part 22)

Applications: TPEG2-PKI (Part 14), TPEG2-TEC (Part 15), TPEG2-FPI (Part 16), TPEG2-TFP (Part 18), TPEG2-WEA (Part 19), TPEG2-RMR (Part 23)

TPEG2 also has many location referencing options as required by the service provider community, any of which may be delivered by vectoring data included in the Location Referencing Container.

TPEG2 has been developed to be broadly (but not totally) backward compatible with TPEG1 to assist in transitions from earlier implementations, whilst not hindering the TPEG2 innovative approach and being able to support many new features, such as dealing with applications having both long-term, unchanging content and highly dynamic content, such as Parking Information.

### **4.1.3 Scope**

Rules for the drafting of the scope of TPEG specifications are given in 6.2.1 of [2].

### **4.1.4 Bibliography**

Rules for the drafting of the bibliography of TPEG specifications are given in 6.4.2 of [2].

## **4.2 Normative clauses**

Each TPEG application specification should include the following normative clauses, preferably in the order as given in this subclause.

#### 4.2.1 Application specific constraints

A TPEG application may pose constraints on elements of TPEG specifications the application specification refers to, such as the TPEG Toolkit. If these constraints are purely application specific, they shall be stated in this clause. If these constraints are of more general nature, definition of a separate TPEG profile should be considered.

#### 4.2.2 Class model

This clause contains the UML model of the application. The UML model shall be drafted according to the rules specified in this Technical Specification.

#### 4.2.3 Components

Each class in the class model that is not stereotyped as <<DataStructure>> shall be described in this clause. The description shall at least consist of a functional description of the component and a tabular description of the component attributes. This tabular attribute description shall have four columns: *name*, *type*, *multiplicity* and *description*. The description of attributes of primitive data types shall specify its function and, if required, its allowed value range. The description of attributes of compound data type (components or datastructures) shall refer to the clause in which the respective attribute is defined.

#### 4.2.4 Datatypes

Each class in the class model that is stereotyped as <<DataStructure>> shall be described in this clause. The description shall at least consist of a functional description of the datastructure and a tabular description of the datastructure attributes. This tabular description shall have four columns: *name*, *type*, *multiplicity* and *description*. The description of attributes of primitive data types shall specify its function and, if required, its allowed value range. The description of attributes of compound data type (components or datastructures) shall refer to the clause in which the respective attribute is defined.

#### 4.2.5 Tables

When an application defines application-specific tables, they shall be enlisted in this clause. Each table shall be listed in a separate subclause, the subclause having the name of the respective table. Switched tables (tables that have an abstract parent class, see 3.2.5) shall be grouped in a subclause that has the name of the abstract parent class and shall be listed in subclauses of the abstract parent class.

### 4.3 Specification of normative annexes

The normative annexes of TPEG specifications shall at least contain the physical format descriptions of the respective standard. Rules for converting TPEG UML models to the TPEG binary format description can be found in[7]. Rules for converting TPEG UML models to the tpegML format description can be found in[8].

## Annex A (normative)

### TPEG abstract data types

#### A.1 Data type definition

The abstract data types enlisted in [Table A.1](#) are available for modelling TPEG applications. Compound data types may be specified in toolkits or within an application.

**Table A.1 — TPEG abstract data types**

Data type	Definition
BitArray	List of Boolean values.
Boolean	Attribute having values [true, false].
DateTime	Attribute providing date and time information in UTC.
DaySelector	Attribute that allows selection of one or multiple of [Monday, Tuesday, Wednesday, Thursday, Friday, Saturday, Sunday].
DistanceMetres	Distance in whole metres [0 .. 4 294 967 295].
DistanceCentiMetres	Distance in whole centimetres [0 .. 4 294 967 295].
Duration	Temporal duration in whole seconds [0 .. 4 294 967 295].
FixedPercentage	Percentage value in whole percents [0 .. 100].
FixedPointNumber	Value with a precision of 2 decimals [-2 147 483 648.99 .. 2 147 483 648.99].
Float	Number with decimal precision [ $\pm 2^{-126} .. \pm (1-2^{-24}) \times 2^{128}$ ].
IntSiTi	(Integer Signed Tiny) Signed integer value of fixed size [-128 .. 127].
IntSiLi	(Integer Signed Little) Signed integer value of fixed size [-32 768 .. 32 767].
IntSiLo	(Integer Signed Long) Signed integer value of fixed size [-2 147 483 648 .. 2 147 483 647].
IntSiLoMB	(Integer Signed Long MultiByte) Signed integer value of variable size [-2 147 483 648 .. 2 147 483 647].
IntUnTi	(Integer Unsigned Tiny) Unsigned integer value of fixed size [0 .. 255].
IntUnLi	(Integer Unsigned Little) Unsigned integer value of fixed size [0 .. 65 535].
IntUnLo	(Integer Unsigned Long) Unsigned integer value of fixed size [0 .. 4 294 967 295].
IntUnLoMB	(Integer Unsigned Long MultiByte) Unsigned integer value of variable size [0 .. 4 294 967 295].
ShortString	Sequence up to 255 characters (in single-byte character encoding).
LongString	Sequence of up to 65 535 characters (in single-byte character encoding).
LocalisedShortString	Sequence of up to 255 characters (in single-byte character encoding) accompanied with a language code (typ001:LanguageCode).
LocalisedLongString	Sequence of up to 65 535 characters (in single-byte character encoding) accompanied with a language code (typ001:LanguageCode).
Probability	Probability value with a precision of two decimals [0.00 .. 1.00].

**Table A.1** (continued)

Data type	Definition
ServiceIdentifier	Three part numeric value [SID_A.SID_B.SID_C] with SID_A, SID_B and SID_C each having a range of [0 .. 255].
TimeInterval	Temporal duration with indication of years [0 .. 130], months [0 .. 12], days [0 .. 31], hours [0 .. 24], minutes [0 .. 60] and seconds [0 .. 60]. At least one attribute must be defined. Undefined attributes imply the default value zero.
TimePoint	Point in time with indication of years [1970 .. 2100], months [0 .. 12], days [0 .. 31], hours [0 .. 24], minutes [0 .. 60] and seconds [0 .. 60]. At least one attribute must be defined. Undefined attributes imply the default value zero.
TimeToolkit	DataStructure with optional elements: <TimePoint>(startTime), <TimePoint>(stopTime), only used together with startTime <TimeInterval>(duration), <typ002:SpecialDay>(specialDay), <DaySelector>(daySelector).
Velocity	Velocity in integer units of metres per seconds [0 .. 255].
Weight	Weights in integer units of kilogrammes [0 .. 4 294 967 295].

The character encoding of strings within a service is specified in the TPEG SNI Application. In the binary physical format, multibyte character encodings shall use fewer characters if one or more characters in the specific string require more than one byte. The total number of bytes shall not exceed the number of characters specified for single-byte encoding.

## A.2 Data type guidelines

### A.2.1 MultiBytes

The IntUnLoMB and IntSiLoMB data types provide integer values with the same range as IntUnLo and IntSiLo respectively. In the TPEG binary format however, IntUnLoMB and IntSiLoMB constitute of a datastructure of variable size. If an application requires an integer variable having a large range but generally having smaller values, the IntUnLoMB and IntSiLoMB data types are preferred over their fixed-size versions.

**Table A.2 — MultiByte ranges**

Size	Range IntUnLoMB	Range IntSiLoMB
1 byte	[0 .. 127]	[-64 .. 63]
2 bytes	[0 .. 16 384]	[-8 192 .. 8 191]
3 bytes	[0 .. 2 097 151]	[-1 048 576 .. 1 048 575]
4 bytes	[0 .. 268 435 455]	[-134 217 728 .. 134 217 727]
5 bytes	[0 .. 4 294 967 295]	[-2 147 483 648 .. 2 147 483 647]

### A.2.2 TimeInterval

The TimeInterval data structure can be used when an interval in time must be specified with more flexibility than the simple Duration type allows. Each TimeInterval attribute has a number of optional attributes. It is maximally 256 years long. Each attribute can be used as stand-alone attribute or in combination with other attributes. When an attribute is not given, the value zero is implied. Every TimeInterval must specify at least one attribute.

### **A.2.3 TimePoint**

The TimePoint data structure can be used when a point in time must be specified with fewer granularities than the simple DateTime allows. Each TimePoint attribute has a number of optional attributes. Each attribute can be used as stand-alone attribute or in combination with other attributes. Every TimePoint must specify at least one attribute.

### **A.2.4 TimeToolkit**

The TimeToolkit allows a set of date and time information to be described. Each TimeToolkit attribute has a number of optional attributes. Each attribute can be used as stand-alone attribute or in combination with other attributes. Every TimeToolkit must specify at least one attribute. For a timestamp the DateTime type should be used.

**EXAMPLE** An event has a start but no known end-time. In this case, only a start time is used but the end-time is omitted.

## Annex B (normative)

### TPEG tables

In TPEG much information is based on tables. These tables represent clearly defined groupings of pre-defined concepts. The idea is to inform the device about the concept and let the device choose the best possible presentation of this concept in the context of the other parts of the TPEG message. This approach means that devices can present concepts, e.g. in any language or even as graphical icons.

This annex specifies the tables that are of general use for TPEG applications.

#### B.1 typ001:LanguageCode

Language code, based on the 2-alpha codes of ISO 639<sup>[3]</sup>.

Table B.1 — typ001:LanguageCode

Code	Reference-English Language Name	Comment 2-alpha code
0	Unknown	
1	Afar	aa
2	Abkhazian	ab
3	Avestan	ae
4	Afrikaans	af
5	Akan	ak
6	Amharic	am
7	Aragonese	an
8	Arabic	ar
9	Assamese	as
10	Avaric	av
11	Aymara	ay
12	Azerbaijani	az
13	Bashkir	ba
14	Belarusian	be
15	Bulgarian	bg
16	Bihari	bh
17	Bislama	bi
18	Bambara	bm
19	Bengali	bn
20	Tibetan	bo
21	Breton	br
22	Bosnian	bs
23	Catalan	ca

**Table B.1** (continued)

<b>Code</b>	<b>Reference-English Language Name</b>	<b>Comment 2-alpha code</b>
24	Chechen	ce
25	Chamorro	ch
26	Corsican	co
27	Cree	cr
28	Czech	cs
29	Church Slavic	cu
30	Chuvash	cv
31	Welsh	cy
32	Danish	da
33	German	de
34	Divehi	dv
35	Dzongkha	dz
36	Ewe	ee
37	Greek	el
38	English	en
39	Esperanto	eo
40	Spanish	es
41	Estonian	et
42	Basque	eu
43	Persian	fa
44	Fulah	ff
45	Finnish	fi
46	Fijian	fj
47	Faroese	fo
48	French	fr
49	Western Frisian	fy
50	Irish	ga
51	Scottish Gaelic	gd
52	Galician	gl
53	Guaraní	gn
54	Gujarati	gu
55	Manx	gv
56	Hausa	ha
57	Hebrew	he
58	Hindi	hi
59	Hiri Motu	ho
60	Croatian	hr
61	Haitian	ht
62	Hungarian	hu
63	Armenian	hy

**Table B.1** (continued)

<b>Code</b>	<b>Reference-English Language Name</b>	<b>Comment 2-alpha code</b>
64	Herero	hz
65	Interlingua (International Auxiliary Language Association)	ia
66	Indonesian	id
67	Interlingue	ie
68	Igbo	ig
69	Sichuan Yi	ii
70	Inupiaq	ik
71	Ido	io
72	Icelandic	is
73	Italian	it
74	Inuktitut	iu
75	Japanese	ja
76	Javanese	jv
77	Georgian	ka
78	Kongo	kg
79	Kikuyu	ki
80	Kuanyama	kj
81	Kazakh	kk
82	Kalaallisut	kl
83	Khmer	km
84	Kannada	kn
85	Korean	ko
86	Kanuri	kr
87	Kashmiri	ks
88	Kurdish	ku
89	Komi	kv
90	Cornish	kw
91	Kirghiz	ky
92	Latin	la
93	Luxembourgish	lb
94	Ganda	lg
95	Limburgish	li
96	Lingala	ln
97	Lao	lo
98	Lithuanian	lt
99	Luba-Katanga	lu
100	Latvian	lv
101	Malagasy	mg
102	Marshallese	mh



**Table B.1** (continued)

<b>Code</b>	<b>Reference-English Language Name</b>	<b>Comment 2-alpha code</b>
103	Ma-ori	mi
104	Macedonian	mk /sl
105	Malayalam	ml
106	Mongolian	mn
107	Moldavian	mo
108	Marathi	mr
109	Malay	ms
110	Maltese	mt
111	Burmese	my
112	Nauru	na
113	Norwegian Bokmål	nb
114	North Ndebele	nd
115	Nepali	ne
116	Ndonga	ng
117	Dutch	nl
118	Norwegian Nynorsk	nn
119	Norwegian	no
120	South Ndebele	nr
121	Navajo	nv
122	Chichewa	ny
123	Occitan	oc
124	Ojibwa	oj
125	Oromo	om
126	Oriya	or
127	Ossetian	os
128	Panjabi	pa
129	Pa-li	pi
130	Polish	pl
131	Pashto	ps
132	Portuguese	pt
133	Quechua	qu
134	Raeto-Romance	rm
135	Kirundi	rn
136	Romanian	ro
137	Russian	ru
138	Kinyarwanda	rw
139	Sanskrit	sa
140	Sardinian	sc
141	Sindhi	sd
142	Northern Sami	se

**Table B.1** (continued)

<b>Code</b>	<b>Reference-English Language Name</b>	<b>Comment 2-alpha code</b>
143	Sango	sg
144	Serbo-Croatian	sh
145	Sinhalese	si
146	Slovak	sk
147	Slovenian	sl
148	Samoan	sm
149	Shona	sn
150	Somali	so
151	Albanian	sq
152	Serbian	sr
153	Swati	ss
154	Southern Sotho	st
155	Sundanese	su
156	Swedish	sv
157	Swahili	sw
158	Tamil	ta
159	Telugu	te
160	Tajik	tg
161	Thai	th
162	Tigrinya	ti
163	Turkmen	tk
164	Tagalog	tl
165	Tswana	tn
166	Tonga	to
167	Turkish	tr
168	Tsonga	ts
169	Tatar	tt
170	Twi	tw
171	Tahitian	ty
172	Uighur	ug
173	Ukrainian	uk
174	Urdu	ur
175	Uzbek	uz
176	Venda	ve
177	Vietnamese	vi
178	Volapük	vo
179	Walloon	wa
180	Wolof	wo
181	Xhosa	xh
182	Yiddish	yi

**Table B.1** (continued)

Code	Reference-English Language Name	Comment 2-alpha code
183	Yoruba	yo
184	Zhuang	za
185	Chinese	zh
186	Zulu	zu

## B.2 typ002:SpecialDay

The SpecialDay table lists special types of days, such as a public holiday or similar.

**Table B.2 — typ002:SpecialDay**

Code	Reference-English 'Word'	Comment	Example
0	unknown		
1	weekdays	Monday to Friday	
2	weekends	Saturday and Sunday	
3	holiday		
4	public holiday		
5	religious holiday		e.g. Christmas day
6	federal holiday		
7	regional holiday		
8	national holiday		e.g. In UK: Mayday
9	school days		
10	every day		

## B.3 typ003:CurrencyType

Currency type, based on the three-alpha codes of ISO 4217[5].

**Table B.3 — typ003:CurrencyType**

Code	Reference-English 'Word'	Comment
0	unknown	
1	AED	
2	AFA	
3	ALL	
4	AMD	
5	ANG	
6	AOA	
7	ARS	
8	AUD	
9	AWG	
10	AZM	
11	BAM	

**Table B.3** (continued)

<b>Code</b>	<b>Reference-English 'Word'</b>	<b>Comment</b>
12	BBD	
13	BDT	
14	BGN	
15	BHD	
16	BIF	
17	BMD	
18	BND	
19	BOB	
20	BRL	
21	BSD	
22	BTN	
23	BWP	
24	BYR	
25	BZD	
26	CAD	
27	CDF	
28	CHF	
29	CLP	
30	CNY	
31	COP	
32	CRC	
33	CSD	
34	CUP	
35	CVE	
36	CYP	
37	CZK	
38	DJF	
39	DKK	
40	DOP	
41	DZD	
42	EEK	
43	EGP	
44	ERN	
45	ETB	
46	EUR	
47	FJD	
48	FKP	
49	GBP	
50	GEL	
51	GGP	
52	GHC	

**Table B.3** (continued)

<b>Code</b>	<b>Reference-English 'Word'</b>	<b>Comment</b>
53	GIP	
54	GMD	
55	GNF	
56	GTQ	
57	GYD	
58	HKD	
59	HNL	
60	HRK	
61	HTG	
62	HUF	
63	IDR	
64	ILS	
65	IMP	
66	INR	
67	IQD	
68	IRR	
69	ISK	
70	JEP	
71	JMD	
72	JOD	
73	JPY	
74	KES	
75	KGS	
76	KHR	
77	KMF	
78	KPW	
79	KRW	
80	KWD	
81	KYD	
82	KZT	
83	LAK	
84	LBP	
85	LKR	
86	LRD	
87	LSL	
88	LTL	
89	LVL	
90	LYD	
91	MAD	
92	MDL	
93	MGA	

**Table B.3** (continued)

<b>Code</b>	<b>Reference-English 'Word'</b>	<b>Comment</b>
94	MKD	
95	MMK	
96	MNT	
97	MOP	
98	MRO	
99	MTL	
100	MUR	
101	MVR	
102	MWK	
103	MXN	
104	MYR	
105	MZM	
106	NAD	
107	NGN	
108	NIO	
109	NOK	
110	NPR	
111	NZD	
112	OMR	
113	PAB	
114	PEN	
115	PGK	
116	PHP	
117	PKR	
118	PLN	
119	PYG	
120	QAR	
121	ROL	
122	RUR	
123	RWF	
124	SAR	
125	SBD	
126	SCR	
127	SDD	
128	SEK	
129	SGD	
130	SHP	
131	SIT	
132	SKK	
133	SLL	
134	SOS	

**Table B.3** (continued)

<b>Code</b>	<b>Reference-English 'Word'</b>	<b>Comment</b>
135	SPL	
136	SRD	
137	STD	
138	SVC	
139	SYP	
140	SZL	
141	THB	
142	TJS	
143	TMM	
144	TND	
145	TOP	
146	TRL	
147	TTD	
148	TVD	
149	TWD	
150	TZS	
151	UAH	
152	UGX	
153	USD	
154	UYU	
155	UZS	
156	VEB	
157	VND	
158	VUV	
159	WST	
160	XAF	
161	XAG	
162	XAU	
163	XCD	
164	XDR	
165	XOF	
166	XPD	
167	XPF	
168	XPT	
169	YER	
170	ZAR	
171	ZMK	
172	ZWD	
255	undefined	

## B.4 typ004:NumericalMagnitude

The numerical magnitude, or “numag”, table contains unsigned integer values in the range 0 to 3000000 with decreasing precision.

The relation between code  $n$  and value  $r$  is given by:

$$r = (5 + \text{sign}(n-5) \times (\text{abs}(n-5) \bmod 45)) \times 10^{(n-5) \text{ div } 45}$$

**Table B.4 — typ004:NumericalMagnitude**

<b>Code</b>	<b>Value</b>
<b>n:</b>	<b>r:</b>
0	0
1	1
2	2
3	3
4	4
5	5
6	6
7	7
8	8
9	9
10	10
11	11
12	12
13	13
14	14
15	15
16	16
17	17
18	18
19	19
20	20
21	21
22	22
23	23
24	24
25	25
26	26
27	27
28	28
29	29
30	30
31	31
32	32



**Table B.4** (continued)

<b>Code n:</b>	<b>Value r:</b>
33	33
34	34
35	35
36	36
37	37
38	38
39	39
40	40
41	41
42	42
43	43
44	44
45	45
46	46
47	47
48	48
49	49
50	50
51	60
52	70
53	80
54	90
55	100
56	110
57	120
58	130
59	140
60	150
61	160
62	170
63	180
64	190
65	200
66	210
67	220
68	230
69	240
70	250
71	260
72	270

**Table B.4** (continued)

<b>Code</b>	<b>Value</b>
<b>n:</b>	<b>r:</b>
73	280
74	290
75	300
76	310
77	320
78	330
79	340
80	350
81	360
82	370
83	380
84	390
85	400
86	410
87	420
88	430
89	440
90	450
91	460
92	470
93	480
94	490
95	500
96	600
97	700
98	800
99	900
100	1000
101	1100
102	1200
103	1300
104	1400
105	1500
106	1600
107	1700
108	1800
109	1900
110	2000
111	2100
112	2200

**Table B.4** (continued)

<b>Code n:</b>	<b>Value r:</b>
113	2300
114	2400
115	2500
116	2600
117	2700
118	2800
119	2900
120	3000
121	3100
122	3200
123	3300
124	3400
125	3500
126	3600
127	3700
128	3800
129	3900
130	4000
131	4100
132	4200
133	4300
134	4400
135	4500
136	4600
137	4700
138	4800
139	4900
140	5000
141	6000
142	7000
143	8000
144	9000
145	10000
146	11000
147	12000
148	13000
149	14000
150	15000
151	16000
152	17000

**Table B.4** (continued)

<b>Code n:</b>	<b>Value r:</b>
153	18000
154	19000
155	20000
156	21000
157	22000
158	23000
159	24000
160	25000
161	26000
162	27000
163	28000
164	29000
165	30000
166	31000
167	32000
168	33000
169	34000
170	35000
171	36000
172	37000
173	38000
174	39000
175	40000
176	41000
177	42000
178	43000
179	44000
180	45000
181	46000
182	47000
183	48000
184	49000
185	50000
186	60000
187	70000
188	80000
189	90000
190	100000
191	110000
192	120000

**Table B.4** (continued)

<b>Code n:</b>	<b>Value r:</b>
193	130000
194	140000
195	150000
196	160000
197	170000
198	180000
199	190000
200	200000
200	200000
201	210000
202	220000
203	230000
204	240000
205	250000
206	260000
207	270000
208	280000
209	290000
210	300000
211	310000
212	320000
213	330000
214	340000
215	350000
216	360000
217	370000
218	380000
219	390000
220	400000
221	410000
222	420000
223	430000
224	440000
225	450000
226	460000
227	470000
228	480000
229	490000
230	500000
231	600000

**Table B.4** (continued)

<b>Code n:</b>	<b>Value r:</b>
232	700000
233	800000
234	900000
235	1000000
236	1100000
237	1200000
238	1300000
239	1400000
240	1500000
241	1600000
242	1700000
243	1800000
244	1900000
245	2000000
246	2100000
247	2200000
248	2300000
249	2400000
250	2500000
251	2600000
252	2700000
253	2800000
254	2900000
255	3000000

## **B.5 typ005:CountryCode**

This table lists countries as defined by ISO 3166-1[6]. The comment column shows the corresponding 2-alpha code elements.

“undecodable country” is to be used by a client device unable to read the typ005 code used by a service provider - no code value for this word is ever transmitted.

**Table B.5 — typ005:CountryCode**

<b>Code</b>	<b>Reference-English Country Name</b>	<b>Comment 2-alpha code</b>
0	unknown	
1	Afghanistan	AF
2	Åland Islands	AX
3	Albania	AL
4	Algeria	DZ

**Table B.5** (continued)

<b>Code</b>	<b>Reference-English Country Name</b>	<b>Comment 2-alpha code</b>
5	American Samoa	AS
6	Andorra	AD
7	Angola	AO
8	Anguilla	AI
9	Antarctica	AQ
10	Antigua and Barbuda	AG
11	Argentina	AR
12	Armenia	AM
13	Aruba	AW
14	Australia	AU
15	Austria	AT
16	Azerbaijan	AZ
17	Bahamas	BS
18	Bahrain	BH
19	Bangladesh	BD
20	Barbados	BB
21	Belarus	BY
22	Belgium	BE
23	Belize	BZ
24	Benin	BJ
25	Bermuda	BM
26	Bhutan	BT
27	Bolivia	BO
28	Bosnia and Herzegovina	BA
29	Botswana	BW
30	Bouvet Island	BV
31	Brazil	BR
32	British Indian Ocean Territory	IO
33	Brunei Darussalam	BN
34	Bulgaria	BG
35	Burkina Faso	BF
36	Burundi	BI
37	Cambodia	KH
38	Cameroon	CM
39	Canada	CA
40	Cape Verde	CV
41	Cayman Islands	KY
42	Central African Republic	CF
43	Chad	TD
44	Chile	CL

**Table B.5** (continued)

<b>Code</b>	<b>Reference-English Country Name</b>	<b>Comment 2-alpha code</b>
45	China	CN
46	Christmas Island	CX
47	Cocos (Keeling) Islands	CC
48	Colombia	CO
49	Comoros	KM
50	Congo	CG
51	Congo, The Democratic Republic of the	CD
52	Cook Islands	CK
53	Costa Rica	CR
54	Côte D'ivoire	CI
55	Croatia	HR
56	Cuba	CU
57	Cyprus	CY
58	Czech Republic	CZ
59	Denmark	DK
60	Djibouti	DJ
61	Dominica	DM
62	Dominican Republic	DO
63	Ecuador	EC
64	Egypt	EG
65	El Salvador	SV
66	Equatorial Guinea	GQ
67	Eritrea	ER
68	Estonia	EE
69	Ethiopia	ET
70	Falkland Islands (Malvinas)	FK
71	Faroe Islands	FO
72	Fiji	FJ
73	Finland	FI
74	France	FR
75	French Guiana	GF
76	French Polynesia	PF
77	French Southern Territories	TF
78	Gabon	GA
79	Gambia	GM
80	Georgia	GE
81	Germany	DE
82	Ghana	GH
83	Gibraltar	GI
84	Greece	GR



**Table B.5** (continued)

<b>Code</b>	<b>Reference-English Country Name</b>	<b>Comment 2-alpha code</b>
85	Greenland	GL
86	Grenada	GD
87	Guadeloupe	GP
88	Guam	GU
89	Guatemala	GT
90	Guernsey	GG
91	Guinea	GN
92	Guinea-Bissau	GW
93	Guyana	GY
94	Haiti	HT
95	Heard Island and Mcdonald Islands	HM
96	Holy See (Vatican City State)	VA
97	Honduras	HN
98	Hong Kong	HK
99	Hungary	HU
100	Iceland	IS
101	India	IN
102	Indonesia	ID
103	Iran, Islamic Republic of	IR
104	Iraq	IQ
105	Ireland	IE
106	Isle of Man	IM
107	Israel	IL
108	Italy	IT
109	Jamaica	JM
110	Japan	JP
111	Jersey	JE
112	Jordan	JO
113	Kazakhstan	KZ
114	Kenya	KE
115	Kiribati	KI
116	Korea, Democratic People's Republic of	KP
117	Korea, Republic of	KR
118	Kuwait	KW
119	Kyrgyzstan	KG
120	Lao People's Democratic Republic	LA
121	Latvia	LV
122	Lebanon	LB
123	Lesotho	LS
124	Liberia	LR

**Table B.5** (continued)

<b>Code</b>	<b>Reference-English Country Name</b>	<b>Comment 2-alpha code</b>
125	Libyan Arab Jamahiriya	LY
126	Liechtenstein	LI
127	Lithuania	LT
128	Luxembourg	LU
129	Macao	MO
130	Macedonia, The Former Yugoslav Republic of	MK
131	Madagascar	MG
132	Malawi	MW
133	Malaysia	MY
134	Maldives	MV
135	Mali	ML
136	Malta	MT
137	Marshall Islands	MH
138	Martinique	MQ
139	Mauritania	MR
140	Mauritius	MU
141	Mayotte	YT
142	Mexico	MX
143	Micronesia, Federated States of	FM
144	Moldova, Republic of	MD
145	Monaco	MC
146	Mongolia	MN
147	Montenegro	ME
148	Montserrat	MS
149	Morocco	MA
150	Mozambique	MZ
151	Myanmar	MM
152	Namibia	NA
153	Nauru	NR
154	Nepal	NP
155	Netherlands	NL
156	Netherlands Antilles	AN
157	New Caledonia	NC
158	New Zealand	NZ
159	Nicaragua	NI
160	Niger	NE
161	Nigeria	NG
162	Niue	NU
163	Norfolk Island	NF

**Table B.5** (continued)

<b>Code</b>	<b>Reference-English Country Name</b>	<b>Comment 2-alpha code</b>
164	Northern Mariana Islands	MP
165	Norway	NO
166	Oman	OM
167	Pakistan	PK
168	Palau	PW
169	Palestinian Territory, Occupied	PS
170	Panama	PA
171	Papua New Guinea	PG
172	Paraguay	PY
173	Peru	PE
174	Philippines	PH
175	Pitcairn	PN
176	Poland	PL
177	Portugal	PT
178	Puerto Rico	PR
179	Qatar	QA
180	Réunion	RE
181	Romania	RO
182	Russian Federation	RU
183	Rwanda	RW
184	Saint Helena	SH
185	Saint Kitts and Nevis	KN
186	Saint Lucia	LC
187	Saint Pierre and Miquelon	PM
188	Saint Vincent and the Grenadines	VC
189	Samoa	WS
190	San Marino	SM
191	Sao Tome and Principe	ST
192	Saudi Arabia	SA
193	Senegal	SN
194	Serbia	RS
195	Seychelles	SC
196	Sierra Leone	SL
197	Singapore	SG
198	Slovakia	SK
199	Slovenia	SI
200	Solomon Islands	SB
201	Somalia	SO
202	South Africa	ZA

**Table B.5** (continued)

<b>Code</b>	<b>Reference-English Country Name</b>	<b>Comment 2-alpha code</b>
203	South Georgia and the South Sandwich Islands	GS
204	Spain	ES
205	Sri Lanka	LK
206	Sudan	SD
207	Suriname	SR
208	Svalbard and Jan Mayen	SJ
209	Swaziland	SZ
210	Sweden	SE
211	Switzerland	CH
212	Syrian Arab Republic	SY
213	Taiwan, Province of China	TW
214	Tajikistan	TJ
215	Tanzania, United Republic of	TZ
216	Thailand	TH
217	Timor-Leste	TL
218	Togo	TG
219	Tokelau	TK
220	Tonga	TO
221	Trinidad And Tobago	TT
222	Tunisia	TN
223	Turkey	TR
224	Turkmenistan	TM
225	Turks and Caicos Islands	TC
226	Tuvalu	TV
227	Uganda	UG
228	Ukraine	UA
229	United Arab Emirates	AE
230	United Kingdom	GB
231	United States	US
232	United States Minor Outlying Islands	UM
233	Uruguay	UY
234	Uzbekistan	UZ
235	Vanuatu	VU
236	Venezuela	VE
237	Viet Nam	VN
238	Virgin Islands, British	VG
239	Virgin Islands, U.S.	VI
240	Wallis And Futuna	WF
241	Western Sahara	EH

**Table B.5** (continued)

Code	Reference-English Country Name	Comment 2-alpha code
242	Yemen	YE
243	Zambia	ZM
244	Zimbabwe	ZW

## B.6 typ006:OrientationType

[Table B.6](#) shows the values of the compass orientation used in TPEG.

**Table B.6 — typ006:OrientationType**

Code	Reference-English 'Word'	Comment
000	unknown compass orientation	Service provider does not know at time of message generation
001	north	
002	north-east	
003	east	
004	south-east	
005	south	
006	south-west	
007	west	
008	north-west	

## B.7 typ007:Priority

[Table B.7](#) shows the values of the priority of messages.

**Table B.7 — typ007:Priority**

Code	Reference-English 'Word'	Comment
000	undefined	
001	low	Decoding of this message can be delayed if resources in the receiver are limited or overloaded.
002	medium	
003	high	This message should be decoded as soon as possible.

## B.8 typ008:OptionalBoolean

[Table B.8](#) is used for representing optional Booleans.

**Table B.8 — typ008:OptionalBoolean**

Code	Reference-English 'Word'	Comment
000	undefined	
001	true	
002	false	

## Bibliography

- [1] ISO/IEC 19501: 2005, *Information technology — Open Distributed Processing — Unified Modeling Language(UML) Version 1.4.2*
- [2] ISO/IEC Directives. Part 2, 2011, *Rules for the structure and drafting of International Standards*
- [3] DIRECTIVES ETSI 2008, *ETSI Drafting Rules*
- [4] ISO 639-1: 2002, *Codes for the representation of names of languages — Part 1: Alpha-2 code*
- [5] ISO 4217: 2008, *Codes for the representation of currencies and funds*
- [6] ISO 3166-1: 2006, *Codes for the representation of names of countries and their subdivisions — Part 1: Country codes*
- [7] ISO/TS 21219-3, *Intelligent transport systems — Traffic and travel information (TTI) via transport protocol experts group, generation 2 (TPEG2) — Part 3: UML to binary conversion rules*
- [8] ISO/TS 21219-4, *Intelligent transport systems — Traffic and travel information (TTI) via transport protocol experts group, generation 2 (TPEG2) — Part 4: UML to XML conversion rules*









# British Standards Institution (BSI)

BSI is the national body responsible for preparing British Standards and other standards-related publications, information and services.

BSI is incorporated by Royal Charter. British Standards and other standardization products are published by BSI Standards Limited.

## About us

We bring together business, industry, government, consumers, innovators and others to shape their combined experience and expertise into standards-based solutions.

The knowledge embodied in our standards has been carefully assembled in a dependable format and refined through our open consultation process. Organizations of all sizes and across all sectors choose standards to help them achieve their goals.

## Information on standards

We can provide you with the knowledge that your organization needs to succeed. Find out more about British Standards by visiting our website at [bsigroup.com/standards](http://bsigroup.com/standards) or contacting our Customer Services team or Knowledge Centre.

## Buying standards

You can buy and download PDF versions of BSI publications, including British and adopted European and international standards, through our website at [bsigroup.com/shop](http://bsigroup.com/shop), where hard copies can also be purchased.

If you need international and foreign standards from other Standards Development Organizations, hard copies can be ordered from our Customer Services team.

## Subscriptions

Our range of subscription services are designed to make using standards easier for you. For further information on our subscription products go to [bsigroup.com/subscriptions](http://bsigroup.com/subscriptions).

With **British Standards Online (BSOL)** you'll have instant access to over 55,000 British and adopted European and international standards from your desktop. It's available 24/7 and is refreshed daily so you'll always be up to date.

You can keep in touch with standards developments and receive substantial discounts on the purchase price of standards, both in single copy and subscription format, by becoming a **BSI Subscribing Member**.

**PLUS** is an updating service exclusive to BSI Subscribing Members. You will automatically receive the latest hard copy of your standards when they're revised or replaced.

To find out more about becoming a BSI Subscribing Member and the benefits of membership, please visit [bsigroup.com/shop](http://bsigroup.com/shop).

With a **Multi-User Network Licence (MUNL)** you are able to host standards publications on your intranet. Licences can cover as few or as many users as you wish. With updates supplied as soon as they're available, you can be sure your documentation is current. For further information, email [bsmusales@bsigroup.com](mailto:bsmusales@bsigroup.com).

## BSI Group Headquarters

389 Chiswick High Road London W4 4AL UK

## Revisions

Our British Standards and other publications are updated by amendment or revision.

We continually improve the quality of our products and services to benefit your business. If you find an inaccuracy or ambiguity within a British Standard or other BSI publication please inform the Knowledge Centre.

## Copyright

All the data, software and documentation set out in all British Standards and other BSI publications are the property of and copyrighted by BSI, or some person or entity that owns copyright in the information used (such as the international standardization bodies) and has formally licensed such information to BSI for commercial publication and use. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI. Details and advice can be obtained from the Copyright & Licensing Department.

## Useful Contacts:

### Customer Services

**Tel:** +44 845 086 9001

**Email (orders):** [orders@bsigroup.com](mailto:orders@bsigroup.com)

**Email (enquiries):** [cservices@bsigroup.com](mailto:cservices@bsigroup.com)

### Subscriptions

**Tel:** +44 845 086 9001

**Email:** [subscriptions@bsigroup.com](mailto:subscriptions@bsigroup.com)

### Knowledge Centre

**Tel:** +44 20 8996 7004

**Email:** [knowledgecentre@bsigroup.com](mailto:knowledgecentre@bsigroup.com)

### Copyright & Licensing

**Tel:** +44 20 8996 7070

**Email:** [copyright@bsigroup.com](mailto:copyright@bsigroup.com)



...making excellence a habit.™