

INTERNATIONAL STANDARD

ISO 441

Second edition
1997-01-15

Textile machinery and accessories — Drop wires for warp stop motions for weaving machines without automatic drawing-in

*Matériel pour l'industrie textile — Lamelles pour casse-chaînes pour
machines à tisser sans rentrée automatique des lamelles*

This material is reproduced from ISO documents under International Organization for Standardization (ISO) Copyright License number IHS/ICC/1996. Not for resale. No part of these ISO documents may be reproduced in any form, electronic retrieval system or otherwise, except as allowed in the copyright law of the country of use, or with the prior written consent of ISO (Case postale 56, 1211 Geneva 20, Switzerland, Fax +41 22 734 10 79), IHS or the ISO Licensor's members.



Reference number
ISO 441:1997(E)

ISO 441:1997(E)**Foreword**

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

International Standard ISO 441 was prepared by Technical Committee ISO/TC 72, *Textile machinery*, Subcommittee SC 3, *Machinery for fabric manufacture*.

This second edition cancels and replaces the first edition (ISO 441-1978), which has been technically revised.

© ISO 1997

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from the publisher.

International Organization for Standardization
Case Postale 56 • CH-1211 Genève 20 • Switzerland

Printed in Switzerland

Textile machinery and accessories — Drop wires for warp stop motions for weaving machines without automatic drawing-in

1 Scope

This International Standard specifies the principal dimensions, tolerances and designation of drop wires for mechanical, electromechanical and electrical warp stop motions for weaving machines.

This International Standard applies only to drop wires that are drawn in by hand or pinned by means of a pinning machine. It applies to the following types of drop wires:

- a) for mechanical and electromechanical warp stop motions
 - MG (closed end)
 - MO (open end)
- b) for electrical warp stop motions
 - EG (closed end)
 - EO (open end)

2 Dimensions

2.1 The dimensions for drop wires type MG and MO for mechanical and electromechanical warp stop motions are given in figure 1 and table 1.

2.2 The dimensions for drop wires type EG and EO for electrical warp stop motions are given in figure 2 and table 1.

3 Designation

The drop wires for warp stop motions as specified in this International Standard shall be designated as follows, in the order given:

- a) the block descriptor, "drop wire";
- b) a reference to this International Standard, "ISO 441";
- c) the type of warp stop motion (M or E);
- d) the type of end (G or O);
- e) the thread eye shape;
- f) the length l of the drop wire, in millimetres;
- g) the width b of the drop wire, in millimetres;
- h) the thickness e of the drop wire, in millimetres.

EXAMPLES


A drop wire for mechanical or electromechanical warp stop motion with closed end (MG) and U-shaped eye, having a length of 145 mm, a width of 11 mm and a thickness of 0,3 mm is designated as follows:

Drop wire ISO 441 - MGU 145 × 11 × 0,3

A drop wire for electrical warp stop motion with closed end (EG) and U-shaped eye, having a length of 165 mm, a width of 11 mm and a thickness of 0,4 mm is designated as follows:

Drop wire ISO 441 - EGU 165 × 11 × 0,4


Dimensions in millimetres

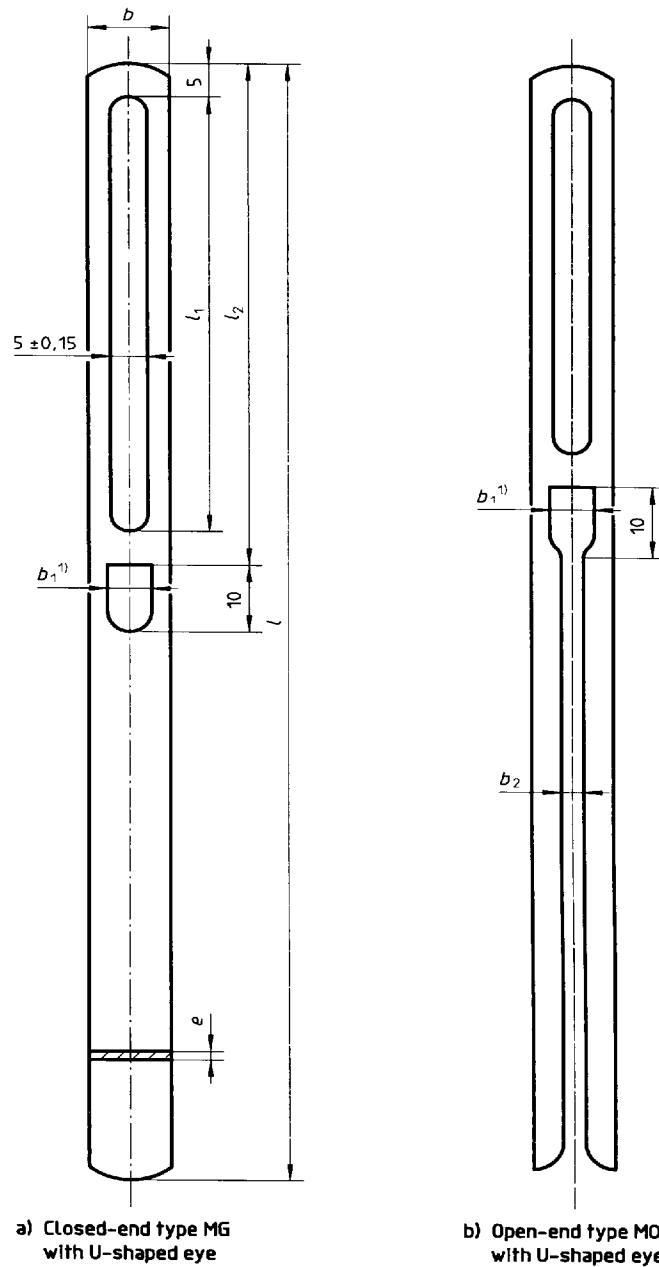

1) Or width of another shape of thread eye, for example round eye, type R. The upper edge of the eye shape should be at the same level as the upper edge of a U-shaped thread eye.

Figure 1

Dimensions in millimetres

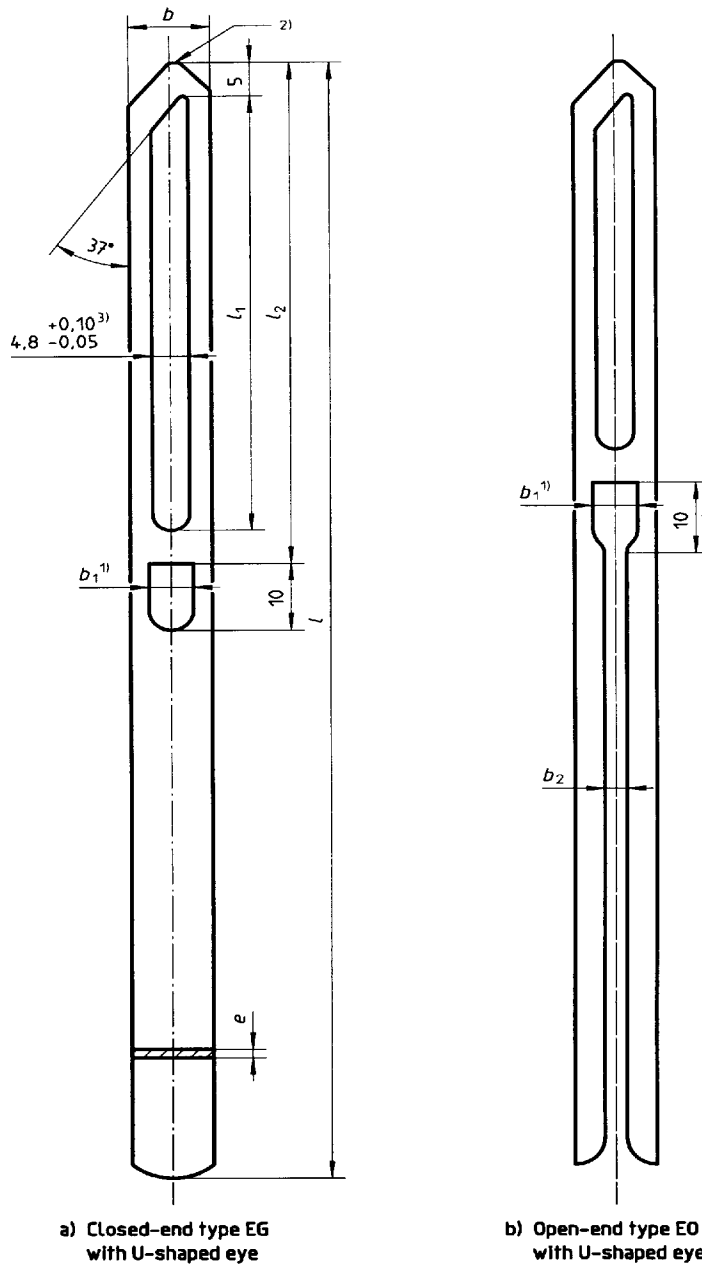

- 1) Or width of another shape of thread eye, for example round eye, type R. The upper edge of the thread eye should be at the same level as the upper edge of a U-shaped thread eye.
- 2) The top end of the drop wire may be rounded at the option of the manufacturer.
+0,10 mm
- 3) For $b = 7$ mm, the width of the upper slot is 4,5 mm -0,05 mm.

Figure 2

Table 1 — Dimensions for drop wire types MG, MO, EG and EO

Drop wire type	Length <i>l</i> mm	Width <i>b</i> mm	Thickness <i>e</i> mm	Length of upper slot <i>l</i> ₁ mm	Length of upper part <i>l</i> ₂ ±0,3 mm	Width of U-shaped ¹⁾ thread eye <i>b</i> ₁ mm	Width of lower slot <i>b</i> ₂ min. mm	Mass	
								Closed-end type g	Open-end type g
EO	145	7	0,2	53	63	4	2,5	—	0,9
		8 ²⁾	0,2			5		—	1,1
MO and EO	145	11	0,2	53	63	6	3	—	1,7
			0,3					—	2,5
EG	145	8 ²⁾	0,2	53	63	5	—	1,2	—
			0,2					1,9	—
MG and EG	145	11	0,3	53	63	6	—	2,9	—
			0,4					3,8	—
EO	165	8 ²⁾	0,2	65	75	5	2,5	—	1,2
			0,3					2,2	1,9
MO, EO MG and EG	165	11	0,4	65	75	6	3	3,3	2,9
			0,5					4,4	3,8
MO and EO	180	11	0,2	65	75	6	3	—	2,2
			0,3					—	3,3
MO and EO	180	11	0,4	65	75	6	3	—	4,4
			0,5					—	5,5

1) Or width of another shape of thread eye.
2) Deprecated.

ICS 59.120.30

Descriptors: textile machinery, weaving machinery, drop wires, warp stop motions, dimensions, dimensional tolerances.

Price based on 5 pages
