

# INTERNATIONAL STANDARD

# ISO 2041

Third edition  
2009-08-01

---

---

## Mechanical vibration, shock and condition monitoring — Vocabulary

*Vibrations et chocs mécaniques, et leur surveillance — Vocabulaire*



Reference number  
ISO 2041:2009(E)

© ISO 2009

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.



**COPYRIGHT PROTECTED DOCUMENT**

© ISO 2009

The reproduction of the terms and definitions contained in this International Standard is permitted in teaching manuals, instruction booklets, technical publications and journals for strictly educational or implementation purposes. The conditions for such reproduction are: that no modifications are made to the terms and definitions; that such reproduction is not permitted for dictionaries or similar publications offered for sale; and that this International Standard is referenced as the source document.

With the sole exceptions noted above, no other part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.org](mailto:copyright@iso.org)  
Web [www.iso.org](http://www.iso.org)

Published in Switzerland

<b>Contents</b>	Page
<b>Foreword</b> .....	<b>iv</b>
<b>Introduction</b> .....	<b>v</b>
<b>Scope</b> .....	<b>1</b>
<b>1 General</b> .....	<b>1</b>
<b>2 Vibration</b> .....	<b>15</b>
<b>3 Mechanical shock</b> .....	<b>29</b>
<b>4 Transducers for shock and vibration measurement</b> .....	<b>31</b>
<b>5 Signal processing</b> .....	<b>34</b>
<b>6 Condition monitoring and diagnostics</b> .....	<b>40</b>
<b>Bibliography</b> .....	<b>43</b>
<b>Alphabetical index</b> .....	<b>44</b>

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 2.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

ISO 2041 was prepared by Technical Committee ISO/TC 108, *Mechanical vibration, shock and condition monitoring*.

This third edition cancels and replaces the second edition (ISO 2041:1990) which has been technically revised. This revision reflects advances in technology and refinements in terms used in the previous version. As such, it incorporates more precise definitions of some terms reflecting changes in accepted meaning. New terms which were driven by changes in technology (primarily in the areas of signal processing, condition monitoring and vibration and shock diagnostics and prognostics) and, in order to be a stand-alone standard, terms from ISO 2041:1990 still in common usage are incorporated.

## Introduction

Vocabulary is the most basic of subjects for standardization. Without an accepted standard for the definition of terminology, the development of other technical standards in a technical area becomes a laborious and time-consuming task that would ultimately result in the inefficient use of time and a high probability of misinterpretation.

.....

# Mechanical vibration, shock and condition monitoring — Vocabulary

## Scope

This International Standard defines terms and expressions unique to the areas of mechanical vibration, shock and condition monitoring.

## 1 General

### 1.1

#### **displacement** **relative displacement**

(vibration and shock) time varying quantity that specifies the change in position of a point on a body with respect to a reference frame

NOTE 1 The reference frame is usually a set of axes at a mean position or a position of rest. In general, a rotation displacement vector, a translation displacement vector, or both can represent the displacement.

NOTE 2 A displacement is designated as relative displacement if it is measured with respect to a reference frame other than the primary reference frame designated in a given case.

NOTE 3 Displacement can be:

- oscillatory, in which case simple harmonic components can be defined by the displacement amplitude (and frequency), or
- random, in which case the root-mean-square (rms) displacement (and band-width and probability density distribution) can be used to define the probability that the displacement will have values within any given range.

Displacements of short time duration are defined as transient displacements. Non-oscillatory displacements are defined as sustained displacements, if of long duration, or as displacement pulses, if of short duration.

### 1.2

#### **velocity** **relative velocity**

(vibration and shock) rate of change of displacement

NOTE 1 In general, velocity is time-dependent.

NOTE 2 The reference frame is usually a set of axes at a mean position or a position of rest. In general, a rotation velocity vector, a translation velocity vector, or both can represent the velocity.

NOTE 3 A velocity is designated as relative velocity if it is measured with respect to a reference frame other than the primary reference frame designated in a given case. The relative velocity between two points is the vector difference between the velocities of the two points.

NOTE 4 Velocity can be:

- oscillatory, in which case simple harmonic components can be defined by the velocity amplitude (and frequency), or
- random, in which case the root-mean-square (rms) velocity (and band-width and probability density distribution) can be used to define the probability that the velocity will have values within any given range.

Velocities of short time duration are defined as transient velocities. Non-oscillatory velocities are defined as sustained velocities, if of long duration.

**1.3**  
**acceleration**  
**relative acceleration**

(vibration and shock) rate of change of velocity

NOTE 1 In general, acceleration is time-dependent.

NOTE 2 The reference frame is usually a set of axes at a mean position or a position of rest. In general, a rotation acceleration vector, a translation acceleration vector, or both and the Coriolis acceleration can represent the acceleration.

NOTE 3 An acceleration is designated as relative acceleration if it is measured with respect to a reference frame other than the inertial reference frame designated in a given case. The relative acceleration between two points is the vector difference between the accelerations of the two points.

NOTE 4 In the case of time-dependent accelerations, various self-explanatory modifiers, such as peak, average, and rms (root-mean-square), are often used. The time intervals over which the average or root-mean-square values are taken should be indicated or implied.

NOTE 5 Acceleration can be:

- oscillatory, in which case simple harmonic components can be defined by the acceleration amplitude (and frequency), or
- random, in which case the rms acceleration (and band-width and probability density distribution) can be used to define the probability that the acceleration will have values within any given range.

Accelerations of short time duration are defined as transient accelerations. Non-oscillatory accelerations are defined as sustained accelerations, if of long duration, or as acceleration pulses, if of short duration.

**1.4**  
**standard acceleration due to gravity**

$g_n$   
unit, 9,806 65 metres per second-squared (9,806 65 m/s<sup>2</sup>)

NOTE 1 Value adopted in the International Service of Weights and Measures and confirmed in 1913 by the 5th CGPM as the standard for acceleration due to gravity.

NOTE 2 This "standard value" ( $g_n = 9,806\ 65\ \text{m/s}^2 = 980,665\ \text{cm/s}^2 \approx 386,089\ \text{in/s}^2 \approx 32,174\ 0\ \text{ft/s}^2$ ) should be used for reduction to standard gravity of measurements made in any location on Earth.

NOTE 3 Frequently, the magnitude of acceleration is expressed in units of  $g_n$ .

NOTE 4 The actual acceleration produced by the force of gravity at or below the surface of the Earth varies with the latitude and elevation of the point of observation. This variable is often expressed using the symbol  $g$ . Caution should be exercised if this is done so as not to create an ambiguity with this use and the standard symbol for the unit of the gram.

**1.5**  
**force**

dynamic influence that changes a body from a state of rest to one of motion or changes its rate of motion

NOTE 1 A force could also change a body's size or shape if the body resists motion.

NOTE 2 The newton is the unit of force. One newton is the force required to give a mass of one kilogram an acceleration of one metre per second squared.

**1.6**  
**restoring force**

reaction force caused by the elastic property of a structure when it is being deformed

**1.7**  
**jerk**

rate of change of acceleration



**1.8****inertial reference system****inertial reference frame**

coordinate system or frame which is fixed in space or moves at constant velocity without rotational motion and thus, not accelerating

**1.9****inertial force**

reaction force exerted by a mass when it is being accelerated

**1.10****oscillation**

variation, usually with time, of the magnitude of a quantity with respect to a specified reference when the magnitude is alternately greater and smaller than the specified reference

NOTE 1 See **vibration** (2.1).

NOTE 2 Variations with time such as shock processes or creeping motions are also considered to be oscillations in a more general sense of the word.

**1.11****environment**

aggregate, at a given moment, of all external conditions and influences to which a system is subjected

NOTE See **induced environment** (1.12) and **natural environment** (1.13).

**1.12****induced environment**

conditions external to a system generated as a result of the operation of the system

**1.13****natural environment**

conditions generated by the forces of nature and the effects of which are experienced by a system when it is at rest as well as when it is in operation

**1.14****preconditioning**

climatic and/or mechanical and/or electrical treatment procedure which may be specified for a particular system so that it attains a defined state

**1.15****conditioning**

climatic and/or mechanical and/or electrical conditions to which a system is subjected in order to determine the effect of such conditions upon it

**1.16****excitation****stimulus**

external force (or other input) applied to a system that causes the system to respond in some way

**1.17****response (of a system)**

output quantity of a system

**1.18****transmissibility**

non-dimensional complex ratio of the response of a system in forced vibration to the excitation

NOTE 1 The ratio may be one of forces, displacements, velocities or accelerations.

NOTE 2 This is sometimes known as a transmissibility function.

**1.19**

**overshoot**

when the maximum transient response exceeds the desired response

NOTE 1 If the output of a system is changed from a steady value A to a steady value B by varying the input, such that value B is greater than A, then the response is said to overshoot when the maximum transient response exceeds value B.

NOTE 2 The difference between the maximum transient response and the value B is the value of the overshoot. This is usually expressed as a percentage.

**1.20**

**undershoot**

when the minimum transient response falls below the desired response

NOTE 1 If the output of a system is changed from a steady value A to a steady value B by varying the input, such that value B is less than A, then the response is said to undershoot when the minimum transient response is less than value B.

NOTE 2 The difference between the minimum transient response and the value B is the value of the undershoot. This is usually expressed as a percentage.

**1.21**

**system**

set of interrelated elements considered in a defined context as a whole and separated from their environment

**1.22**

**linear system**

system in which the magnitude of the response is proportional to the magnitude of the excitation

NOTE This definition implies that the principle of superposition can be applied to the relationship between output response and input excitation.

**1.23**

**mechanical system**

system comprising elements of mass, stiffness and damping

**1.24**

**foundation**

structure that supports a mechanical system

NOTE It can be fixed in a specified reference frame or it can undergo a motion.

**1.25**

**seismic system**

system consisting of a mechanical system attached to a reference base by one or more flexible elements, with damping normally included

NOTE 1 Seismic systems are usually idealized as single-degree-of-freedom systems with viscous damping.

NOTE 2 The natural frequencies of the mass as supported by the flexible elements are relatively low for seismic systems associated with displacement or velocity transducers, and are relatively high for acceleration transducers, as compared with the range of frequencies to be measured.

NOTE 3 When the natural frequency of the seismic system is low relative to the frequency range of interest, the mass of the seismic system may be considered to be at rest over this range of frequencies.

**1.26**

**equivalent system**

system that can be substituted for another system for the purpose of analysis

NOTE Many types of equivalence are common in vibration and shock technology:

- a) a torsional system equivalent to a translational system;
- b) an electrical or acoustical system equivalent to a mechanical system, etc.;
- c) equivalent stiffness;
- d) equivalent damping.

### **1.27 degrees of freedom**

minimum number of generalized coordinates required to define completely the configuration of a mechanical system

NOTE 1 This applies to mechanical systems, not to be confused with statistical degrees of freedom.

NOTE 2 It is often referred to by the acronym DOF.

### **1.28 discrete system lumped parameter system**

mechanical system in which the mass, stiffness, and/or damping elements are discretely located

### **1.29 single-degree-of-freedom system SDOF**

system requiring only one coordinate to define completely its configuration at any instant

### **1.30 multi-degree-of-freedom system**

system for which two or more coordinates are required to define completely the configuration of the system at any instant

### **1.31 continuous system**

mechanical system in which the mass, stiffness, and/or damping properties are spatially distributed rather than discretely located

NOTE The configuration of a continuous system is specified by a function of a continuous spatial variable, or variables, in contrast to a discrete or lumped parameter system that requires only a finite number of coordinates to specify its configuration.

### **1.32 centre of gravity**

point through which the resultant of the weights of its component particles passes without resulting in moment for all orientations of the body with respect to a gravitational field

NOTE If the field is uniform, the centre of gravity coincides with the **centre of mass** (1.33).

### **1.33 centre of mass**

point of a body where the first moment of the overall mass with reference to a Cartesian coordinate system is equal to the first moments of mass of all points of the body

NOTE This is the point at which an object is in balance in a uniform gravitational field.

### **1.34 principal axes of inertia**

three mutually perpendicular axes intersecting each other at a given point about which the products of inertia of a solid body are zero

NOTE 1 If the point is the centre of mass of the body, the axes and moments are called central principal axes and central principal moments of inertia.

NOTE 2 In balancing, the term “principal inertia axis” is used to designate the one central principal axis (of the three such axes) most nearly coincident with the shaft axis of the rotor and is sometimes referred to as the balance axis or the mass axis.

**1.35**  
**moment of inertia**

sum (integral) of the product of the masses of the individual particles (elements of mass) of a body and the square of their perpendicular distances from the axis of rotation

**1.36**  
**product of inertia**

sum (integral) of the product of the masses of the individual particles (elements of mass) of a body and their distances from two mutually perpendicular planes

**1.37**  
**stiffness**

ratio of change of force (or torque) to the corresponding change in translational (or rotational) deformation of an elastic element

NOTE See also **dynamic stiffness** (1.58).

**1.38**  
**compliance**

reciprocal of stiffness

NOTE See also **dynamic compliance** (1.57).

**1.39**  
**neutral surface**  
**neutral surface of a beam in simple flexure**

surface in which there is no strain

NOTE It should be stated whether or not the neutral surface is a result of the flexure alone, or whether it is a result of the flexure and other superimposed loads.

**1.40**  
**neutral axis**  
**neutral axis of a beam in simple flexure**

line or plane in a beam where the longitudinal stress, tensile or compressive is zero

**1.41**  
**transfer function**

mathematical representation of the relationship between the input and output of a linear time-invariant system

NOTE 1 A transfer function is usually a complex function defined as the ratio of the Laplace transforms of the output to the input of a linear time-invariant system.

NOTE 2 It is usually given as a function of frequency, and is usually a complex function. See **response** (1.17), **transmissibility** (1.18) and **transfer impedance** (1.50).

**1.42**  
**complex excitation**

excitation expressed as a complex quantity with amplitude and phase angle

NOTE 1 The concepts of complex excitations and responses were evolved historically in order to simplify calculations. The actual excitation and response are the real parts of the complex excitation and response. If the system is linear, the concept is valid because superposition holds in such a situation.

NOTE 2 This term should not be confused with excitation by a complex vibration, or vibration of complex waveform. The use of the term “complex vibration” in this sense is deprecated.

**1.43****complex response**

response of a system expressed as a complex quantity with amplitude and phase angle from a specified excitation

NOTE See the notes under **complex excitation** (1.42).

**1.44****modal analysis**

vibration analysis method that characterizes a complex structural system by its modes of vibration, i.e. its natural frequencies, modal damping and mode shapes, and based on the principle of superposition

**1.45****modal matrix**

linear transformation matrix which consists of the eigen vectors or modal vectors of a system

NOTE It renders the system both inertially and elastically uncoupled, i.e. the modal mass and modal stiffness matrices are transformed into diagonal matrices.

**1.46****modal stiffness**

stiffness element associated with a specified mode of vibration

**1.47****modal density**

number of modes per unit bandwidth

NOTE Modal density is a measure widely used in structural dynamics as a diagnostic tool in assessing vibration power flow in complex, structural systems. It can play a crucial role in determining changes in vibration power flow that may be a precursor to fatigue failure in some part of the structure, or a metric used in structural condition monitoring evaluations. In addition to these applications, it is a parameter required by the Statistical Energy Analysis method for evaluating the high-frequency response of complex structures and in selecting appropriate vibration-control methods and devices.

**1.48****mechanical impedance**

complex ratio of force to velocity at a specified point and degree-of-freedom in a mechanical system

NOTE 1 The force and velocity may be taken at the same or different points and degrees-of-freedom in the system undergoing simple harmonic motion.

NOTE 2 In the case of torsional mechanical impedance, the terms “force” and “velocity” should be replaced by “torque” and “angular velocity”, respectively.

NOTE 3 In general, the term “impedance” applies to linear systems only.

NOTE 4 The concept is extended to non-linear systems where the term “incremental impedance” is used to describe a similar quantity.

**1.49****direct mechanical impedance**  
**driving point mechanical impedance**

complex ratio of the force to velocity taken at the same point or degree-of-freedom in a mechanical system during simple harmonic motion

NOTE See the notes under **mechanical impedance** (1.48).

**1.50****transfer (mechanical) impedance**

complex ratio of the force applied at point  $i$ , in a specified degree-of-freedom in a mechanical system, to the velocity at another point  $j$  in a specified direction or degree-of-freedom in the same system, during simple harmonic motion

NOTE See the notes under **mechanical impedance** (1.48).

**1.51**  
**free impedance**

ratio of the applied excitation complex force to the resulting complex velocity with all other connection points of the system free, i.e. having zero restraining forces

NOTE 1 Historically, often no distinction has been made between blocked impedance and free impedance. Caution should, therefore, be exercised in interpreting published data.

NOTE 2 Free impedance is the arithmetic reciprocal of a single element of the mobility matrix. While experimentally determined free impedances could be assembled into a matrix, this matrix would be quite different from the blocked impedance matrix resulting from mathematical modelling of the structure and, therefore, would not conform to the requirements for using mechanical impedance in an overall theoretical analysis of the system.

**1.52**  
**blocked impedance**

impedance at the input when all output degrees of freedom are connected to a load of infinite mechanical impedance

NOTE 1 Blocked impedance is the frequency-response function formed by the ratio of the phasor of the blocking or driving-point force response at point  $i$ , to the phasor of the applied excitation velocity at point  $j$ , with all other measurement points on the structure "blocked", i.e. constrained to have zero velocity. All forces and moments required to fully constrain all points of interest on the structure need to be measured in order to obtain a valid blocked impedance matrix.

NOTE 2 Any changes in the number of measurement points or their location will change the blocked impedances at all measurement points.

NOTE 3 The primary usefulness of blocked impedance is in the mathematical modelling of a structure using lumped mass, stiffness and damping elements or finite element techniques. When combining or comparing such mathematical models with experimental mobility data, it is necessary to convert the analytical blocked impedance matrix into a mobility matrix or vice versa.

**1.53**  
**frequency-response function**

frequency-dependent ratio of the motion-response Fourier transform to the Fourier transform of the excitation force of a linear system

NOTE 1 Excitation can be harmonic, random or transient functions of time. The test results obtained with one type of excitation can thus be used for predicting the response of the system to any other type of excitation.

NOTE 2 Motion may be expressed in terms of velocity, acceleration or displacement; the corresponding frequency-response function designations are mobility, accelerance and dynamic compliance or impedance, effective (i.e. apparent) mass and dynamic stiffness, respectively (see Table 1).

**1.54**  
**mobility**  
**mechanical mobility**

complex ratio of the velocity, taken at a point in a mechanical system, to the force, taken at the same or another point in the system

NOTE 1 Mobility is the ratio of the complex velocity-response at point  $i$  to the complex excitation force at point  $j$  with all other measurement points on the structure allowed to respond freely without any constraints other than those constraints which represent the normal support of the structure in its intended application.

NOTE 2 The term "point" designates both a location and a direction.

NOTE 3 The velocity response can be either translational or rotational, and the excitation force can be either a rectilinear force or a moment.

NOTE 4 If the velocity response measured is a translational one and if the excitation force applied is a rectilinear one, the units of the mobility term will be  $m/(N \cdot s)$  in the SI system.

NOTE 5 Mechanical mobility is the matrix inverse of mechanical impedance.

**1.55****direct (mechanical) mobility**  
**driving-point (mechanical) mobility**

complex ratio of velocity and force taken at the same point in a mechanical system

NOTE Driving-point mobility is the frequency-response function formed by the ratio, in metres per Newton second, of the velocity-response complex amplitude at point  $j$  to the excitation force complex amplitude applied at the same point with all other measurement points on the structure allowed to respond freely without any constraints other than those constraints which represent the normal support of the structure in its intended application.

**1.56****transfer (mechanical) mobility**

mechanical mobility where the velocity and the force are considered at different points of the system

**1.57****dynamic compliance**

frequency-dependent ratio of the spectrum, or spectral density, of the displacement to the spectrum, or spectral density, of the force

**1.58****dynamic stiffness**

complex ratio of the force, taken at a point in a mechanical system, to the displacement, taken at the same or another point in the system

NOTE 1 The terms “dynamic elastic constant” and “dynamic spring constant” are sometimes used.

NOTE 2 The dynamic stiffness may be dependent upon strain (amplitude and frequency), strain-rate, temperature or other conditions.

NOTE 3 The dynamic stiffness,  $k^*$ , of a linear translational single-degree-of-freedom system characterized by the equation

$$m \frac{d^2x}{dt^2} + c \frac{dx}{dt} + kx = F \quad \text{where } F = F_0 e^{i\omega t}$$

is equal to

$$k = (F_0 + m\omega^2 x_0 - i\omega c x_0) / x_0$$

where

$c$  is the linear (viscous) damping coefficient;

$e$  is the base of natural logarithms;

$F_0$  is the force amplitude;

$i = \sqrt{-1}$ ;

$k$  is the elastic (spring) constant;

$m$  is the mass;

$t$  is the time;

$x$  is the displacement;


$x_0$  is the displacement amplitude;

$\omega$  is the angular frequency.

Table 1 — Equivalent definitions to be used for various kinds of output/input ratios

	Motion expressed as displacement	Motion expressed as velocity	Motion expressed as acceleration
Term	Dynamic compliance <sup>a</sup>	Mobility <sup>b</sup>	Accelerance <sup>c</sup>
Symbol	$x_i/F_j$	$Y_{ij} = v_i/F_j$	$a_i/F_j$
Unit	m/N	m/(N·s)	m/(N·s <sup>2</sup> ) = kg <sup>-1</sup>
Boundary conditions	$F_j = 0; i \neq j$	$F_j = 0; i \neq j$	$F_j = 0; i \neq j$
See Figure	3	1	2
Comment	Boundary conditions are easy to achieve experimentally.		
Term	Dynamic stiffness	Blocked impedance	Blocked effective mass
Symbol	$F_i/x_j$	$Z_{ij} = F_i/v_j$	$F_i/a_j$
Unit	N/m	N·s/m	N·s <sup>2</sup> /m = kg
Boundary conditions	$X_j = 0; i \neq j$	$v_j = 0; i \neq j$	$A_j = 0; i \neq j$
Comment	Boundary conditions are very difficult or impossible to achieve experimentally.		
Term	Free dynamic stiffness	Free impedance	Effective (apparent) mass (free effective mass)
Symbol	$F_j/x_i$	$F_j/v_i = 1/Y_{ij}$	$F_j/a_i$
Unit	N/m	N·s/m	N·s <sup>2</sup> /m = kg
Boundary conditions	$F_j = 0; i \neq j$	$F_j = 0; i \neq j$	$F_j = 0; i \neq j$
Comment	Boundary conditions are easy to achieve, but results shall be used with great caution in system modelling.		
<p><sup>a</sup> Dynamic compliance is also called receptance.</p> <p><sup>b</sup> Mobility is sometimes called mechanical admittance.</p> <p><sup>c</sup> Accelerance has unfortunately been called inertance in some publications. Inertance is not a standard term and is not acceptable because it is in conflict with the common definition of acoustic inertance and is also contrary to the implication carried by the word inertance.</p>			



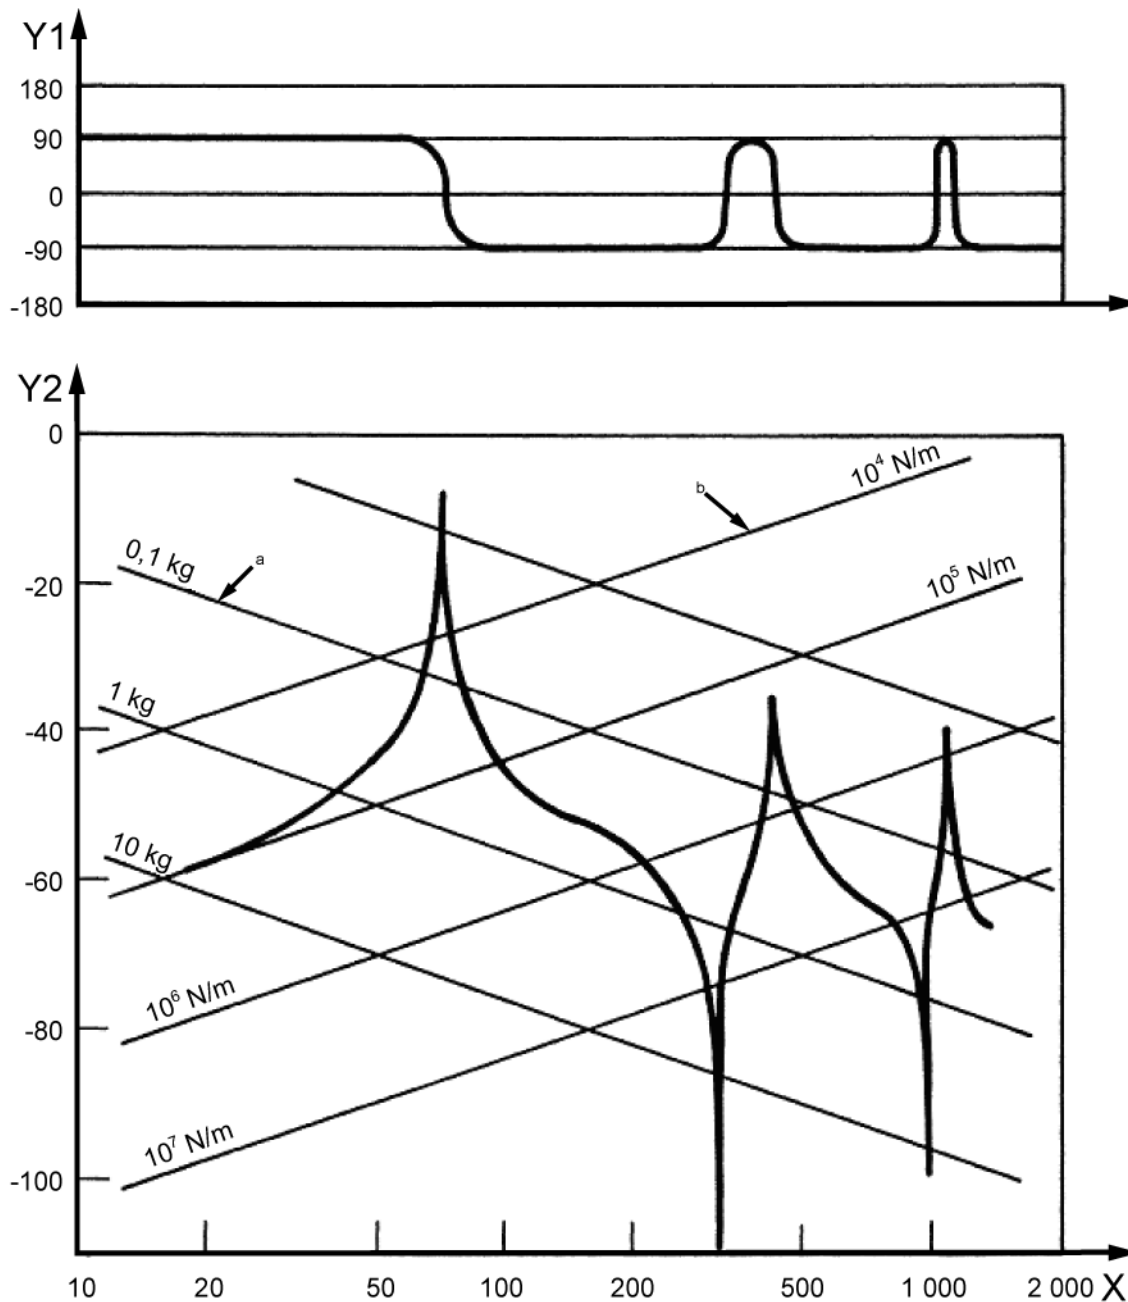


**Key**

- X frequency, in hertz (Hz)
- Y1 phase angle, in degrees
- Y2 mobility magnitude, in decibels (dB), [ref. 1 m/(N·s)]

- a Downwards sloping lines are used for mass.
- b Upwards sloping lines are used for stiffness.


**Figure 1 — Mobility plot**

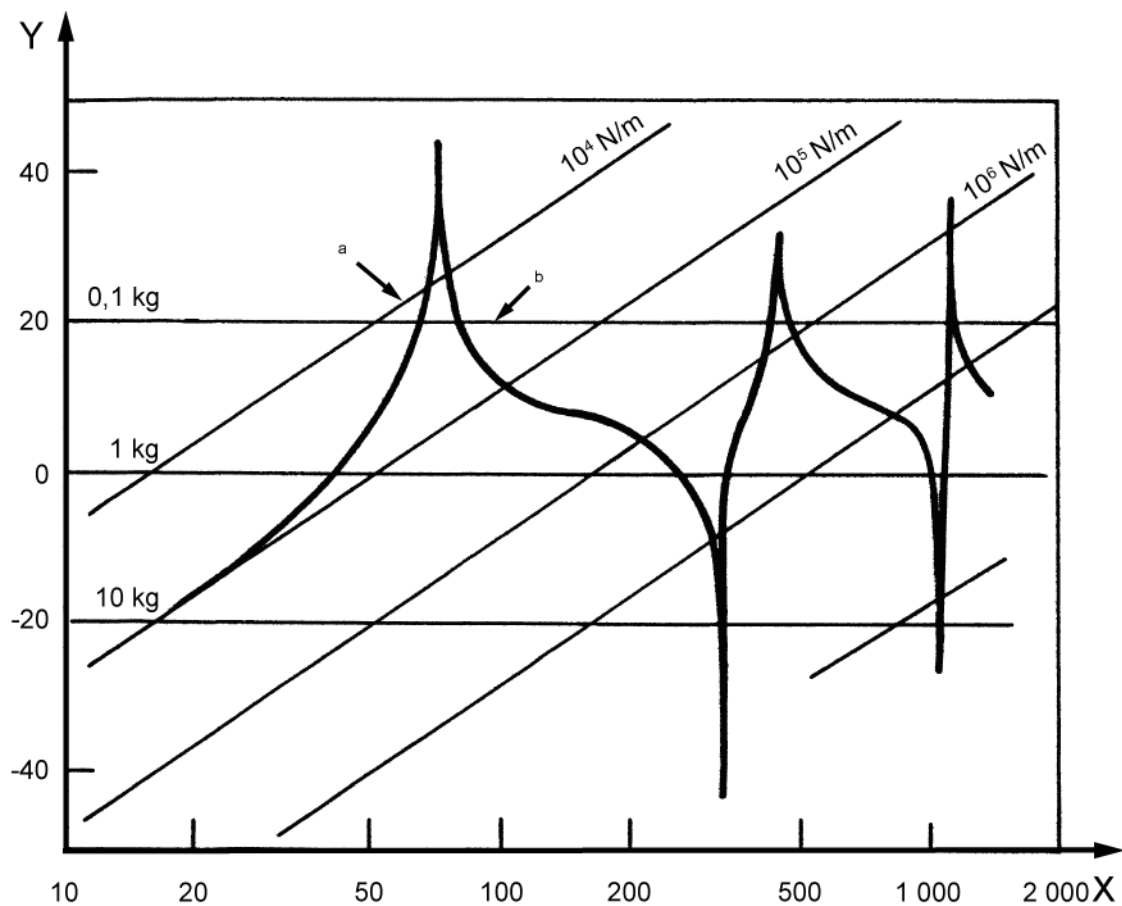

**Key**

- X frequency, in hertz (Hz)
- Y acceleration, in decibels (dB), [ref.  $1 \text{ m}/(\text{N} \cdot \text{s}^2)$ ]
- a Upwards sloping lines represent stiffness.
- b Horizontal lines represent mass.

**Figure 2 — Accelerance magnitude plot corresponding to the mobility graph plotted in Figure 1**

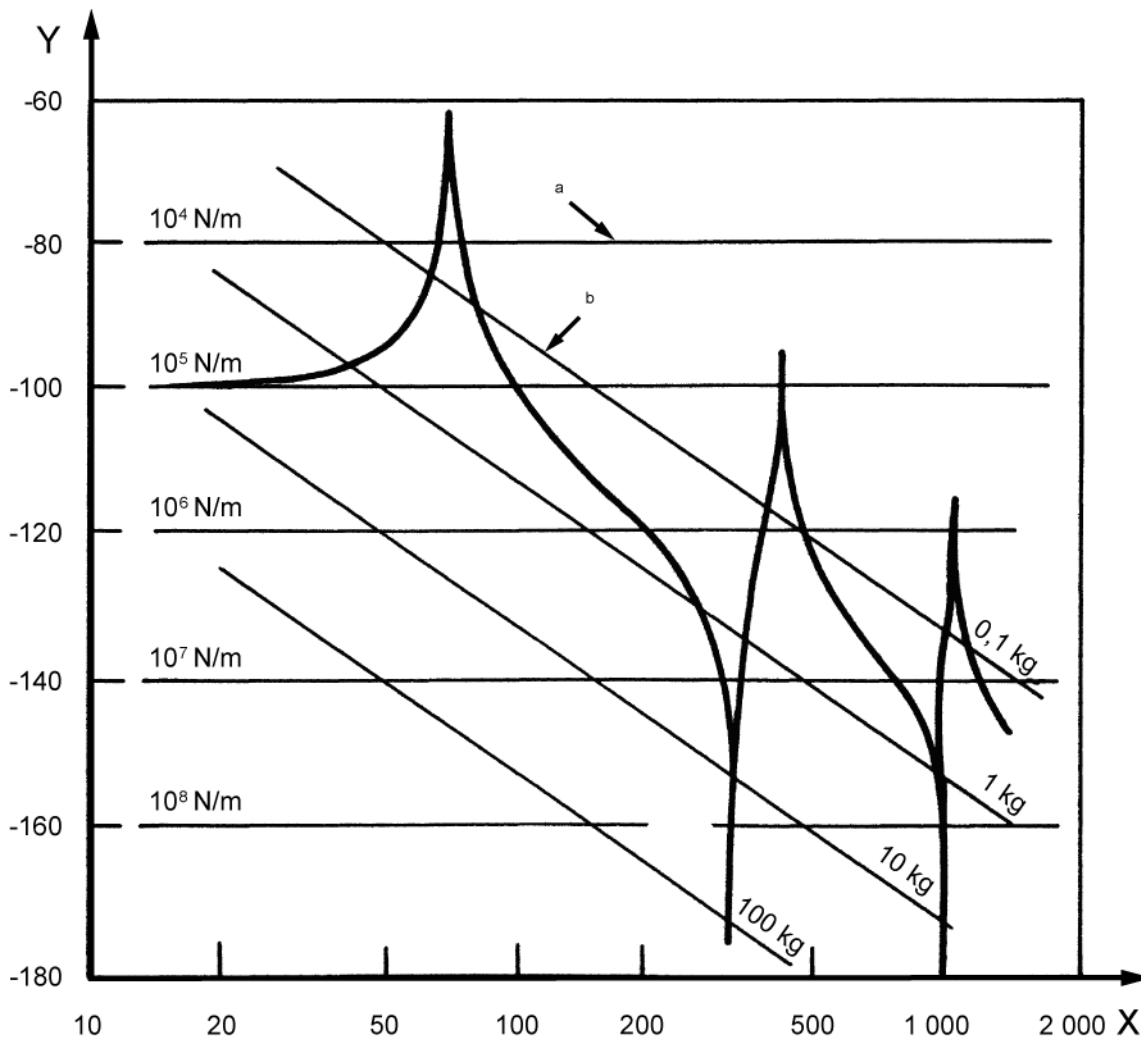

**Key**

X frequency, in hertz (Hz)  
 Y dynamic compliance, in decibels (dB), [ref. 1 m/N]

- a Horizontal lines represent stiffness.
- b Downwards sloping lines represent mass.

**Figure 3 — Dynamic compliance magnitude plot corresponding to the mobility graph plotted in Figure 1**

**1.59**

**dynamic mass**

complex ratio of force to acceleration

**1.60**

**accelerance**

frequency-dependent ratio of the spectrum, or spectral density, of the acceleration to the spectrum, or spectral density, of the force

**1.61**

**spectrum**

description of a quantity as a function of frequency or wavelength

**1.62**

**level (of a quantity)**

logarithm of the ratio of the quantity to a reference of the same kind

NOTE 1 The base of the logarithm, the reference quantity and the kind of level shall be specified.

NOTE 2 Examples of kinds of levels in common use are electric-power level, sound-pressure level, and voltage-squared level.

NOTE 3 The definition is expressed symbolically as:

$$L = \log_r \frac{q}{q_0}$$

where

$L$  is the level of the kind determined by the kind of quantity under consideration, measured in units of  $\log_r$ ;

$r$  is the base of the logarithms and the reference ratio;

$q$  is the quantity under consideration;

$q_0$  is the reference quantity of the same kind.

NOTE 4 A difference in the levels of two like quantities  $q_1$  and  $q_2$  is described by the same formula because, by the rules of logarithms, the reference quantity is automatically divided out as follows:

$$\log_r \frac{q_1}{q_0} - \log_r \frac{q_2}{q_0} = \log_r \frac{q_1}{q_2}$$

NOTE 5 In vibration terminology, the term "level" is sometimes used to denote amplitude, average value, root-mean-square value, or ratios of these values. These uses are deprecated.

**1.63**

**bel**

unit of level when the base of the logarithm is 10

NOTE Use of the bel is restricted to levels of quantities proportional to power. See also the notes under **level** (1.62) and **decibel** (1.64).

**1.64**

**decibel**

**dB**

one tenth of a bel

NOTE 1 The magnitude of a level in decibels is ten times the logarithm to the base 10 of the ratio of power-like quantities, i.e.

$$L = 10 \lg \frac{X^2}{X_0^2} = 20 \lg \frac{X}{X_0}$$

NOTE 2 Examples of quantities that qualify as power-like quantities are sound-pressure squared, particle-velocity squared, sound intensity, sound-energy density and voltage squared. Thus, the bel is a unit of sound-pressure-squared level; however, it is common practice to shorten this to sound-pressure level because ordinarily no ambiguity results from so doing.

## 2 Vibration

### 2.1 vibration

mechanical oscillations about an equilibrium point. The oscillations may be periodic or random

NOTE See **oscillation** (1.10).

### 2.2 periodic vibration

vibration where the values of the vibration parameter recur for certain equal increments of the independent time variable

NOTE 1 A periodic quantity,  $y$ , which is a function of time,  $t$ , can be expressed as:

$$y = f(t) = f(t \pm n\tau)$$

where

- $n$  is a whole number;
- $t$  is the independent time variable;
- $\tau$  is the period.

NOTE 2 A quasi-periodic vibration is a vibration which deviates only slightly from a periodic vibration.

### 2.3 simple harmonic vibration sinusoidal vibration

periodic vibration where the values of the vibration parameters can be described as sinusoidal functions of the independent time variable

NOTE 1 Simple harmonic motion can be described as:

$$y = \hat{y} \sin(\omega t + \varphi_0)$$

where

- $\hat{y}$  is the amplitude;
- $t$  is the independent time variable;
- $y$  is the simple harmonic vibration;
- $\varphi_0$  is the initial phase angle of the vibration;
- $\omega$  is the angular frequency.

NOTE 2 A periodic vibration consisting of the sum of more than one sinusoid, each having a frequency which is a multiple of the fundamental frequency, is often referred to as a multi-sinusoidal vibration. The use of the term "complex vibration" in this context is deprecated.

NOTE 3 A quasi-sinusoidal vibration has the appearance of a sinusoid, but varies relatively slowly in frequency and/or in amplitude.

### 2.4 random vibration stochastic vibration

vibration where the instantaneous value cannot be predicted

NOTE The probability that the magnitude of a random vibration is within a given range can be described by a probability distribution function.

### 2.5 angular vibration

vibration associated with the three rotational degrees of freedom of a point on a body

**2.6**

**torsional vibration**

periodic vibration caused by an object twisting about its own axis

NOTE 1 See **angular vibration** (2.5).

NOTE 2 This term is commonly used when referring to the rotation of shafts in the plane of the shaft cross-section.

**2.7**

**angular displacement**

displacement of a body, characterized by one of its rotational degrees of freedom

**2.8**

**angular velocity**

velocity of a body, characterized by one of its rotational degrees of freedom

**2.9**

**angular acceleration**

acceleration of a body, characterized by one of its rotational degrees of freedom

**2.10**

**non-stationary vibration**

vibration with time-dependent statistical properties

**2.11**

**stationary vibration**

vibration that has statistical characteristics that do not change with time; therefore, the amplitude does not increase or decrease with time

NOTE The vibration can be deterministic or random.

**2.12**

**noise**

undesired signal, generally of a random nature, the spectrum of which does not exhibit clearly defined frequency components

NOTE By extension of the above definition, noise may consist of electrical oscillations of an undesired or random nature. If ambiguity exists as to the nature of the noise, a term such as "acoustic noise" or "electrical noise" should be used.

**2.13**

**random noise**

**stochastic noise**

noise for which the instantaneous value cannot be predicted

NOTE See **random vibration** (2.4) and the accompanying note.

**2.14**

**Gaussian random vibration**

**Gaussian stochastic vibration**

random vibration whose instantaneous magnitudes have a Gaussian distribution

**2.15**

**white random vibration**

**white stochastic vibration**

vibration that has equal energy for any frequency band of constant width (or per unit bandwidth) over the spectrum of interest

**2.16****pink random vibration**  
**pink stochastic vibration**

vibration that has a constant energy within a bandwidth proportional to the centre frequency of the band

NOTE The energy spectrum of pink vibration as determined by an octave bandwidth (or any fractional part of an octave bandwidth) filter will have a constant value.

**2.17****narrow-band random vibration**  
**narrow-band stochastic vibration**

random vibration having its frequency components within a narrow band only

NOTE 1 The defining of what is meant by “narrow” is a relative matter depending upon the problem involved. It is usually equal to or less than one-third octave.

NOTE 2 The waveform of a narrow-band random vibration has the appearance of a sine wave, the amplitude and phase of which vary in an unpredictable manner.

NOTE 3 See **random vibration** (2.4).

**2.18****broad-band random vibration**  
**broad-band stochastic vibration**

random vibration having its frequency components distributed over a broad frequency band

NOTE 1 The definition of what is meant by “broad” is a relative matter depending upon the problem involved. It is usually one octave or greater.

NOTE 2 See **random vibration** (2.4).

**2.19****dominant frequency**

frequency at which a maximum value occurs in a spectrum

**2.20****steady-state vibration**

continuous vibration that has on average reached equilibrium

**2.21****transient vibration**

vibration, typically of short duration, that decays with time

NOTE This term is basically associated with mechanical **shock** (3.1).

**2.22****forced vibration**

vibration of a system due to an external time-dependent force

NOTE The vibration (for linear systems) has the same frequencies as the excitation.

**2.23****free vibration**

vibration of a system that occurs after the removal of excitation or restraint

NOTE A linear system vibrates as a linear combination of natural modes.

**2.24****non-linear vibration**

vibration of a system which has a non-linear response and can only be described by non-linear differential equations

NOTE In a non-linear system, the relationship between cause and effect is no longer proportional and the principle of superposition does not hold for their solution.

**2.25**

**longitudinal vibration**

vibration along longitudinal axis in an elastic body

**2.26**

**self-induced vibration**  
**self-excited vibration**

vibration of a mechanical system resulting from conversion, within the system, of energy to oscillatory excitation

**2.27**

**ambient vibration**

all-encompassing vibration associated with a given environment usually a composite vibration from many surrounding sources

**2.28**

**extraneous vibration**

total vibration other than the vibration of principal interest

NOTE Ambient vibration contributes to the magnitude of extraneous vibration.

**2.29**

**aperiodic vibration**

vibration that is not periodic

**2.30**

**jump**

phenomenon where vibration response changes suddenly due to small change in frequency of an excitation force

**2.31**

**cycle**, noun

complete range of states or values through which a periodic phenomenon or function passes before repeating itself identically

NOTE See **cycle**, verb (2.111).

**2.32**

**fundamental period**  
**period**

smallest increment of time for which a periodic function repeats itself

NOTE 1 If no ambiguity is likely, the fundamental period is called the period.

NOTE 2 See **periodic vibration** (2.2).

**2.33**

**frequency**

reciprocal of the period

NOTE The unit of frequency is the hertz (Hz), which corresponds to one cycle per second.

**2.34**

**fundamental frequency**

lowest natural frequency in an oscillating system

NOTE 1 The normal mode of vibration associated with the lowest natural frequency is known as the fundamental mode.

NOTE 2 See **natural frequency** (2.88).



**2.35****harmonic (of a periodic quantity)**

harmonic vibration, the frequency of which is an integral multiple of the fundamental frequency

NOTE The term “overtone” has frequently been used in place of harmonic, the  $n$ th harmonic being called the  $(n - 1)$ th overtone. The term “overtone” is deprecated.

**2.36****sub harmonic**

harmonic vibration, the frequency of which is an integral sub-multiple of the fundamental frequency of the quantity to which it is related

**2.37****harmonic excitation**

sinusoidal excitation

**2.38****beats**

periodic variation in the magnitude of an oscillation resulting from the combination of two oscillations of slightly different frequencies

NOTE The beat occurs at the difference frequency.

**2.39****beat frequency**

absolute value of the difference in frequency of two oscillations of slightly different frequencies

**2.40****angular frequency****pulsatance**

product of the frequency of a sinusoidal quantity and the factor  $2\pi$

NOTE The unit of angular frequency is the radian (rad) per unit of time.

**2.41****phase angle**

angle of a complex response which characterizes a shift in time at a given frequency

**2.42****phase difference****phase angle difference**

between two harmonic vibrations of the same frequency, the difference between their respective phases or, in the case of sinusoidal vibrations, between their phase angles measured from the same origin

**2.43****amplitude**

magnitude, size or value of a quantity

**2.44****peak value****peak magnitude****positive peak value****negative peak value**

maximum value of a vibration during a specified time interval

NOTE A peak value vibration is usually taken as the maximum deviation of that vibration from the mean value. A positive peak value is the maximum positive deviation and a negative peak value is the maximum negative deviation.

**2.45**

**peak-to-peak value (of a vibration)**

difference between the maximum positive and maximum negative values of a vibration during a specified interval

NOTE The magnitude is dependent upon the measurement system response or **rise time** (3.18).

**2.46**

**excursion**

**total excursion (of a vibration)**

peak-to-peak displacement

**2.47**

**crest factor (of a vibration)**

ratio of the peak value to the rms value

NOTE The value of the crest factor of a sine wave is  $\sqrt{2}$ .

**2.48**

**form factor (of a vibration)**

ratio of the rms value to the mean value for one-half cycle between two successive zero crossings

NOTE The form factor for a sinusoid is  $\pi/(2\sqrt{2}) = 1,111$ .

**2.49**

**instantaneous value**

value of a variable quantity at a given instant

**2.50**

**maximax**

maximum value that is of greatest magnitude when a function contains more than one maximum value within a series of given intervals of the independent variable

**2.51**

**vibration severity**

value, or set of values, such as a maximum value, average or rms value, or other parameters that are descriptive of the vibration, referring to instantaneous values or to average values

NOTE 1 Vibration severity is a generic term, which in the past has been used in relation to vibration velocity. However, it is now more generally used as descriptive of other measurement units such as displacement acceleration, etc.

NOTE 2 Vibration severity of a machine is defined as the maximum value of the vibration measured at a number of different points on that machine, such as shafts, bearings, or other parts of a machine structure.

NOTE 3 The duration of a vibration is sometimes included as a parameter descriptive of vibration severity. This usage is deprecated.

**2.52**

**elliptical vibration**

vibration in which the locus of a vibrating point is elliptical in form

**2.53**

**rectilinear vibration**

**linear vibration**

vibration in which the locus of a vibration point is a straight line

**2.54**

**circular vibration**

vibration in which the locus of a vibrating point is circular in form

NOTE This is a special case of elliptical vibration.

**2.55****translational motion**

motion of a point on a body that represents a linear change in its spatial coordinates, usually characterized by a local set of coordinates in the x-y-z directions

NOTE For the case of translational vibration, changes in its spatial coordinates are monitored as a function of time.

**2.56****rotational motion**

motion of a body that represents a change in its three local rotational or angular coordinates, i.e. pure rotation about the x-axis, y-axis and z-axis

NOTE For the case of rotational vibration, changes in its angular coordinates are monitored as a function of time.

**2.57****node**

point, line or surface in a mechanical system where some characteristic of the wave field has zero amplitude

**2.58****antinode**

point, line or surface in a mechanical system where the magnitude of some characteristic of the wave field has a peak value

**2.59****natural mode of vibration**

mode of vibration assumed by a system when vibrating freely at a natural frequency

NOTE 1 If the system has zero damping, the natural modes are the same as the normal modes. See **undamped natural mode** (2.66).

NOTE 2 This is also called eigenmode or eigen mode.

NOTE 3 Natural mode of vibration is a product of mode of vibration and harmonic function having a natural frequency.

NOTE 4 The number of natural modes of vibration of a system is the same as the number of degrees of freedom.

**2.60****mode of vibration**

in a system undergoing vibration under harmonic excitation, the characteristic pattern assumed by the system in which the motion of every position is simple harmonic

NOTE Two or more modes may exist concurrently in a multi-degree-of-freedom system.

**2.61****fundamental natural mode of vibration**

mode of vibration of a system having the lowest natural frequency

NOTE See **fundamental frequency** (2.34).

**2.62****mode shape**

shape of a natural mode of vibration of a mechanical system, given by the maximum change in position, usually normalized to a specified deflection magnitude at a specified point, of its neutral surface (or neutral axis) from its mean value

NOTE The mean value is the mean for the given mode of vibration only.

**2.63****modal number**

integer characterizing modes in a multi-degree-of-freedom system

**2.64**

**coupled modes**

modes of vibration that influence one another because of energy transfer from one mode to another through damping

NOTE An energy transfer results from the neighbouring natural frequencies.

**2.65**

**uncoupled modes**

modes of vibration that are independent from one another because there is no energy transfer from one mode to another

NOTE No energy transfer between the modes is observed.

**2.66**

**undamped natural mode**

natural mode of an undamped mechanical system

NOTE 1 The motion of a system consists of the summation of the contribution of each of the participating normal modes.

NOTE 2 The terms “natural mode”, “characteristic mode” and “eigen mode” (or “eigenmode”) are synonymous with “normal” mode for undamped systems.

**2.67**

**damped natural mode**

natural mode of a damped mechanical system

**2.68**

**wave train**

succession of a limited number of waves, usually nearly periodic, travelling at the same (or nearly the same) velocity

**2.69**

**wavelength (of a periodic wave)**

distance in the direction of propagation of a sinusoidal wave between two successive points where at a given instant in time the phase differs by  $2\pi$

[ISO 80000-3:2006, 3-17]

**2.70**

**compressional wave**

wave of compressive or tensile stresses propagated in an elastic medium

NOTE A compressional wave is normally a longitudinal wave. See **longitudinal wave** (2.71).

**2.71**

**longitudinal wave**

wave in which the particle displacement is in the direction of propagation

**2.72**

**shear wave**

wave of shear stresses propagated in an elastic medium

NOTE 1 A shear wave is normally a transverse wave. See **transverse wave** (2.73).

NOTE 2 A shear wave causes no changes in volume.

**2.73**

**transverse wave**

wave in which the particle displacement is perpendicular to the direction of wave propagation

**2.74****surface wave****Rayleigh wave**

wave associated with the free boundary (or interface between two media) of a solid such that a surface or interface particle describes an ellipse whose major axis is normal to the surface and whose centre is at the undisturbed surface

NOTE At maximum particle displacement away from the solid surface, the motion of the particle is opposite to that of the wave.

**2.75****wave front**

locus of points of a progressive wave having the same phase at a given instant

NOTE A wave front for a surface wave is a continuous line; for a space wave, it is a continuous area.

**2.76****plane wave**

wave in which the wave fronts are parallel planes

**2.77****spherical wave**

wave in which the wave fronts are concentric spheres

**2.78****standing wave**

wave having a fixed amplitude distribution in space

NOTE 1 A standing wave can be considered to be the result of superposition of opposing progressive waves of the same frequency and kind.

NOTE 2 Standing waves are characterized by nodes and antinodes that are fixed in position.

**2.79****audio frequency**

any frequency of a normally audible sound wave

NOTE Audio frequencies generally lie between 20 Hz and 20 000 Hz.

**2.80****resonance**

state of a system in forced oscillation when any change, however small, in the frequency of excitation causes a decrease in a response of the system

**2.81****resonance frequency**

frequency at which resonance exists

NOTE 1 Resonance frequencies may depend upon the measured variables, for example velocity resonance may occur at a different frequency from that of displacement resonance (see Table 2).

NOTE 2 To avoid confusion, the type of resonance needs to be indicated, for example velocity resonance frequency (see Table 2).

**2.82****antiresonance**

state of a system in forced oscillation at a point when any change, however small, in the frequency of excitation causes an increase in a response at this point

**2.83**

**antiresonance frequency**

frequency at which antiresonance occurs

NOTE 1 Antiresonance frequencies may depend upon the measured variable, for example velocity antiresonance may occur at a different frequency from that of displacement antiresonance.

NOTE 2 To avoid confusion, the type of antiresonance needs to be indicated, for example velocity antiresonance frequency.

**2.84**

**fixed-base natural frequency**

natural frequency that a system would have if the foundation to which the equipment is attached were rigid and of infinite mass

NOTE The equation given in Table 2 and the natural frequencies shown are for fixed-base conditions.

**2.85**

**resonance speed  
critical speed**

characteristic speed at which resonances of a system are excited

NOTE 1 Resonance speed of a rotating system is a speed of the rotating system that corresponds to a resonance frequency (it may also include multiples and submultiples of the resonance frequency) of the system, for example speed in revolutions per unit time equals the resonance frequency in cycles per unit time.

NOTE 2 Where there are several rotating systems, there will be several corresponding sets of resonant speeds, one for each mode of the overall system.

**2.86**

**subharmonic response  
subharmonic resonance response**

response of a mechanical system exhibiting some of the characteristics of resonance at a period having a duration that is an integer multiple of the period of excitation

**2.87**

**damping**

dissipation of energy with time or distance

NOTE In the context of vibration and shock, damping is the progressive reduction of the amplitude with time.

**2.88**

**natural frequency (of a mechanical system)**

frequency of free vibration of an undamped linear vibration system

NOTE For the equation of motion given in Table 2, the natural frequency is  $\frac{1}{2\pi} \sqrt{\frac{k}{m}}$ .

**2.89**

**damped natural frequency**

frequency of free vibration of a damped linear system

NOTE See Table 2.

**2.90**

**linear damping**

damping which occurs due to a force which is proportional to and in the opposite direction to the velocity

NOTE An element that generates linear damping is often referred to as a **dashpot** (2.94).

**2.91**

**equivalent linear damping**

value of linear damping, assumed for the purpose of analysis of a vibratory motion, such that the dissipation of energy per cycle at resonance is the same for the assumed as well as for the actual damping force

**2.92**

**linear damping coefficient**

ratio of damping force to velocity

NOTE See **linear damping** (2.90).

**2.93**

**hysteresis damping structural damping**

energy losses within a structure that are caused by internal friction within the structure

NOTE 1 Dynamic hysteresis damping is essentially linear and includes viscoelastic, rheological damping and internal friction.

NOTE 2 Represented by a damping force 90 degrees out of phase with the restoring force. Static hysteresis is nonlinear with stress-strain laws that are insensitive to time, stress rate and strain rate, and includes plastic and plastic flow.

NOTE 3 These losses are independent of frequency of oscillation but are proportional to the vibration amplitude squared.

**2.94**

**dashpot**

resistance element in a mechanical system associated with viscous damping in linear systems

NOTE This resistance force is proportional to the velocity but more correctly contains a dynamic force term proportional to the square of velocity.

**Table 2 — Resonance relationships**

Characteristic	Displacement resonance	Velocity resonance	Damped natural frequency
Frequency	$\frac{1}{2\pi} \sqrt{\frac{k}{m} - \frac{c^2}{2m^2}}$	$\frac{1}{2\pi} \sqrt{\frac{k}{m}}$	$\frac{1}{2\pi} \sqrt{\frac{k}{m} - \frac{c^2}{4m^2}}$
Amplitude of displacement	$\frac{\hat{F}}{c \sqrt{\frac{k}{m} - \frac{c^2}{4m^2}}}$	$\frac{\hat{F}}{c \sqrt{\frac{k}{m}}}$	$\frac{\hat{F}}{c \sqrt{\frac{k}{m} - \frac{3c^2}{16m^2}}}$
Amplitude of velocity	$\frac{\hat{F}}{c \sqrt{1 + \frac{c^2}{4mk} - \frac{2c^2}{m^2}}}$	$\frac{\hat{F}}{c}$	$\frac{\hat{F}}{c \sqrt{1 + \frac{c^2}{16mk} - \frac{4c^2}{m^2}}}$
Phase of displacement with reference to applied force	$\arctan \sqrt{\frac{4mk}{c^2} - 2}$	$\frac{\pi}{2}$	$\arctan \sqrt{\frac{16mk}{c^2} - 4}$

NOTE 1 In the case of a linear single-degree-of-freedom system, the motion of which can be described by the equation

$$m \frac{d^2x}{dt^2} + c \frac{dx}{dt} + kx = \hat{F} \cos \omega t$$

where

- $t$  is the time;
- $x$  is the displacement;
- $\omega$  is the angular frequency;
- $\hat{F}$  is the magnitude of the exciting force;
- $m$  is the mass of the system;
- $c$  is the coefficient of linear damping of the damping element in the system;
- $k$  is the stiffness of the spring in the system,

the characteristics of the different kinds of resonance in terms of the constants of the above equation are as given in the table.

NOTE 2 For values of  $c$  which are small compared with  $\sqrt{mk}$ , there is little difference between the three cases. The frequency at velocity resonance is equal to the natural frequency of the system. Other symbols are employed for electrical resonance.

**2.95**

**critical damping**  
**critical viscous damping**

for a single-degree-of-freedom system, the amount of damping which corresponds to the limiting condition between an oscillatory and a non-oscillatory transient state of free vibration

NOTE The critical damping coefficient,  $c_c$ , is equal to  $c_c = 2\sqrt{mk} = 2m\omega_0$  for the single-degree-of-freedom system represented by the equation given in Table 2, where  $\omega_0$  is the natural frequency (angular). See **natural frequency** (2.88).

**2.96**

**damping ratio**

ratio of the actual damping coefficient to the critical damping coefficient

NOTE 1 The fraction of critical damping may also be expressed in terms of per cent of critical damping.

NOTE 2 See **linear damping coefficient** (2.92) and **critical damping** (2.95).

**2.97**

**logarithmic decrement**

natural logarithm of the ratio of any two successive maximum values of a vibration in a single-degree-of-freedom system at a damped natural frequency

**2.98**

**non-linear damping**

damping due to a force or moment which is not proportional to and is in the opposite direction to the velocity

**2.99**

**$Q$  factor**

quantity characterizing the amplification of a vibration at resonance

NOTE The quantity  $Q$  is equal to one-half of the reciprocal of the damping ratio,  $Q = c_c/2c$ .

**2.100**

**vibration generator**  
**vibration machine**  
**vibration exciter**

machine that is specifically designed for, and is capable of, generating vibrations and of imparting these vibrations to other structures or devices

NOTE Equipment to be tested may be attached to a table on the generator or the generator may be used to excite equipment by means of studs without the use of a table.

**2.101**

**vibration generator system**

vibration generator and associated equipment necessary for its operation

**2.102**

**electrodynamic vibration generator**  
**electrodynamic vibration machine**

vibration generator that derives its vibratory force from the interaction of a magnetic field of constant value, and a coil of wire contained in it that is excited by a suitable alternating current

NOTE The moving element of an electrodynamic vibration generator includes the vibration table, the moving coil, and all the parts of the generator that are intended to participate in the vibration.

**2.103**

**electromagnetic vibration generator**  
**electromagnetic vibration machine**

vibration generator that derives its vibratory force from the interaction of electromagnets and magnetic materials



**2.104****mechanical direct-drive vibration generator**  
**direct-drive vibration generator**

vibration generator in which the vibration table is forced, by a positive linkage, to undergo a displacement amplitude of vibration that remains essentially constant regardless of the load or frequency of operation

**2.105****hydraulic vibration generator**

vibration generator that derives its vibratory force from the application of a liquid pressure through a suitable drive arrangement

**2.106****mechanical reaction vibration generator**  
**unbalanced mass vibration generator**

vibration generator in which the forces exciting the vibration are generated by rotating or reciprocating unbalanced masses

**2.107****resonance vibration generator**

vibration generator that contains a vibration system that is excited at its resonance frequency

**2.108****piezoelectric vibration generator**

vibration generator that has a piezoelectric transducer as its force-generating element

**2.109****magnetostrictive vibration generator**

vibration generator that has a magnetostrictive transducer as its force-generating element

**2.110****deadweight**  
**pure mass**  
**lumped mass**

mass having the characteristics of a perfectly rigid mass over the frequency region of concern

**2.111****cycle**, verb

to repetitively operate a device through a range of a controlled variable such as frequency

NOTE See **cycle**, noun (2.31).

**2.112****cycle period**

time required to cycle a device through all the controlled variables in the control range

**2.113****cycle range**

range defined by the minimum and maximum values of the controlled variable, such as frequency, between which the device is cycled

**2.114****sweep**

(in a vibration generator system) the process of traversing continuously through a range of values of an independent variable, usually frequency

**2.115****sweep rate**

rate of change of the independent variable, usually frequency

EXAMPLE Sweep rate can be described as:  $df/dt$  where  $f$  is frequency and  $t$  is time.

**2.116**

**uniform sweep rate**

**linear sweep rate**

sweep rate for which the rate of change of the independent variable for a sweep, usually frequency, is constant, i.e.  $df/dt = \text{constant}$

NOTE See **sweep rate** (2.115).

**2.117**

**logarithmic (frequency) sweep rate**

sweep rate for which the rate of change of frequency per unit of frequency is constant, i.e.  $(df/f)/dt = \text{constant}$

NOTE 1 For a logarithmic sweep rate, the time to sweep between any two frequencies of fixed ratio is constant.

NOTE 2 It is recommended that logarithmic sweep rate be expressed in octaves per minute.

NOTE 3 See **sweep rate** (2.115).

**2.118**

**cross-over frequency**

(in vibration environmental testing) frequency at which a characteristic of a vibration changes from one relationship to another

EXAMPLE A cross-over frequency may be that frequency at which the vibration amplitude, or rms value, changes from a constant displacement value versus frequency to a constant acceleration value versus frequency.

**2.119**

**isolator**

support, usually resilient, the function of which is to attenuate the transmission of shock and/or vibration

NOTE An isolator may include collapsible parts, servo-mechanisms or other devices in lieu of, or in addition to, the resilient member.

**2.120**

**vibration isolator**

isolator designed to attenuate the transmission of vibration in a frequency range

**2.121**

**shock isolator**

isolator designed to protect a system from a range of shock motions or forces

**2.122**

**elastic centre**

point of intersection of three principal directions of deformation in elastic mounts

NOTE 1 This definition applies to the case where the mount size is small compared to the size of the machine or equipment to which it is attached.

NOTE 2 The principal direction of an elastic mount is the direction where the deflection occurs due to a force input.

**2.123**

**centre-of-gravity mounting system**

mounting system where, when the mounted equipment is displaced by translation from its neutral position, there is no resultant moment about any axis through the centre of mass

NOTE 1 If a piece of equipment is supported by a centre-of-gravity mounting system, then all translational and rotational modes of vibration of the equipment on its mounts are decoupled.

NOTE 2 A centre-of-gravity mounting system is one where the centre-of-gravity of the mounted equipment coincides with the **elastic centre** of the mount (2.122).

**2.124**

**shock absorber**

device for the dissipation of energy in order to reduce the response of a mechanical system to applied shock

**2.125****damper**

(in vibration applications) device used for reducing the magnitude of a shock or vibration by energy dissipation methods

**2.126****snubber**

device used to restrict the relative displacement of a mechanical system by increasing the stiffness of an elastic element in the system (usually abruptly and by a large factor) whenever the displacement becomes larger than a specified amount

**2.127****dynamic vibration absorber**

device for reducing vibrations of a primary system over a desired frequency range by the transfer of energy to an auxiliary system in resonance so tuned that the force exerted by the auxiliary system is opposite in phase to the force acting on the primary system

NOTE 1 Dynamic vibration absorbers may be damped or undamped, but damping is not the primary purpose.

NOTE 2 Dynamic vibration absorbers without damping elements are also known as dynamic vibration neutralizers as they reflect the energy back towards the source and do not absorb.

**2.128****detuner**

auxiliary vibratory system with an amplitude-dependent frequency characteristic which modifies the vibration characteristics of the main system to which it is attached

EXAMPLE An auxiliary mass controlled by a non-linear spring.

**3 Mechanical shock****3.1****shock**

sudden change of force, position, velocity or acceleration that excites transient disturbances in a system

NOTE The change is normally considered sudden if it takes place in a time that is short compared with the fundamental periods of concern.

**3.2****shock pulse**

excitation event characterized by a sudden rise and/or sudden decay of a time-dependent parameter

NOTE 1 A descriptive mechanical term should be used, for example acceleration shock pulse.

NOTE 2 A shock pulse may also be characterized by its motion, force or velocity.

**3.3****shock motion**

transient motion causing, or resulting from, a shock excitation

**3.4****impact**

single collision of two bodies

**3.5****impulse**

integral with respect to time of a force taken over the time during which the force is applied

NOTE 1 In shock usage, the time interval is relatively short.

NOTE 2 For a constant force, it is the product of the force and the time during which the force is applied.

NOTE 3 Excitation due to an instant force is referred to as impulse excitation.

### 3.6

#### **bump**

form of shock that is repeated many times for test purposes

### 3.7

#### **ideal shock pulse**

shock pulse that is described by a simple time function

EXAMPLE See those defined in 3.8 to 3.14.

### 3.8

#### **half-sine shock pulse**

shock pulse for which the time-history curve has the shape of the positive (or negative) section of one cycle of a sine wave

### 3.9

#### **final peak sawtooth shock pulse**

#### **terminal peak sawtooth shock pulse**

shock pulse for which the time-history curve has a triangular shape for which the motion increases linearly to a maximum value and then drops instantaneously to zero

### 3.10

#### **initial peak sawtooth shock pulse**

shock pulse for which the motion rises instantaneously to a maximum value, after which it decreases linearly to zero

### 3.11

#### **symmetrical triangular shock pulse**

shock pulse for which the time-history curve has the shape of an isosceles triangle

### 3.12

#### **versine shock pulse**

#### **haversine shock pulse**

shock pulse for which the time-history curve has the shape of one full cycle of a versine curve beginning at zero (sine-squared curve)

### 3.13

#### **rectangular shock pulse**

shock pulse for which the motion rises instantaneously to a given value, remains constant for the duration of the pulse, then instantaneously drops to zero

### 3.14

#### **trapezoidal shock pulse**

shock pulse for which the motion rises linearly to a given value, which then remains constant for a period of time after which it decreases to zero in a linear manner

### 3.15

#### **nominal shock pulse**

#### **nominal pulse**

specified shock pulse that is given with specified tolerances

NOTE 1 Nominal shock pulse is a generic term. It requires an additional modifier to make its meaning specific, for example nominal half-sine shock pulse, or nominal sawtooth shock pulse.

NOTE 2 The tolerances of the nominal pulse from the ideal may be expressed in terms of pulse shapes (including area), or corresponding spectra.

### 3.16

#### **nominal value of a shock pulse**

specified value (such as peak value or duration) given with specified tolerances

**3.17****duration of shock pulse**

time interval between the instant the motion rises above some stated fraction of the maximum value and the instant it decays to this fraction

NOTE For measured pulses, the “stated fraction” is usually taken as 1/10. For ideal pulses, it is taken as zero.

**3.18****rise time****pulse rise time**

interval of time required for the value of the pulse to rise from some specified small fraction of the maximum value to some specified large fraction of the maximum value

NOTE For measured pulses, the “specified small fraction” is usually taken as 1/10 and the “specified large fraction” as 9/10. For ideal pulses, the fractions are taken as 0 and 1 respectively.

**3.19****pulse drop-off time****pulse decay time**

interval of time required for the value of the pulse to drop from some specified large fraction of the maximum value to some specified small fraction of the maximum value

NOTE See the note to **rise time** (3.18).

**3.20****shock wave**

shock time history (displacement, pressure or other variable) associated with the propagation of the shock through a medium or structure

NOTE In liquids and gases, a shock wave is usually characterized by a wave front in which the pressure rises suddenly to a relatively large value.

**3.21****shock testing machine****shock machine**

device for subjecting a system to controlled and reproducible mechanical shock

**3.22****shock response spectrum**

maximum response of a series of uniformly damped single-degree-of-freedom systems to an applied shock input

NOTE 1 Shock response spectrum is a generic term. It requires an additional modifier to make its meaning specific, for example acceleration or velocity or displacement shock response spectrum.

NOTE 2 If the amount and type of damping of the systems are not given, they are assumed to be zero. Unless otherwise indicated, the responses are maximum absolute values irrespective of sign and the time at which the maximum occurs. This is often referred to as maximax shock response spectrum. If reference is made to other types of shock response spectra, this needs to be stated.

NOTE 3 The shock response spectrum of a structure tested on a vibration generator system applying a specified earthquake motion of a floor is termed floor response spectrum.

**4 Transducers for shock and vibration measurement****4.1****transducer**

device designed to convert energy from one form to another in such a manner that the desired characteristics of the input energy appear at the output

NOTE 1 The output is usually electrical.

NOTE 2 The use of the term “pick-up” is deprecated.

## 4.2

### **electromechanical transducer**

transducer that is actuated by energy from a mechanical system (strain, force, motion, etc.), and supplies energy to an electrical system, or vice versa

NOTE 1 The term “pick-up” is deprecated.

NOTE 2 The principal types of transducers used in vibration and shock are:

- a) piezoelectric accelerometer;
- b) piezoresistive accelerometer;
- c) strain-gauge type accelerometer;
- d) variable-resistance transducer;
- e) electrostatic (capacitor) (condenser) transducer;
- f) bonded-wire (foil) strain-gauge;
- g) variable-reluctance transducer;
- h) magnetostrictive transducer;
- i) moving-conductor transducer;
- j) moving-coil transducer;
- k) induction transducer;
- l) electronic transducer;
- m) laser doppler vibrometer;
- n) eddy-current.

## 4.3

### **seismic transducer**

transducer consisting of a seismic system in which the differential movement between the mass and the base of the system produces an electrical output

NOTE Acceleration transducers operate in a frequency range below the significant natural frequency of the seismic system. Velocity and displacement transducers operate in a frequency range above the natural frequency of the seismic system.

## 4.4

### **linear transducer**

transducer for which the output quantity and the input quantity are linearly related within a specified set of tolerances for given ranges of frequency and amplitude

## 4.5

### **unilateral transducer**

transducer that cannot be actuated by signals at its outputs in such a manner as to supply related signals at its inputs

## 4.6

### **bilateral transducer**

transducer capable of transmission in either direction between its terminations

NOTE A bilateral transducer usually satisfies the principle of reciprocity.

## 4.7

### **sensing element**

part of a transducer that is activated by the input excitation and supplies the output signal

## 4.8

### **rectilinear transducer**

transducer designed to be sensitive to some characteristics of a translational motion

NOTE The modifier “rectilinear” is used only when it is necessary to distinguish this type of transducer from those sensitive to rotational motions.

**4.9****angular transducer**

transducer designed to measure some characteristic of rotational motion

**4.10****accelerometer****acceleration transducer**

transducer that converts an input acceleration to an output (usually electrical) that is proportional to the input acceleration

**4.11****velocity transducer**

transducer that converts an input velocity to an output (usually electrical) that is proportional to the input velocity

**4.12****displacement transducer**

transducer that converts an input displacement to an output (usually electrical) that is proportional to the input displacement

**4.13****vibrograph**

instrument, usually self-contained and mechanical in operation, which can present an oscillographic recording of a vibration waveform

**4.14****vibrometer**

instrument with one or more outputs (typically voltage) that are proportional to either displacement or velocity

**4.15****force transducer**

transducer that converts an input force to an output (usually electrical) that is proportional to the input force

**4.16****sensitivity (of a transducer)**

ratio of a specified output quantity to a specified input quantity

NOTE The sensitivity of a transducer is usually determined as a function of frequency using sinusoidal excitation.

**4.17****dynamic range (of a transducer)**

range of values that can be measured

**4.18****calibration factor (of a transducer)**

average sensitivity within a specified frequency range

NOTE See **sensitivity** (4.16).

**4.19****sensitive axis (of a rectilinear transducer)**

nominal direction for which a rectilinear transducer has the greatest sensitivity

**4.20****transverse axis (of a transducer)**

nominal direction perpendicular to the sensitive axis

**4.21**

**transverse sensitivity (of a rectilinear transducer)**

**cross axis sensitivity**

sensitivity of a transducer to excitation in a nominal direction perpendicular to its sensitive axis

NOTE The transverse sensitivity is usually a function of the nominal direction of the axis chosen.

**4.22**

**transverse sensitivity ratio (of a rectilinear transducer)**

**cross axis sensitivity ratio**

ratio of the transverse sensitivity of a transducer to its sensitivity along its sensitive axis

NOTE The transverse sensitivity ratio is sometimes expressed as a percentage.

**4.23**

**transducer phase shift**

phase angle between the transducer output and input for sinusoidal excitation

**4.24**

**transducer distortion**

distortion which occurs when the output of the transducer is not proportional to the input

**4.25**

**amplitude distortion (of a transducer)**

distortion occurring when the ratio of the output of a transducer to its input at a given frequency varies with the input amplitude

**4.26**

**frequency distortion**

**frequency response**

distortion or response occurring within a given frequency range when the amplitude sensitivity of the transducer for a given amplitude of excitation is not constant over that range

**4.27**

**phase distortion**

distortion occurring when the phase angle between the output of a transducer and its input is not a linear function of frequency

**5 Signal processing**

**5.1**

**data**

sampled measurements of a physical quantity

**5.2**

**sampling**

measurement of a varying physical quantity at a sequence of values of time, angle, revolutions or other mechanical, independent variable

NOTE Other meanings of this term may be used in particular fields, for example in statistics.

**5.3**

**sampling frequency**

number of samples per unit of time for uniformly sampled data

**5.4**

**sampling period**

duration of time between two successive samples



**5.5****Nyquist frequency**

maximum usable frequency available in data taken at a given sampling rate

NOTE The Nyquist frequency is  $f_N = f_s/2$ , where  $f_s$  is the sampling frequency.

**5.6****sampling rate**

number of samples per unit of time, angle, revolutions or other mechanical, independent variable for uniformly sampled data

**5.7****sampling interval**

number of physical or engineering units (e.g. time, angle, revolutions) between two successive samples

**5.8****frequency resolution**

difference of frequency between two adjacent spectral lines

NOTE This is equal to the reciprocal of the total time of a block of data that is Fourier transformed.

**5.9****Fourier transform**

frequency description of a transient vibration

NOTE 1 The Fourier transform of a transient vibration  $x(t)$  is given by:

$$X(f) = \int_{-\infty}^{\infty} x(t)e^{-2\pi ift} dt$$

NOTE 2 The Fourier transform of vibration data  $x(t)$  measured over an interval  $T$  is given by:

$$X(f_m) = \int_0^T x(t)e^{-2\pi if_m t} dt$$

where  $f_m = \frac{m}{T}$  and where  $m$  is an integer.

**5.10****Fourier series**

frequency description of a set of sampled vibration data

NOTE The Fourier series  $X$  of vibration data  $x(n)$  sampled at times  $n\Delta t$  where  $0 \leq n \leq N-1$  and  $\Delta t$  is the time interval between the samples given by:

$$X(m) = \frac{1}{f_s} \sum_{n=0}^{N-1} x(n)e^{-2\pi inm}$$

where  $f_s = 1/\Delta t$  is the sampling frequency;  $X(m)$  is sampled at frequencies  $m/(N\Delta t)$  and  $m$  is an integer ( $0 \leq m \leq N-1$ ).

**5.11****rms spectrum**

amplitude spectrum is used to quantify the components of sinusoidal, harmonic and non-harmonic signals, such as vibrations from an unbalanced rotor, gears or rolling bearings

NOTE 1 The rms spectrum  $R_{xx}$  of a sampled signal  $x(n)$  with physical or engineering units U,  $0 \leq n \leq N$ , from a block of data measured over the interval of one period  $T$  is expressed as:

$$R_{xx}(0) = \frac{f_s}{NC_a} |X(0)|$$

$$R_{xx}(f_m) = \frac{\sqrt{2}f_s}{NC_a} |X(f_m)| \quad \left( \text{for } 1 \leq m \leq \frac{N}{2} - 1 \right)$$

where  $C_a$  is the amplitude scaling factor;  $N$  is the number of samples in the data block;  $n$  is the index of time;  $R_{xx}$  is sampled at frequencies  $m/(N\Delta t)$ , where  $\Delta t$  is the time interval between time samples and  $m$  is an integer ( $0 \leq m \leq N-1$ ).

NOTE 2 The physical or engineering units of the rms spectrum are U rms.

**5.12**  
**power spectral density**  
**auto-spectral density**

magnitude of the frequency domain description of random, continuous signals

NOTE 1 The power spectral density  $P_{xx}$  from blocks of sampled data measured over a time interval of duration  $T$  is the following average:

$$P_{xx}(m) = E \left\{ \frac{2}{T} |X(m)|^2 \right\} \quad \left( \text{for } 0 \leq m \leq \frac{N}{2} - 1 \right)$$

NOTE 2 The physical or engineering units of the power spectral density are  $U^2/\text{Hz}$ .

NOTE 3 Power spectral density is a generic term used regardless of the physical process represented by the time history. The physical process involved is indicated in referring to particular data, e.g. the term "acceleration power spectral density" or the term "acceleration spectral density" is used instead of power spectral density when the acceleration spectrum is to be described.

**5.13**  
**energy spectral density**

magnitude of the frequency description of a transient signal

NOTE 1 The energy spectrum  $e_{xx}$  from a block of sampled data measured over a time interval that includes the complete signal is:

$$e_{xx}(m) = 2 |X(m)|^2 \quad \left( \text{for } 0 \leq m \leq \frac{N}{2} - 1 \right)$$

NOTE 2 If the data  $x(n)$  are measured from a random process, then the average of the preceding equation is taken.

**5.14**  
**cross spectral density**

magnitude of the frequency domain relationship between the two signals

NOTE 1 For signals described by the energy spectral density, the cross spectrum is the cross energy spectral density  $e_{xy}$ ,

$$e_{xy}(m) = 2 X^*(m) Y(m) \quad \left( \text{for } 0 \leq m \leq \frac{N}{2} - 1 \right)$$

where an average is taken for random signals.

NOTE 2 For random signals described by the power spectrum, the cross power spectral density is the cross power spectral density  $P_{xy}$ ,

$$P_{xy}(m) = \frac{2}{T} E \{ X^*(m) Y(m) \} \quad \left( \text{for } 0 \leq m \leq \frac{N}{2} - 1 \right)$$

**5.15**  
**coherence function**

dimensionless measure of the relationship between two signals in the frequency domain

NOTE 1 For signals described by energy spectral density, the coherence function  $\gamma_{xy}$  is:

$$\gamma_{xy}^2(m) = \frac{|e_{xy}(m)|^2}{e_{xx}(m) e_{yy}(m)} \quad \left( \text{for } 0 \leq m \leq \frac{N}{2} - 1 \right)$$

NOTE 2 For signals described by power spectral density, the coherence function  $\gamma_{xy}$  is:

$$\gamma_{xy}^2(m) = \frac{|P_{xy}(m)|^2}{P_{xx}(m) P_{yy}(m)} \quad \left( \text{for } 0 \leq m \leq \frac{N}{2} - 1 \right)$$

NOTE 3 The value of the coherence function ranges between 0 and 1.

**5.16**  
**statistical degrees of freedom**

number of independent variables in a statistical estimate of a probability

NOTE The number of degrees of freedom determines the statistical accuracy of an estimate.

**5.17****aliasing error  
aliasing**

false representation of spectral energy caused by mixing of spectral components above the Nyquist frequency with those spectral components below the Nyquist frequency

**5.18****window function  
window**

pre-defined mathematical function that multiplies a data block and improves some characteristics of the frequency description

NOTE 1 If a window function is used, then an amplitude scaling constant must be used.

NOTE 2 A window function is used for reducing the errors in processing weighted data points.

**5.19****amplitude scaling factor**

constant derived from window function that corrects the amplitude of the frequency description of a narrowband signal

NOTE Amplitude scaling factor can be described as:

$$C_a = \frac{1}{N} \sum_{n=0}^{N-1} w(n)$$

where  $w(n)$  is the window function.

**5.20****effective noise bandwidth**

bandwidth between frequency lines for a windowed signal, to be used to quantify the frequency description of noise

**5.21****time history**

sequence of values of a physical or engineering quantity as a function of time

**5.22****sidelobes**

spurious peaks in the frequency domain caused by the use of a finite time window with the Fourier transform

**5.23****spectral leakage**

broadening of a peak in the frequency domain caused by window function with the Fourier transform

**5.24****leakage error**

error in frequency spectrum caused by mismatch of recording time to frequency of interest

**5.25****deterministic vibration**

vibration for which the instantaneous value at a certain time can be predicted

NOTE The vibration can be produced as a response to a known input, such as an impact, or predicted from another measured quantity, such as shaft position.

**5.26****ensemble  
set**

collection of time histories

**5.27**

**number of lines**

number of spectral lines that are displayed

**5.28**

**record length**

number of data points comprising a contiguous set of sampled data points

**5.29**

**stationary process**

ensemble of time histories such that their statistical properties are constant with respect to time

**5.30**

**ergodic process**

stationary process that possesses statistical properties that permit averages over time to replace averages over ensemble

NOTE It follows that these time averages from any time history will then be equal to corresponding statistical averages over the ensemble.

**5.31**

**random process**

**stochastic process**

ensemble of time histories that is characterized through statistical properties

**5.32**

**autocorrelation function**

average of the product of the data's value at one time with its value at another time

NOTE 1 The autocorrelation function  $r_{xx}$  of random vibration  $x(t)$  is the average  $E$ :

$$r_{xx}(t, \tau) = E\{x(t)x(t-\tau)\}$$

NOTE 2 If the vibration is stationary then the autocorrelation is a function only of the time difference  $\tau$ . If the vibration is ergodic, then the average can be taken over time. If it is non-ergodic, then averages must be taken over statistically independent samples.

**5.33**

**cross-correlation function**

average of the product of the values of two physical or engineering quantities at different times for two sets of data  $x(t)$  and  $y(t)$ , the mean of the product of the value of one set of data at one time and the value of the other set of data at another time

NOTE 1 The cross-correlation function  $r_{xy}$  of random vibrations  $x(t)$  and  $y(t)$  is the average  $E$ :

$$r_{xy}(t, \tau) = E\{x(t)y(t-\tau)\}$$

NOTE 2 See Note 2 under **autocorrelation function** (5.32).

**5.34**

**normalized autocorrelation function**

ratio of the autocorrelation function to its value with zero time delay

NOTE The normalized autocorrelation coefficient  $\rho_{xx}$  is:

$$\rho_{xx}(t, \tau) = \frac{r_{xx}(t, \tau)}{r_{xx}(t, 0)}$$

**5.35**

**normalized cross-correlation coefficient**

ratio of the cross-correlation function to the square root of the product of autocorrelations at zero time delay

NOTE 1 The cross-correlation coefficient  $\rho_{xy}$  is:

$$\rho_{xy}(t, \tau) = \frac{r_{xy}(t, \tau)}{\sqrt{r_{xx}(t, 0) r_{yy}(t, 0)}}$$

NOTE 2 At any delay  $\tau$ , the cross-correlation coefficient satisfies  $-1 \leq \rho_{xy}(\tau) \leq 1$ .

### 5.36 effective bandwidth (of a specified band-pass filter)

bandwidth of an ideal filter which has flat response in its passband and transmits the same power as the specified filter when the two filters receive the same white-noise input signal

NOTE The effective bandwidth may be measured by dividing the mean-square response of the filter to white-noise excitation by the product of the excitation spectral density and the square of the maximum transmission.

### 5.37 signal bandwidth

interval over frequency between the upper and lower frequencies of interest

### 5.38 confidence level

range within which the true value of a statistical quantity will lie, given a value of the probability

### 5.39 probability

expression of the likelihood of occurrence of a vibration event

NOTE 1 The probability of occurrence of a particular event is generally estimated as the ratio of the number of occurrences of the particular event to the total number of occurrences of all types of events considered.

NOTE 2 For a stationary random vibration, the probability that the magnitude will be within a given magnitude range is taken to be equal to the ratio of the time that the vibration is within that range to the total time of observation.

NOTE 3 It is required that a large number of events or a long observation time be involved in the probability determinations.

NOTE 4 A unit probability means that the occurrence of a particular event is certain. Zero probability means that it will not occur.

NOTE 5 The probability that the magnitude of a vibration will be within a given range is equal to the integral of the probability density function of that vibration integrated over the given range. See **probability density function** (5.41).

### 5.40 probability density

(vibration theory) at a specified vibration magnitude, the ratio of the probability that the vibration magnitude will be within a given incremental range, to the size of the incremental range, as the increment size approaches zero

NOTE 1 The probability density of vibration quantity  $x$  is:

$$p(x_m) = \lim_{\Delta x_m \rightarrow 0} \frac{P(\Delta x_m)}{\Delta x_m}$$

or

$$p(x) = \frac{dP(x)}{dx}$$

where

$p(x_m)$  is the probability density at  $x_m$ ;

$\Delta x_m$  is an incremental range of magnitude beginning at a magnitude  $x_m$ ;

$P(\Delta x_m)$  is the probability that the vibration magnitude will have a value between  $x_m$  and  $x_m + \Delta x_m$ .

NOTE 2 The probability density,  $p(x)$ , is the derivative of the cumulative probability distribution function,  $P(x)$ , with respect to  $x$  (see 5.41).

**5.41**

**probability density function  
probability density distribution curve**

(vibration theory) expression of the probability density associated with a stated vibration

NOTE 1 The functions  $p(x)$  given under probability density, normal distribution and Rayleigh distribution are probability density functions.

NOTE 2 The probability density distribution curve is a graphical representation of the probability density function. The total area under the probability density curve is equal to unity.

**5.42**

**confidence interval**

range within which the true value of a statistical quantity will lie, given a value of the probability

**6 Condition monitoring and diagnostics**

**6.1**

**ball pass frequency, inner**

$f_{BPI}$

frequency generated as the rolling elements of an anti-friction bearing pass over a defect in the inner race

NOTE The frequency generated is:

$$f_{BPI} = \frac{N_b}{2} |S| \left( 1 + \frac{d_B}{d_P} \cos \theta \right)$$

where

- $f_{BPI}$  is the ball pass frequency, inner, expressed in hertz (Hz);
- $N_b$  is the number of rolling elements;
- $d_B$  is the ball diameter, expressed in millimetres (mm);
- $d_P$  is the pitch diameter, expressed in millimetres (mm);
- $S$  is the speed, expressed in revolutions per second (rps);
- $\theta$  is the contact angle, expressed in degrees.

**6.2**

**ball pass frequency, outer**

$f_{BPO}$

frequency generated as the rolling elements of an anti-friction bearing pass over a defect in the outer race

NOTE The frequency generated when the outer race is stationary is:

$$f_{BPO} = \frac{N_b}{2} |S| \left( 1 - \frac{d_B}{d_P} \cos \theta \right)$$

where

- $f_{BPO}$  is the ball pass frequency, outer, expressed in hertz (Hz);
- $N_b$  is the number of rolling elements;
- $d_B$  is the ball diameter, expressed in millimetres (mm);
- $d_P$  is the pitch diameter, expressed in millimetres (mm);
- $S$  is the speed, expressed in revolutions per second (rps);
- $\theta$  is the contact angle, expressed in degrees.

### 6.3 ball spin frequency

$f_{BS}$

frequency of each rolling element in an anti-friction bearing as it spins during revolution around the bearing shell

NOTE The ball spin frequency is:

$$f_{BS} = \frac{d_P}{2d_B} |S| \left[ 1 - \left( \frac{d_B}{d_P} \right)^2 \cos^2 \theta \right]$$

where

- $f_{BS}$  is the ball spin frequency, expressed in hertz (Hz);
- $d_B$  is the ball diameter, expressed in millimetres (mm);
- $d_P$  is the pitch diameter, expressed in millimetres (mm);
- $S$  is the speed, expressed in revolutions per second (rps);
- $\theta$  is the contact angle, expressed in degrees.

### 6.4 fundamental train frequency

$f_{FT}$

frequency generated in an anti-friction bearing when there is a cage fault

NOTE 1 The frequency generated when the outer race is stationary is:

$$f_{FT} = \frac{S}{2} \left( 1 - \frac{d_B}{d_P} \cos \theta \right)$$

NOTE 2 The frequency generated when the outer race rotates is:

$$f_{FT} = \frac{S}{2} \left( 1 + \frac{d_B}{d_P} \cos \theta \right)$$

where

- $f_{FT}$  is the fundamental train frequency, expressed in hertz (Hz);
- $S$  is the speed, expressed in revolutions per second (rps);
- $d_B$  is the ball diameter, expressed in millimetres (mm);
- $d_P$  is the pitch diameter, expressed in millimetres (mm);
- $\theta$  is the contact angle, expressed in degrees.

NOTE 3 If both the inner and outer races rotate, the terms are additive or subtractive depending on relative rotational direction.

### 6.5 primary belt frequency

$f_b$

number of times per second that a belt makes one complete circuit

NOTE The frequency is found from:

$$f_b = - \frac{\pi d_s S}{B_l}$$

where

- $f_b$  is the primary belt frequency, expressed in hertz (Hz);
- $d_s$  is the sheave diameter, expressed in millimetres (mm);
- $S$  is the speed of the sheave, expressed in revolutions per second (rps);
- $B_l$  is the belt length, expressed in millimetres (mm).

**6.6**  
**gyroscopic moment**

cross effect which yields a vibratory whirling torque on a shaft that can increase or decrease natural frequencies

NOTE In rotor dynamics, the gyroscopic effect results from whirling of an inclined spinning shaft of a rotor having angular momentum.

**6.7**  
**flexural vibration**

vibration of a body in which the resultant deflections cause elastic (or plastic) deformation within the body

NOTE 1 It is related to the mode shape of a vibrating system.

NOTE 2 In a shaft or beam supported by two bearings (supports), the flexural vibration is the displacement of the neutral axis of the shaft or beam from that in the static equilibrium condition.

**6.8**  
**whirling**

motion of a rotor in which individual elements of the rotor are deformed from the static deflection line due to the influence of, for example, unbalanced forces

NOTE The motion of the deformed shape about the static deflection is described as “whirling” of the shaft.

**6.9**  
**oil whip**

self-excited vibration of a rotor supported by fluid bearings due to an increase in tangential force of the fluid bearings

**6.10**  
**surging**

vibratory movement of fluid in fans or compressors due to system back pressure instability

**6.11**  
**flutter**

self-excited vibration of a structure caused by dynamic interaction with motion of surrounding gas or fluid

**6.12**  
**sloshing**

free surface oscillation of liquid in a partly filled moving container

NOTE Examples of partly filled moving containers include mobile liquid storage tanks, seismic slosh tanks and marine fuel oil tanks.

**6.13**  
**flow induced vibration**

vibration induced by fluid flow fluctuations





## Bibliography

- [1] ISO 1925, *Mechanical vibration — Balancing — Vocabulary*
- [2] ISO 5805, *Mechanical vibration and shock — Human exposure — Vocabulary*
- [3] ISO 13372, *Condition monitoring and diagnostics of machines — Vocabulary*
- [4] ISO 15261, *Vibration and shock generating systems — Vocabulary*
- [5] ISO 18431-1, *Mechanical vibration and shock — Signal processing — Part 1: General introduction*
- [6] ISO 80000-3:2006, *Quantities and units — Part 3: Space and time*
- [7] IEC 60050-801, *International Electrotechnical Vocabulary — Chapter 801: Acoustics and electroacoustics*

## Alphabetical index

### A

acceleration 1.60  
 acceleration 1.3  
 acceleration transducer 4.10  
 accelerometer 4.10  
 aliasing 5.17  
 aliasing error 5.17  
 ambient vibration 2.27  
 amplitude 2.43  
 amplitude distortion (of a transducer) 4.25  
 amplitude scaling factor 5.19  
 angular acceleration 2.9  
 angular displacement 2.7  
 angular frequency 2.40  
 angular transducer 4.9  
 angular velocity 2.8  
 angular vibration 2.5  
 antinode 2.58  
 antiresonance 2.82  
 antiresonance frequency 2.83  
 aperiodic vibration 2.29  
 audio frequency 2.79  
 autocorrelation function 5.32  
 auto-spectral density 5.12

### B

ball pass frequency, inner 6.1  
 ball pass frequency, outer 6.2  
 ball spin frequency 6.3  
 beat frequency 2.39  
 beats 2.38  
 bel 1.63  
 bilateral transducer 4.6  
 blocked impedance 1.52  
 broad-band random vibration 2.18  
 broad-band stochastic vibration 2.18  
 bump 3.6

### C

calibration factor (of a transducer) 4.18  
 centre of gravity 1.32  
 centre of mass 1.33  
 centre-of-gravity mounting system 2.123  
 circular vibration 2.54  
 coherence function 5.15  
 complex excitation 1.42  
 complex response 1.43  
 compliance 1.38  
 compressional wave 2.70  
 conditioning 1.15  
 confidence interval 5.42

confidence level 5.38  
 continuous system 1.31  
 coupled modes 2.64  
 crest factor (of a vibration) 2.47  
 critical damping 2.95  
 critical speed 2.85  
 critical viscous damping 2.95  
 cross axis sensitivity 4.21  
 cross axis sensitivity ratio 4.22  
 cross spectral density 5.14  
 cross-correlation function 5.33  
 cross-over frequency 2.118  
 cycle 2.31, 2.111  
 cycle period 2.112  
 cycle range 2.113

### D

damped natural frequency 2.89  
 damped natural mode 2.67  
 damper 2.125  
 damping 2.87  
 damping ratio 2.96  
 dashpot 2.94  
 data 5.1  
 dB 1.64  
 deadweight 2.110  
 decibel 1.64  
 degrees of freedom 1.27  
 deterministic vibration 5.25  
 detuner 2.128  
 direct (mechanical) mobility 1.55  
 direct mechanical impedance 1.49  
 direct-drive vibration generator 2.104  
 discrete system 1.28  
 displacement 1.1  
 displacement transducer 4.12  
 dominant frequency 2.19  
 driving point mechanical impedance 1.49  
 driving-point (mechanical) mobility 1.55  
 duration of shock pulse 3.17  
 dynamic compliance 1.57  
 dynamic mass 1.59  
 dynamic range (of a transducer) 4.17  
 dynamic stiffness 1.58  
 dynamic vibration absorber 2.127

### E

effective bandwidth (of a specified band-pass filter) 5.36  
 effective noise bandwidth 5.20  
 elastic centre 2.122

electrodynamic vibration generator 2.102  
 electrodynamic vibration machine 2.102  
 electromagnetic vibration generator 2.103  
 electromagnetic vibration machine 2.103  
 electromechanical transducer 4.2  
 elliptical vibration 2.52  
 energy spectral density 5.13  
 ensemble 5.26  
 environment 1.11  
 equivalent linear damping 2.91  
 equivalent system 1.26  
 ergodic process 5.30  
 excitation 1.16  
 excursion 2.46  
 extraneous vibration 2.28

### F

final peak sawtooth shock pulse 3.9  
 fixed-base natural frequency 2.84  
 flexural vibration 6.7  
 flow induced vibration 6.13  
 flutter 6.11  
 force 1.5  
 force transducer 4.15  
 forced vibration 2.22  
 form factor (of a vibration) 2.48  
 foundation 1.24  
 Fourier series 5.10  
 Fourier transform 5.9  
 free impedance 1.51  
 free vibration 2.23  
 frequency 2.33  
 frequency distortion 4.26  
 frequency resolution 5.8  
 frequency response 4.26  
 frequency-response function 1.53  
 fundamental frequency 2.34  
 fundamental natural mode of vibration 2.61  
 fundamental period 2.32  
 fundamental train frequency 6.4

### G

Gaussian random vibration 2.14  
 Gaussian stochastic vibration 2.14  
 gyroscopic moment 6.6

### H

half-sine shock pulse 3.8

harmonic (of a periodic quantity) 2.35  
 harmonic excitation 2.37  
 haversine shock pulse 3.12  
 hydraulic vibration generator 2.105  
 hysteresis damping 2.93

## I

ideal shock pulse 3.7  
 impact 3.4  
 impulse 3.5  
 induced environment 1.12  
 inertial force 1.9  
 inertial reference frame 1.8  
 inertial reference system 1.8  
 initial peak sawtooth shock pulse 3.10  
 instantaneous value 2.49  
 isolator 2.119

## J

jerk 1.7  
 jump 2.30

## L

leakage error 5.24  
 level (of a quantity) 1.62  
 linear damping 2.90  
 linear damping coefficient 2.92  
 linear sweep rate 2.116  
 linear system 1.22  
 linear transducer 4.4  
 linear vibration 2.53  
 logarithmic (frequency) sweep rate 2.117  
 logarithmic decrement 2.97  
 longitudinal vibration 2.25  
 longitudinal wave 2.71  
 lumped mass 2.110  
 lumped parameter system 1.28

## M

magnetostrictive vibration generator 2.109  
 maximax 2.50  
 mechanical direct-drive vibration generator 2.104  
 mechanical impedance 1.48  
 mechanical mobility 1.54  
 mechanical reaction vibration generator 2.106  
 mechanical system 1.23  
 mobility 1.54  
 modal analysis 1.44

modal density 1.47  
 modal matrix 1.45  
 modal number 2.63  
 modal stiffness 1.46  
 mode of vibration 2.60  
 mode shape 2.62  
 moment of inertia 1.35  
 multi-degree-of-freedom system 1.30

## N

narrow-band random vibration 2.17  
 narrow-band stochastic vibration 2.17  
 natural environment 1.13  
 natural frequency (of a mechanical system) 2.88  
 natural mode of vibration 2.59  
 negative peak value 2.44  
 neutral axis 1.40  
 neutral axis of a beam in simple flexure 1.40  
 neutral surface 1.39  
 neutral surface of a beam in simple flexure 1.39  
 node 2.57  
 noise 2.12  
 nominal pulse 3.15  
 nominal shock pulse 3.15  
 nominal value of a shock pulse 3.16  
 non-linear damping 2.98  
 non-linear vibration 2.24  
 non-stationary vibration 2.10  
 normalized autocorrelation function 5.34  
 normalized cross-correlation coefficient 5.35  
 number of lines 5.27  
 Nyquist frequency 5.5

## O

oil whip 6.9  
 oscillation 1.10  
 overshoot 1.19

## P

peak magnitude 2.44  
 peak value 2.44  
 peak-to-peak value (of a vibration) 2.45  
 period 2.32  
 periodic vibration 2.2  
 phase angle 2.41  
 phase angle difference 2.42  
 phase difference 2.42

phase distortion 4.27  
 piezoelectric vibration generator 2.108  
 pink random vibration 2.16  
 pink stochastic vibration 2.16  
 plane wave 2.76  
 positive peak value 2.44  
 power spectral density 5.12  
 preconditioning 1.14  
 primary belt frequency 6.5  
 principal axes of inertia 1.34  
 probability 5.39  
 probability density 5.40  
 probability density distribution curve 5.41  
 probability density function 5.41  
 product of inertia 1.36  
 pulsance 2.40  
 pulse decay time 3.19  
 pulse drop-off time 3.19  
 pulse rise time 3.18  
 pure mass 2.110

## Q

Q factor 2.99

## R

random noise 2.13  
 random process 5.31  
 random vibration 2.4  
 Rayleigh wave 2.74  
 record length 5.28  
 rectangular shock pulse 3.13  
 rectilinear transducer 4.8  
 rectilinear vibration 2.53  
 relative acceleration 1.3  
 relative displacement 1.1  
 relative velocity 1.2  
 resonance 2.80  
 resonance frequency 2.81  
 resonance speed 2.85  
 resonance vibration generator 2.107  
 response (of a system) 1.17  
 restoring force 1.6  
 rise time 3.18  
 rms spectrum 5.11  
 rotational motion 2.56

## S

sampling 5.2  
 sampling frequency 5.3  
 sampling interval 5.7  
 sampling period 5.4  
 sampling rate 5.6  
 SDOF 1.29  
 seismic system 1.25

seismic transducer 4.3  
 self-excited vibration 2.26  
 self-induced vibration 2.26  
 sensing element 4.7  
 sensitive axis (of a rectilinear transducer) 4.19  
 sensitivity (of a transducer) 4.16  
 set 5.26  
 shear wave 2.72  
 shock 3.1  
 shock absorber 2.124  
 shock isolator 2.121  
 shock machine 3.21  
 shock motion 3.3  
 shock pulse 3.2  
 shock response spectrum 3.22  
 shock testing machine 3.21  
 shock wave 3.20  
 sidelobes 5.22  
 signal bandwidth 5.37  
 simple harmonic vibration 2.3  
 single-degree-of-freedom system 1.29  
 sinusoidal vibration 2.3  
 sloshing 6.12  
 snubber 2.126  
 spectral leakage 5.23  
 spectrum 1.61  
 spherical wave 2.77  
 standard acceleration due to gravity 1.4  
 standing wave 2.78  
 stationary process 5.29  
 stationary vibration 2.11  
 statistical degrees of freedom 5.16  
 steady-state vibration 2.20  
 stiffness 1.37  
 stimulus 1.16  
 stochastic noise 2.13  
 stochastic process 5.31  
 stochastic vibration 2.4  
 structural damping 2.93  
 sub harmonic 2.36  
 subharmonic resonance response 2.86  
 subharmonic response 2.86  
 surface wave 2.74  
 surging 6.10  
 sweep 2.114  
 sweep rate 2.115  
 symmetrical triangular shock pulse 3.11  
 system 1.21

T

terminal peak sawtooth shock pulse 3.9  
 time history 5.21  
 torsional vibration 2.6  
 total excursion (of a vibration) 2.46

transducer 4.1  
 transducer distortion 4.24  
 transducer phase shift 4.23  
 transfer (mechanical) impedance 1.50  
 transfer (mechanical) mobility 1.56  
 transfer function 1.41  
 transient vibration 2.21  
 translational motion 2.55  
 transmissibility 1.18  
 transverse axis (of a transducer) 4.20  
 transverse sensitivity (of a rectilinear transducer) 4.21  
 transverse sensitivity ratio (of a rectilinear transducer) 4.22  
 transverse wave 2.73  
 trapezoidal shock pulse 3.14

U

unbalanced mass vibration generator 2.106  
 uncoupled modes 2.65  
 undamped natural mode 2.66  
 undershoot 1.20  
 uniform sweep rate 2.116  
 unilateral transducer 4.5

V

velocity 1.2  
 velocity transducer 4.11  
 versine shock pulse 3.12  
 vibration 2.1  
 vibration exciter 2.100  
 vibration generator 2.100  
 vibration generator system 2.101  
 vibration isolator 2.120  
 vibration machine 2.100  
 vibration severity 2.51  
 vibrograph 4.13  
 vibrometer 4.14

W

wave front 2.75  
 wave train 2.68  
 wavelength (of a periodic wave) 2.69  
 whirling 6.8  
 white random vibration 2.15  
 white stochastic vibration 2.15  
 window 5.18  
 window function 5.18



---

---

**ICS 01.040.17; 17.160**

Price based on 46 pages