

# INTERNATIONAL STANDARD

**ISO**  
**3715-1**

First edition  
2002-03-01

---

---

## **Ships and marine technology — Propulsion plants for ships —**

### **Part 1: Vocabulary for geometry of propellers**

*Navires et technologie maritime — Installations de propulsion des navires —*

*Partie 1: Termes et définitions relatifs à la géométrie de l'hélice*



Reference number  
ISO 3715-1:2002(E)

© ISO 2002

**PDF disclaimer**

This PDF file may contain embedded typefaces. In accordance with Adobe's licensing policy, this file may be printed or viewed but shall not be edited unless the typefaces which are embedded are licensed to and installed on the computer performing the editing. In downloading this file, parties accept therein the responsibility of not infringing Adobe's licensing policy. The ISO Central Secretariat accepts no liability in this area.

Adobe is a trademark of Adobe Systems Incorporated.

Details of the software products used to create this PDF file can be found in the General Info relative to the file; the PDF-creation parameters were optimized for printing. Every care has been taken to ensure that the file is suitable for use by ISO member bodies. In the unlikely event that a problem relating to it is found, please inform the Central Secretariat at the address given below.

© ISO 2002

All rights reserved. Unless otherwise specified, no part of this publication may be reproduced or utilized in any form or by any means, electronic or mechanical, including photocopying and microfilm, without permission in writing from either ISO at the address below or ISO's member body in the country of the requester.

ISO copyright office  
Case postale 56 • CH-1211 Geneva 20  
Tel. + 41 22 749 01 11  
Fax + 41 22 749 09 47  
E-mail [copyright@iso.ch](mailto:copyright@iso.ch)  
Web [www.iso.ch](http://www.iso.ch)

Printed in Switzerland

## Foreword

ISO (the International Organization for Standardization) is a worldwide federation of national standards bodies (ISO member bodies). The work of preparing International Standards is normally carried out through ISO technical committees. Each member body interested in a subject for which a technical committee has been established has the right to be represented on that committee. International organizations, governmental and non-governmental, in liaison with ISO, also take part in the work. ISO collaborates closely with the International Electrotechnical Commission (IEC) on all matters of electrotechnical standardization.

International Standards are drafted in accordance with the rules given in the ISO/IEC Directives, Part 3.

The main task of technical committees is to prepare International Standards. Draft International Standards adopted by the technical committees are circulated to the member bodies for voting. Publication as an International Standard requires approval by at least 75 % of the member bodies casting a vote.

Attention is drawn to the possibility that some of the elements of this part of ISO 3715 may be the subject of patent rights. ISO shall not be held responsible for identifying any or all such patent rights.

International Standard ISO 3715-1 was prepared by Technical Committee ISO/TC 8, *Ships and marine technology*, Subcommittee SC 3, *Piping and machinery*.

ISO 3715 consists of the following parts, under the general title *Ships and marine technology — Propulsion plants for ships*:

- *Part 1: Vocabulary for geometry of propellers*
- *Part 2: Vocabulary for controllable-pitch propeller plants*



# Ships and marine technology — Propulsion plants for ships —

## Part 1: Vocabulary for geometry of propellers

### Scope

This part of ISO 3715 gives terms and definitions for screw propellers used in the propulsion plants of ships and other vessels (such as mobile offshore drilling units) that are self-propelled or propulsion-assisted.

The definitions are valid only for the hydrodynamically effective part of the propeller. No definitions are given for the mechanical construction of the hub.

Vocabulary for hydraulically operated controllable-pitch propeller plants is given in ISO 3715-2.


### Normative reference

The following normative document contains provisions which, through reference in this text, constitute provisions of this part of ISO 3715. For dated references, subsequent amendments to, or revisions of, any of these publications do not apply. However, parties to agreements based on this part of ISO 3715 are encouraged to investigate the possibility of applying the most recent edition of the normative document indicated below. For undated references, the latest edition of the normative document referred to applies. Members of ISO and IEC maintain registers of currently valid International Standards.

ISO 3715-2, *Ships and marine technology — Propulsion plants for ships — Part 2: Vocabulary for controllable-pitch propeller plants*

Systems of coordinates

System of rectangular coordinates for definition of propeller position at hull (see Figure 1).

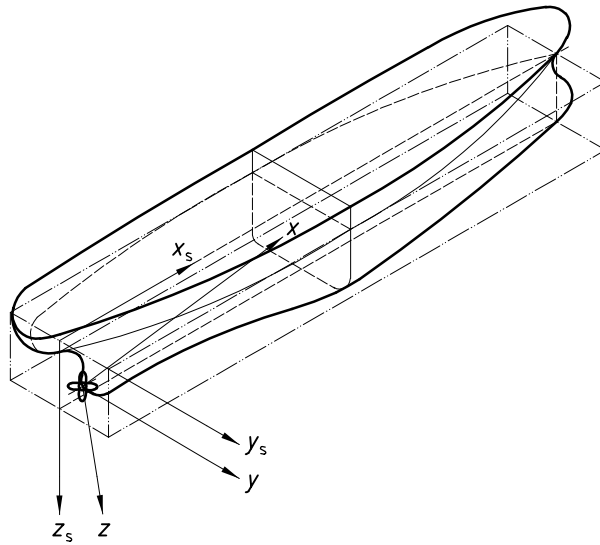


NOTE Coordinates of the ship given in this figure are marked with subscript s [deviating from the International Towing Tank Conference (ITTC), agreement].

Figure 1 — Rectangular coordinates for definition of propeller position at hull

System of rectangular coordinates for definition of propeller geometry (see Figure 2).

This system of coordinates is not in agreement with that of the ship in general.

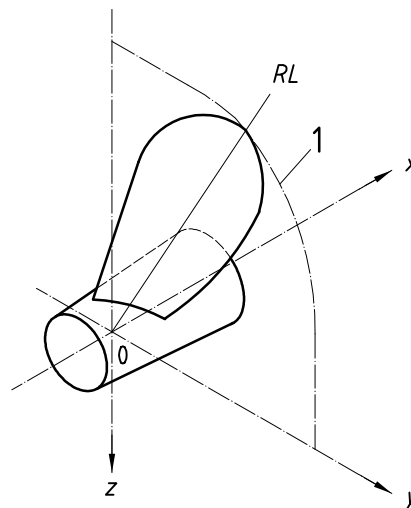


Key

- |   |                              |    |   |
|---|------------------------------|----|---|
| 1 | Limit of propeller disc area | y  | Direction to starboard                          |
| 0 | Origin of coordinates        | z  | Direction perpendicular to x- and y-coordinates |
| x | Direction of shaft centre    | RL | Reference line (see 6.4)                        |

NOTE This system of coordinates is valid independently of the direction of rotation of the propeller.

Figure 2 — Rectangular coordinates for definition of propeller geometry

**System of cylindrical coordinates for definition of propeller geometry** (see Figure 3)

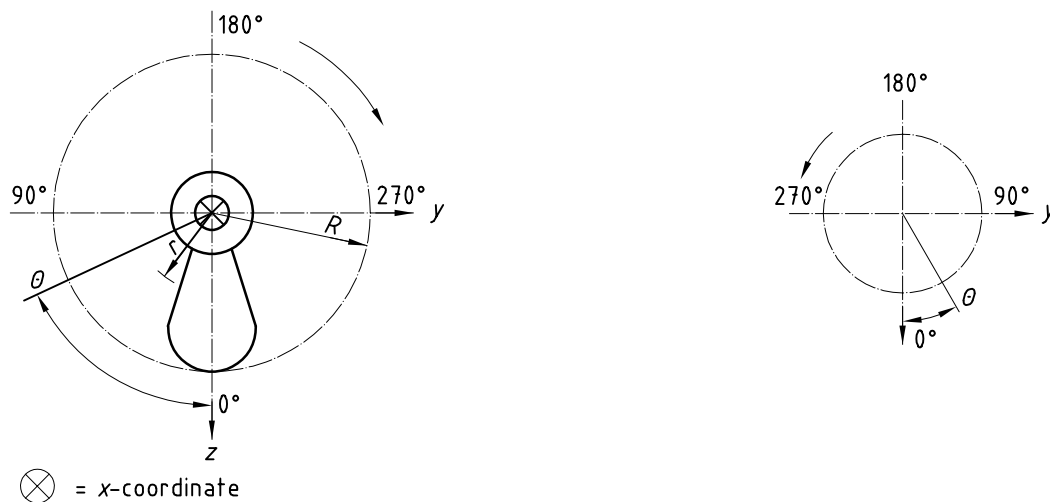

**a) Going ahead with a right-handed propeller**

**b) Going ahead with a left-handed propeller**

**Key**


- Θ Angular coordinate of the system of cylindrical coordinates
- r Radial coordinate of the system of cylindrical coordinates
- x Coordinate perpendicular to the r-plane and identical to the x-coordinate as defined in Figure 2
- R Radius of propeller

NOTE This system of coordinates is used, for example, to define the geometry of propeller blades. Left-handed propellers are drawn in general as being right-handed.

$\bar{r} = \frac{r}{R}$  = dimensionless radius.

**Figure 3 — Cylindrical coordinates for definition of propeller geometry**

**System of rectangular coordinates for definition of cylindrical blade sections** (see Figure 4 and 6)



**Key**

- TE Trailing edge
- LE Leading edge

**Figure 4 — Rectangular coordinates for definition of cylindrical blade section**

## Terms and definitions

### 1 screw propeller

#### 1.1 propeller radius

$R$  [General]

RP [Computer]

largest vertical distance of the extreme point of a blade (i.e. blade tip) related to the  $x$ -coordinate of the system according to Figure 2

NOTE For propellers with mounted blades and controllable-pitch propellers, this definition is valid for design pitch.

#### 1.2 propeller diameter

$D$  [General]

DP [Computer]

diameter of the circle passed by the extreme point of a blade whilst turning around the  $x$ -coordinate

$$D = 2R$$

NOTE For propellers with mounted blades and controllable-pitch propellers, this definition is valid for design pitch.

#### 1.3 number of blades

$Z$  [General]

$Z$  [Computer]

number of blades fitted around the  $x$ -coordinate or on the hub

#### 1.4 disc area

$A_O$  [General]

AO [Computer]

disc area calculated by means of the propeller diameter

$$A_O = D^2 \frac{\pi}{4}$$

NOTE See Figure 3.

#### 1.5 area ratio

##### 1.5.1 developed area ratio

$A_D/A_O$  [General]

ADR [Computer]

developed area of all blades related to the propeller disc area

##### 1.5.2 expanded area ratio

$A_E/A_O$  [General]

AER [Computer]

expanded area of all blades related to the propeller disc area

NOTE For blade areas see 6.1.



**1.6****centre of gravity of propeller**

defined by a measure in  $x$ -direction; the mass of propeller cap is not considered for monoblock propellers

NOTE See Figure 5.

**1.7****propeller plane**

plane of a propeller realized by  $y$ - and  $z$ -coordinates

NOTE For  $y$ - $z$  plane, see Figure 2.

**1.8****direction of rotation, right-handed**

(according to a right-hand thread) when going ahead the propeller moves in the upper point from left to right (seen from aft)

**1.9****direction of rotation, left-handed**

(according to a left-hand thread) when going ahead the propeller moves in the upper part from right to left (seen from aft)

**2****hub**

part of the propeller the blades are fitted to (fixed or removable), also forming the connection to the propellers shaft and, in the case of controllable pitch propellers, the housing of the mechanism to adjust the blades

NOTE The propeller cap is normally not part of the hub.

**2.1****hub diameter**

$d_h$  [General]

DH [Computer]

diameter of the hub in the propeller plane

NOTE See Figure 5.

**2.2****fore diameter of hub**

$d_{hf}$  [General]

DHF [Computer]

fore diameter of the hub, not considering any shoulder

NOTE See Figure 5.

**2.3****after diameter of hub**

$d_{ha}$  [General]

DHA [Computer]

after diameter of the hub, not considering any shoulder

NOTE See Figure 5.

**2.4****hub length**

$l_h$  [General]

LH [Computer]

length of the hub, any shoulder aft and fore included

NOTE See Figure 5.

**2.5**  
**after length of hub**

$l_{ha}$  [General]

LHA [Computer]

length of the hub taken from propeller plane to aft end of the hub including aft shoulder

NOTE See Figure 5.

**2.6**  
**fore length of hub**

$l_{hf}$  [General]

LHF [Computer]

length of the hub taken from propeller plane to fore end of the hub including fore shoulder

**2.7**  
**hub diameter ratio**

$d_h/D$  [General]

DHR [Computer]

relation of hub diameter to propeller diameter

**3**  
**blade**

part of a propeller beginning at the contour of the hub and ending at the blade tip

NOTE In the case of controllable-pitch propellers and propellers with mounted blades, all parts for bearing and fitting the blades to the hub and being fixed to the blade belong to the blades.

**3.1**  
**blade tip**

utmost part of a blade, positioned at the propeller radius  $R$

NOTE In special cases, the blade tip is represented by a cylindrical section at the propeller radius  $R$ .

**3.2**  
**blade root**

zone of transition of blade to hub

**3.3**  
**leading edge**

LE [General and computer]

blade edge directed to the inflow under normal operating conditions starting from the blade root and ending at the blade tip

**3.4**  
**trailing edge**

TE [General and computer]

blade edge opposite to the inflow under normal operating conditions starting from the blade root and ending at the blade tip

**3.5**  
**shape of edges**

shape of the fore and aft part of a cylindrical section e.g. rounded, sharpened

NOTE Examples of shapes: anti-singing edge, edge with rounded nose.

**3.6****suction side  
back**

SS [General and computer]

blade side, directed to the inflow whilst ship is going ahead

NOTE It is the upper side of a cylindrical profile section (see Figure 6).

**3.7****pressure side  
face**

PS [General and computer]

blade side opposite the suction side (see Figure 6)

**3.8****blade outline**

shape of blade

**3.9****centre of gravity of blade**

mass centre of blade

NOTE It is defined by its coordinate values in the coordinate system according to Figure 2 (see also Figure 8 for information).

**4****cylindrical blade section**developed penetration area of a cylinder coaxial related to the  $x$ -coordinate of a propeller with a propeller blade

NOTE See Figure 6.

**4.1****mean line of blade section**

ML [General]

connecting line of the centre of contact circles within a cylindrical profile section between suction and pressure side

NOTE See Figure 6.

**4.2****camber** $f$  [General]

F [Computer]

maximum value of the  $y$ -coordinate or  $f$  is equal to maximum  $y$ -value of the mean line

NOTE See Figure 6.

**4.3****chord length** $c$  [General]

C [Computer]

developed length of a cylindrical profile section from the leading edge to the trailing edge

NOTE See Figure 6.

**4.4****leading part of chord length** $c_{LE}$  [General]

CLE [Computer]

developed length of a cylindrical profile section taken from the leading edge to the reference line related to the  $x$ -coordinate of the cylindrical section

NOTE See system of coordinates in Figure 4; see also Figure 8 for information.

**4.5**  
**trailing part of chord length**

$c_{TE}$  [General]

CTE [Computer]

developed length of a cylindrical section taken from the trailing edge to the reference line, related to the  $x$ -coordinate of a cylindrical section

NOTE See system of coordinate in Figure 4; see also Figure 8 for information.

**4.6**  
**thickness of blade section**

**4.6.1**  
**maximum thickness of blade section**

maximum thickness of the blade section at the radial coordinate  $r$

$t$  [General]

T [Computer]

NOTE See Figure 8.

**4.6.2**  
**local thickness of blade section**

blade thickness at any location along the  $x$ -coordinate axis

$t_x$  [General]

TX [Computer]

NOTE See system of coordinates in Figure 4; see also Figure 6 for information.

**5**  
**pitch**

$P$  [General]

P [Computer]

covered distance of a point in  $x$ -direction after one revolution ( $\theta = 2\pi$ ) moving on a screw line

NOTE 1 See system of coordinates in Figure 3.

NOTE 2 The pitch is unambiguously defined only for a helix of a constant lead.

The area of a propeller blade is in general not an ideal helicoidal surface, but an area similar to a helicoidal surface. Therefore only area elements have defined pitch values.

The pitch values of area elements are in general different in both directions, radial and, with cambered profile sections, peripheral as well.

**5.1**  
**pitch angle**

$\phi$  [General]

PHI [Computer]

angle between the helix of constant lead and the propeller plane, taken on the cylindrical surface

$$\arctan \frac{P}{2\pi r}$$

**5.2**  
**pitch of pressure side**

$P_{PS}$  [General]

PPS [Computer]

pitch of the line between the first and the last measuring point of the pressure side of a cylindrical section (taken in the development of the cylinder)

NOTE See Figure 6.

**5.3****pitch of mean line** $P_{ML}$  [General]

PML [Computer]

pitch of the chord between leading edge and trailing edge point of the mean line (taken in the development of the cylinder)

**5.4****local pitch** $P_x$  [General]

PX [Computer]

pitch of the tangent of a curved line, e.g. pressure side of a cylindrical section, at a certain point

NOTE 1 Approximately, the pitch of the line between two adjacent points of a curved line is named local pitch.

NOTE 2 These measures will be used for examination purpose of the manufactured propeller.

**5.5****pitch of mean line at leading point of blade section** $P_{LE}$  [General]

PLE [Computer]

pitch of the tangent of the mean line at the leading edge point

**5.6****pitch of mean line at trailing point of blade section** $P_{TE}$  [General]

PTE [Computer]

pitch of the tangent of the mean line at the trailing edge point

**5.7****mean pitch of blade** $P_{MB}$  [General]

PMB [Computer]

nominal mean pitch of the blade calculated by means of a defined formular using the pitch of the individual cylindrical sections and the corresponding chord lengths

**5.8****mean pitch of propeller** $P_m$  [General]

PM [Computer]

arithmetical mean, calculated from the mean pitch of the individual blades

NOTE This value is used, for example to calculate the true slip and the apparent slip value as well.

It is used with restrictions for comparison purpose of the propulsion quality of different propellers.

**5.9****pitch at a certain radius** $P$  [General]pitch at a certain radius  $\bar{r}$ EXAMPLE For  $\bar{r} = 0,7$ , the pitch is  $P_{0,7}$ .**5.10****pitch ratio** $P/D$  [General]

PDR [Computer]

quotient of a pitch and the propeller diameter

**6**  
**description of propeller** (see Figure 8)

**6.1**  
**blade areas**

**6.1.1**  
**projected blade area**

$A_P$  [General]  
AP [Computer]  
projection of the blade area in the direction of the  $x$ -coordinate

NOTE See Figure 8.

**6.1.2**  
**developed blade area**

$A_D$  [General]  
AD [Computer]  
area enclosed by the connection line between the end points of the cylindrical profile sections turned in the propeller plane

NOTE See Figure 8.

**6.1.3**  
**expanded blade area**

$A_E$  [General]  
AE [Computer]  
area enclosed by the connection line between the end points of the developed and additionally straightened sections

NOTE See Figure 8.

**6.2**  
**rake and skew of blade sections** (see Figures 7 and 8)

**6.2.1**  
**rake of blade sections**

R<sub>k</sub> [General]  
RK [Computer]  
stagger of cylindrical profile sections in direction of the  $x$ -coordinate (positive values opposite to the  $x$ -direction)

NOTE 1 See Figure 7.

NOTE 2 For numerical description of the rake, for instance, the position of the blade tip or of the centre of the chord of a profile section is used in relation to the propeller plane opposite to the direction of ahead run.

**6.2.1.1**  
**rake at tip of blade**

R<sub>k<sub>t</sub></sub> [General]  
RKT [Computer]  
distance of the blade tip from the propeller plane

NOTE See Figure 8.

**6.2.2**  
**skew of blade sections**

Sk [General]  
SK [Computer]  
stagger of the cylindrical profile sections related to the propeller plane (positive values opposite to ahead rotation)

NOTE 1 See Figure 7.

NOTE 2 For a numerical description of the skew of the profile section, for example, the position of the blade tip or of the centre of the chord of a profile section is used in relation to the reference line opposite to the ahead rotation direction.

**6.2.2.1**

**skew angle at tip of blade**

$\theta_s$  [General]

TETS [Computer]

angle between the straight lines which enclose the  $c/2$  line and start from the propeller centre

NOTE See Figure 8.

**6.3**

**clearance curve**

$C_c$  [General]

curve describing the overall dimensions of a blade passing the  $x$ - $z$ -plane

NOTE 1 See Figure 8.

NOTE 2 When changing the pitch, the clearance curve will change too.


**6.4**

**reference line**


RL [General]

straight line, originated at the origin of the system of coordinates, which all individual points of a blade are related to

NOTE See Figure 8.



a) Examples of hub shapes

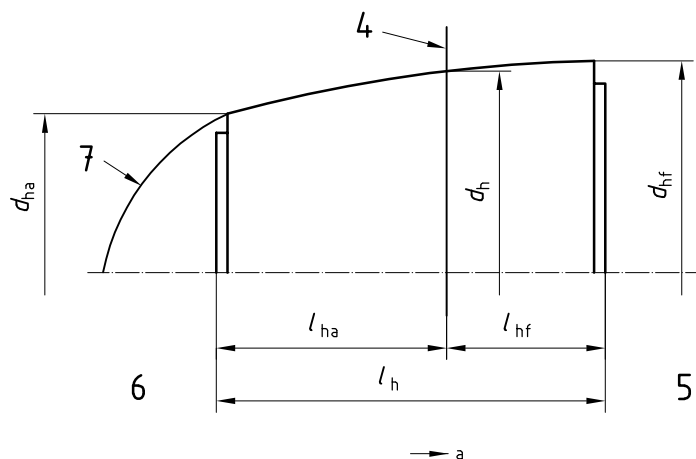

b) Hub dimensions


**Key**

- |   |                 |   |      |
|---|-----------------|---|------|
| 1 | Convergent      | 5 | Fore |
| 2 | Drum-shaped     | 6 | Aft  |
| 3 | Divergent       | 7 | Cap  |
| 4 | Propeller plane |   |      |

NOTE For hub shapes, see also Figure 9.

a Direction of the  $x$ -coordinate for above examples

**Figure 5 — Hub shapes and dimensions**

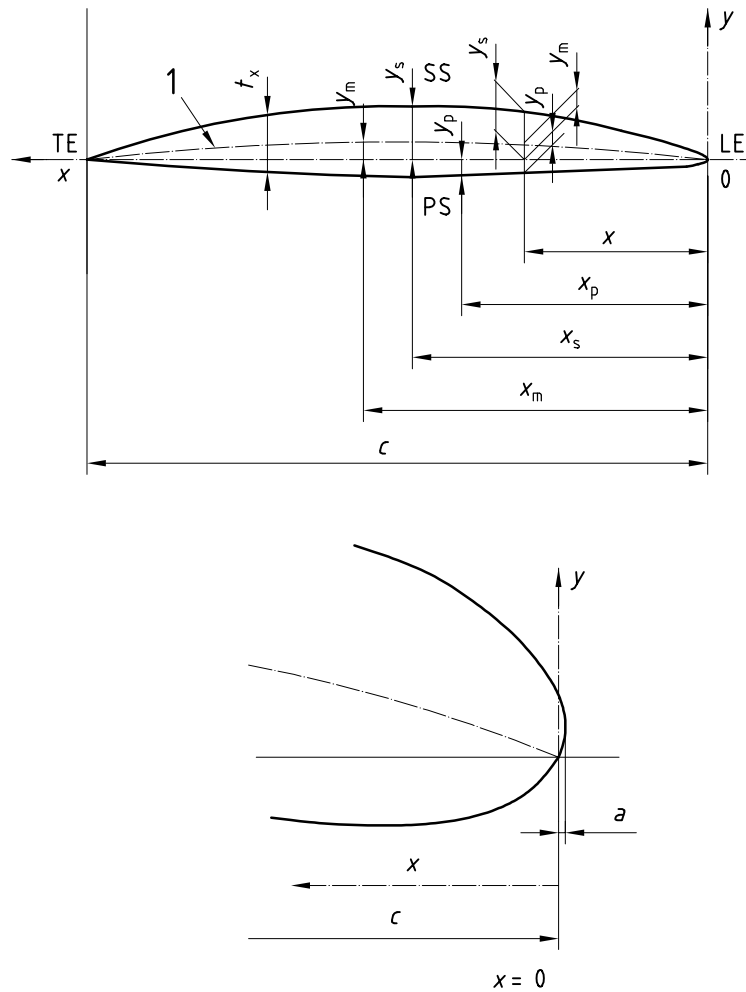

**Key**


- 1 Mean line
- LE Leading edge
- TE Trailing edge
- SS Suction side
- PS Pressure side
- $c$  Chord length of a cylindrical profile section
- $t_x$  Local thickness
- $x, y$  Coordinates according to Figure 4

**Subscripts**

- $a$  Overhang of the leading edge contour
- $m$  Mean line
- $s$  Suction side
- $p$  Pressure side

**Figure 6 — Cylindrical blade section**



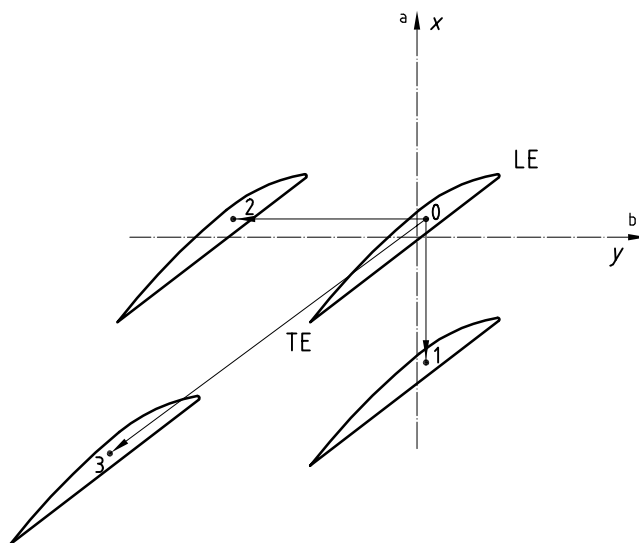

**Key**

LE Leading edge

TE Trailing edge

**Stagger**

from to

0 → 1 = Rake

0 → 2 = Skew


0 → 3 = Rake and skew

(0 = Origin, the choice is open)

a Ahead motion

b Direction of rotation for foreword motion

**Figure 7 — Rake and skew of blade sections**

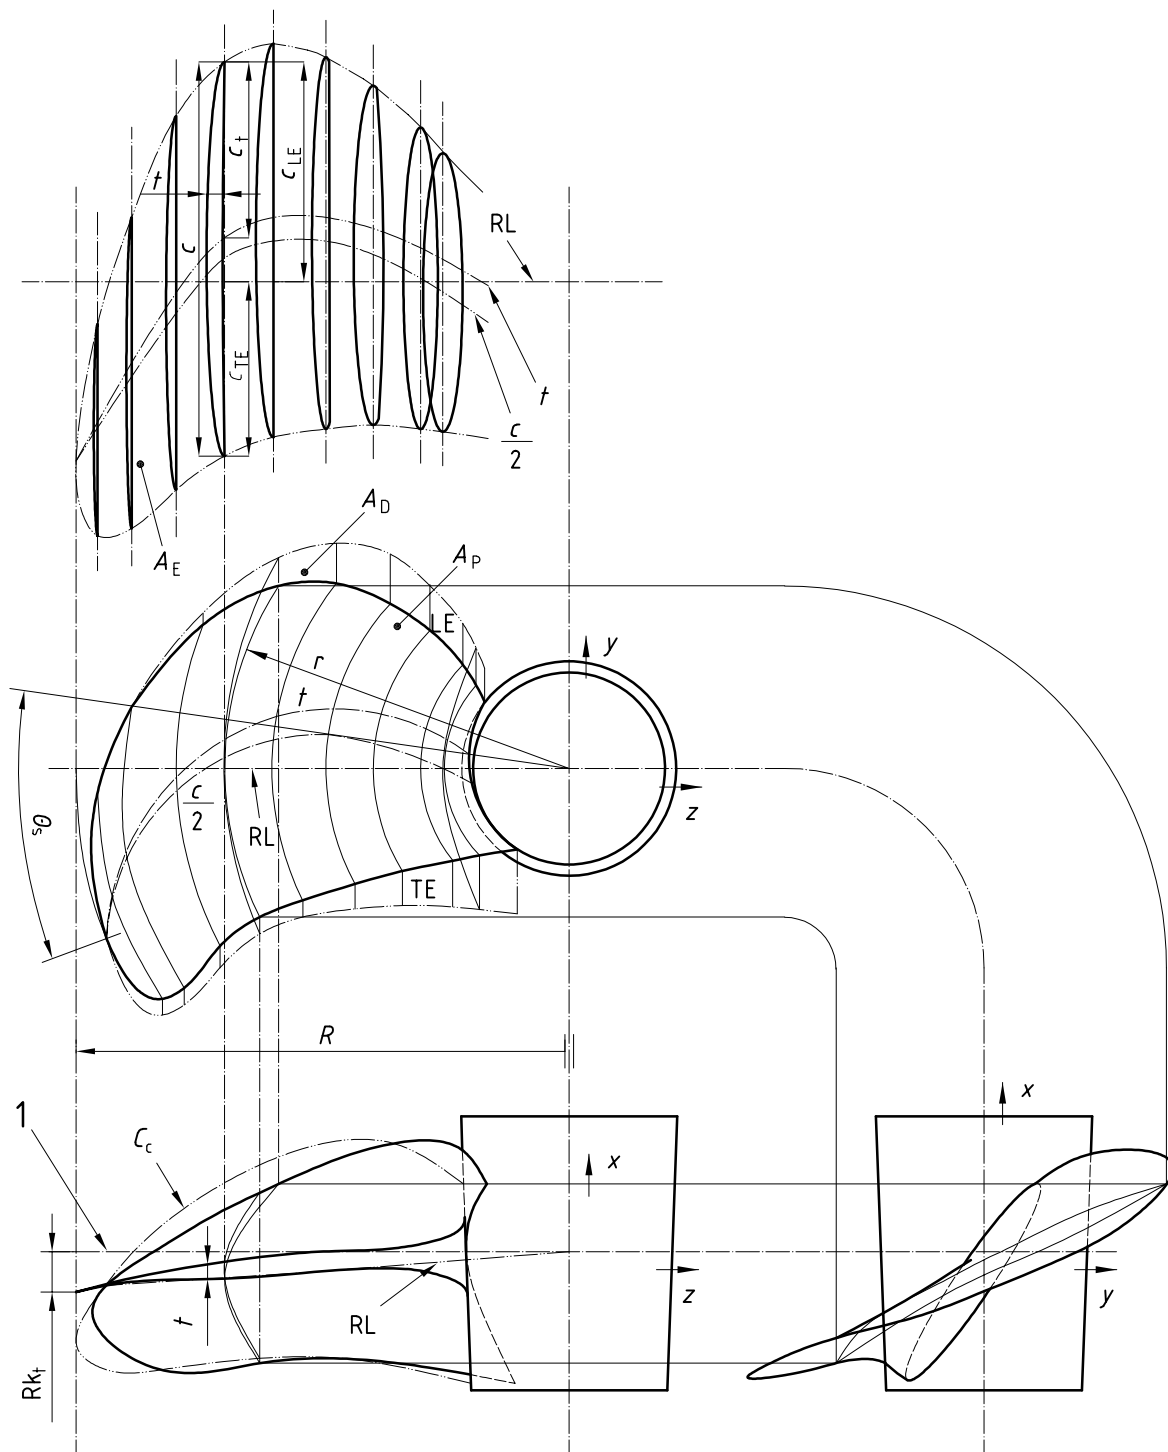

**Key**

1 Propeller plane


$s_0$  Skew angle

TE Trailing edge

LE Leading edge

Other symbols are given in clauses 4 and 6.

**Figure 8 — Description of propeller**

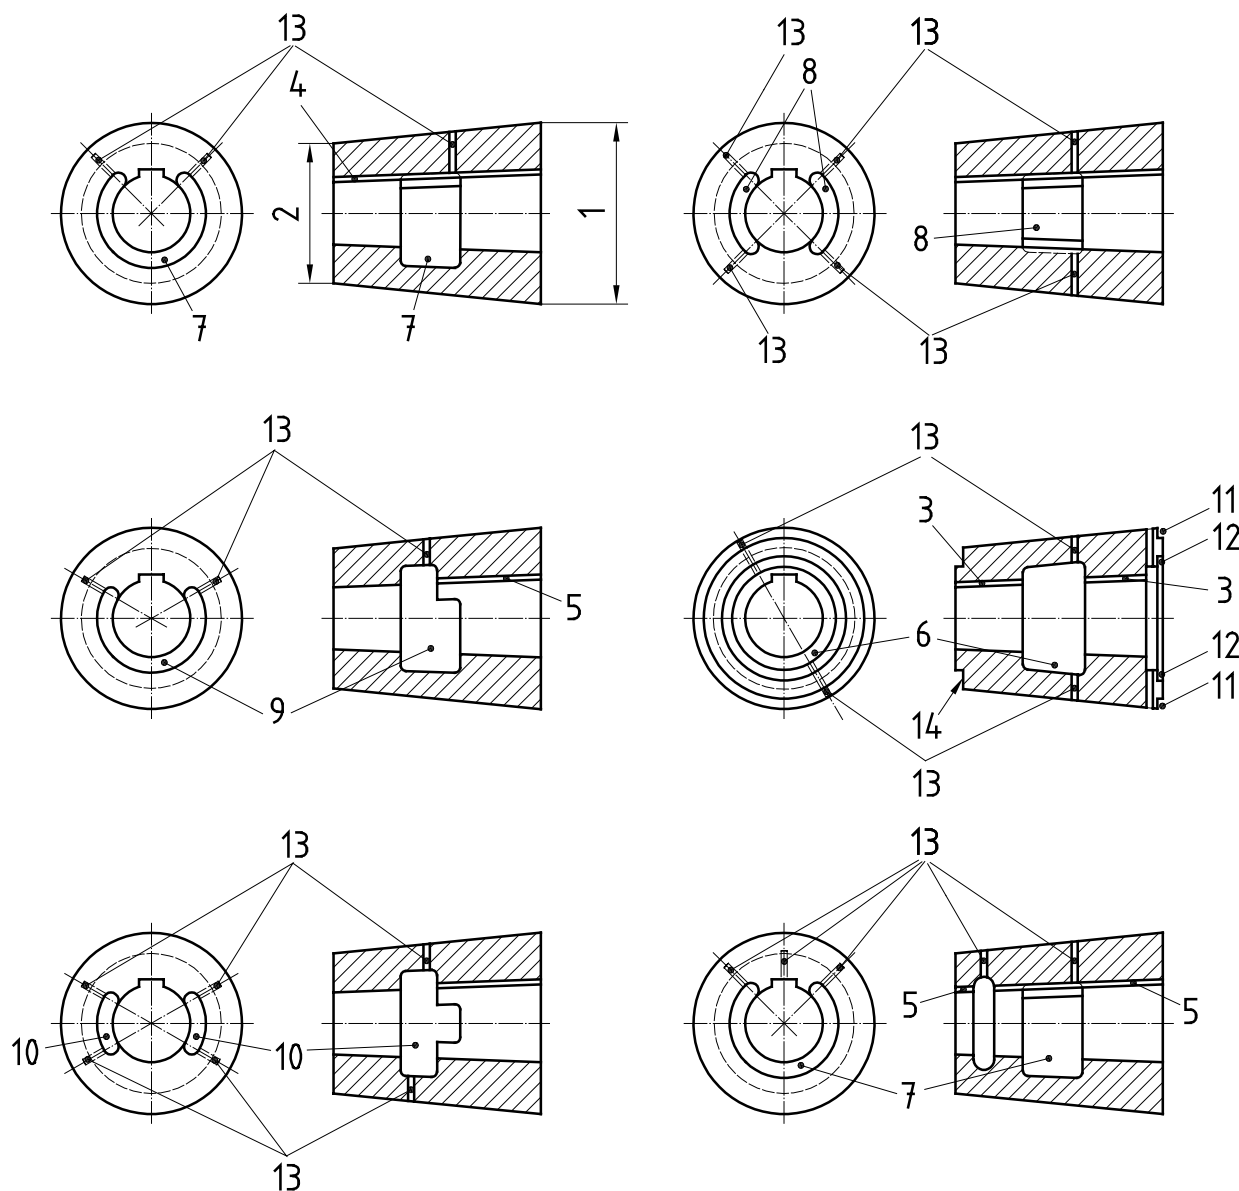

**Key**

- 1 Diameter of hub at forward end
- 2 Diameter of hub at after end
- 3 Interrupted keyway
- 4 Full-length keyway with keyblock
- 5 Uninterrupted keyway (forward end only)
- 6 Full lightening chamber
- 7 Lightening chamber with single keyblock
- 8 Lightening chamber with keyblock and block for balancing
- 9 Lightening chamber with part keyblock
- 10 Lightening chamber with part keyblock and part block for balancing
- 11 Recess for rope guard
- 12 Recess for gland ring seal on propeller shaft
- 13 Grease filling holes and vent holes
- 14 Cone fairing spigot

**Figure 9 — Examples of types of propeller hubs**

## Index

<p><b>A</b></p> <p>after diameter of hub 2.3            after length of hub 2.5            area ratio 1.5</p> <p><b>B</b></p> <p>back 3.6            blade 3            blade areas 6.1            blade outline 3.8            blade root 3.2            blade tip 3.1</p> <p><b>C</b></p> <p>camber 4.2            centre of gravity of blade 3.9            centre of gravity of propeller 1.6            chord length 4.3            clearance curve 6.3            cylindrical blade section 4</p> <p><b>D</b></p> <p>description of propeller 6            developed area ratio 1.5.1            developed blade area 6.1.2            direction of rotation 1.8, 1.9            disc area 1.4</p> <p><b>E</b></p> <p>expanded area ratio 1.5.2            expanded blade area 6.1.3</p> <p><b>F</b></p> <p>face 3.7            fore diameter of hub 2.2            fore length of hub 2.6</p> <p><b>H</b></p> <p>hub 2            hub diameter 2.1            hub diameter ratio 2.6            hub length 2.4</p>	<p><b>L</b></p> <p>leading edge 3.3            leading part of chord length 4.4            local pitch 5.4            local thickness of blade section 4.6.2</p> <p><b>M</b></p> <p>maximum thickness of blade section <i>r</i> 4.6.1            mean line of blade section 4.1            mean pitch of blade 5.7            mean pitch of propeller 5.8</p> <p><b>N</b></p> <p>number of blades 1.3</p> <p><b>P</b></p> <p>pitch 5            pitch angle 5.1            pitch at a certain radius 5.9            pitch of mean line 5.3            pitch of mean line at leading point of blade section 5.5            pitch of mean line at trailing point of blade section 5.6            pitch of pressure side 5.2            pitch ratio 5.10            pressure side 3.7            projected blade area 6.1.1            propeller diameter 1.2            propeller plane 1.7            propeller radius 1.1</p> <p><b>R</b></p> <p>rake and skew of blade sections 6.2            rake at tip of blade 6.2.1.1            rake of blade sections 6.2.1            reference line 6.4</p> <p><b>S</b></p> <p>shape of edges 3.5            screw propeller 1            skew angle at tip of blade 6.2.2.1            skew of blade sections 6.2.2            suction side 3.6</p>	<p><b>T</b></p> <p>thickness of blade section 4.6            trailing edge 3.4            trailing part of chord length 4.5</p>
---	---	---



---

---

**ICS 01.040.47; 47.020.20**

Price based on 16 pages

© ISO 2002 – All rights reserved